

06587606

MODEL 700™ M24

Model **SWS**™

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER

R 94-18212

INITIAL FDC CUSTOMER ORDER NO. DAAA09-92-C-0834

W/10X SCOPE, M-24 SNIPER, W/DEPLOYMENT KIT
ATTN: FRED MARTIN

DATE RECEIVED 06/10/94 DATE OPENED 06/10/94 DATE CODE

SERIAL NUMBER 7606 C6587606 NEW SERIAL NUMBER

MODEL AND GRADE 700 7-62 NATO

ACCESSORIES SLING STRAP HARD CASE SCOPE MNTS

SCOPE BASE

C6587606

90-0990

FROM:

SHIP TO:

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON

AL 36201-5025

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON

AL

36201-5025

CUST NO: 098397 C.O.D.L.

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

FRT

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

PARTS

COMMENTS

Trigger Assy 173.71
Scope Rep 119.43
Clean/Insp/Rep 50.00
343.14

REPAIRMAN	PROOF	CLEAN	TEST	TARGET	PATTERN
GALLERY TESTER	DATE	DATE	DATE	DATE	DATE

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400023652

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6587606

DATE 10-18-95

TESTER DA

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.52	2.63	2.47	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.50	2.67	2.47	
PULL #3	2.67	2.49	2.30	
PULL #4	2.56	2.55	2.51	
PULL #5	2.75	2.36	2.50	
TOTAL	13.00	12.70	12.25	
AVG.	2.60	2.54	2.45	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.00	2.92	
PULL #2	3.00	2.80	
PULL #3	2.90	2.85	
PULL #4	2.87	2.88	
PULL #5	2.98	2.85	
TOTAL	14.75	14.30	
AVG.	2.95	2.86	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.01	4.00	4.19	
PULL #2	4.01	4.03	4.24	
PULL #3	3.98	4.00	4.24	
PULL #4	4.01	3.99	4.21	
PULL #5	4.00	4.02	4.22	
TOTAL	20.01	20.04	21.10	
AVG.	4.00	4.00	4.22	

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6587606

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	5 1/2	5 1/4	5 1/4			11/28	WB
	G) Safety Off Force	3 1/4	3 1/4	3 1/4			11/28	WB
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent							
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test							
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo							
655	Final Inspection							
	A) Headspace							
	B) Trigger Pull	2.74	2.79	2.80	2.62	2.63	11/28	WB
	C) Function							
660	Pack							




VERY IMPORTANT!
Instruction Book
enclosed to assure
safe use of this
firearm.


MODEL 700™ M24

SERIAL NO.
C6587606


ORDER NO.
5716

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

UPC



0 47700 25716 7



5716 C6587606

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6587606

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		10/24/90	KA
600	Proof		10/24/90	KA
607	Check Headspace		10/24/90	KA
610	Dis-assemble Gun		10/24/90	KA
612	Magnaflux Barrel Action		10/24/90	KR
	Magnaflux Bolt		10/24/90	KR
615	Rollmark Caliber		10/24/90	GL
617	Drill and Tap Sight Holes		10/25/90	KB
618	Polish Barrel <i>KB</i>		10/26/90	WB
620	Apply Coatings (Barrel Action)		11-7-90	JA
	Apply Coating (Bolt)			
625	Final Assembly			
	A) Clean inside of Bolt Assembly		11/7/90	KS
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		11/7/90	KS
	C) Inspect Ejector Hole for Chamfer		11/7/90	KS
	D) Oil Firing Pin Ass'y		11/7/90	KS
	E) Adjust Trigger Pull to Min Setting and Stake		11/22/90	JA

1-18/91 WB

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	4 1/2	4 1/2	4 1/2			11/26/90	WS
	G) Safety Off Force	2 1/4	2 1/4	2 1/4			11/26/90	WS
	H) Trigger Pull Test & Retainability						11/18/91 11/26/90	WS
	I) Firing Pin Indent	0205 022	0205 0225	0205 022			11/26/90	WS
	J) Assemble Stock						11/24/90	KS
	K) Assemble Swivel Studs						2-4-91	K
	L) Attach Front and Rear Sight Assemblies						11/26/90	KS
	M) Iron Sight Alignment						11/26/90	KS
	N) Detach Front & Rear Sights & place in numbered container						11/26/90	KS
	O) Attach Scope to Rifle						11/26/90	KS
	P) Detach & Attach Scope 20 Times						11/26/90	KS
640	Gallery Target & Test						11/22/91	KJ
	A) Time							KJ
	B) Malfunctions							KJ
	C) Pierced Primers							KJ
	D) Optical Clarity of Scope							KJ
645	Inspect for Live Ammo						11/22/91	KJ
655	Final Inspection							
	A) Headspace						2-4-91	K
	B) Trigger Pull	2.61	2.65	2.65	2.64	2.70	1-22-91	GR
	C) Function						2-4-91	AC
660	Pack						3-19-91	N

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6587606
DATE 1/18/91
TESTER WB

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.42	2.44	2.53	2.61	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.43	2.60	2.48	2.65	
PULL #3	2.47	2.60	2.53	2.65	
PULL #4	2.48	2.59	2.54	2.64	
PULL #5	2.50	2.52	2.54	2.70	
TOTAL	12.30	12.75	12.62		
AVG.	2.46	2.55	2.52		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.27	3.33		
PULL #2	3.34	3.38		
PULL #3	3.31	3.37		
PULL #4	3.38	3.31		
PULL #5	3.27	3.40		
TOTAL	16.57	16.79		
AVG.	3.31	3.36		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.18	4.23		4.16
PULL #2	4.23	4.29		4.14
PULL #3	4.30	4.35		4.15
PULL #4	4.23	4.28		4.19
PULL #5	4.26	4.28		4.13
TOTAL	21.20	21.43		20.77
AVG.	4.24	4.28		4.15

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6587606 RESHOT
22 Jan 1991

CENTROIDAL DISTANCES

0 TO	1	.300885
1 TO	2	.592638
1 TO	3	.271398
1 TO	4	.592738
1 TO	5	.669355

$\frac{13}{45}$ <----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .2016
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0102
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .201858

THE AMR FOR THIS RIFLE IS: 1.089

22 Jan 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6587686.1

CENTERFIRE PATTERNS # 1

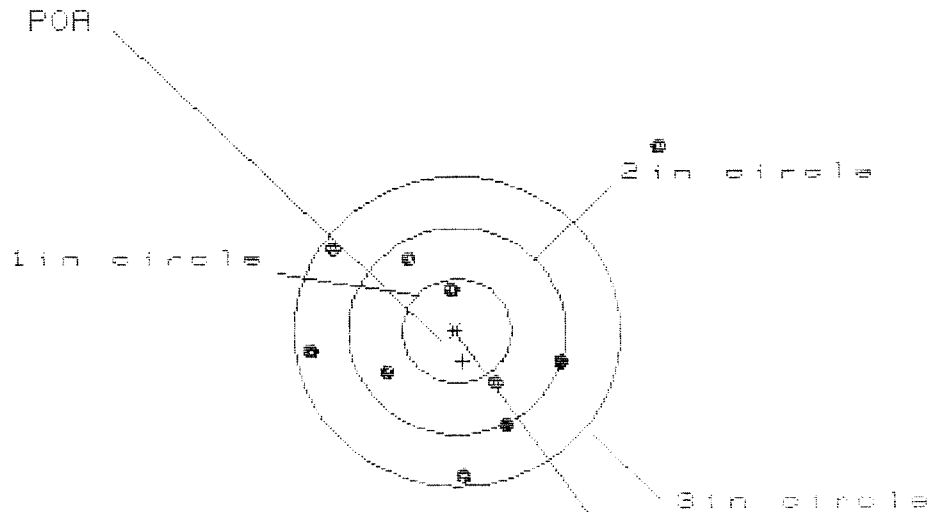

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 5

3 in = 9

HS= 3.271

VS= 3.141


GS= 3.842

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.896	1.165	1.019
MINIMUM X	-1.375	-1.164	-1.055
MAXIMUM Y	1.781	.967	.962
MINIMUM Y	-1.360	-1.162	-1.167
CENTROID X	-.054	-.265	-.119
CENTROID Y	.296	.098	.103
POA TO CENTROID in.	.301	.282	.157
MIN RADIUS	.446	.470	.513
MEAN RADIUS	1.140	.949	.908
MAX RADIUS	2.601	1.327	1.428
HORIZONTAL SPREAD	3.271	2.329	2.074
VERTICAL SPREAD	3.141	2.129	2.129
EXTREME SPREAD	3.842	2.419	2.419
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	9		

22 Jan 1931

FILE:/PATTERNING/CENTERFIRE_PATT/06587686.1

CENTERFIRE PATTERNS # 2

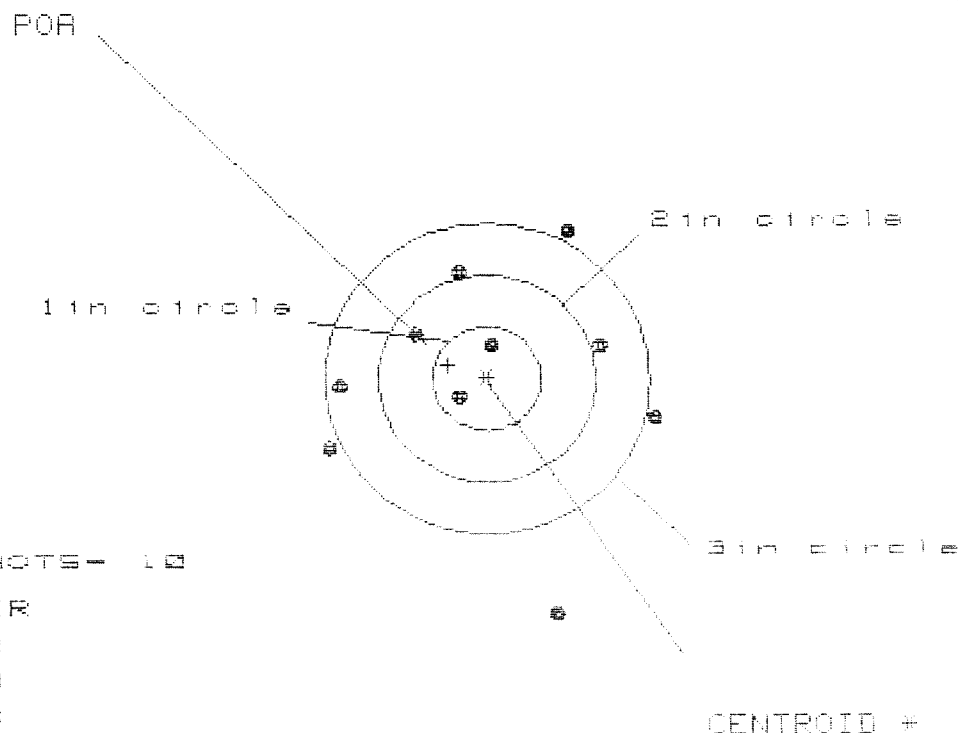

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 3

3 in = 6

HS= 3.002

VS= 3.714


GS= 3.715

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.527	1.597	1.697
MINIMUM X	:	-1.475	-1.405	-1.305
MAXIMUM Y	:	1.445	1.193	.929
MINIMUM Y	:	-2.269	-.883	-.734
CENTROID X	:	.358	.288	.188
CENTROID Y	:	-.130	.122	-.027
POR TO CENTROID in.	:	.381	.313	.190
MIN RADIUS	:	.285	.073	.246
MEAN RADIUS	:	1.200	1.019	.964
MAX RADIUS	:	2.355	1.710	1.759
HORIZONTAL SPREAD	:	3.002	3.002	3.002
VERTICAL SPREAD	:	3.714	2.076	1.660
EXTREME SPREAD	:	3.715	3.031	3.014
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		3	
NUMBER IN THREE INCH CIRCLE	=		6	

22 Jan 1991

FILE:/PATTERNING/CENTERFIRE_PATT/06587600.1

CENTERFIRE PATTERNS # 3

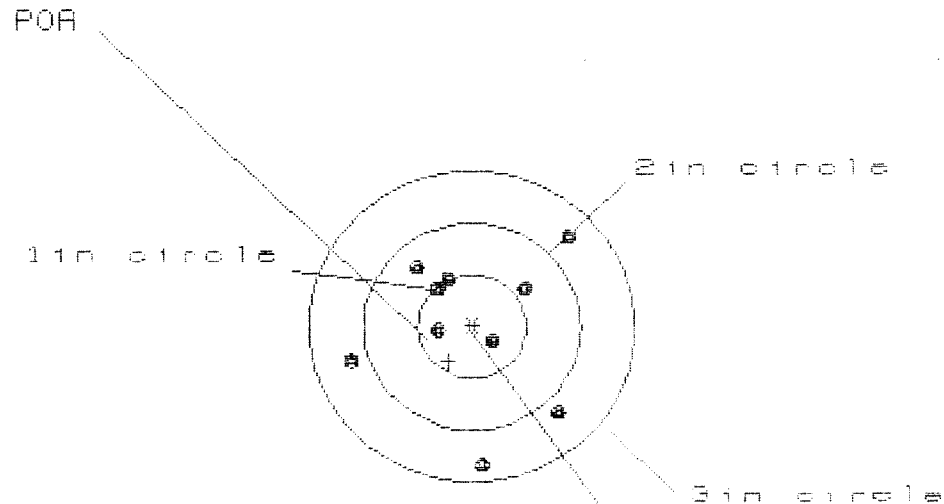

OF SHOTS- 10

IN CIR

1 in = 3

2 in = 6

3 in = 10

HS= 2.011

VS= 2.171


GS= 2.359

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.864	.871	.881
MINIMUM X	:	-1.147	-1.140	-1.031
MAXIMUM Y	:	.866	.721	.510
MINIMUM Y	:	-1.305	-1.016	-.926
CENTROID X	:	.215	.208	.099
CENTROID Y	:	.332	.477	.387
POA TO CENTROID in.	:	.396	.520	.399
MIN RADIUS	:	.274	.362	.222
MEAN RADIUS	:	.794	.714	.654
MAX RADIUS	:	1.307	1.276	1.278
HORIZONTAL SPREAD	:	2.011	2.011	1.912
VERTICAL SPREAD	:	2.171	1.737	1.436
EXTREME SPREAD	:	2.359	2.359	1.977
NUMBER IN ONE INCH CIRCLE =			3	
NUMBER IN TWO INCH CIRCLE =			6	
NUMBER IN THREE INCH CIRCLE =			10	

22 Jan 1991

FILE:/PATTERNING/CENTERFIRE_PATT/08587686.1

CENTERFIRE PATTERNS # 4

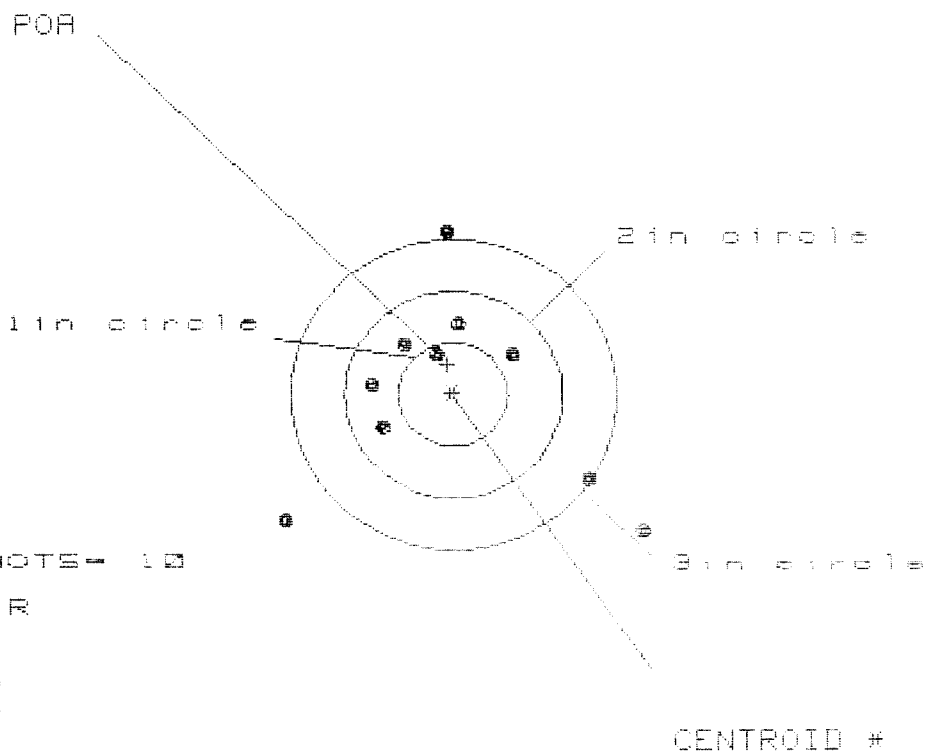

OF SHOTS = 10

IN CIR

1in = 1

2in = 5

3in = 7

HS = 3.343

VS = 2.981


GS = 3.485

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.795	1.398	1.230
MINIMUM X	:	-1.548	-1.349	-1.711
MAXIMUM Y	:	1.631	1.481	1.312
MINIMUM Y	:	-1.350	-1.352	-1.138
CENTROID X	:	.053	-.146	.022
CENTROID Y	:	-.287	-.137	.032
FOR TO CENTROID in.	:	.292	.200	.039
MIN RADIUS	:	.400	.215	.145
MEAN RADIUS	:	1.117	.922	.767
MAX RADIUS	:	2.246	1.910	1.676
HORIZONTAL SPREAD	:	3.343	2.747	1.941
VERTICAL SPREAD	:	2.981	2.833	2.450
EXTREME SPREAD	:	3.485	3.224	2.732
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		7	

22 Jan 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6587686.1

CENTERFIRE PATTERNS # 5

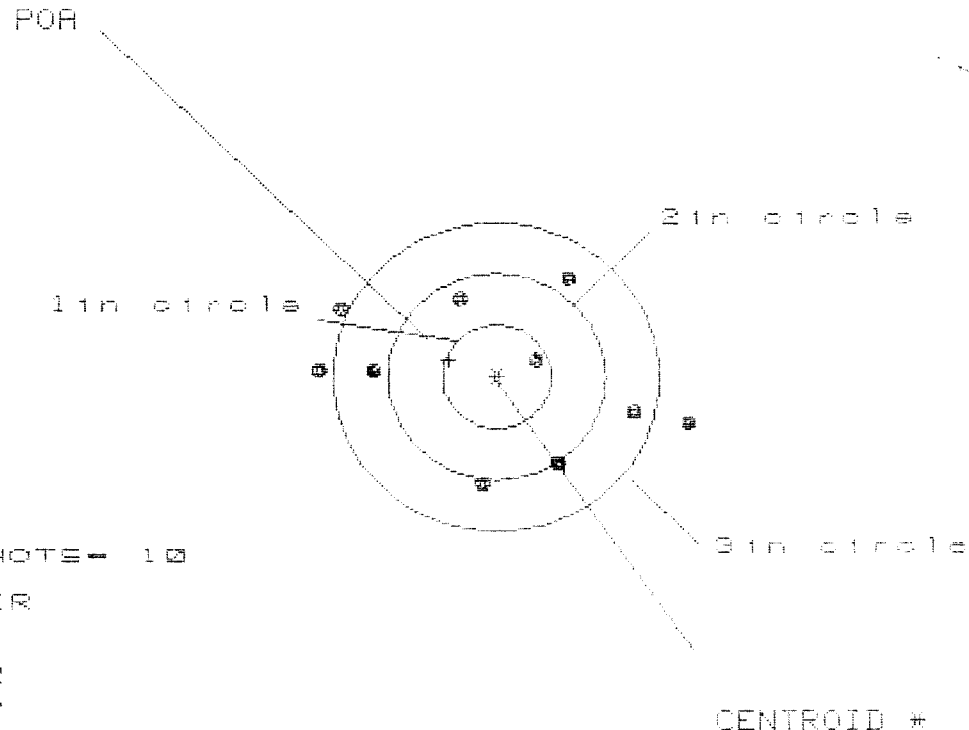

OF SHOTS = 10
 # IN CIR
 1in = 1
 2in = 2
 3in = 7
 HS = 3.343
 VS = 1.926
 GS = 3.383

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.721	1.494	1.315
MINIMUM X	:	-1.622	-1.431	-1.430
MAXIMUM Y	:	.920	.874	.881
MINIMUM Y	:	-1.006	-1.052	-1.045
CENTROID X	:	.436	.245	.424
CENTROID Y	:	-.160	-.114	-.121
POA TO CENTROID in.	:	.465	.270	.441
MIN RADIUS	:	.446	.612	.442
MEAN RADIUS	:	1.196	1.128	1.069
MAX RADIUS	:	1.771	1.548	1.550
HORIZONTAL SPREAD	:	3.343	2.925	2.745
VERTICAL SPREAD	:	1.926	1.926	1.926
EXTREME SPREAD	:	3.383	2.961	2.920
NUMBER IN ONE INCH CIRCLE =			1	
NUMBER IN TWO INCH CIRCLE =			2	
NUMBER IN THREE INCH CIRCLE =			7	

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6587606
22 Jan 1991

CENTROIDAL DISTANCES

0 TO	1	.0818352
1 TO	2	.133034
1 TO	3	.226108
1 TO	4	.189676
1 TO	5	.25316

38 <----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0386
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0624
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0733738

THE AMR FOR THIS RIFLE IS: 1.406

22 Jan 1991

FILE:/PATTERNING/CENTERFIRE_PATT/06587606

CENTERFIRE PATTERNS # 1

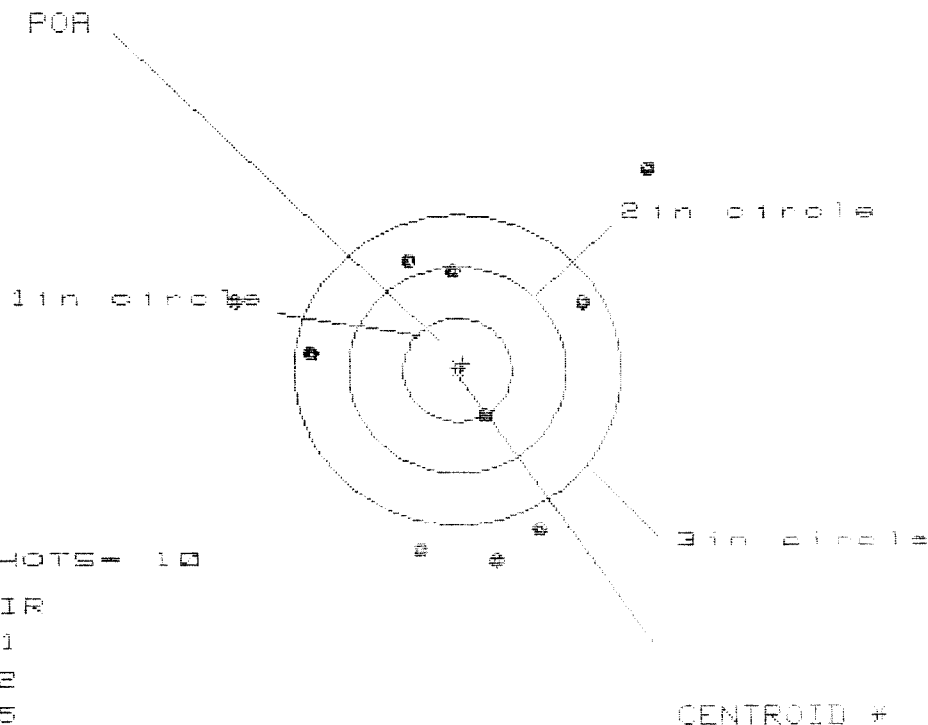

OF SHOTS= 10

IN CIR

1in = 1

2in = 2

3in = 5

HS= 3.844

VS= 3.798


GS= 4.256

PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.764	1.364	1.128
MINIMUM X	:	-2.088	-1.884	-1.368
MAXIMUM Y	:	1.964	1.324	1.434
MINIMUM Y	:	-1.826	-1.608	-1.498
CENTROID X	:	-.051	-.247	-.011
CENTROID Y	:	-.064	-.282	-.392
FOR TO CENTROID IN.	:	.081	.375	.392
MIN RADIUS	:	.494	.507	.247
MEAN RADIUS	:	1.537	1.407	1.285
MAX RADIUS	:	2.639	2.081	1.531
HORIZONTAL SPREAD	:	3.844	3.248	2.496
VERTICAL SPREAD	:	3.798	2.932	2.932
EXTREME SPREAD	:	4.256	3.536	3.029
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		2	
NUMBER IN THREE INCH CIRCLE	=		5	

22 Jan 1991

FILE:/PATTERNING/CENTERFIRE_PATT/08507686

CENTERFIRE PATTERNS # 2

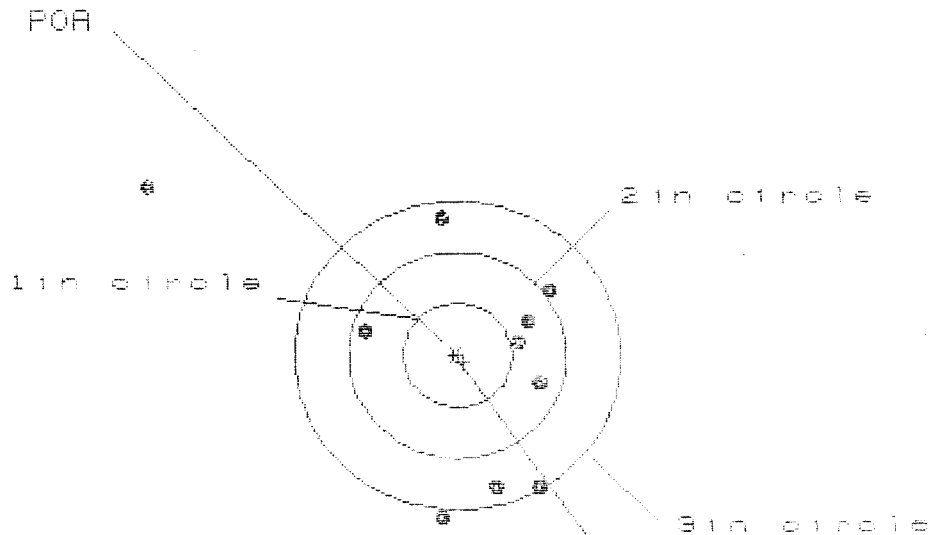

OF SHOTS = 10

IN CIR

1 in = 0

2 in = 4

3 in = 8

HS = 3.549

VS = 3.174

GS = 4.582


PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.849	.538	.487
MINIMUM X	:	-2.800	-1.124	-1.175
MAXIMUM Y	:	1.629	1.499	1.329
MINIMUM Y	:	-1.545	-1.364	-1.279
CENTROID X	:	-.054	.257	.308
CENTROID Y	:	.069	-.112	.058
POA TO CENTROID in.	:	.088	.280	.314
MIN RADIUS	:	.576	.401	.255
MEAN RADIUS	:	1.290	.989	.896
MAX RADIUS	:	3.239	1.578	1.435
HORIZONTAL SPREAD	:	3.649	1.662	1.662
VERTICAL SPREAD	:	3.174	2.863	2.608
EXTREME SPREAD	:	4.582	2.864	2.728
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		8	

22 Jan 1991

FILE:/PATTERNING/CENTERFIRE_PATT/06587688

CENTERFIRE PATTERNS

3

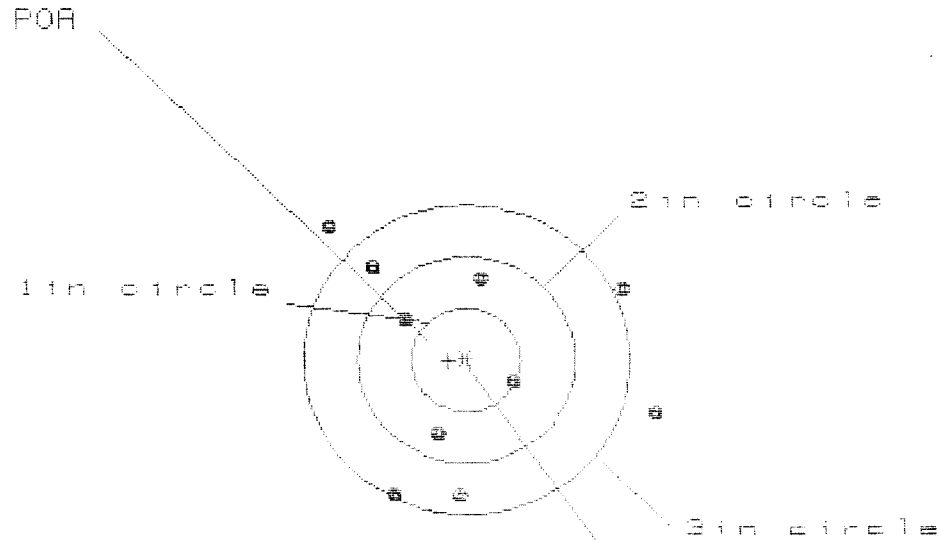

OF SHOTS- 10

IN CIR

1in = 1

2in = 4

3in = 7

HS= 3.001

VS= 2.608

GS= 3.505

CENTROID *


PATTERN #	3		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.705	1.561	1.536
MINIMUM X	-1.296	-1.010	-0.815
MAXIMUM Y	1.305	1.005	0.960
MINIMUM Y	-1.303	-1.158	-1.203
CENTROID X	.163	.307	.112
CENTROID Y	.009	-.136	-.091
POR TO CENTROID in.	.163	.336	.144
MIN RADIUS	.463	.267	.465
MEAN RADIUS	1.199	1.113	1.038
MAX RADIUS	1.839	1.602	1.738
HORIZONTAL SPREAD	3.001	2.571	2.351
VERTICAL SPREAD	2.608	2.163	2.163
EXTREME SPREAD	3.505	2.977	2.977
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		4	
NUMBER IN THREE INCH CIRCLE =		7	

22 Jan 1991

FILE:/PATTERNING/CENTERFIRE_PATT/08587600

CENTERFIRE PATTERNS # 4

POB

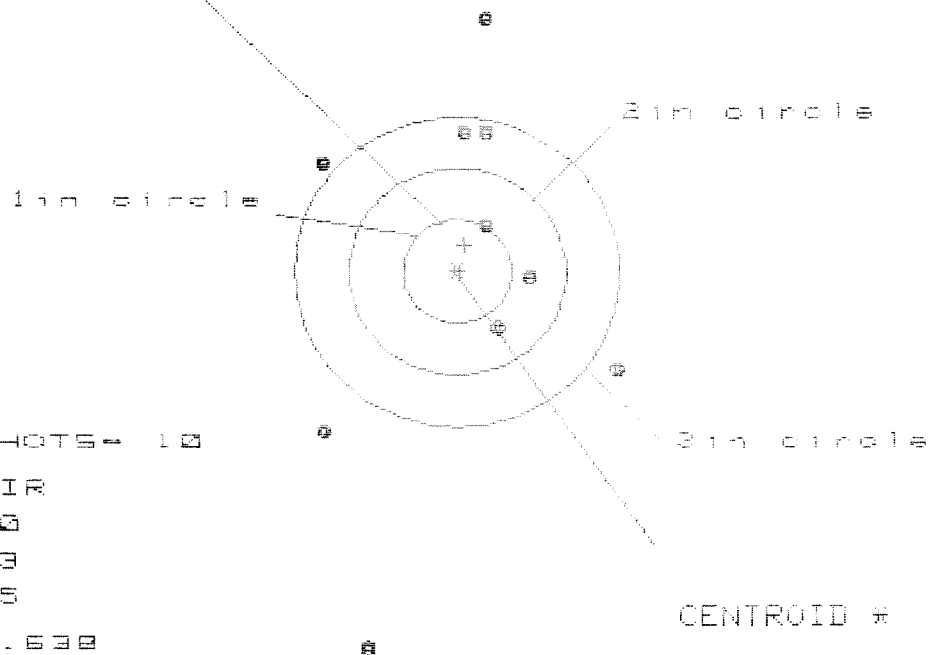

OF SHOTS = 10

IN CIR

1 in = 0

2 in = 3

3 in = 5

LE = 2.638

VS = 6.086

GS = 6.187


CENTROID *

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.420	1.326	1.348
MINIMUM X	:	-1.218	-1.312	-1.290
MAXIMUM Y	:	2.408	2.000	1.232
MINIMUM Y	:	-3.678	-1.967	-1.717
CENTROID X	:	-.067	.027	.005
CENTROID Y	:	-.253	.155	-.095
POB TO CENTROID in.	:	.262	.157	.095
MIN RADIUS	:	.521	.146	.246
MEAN RADIUS	:	1.613	1.282	1.207
MAX RADIUS	:	3.774	2.365	2.148
HORIZONTAL SPREAD	:	2.638	2.638	2.638
VERTICAL SPREAD	:	6.086	3.967	2.949
EXTREME SPREAD	:	6.187	4.237	3.316
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		3	
NUMBER IN THREE INCH CIRCLE	=		5	

22 Jan 1991

FILE: \PATTERNING\CENTERFIRE_PATT\06582606

CENTERFIRE PATTERNS # 5

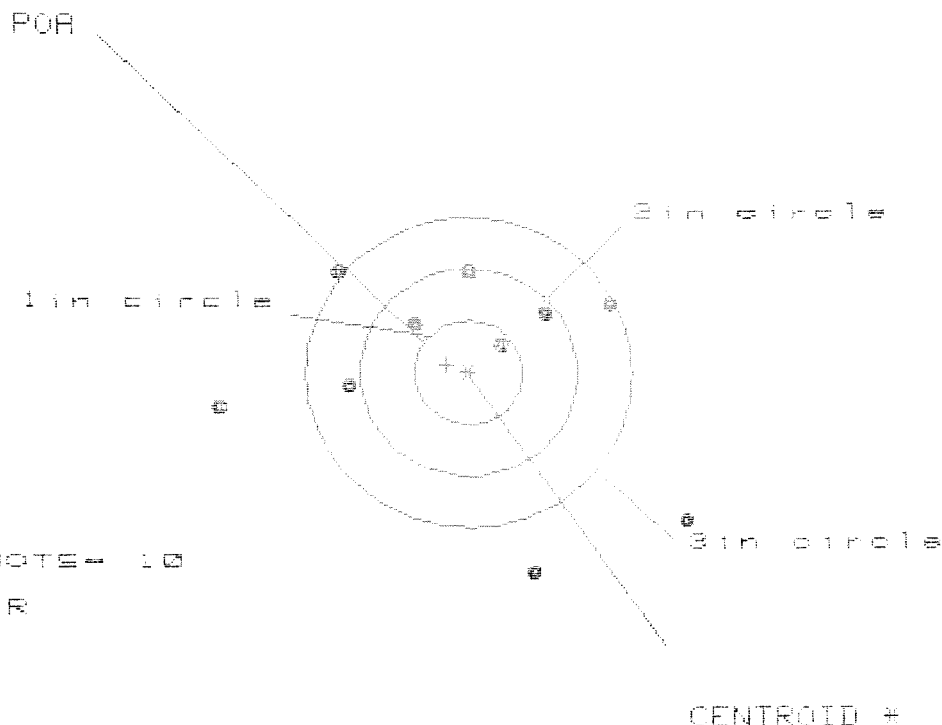

OF SHOTS = 10

IN CIR

1in = 1

2in = 4

3in = 5

HS = 4.376

VS = 2.893

GS = 4.501

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	2.029	1.547	1.281
MINIMUM X	:	-2.347	-2.121	-1.212
MAXIMUM Y	:	.945	.790	.729
MINIMUM Y	:	-1.948	-2.103	-2.164
CENTROID X	:	.202	-.024	.242
CENTROID Y	:	-.073	.082	.143
POB TO CENTROID in.	:	.214	.085	.281
MIN RADIUS	:	.417	.440	.303
MEAN RADIUS	:	1.389	1.228	1.070
MAX RADIUS	:	2.459	2.271	2.244
HORIZONTAL SPREAD	:	4.376	3.668	2.493
VERTICAL SPREAD	:	2.893	2.893	2.893
EXTREME SPREAD	:	4.501	3.813	3.409
NUMBER IN ONE INCH CIRCLE =			1	
NUMBER IN TWO INCH CIRCLE =			4	

NUMBER IN THREE INCH CIRCLE =

6

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400023672