

C6587676

MODEL 700™ M24

Model **SMS**™

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington

C-6587676

Scope S/N 88-1024

Repair Inquiry

Repair Number: **RE00000752** Serial: C6587676 Model 700 Center Fire Caliber: 7.62 SwS M 24 8DF18 Repairman: Status: New 12/15/99 12:54:39 PM

Address Information

Customer: ☒ Received From Return To: ☐ Received From

Name: **TRANSPORTATION OFFICER** **TRANSPORTATION OFFICER**

Address 1: **XVIII AIRBORNE CORPS AND FORT BRAGG** **XVIII AIRBORNE CORPS AND FORT BRAGG**

Address 2: **BUILDING J-2050** **BUILDING J-2050** PO Box: **PO Box**

City: **FORT BRAGG** **FORT BRAGG**

State: **NC** Zip Code: **28310** Country: **US** State: **NC** Zip Code: **28310** Country: **US**

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition **Problems** **Estimate** **History / Status** **Shipping / Billing**

Contact Information

Phone:

Fax:

Email:

Comments:

Received Condition

Pool:

Condition:

Notes:

CSF:

Notes:

Accessories Received

Code	Desc	Qty
A010	Hard Case	1
A016	Scope Mounts	2
A017	Scope Base	1
A026	Scope	1

BBL 96003

Remington.

TRACKING DOCUMENT

Repair Order Number



Repair Order Numbe

RE00000752

Description/Serial

C6587676

Repairman -

Date Received 12/15/1999

Account # - R-

Model 700 Center Fire Caliber: 7.62

Estimate Date

SWS M-24 8OF18

Current Date - 12/16/1999

Customer

TRANSPORTATION OFFICER
XVIII AIRBORNE CORPS AND FORT B
BUILDING J-2050
FORT BRAGG NC 28310 US

Return To

TRANSPORTATION OFFICER
XVIII AIRBORNE CORPS AND FORT
BUILDING J-2050
FORT BRAGG NC 28310 US

Phone (H)

Fax

Phone (W)

Email

Problems

Reported

Found

--	--

Repair

Material #

MaterialDesc

Quantity
Needed

Quantity
From

Quantity
From

Warranty
(Y/N)

Total:

Serial Number: C6587676

Model ID: 700



RE00000752

Repairman	Proof	Clean	Test	Target	Pattern
Gallery Tester	Date	Date	Date	Date	Date

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6587676

5 Apr 2000

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.173

THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0976

THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .198632

THE AMR FOR THIS RIFLE IS: 1.038

CENTROIDAL DISTANCES

Ø TO	1	.207885
1 TO	2	.780708
1 TO	3	.405346
1 TO	4	.478127
1 TO	5	.886199

2 4 3 + 1 <----POA

5


PATTERN #: ☐ 1 ☐

POA TO CENTROID: .208
 MIN RADIUS : .126
 MEAN RADIUS : .688
 MAX RADIUS : 2.107
 CENTROID X : .180
 CENTROID Y : .104

5 Apr 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6587676

CENTERFIRE PATTERN # 1

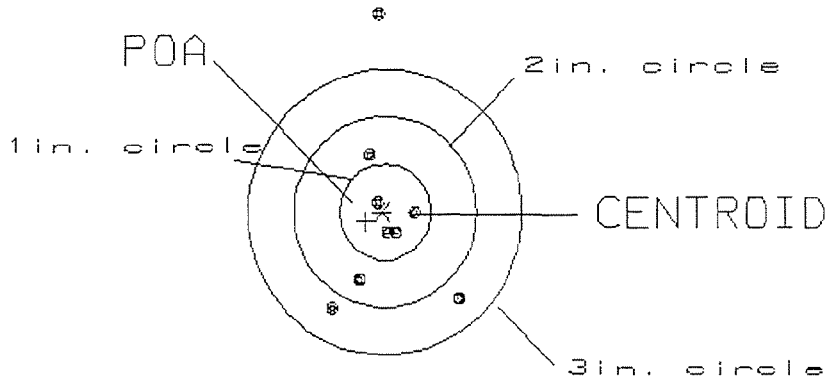

OF SHOTS= 10

IN CIRCLE

H3= 1.37

5

VS= 3.07

7

GS= 3.15

9

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: 2

POA TO CENTROID: .623
 MIN RADIUS : .421
 MEAN RADIUS : 1.279
 MAX RADIUS : 2.165
 CENTROID X : -.597
 CENTROID Y : .180

5 Apr 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6587676

CENTERFIRE PATTERN # 2

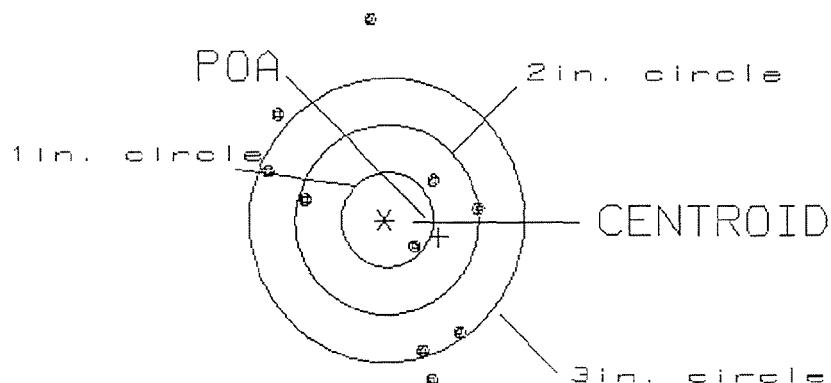

OF SHOTS= 10

IN CIRCLE

HS= 2.29

1

VS= 3.83

3

GS= 3.90

7


PATTERN #: ☐ 3 ☐

POA TO CENTROID: .197
 MIN RADIUS : .251
 MEAN RADIUS : 1.179
 MAX RADIUS : 2.149
 CENTROID X : -.172
 CENTROID Y : -.097

5 Apr 2000

FILE:/Hqbasic/Accuracy/Patterning/Centerfire_Patt/C6587676

CENTERFIRE PATTERN # 3

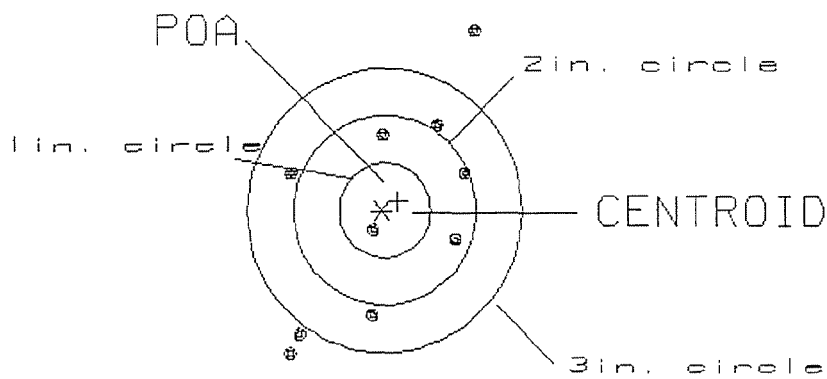

OF SHOTS= 10

IN CIRCLE

HS= 2.02

1

VS= 3.41

4

GS= 3.96

7

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 4 ☐

POA TO CENTROID: .312

MIN RADIUS : .092

MEAN RADIUS : .758

MAX RADIUS : 1.185


CENTROID X : -.298

CENTROID Y : .093

5 Apr 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6587676

CENTERFIRE PATTERN # 4

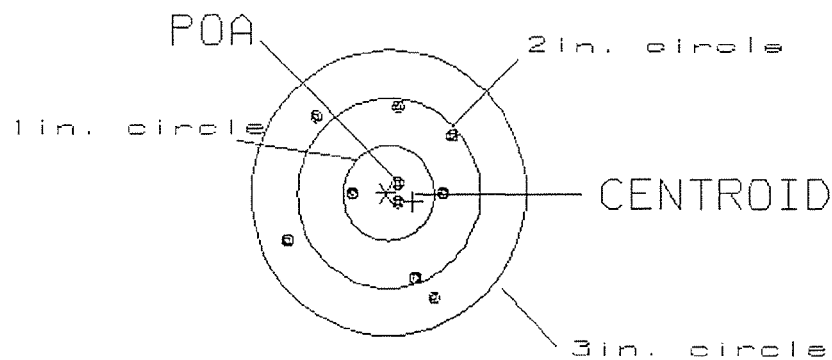

OF SHOTS= 10

IN CIRCLE

HS= 1.79

3

VS= 2.03

7

GS= 2.28

10


PATTERN #: ☐ 5 ☐

POA TO CENTROID: .768
 MIN RADIUS : .430
 MEAN RADIUS : 1.285
 MAX RADIUS : 2.513
 CENTROID X : .022
 CENTROID Y : -.768

5 Apr 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6587676

CENTERFIRE PATTERN # 5

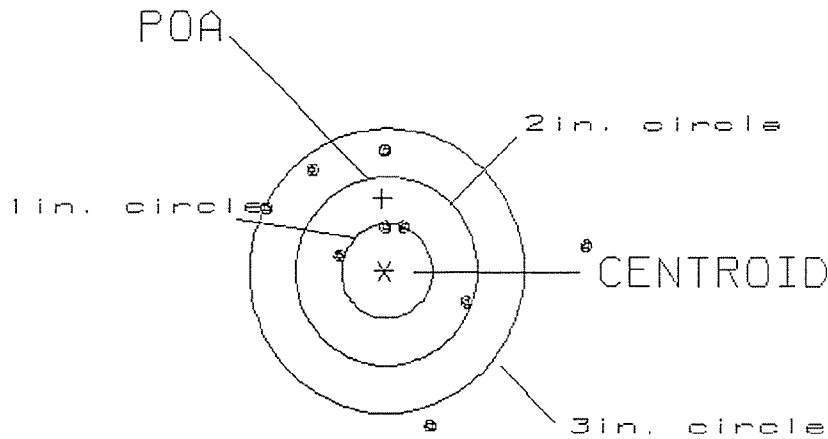

OF SHOTS= 10

IN CIRCLE

HS= 3.47

1

VS= 3.60

4

GS= 3.98

7

21 DAY TURN - AROUND

M-24

CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO. *C6587676*

LOG IN DATE: / /		DATE	INIT.
INSPECT & VERIFY:			
OP. #	OP. NAME		
550	DIS-ASSEMBLE GUN	<i>12-24-99</i>	
560 A	RE-BARREL AT CUSTOM SHOP		
B	DRILL & TAP		
C	POLISH		
575	ASSEMBLE		
600	PROOF	<i>1-12-00</i>	<i>Rw</i>
605	CHECK HEADSPACE	<i>1-12-00</i>	<i>Rw</i>
610	DIS-ASSEMBLE		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST		
C	SAFETY ON FORCE		
D	SAFETY OFF FORCE		
E	FIRING PIN INDENT		
640	TARGET	<i>4-4-00</i>	<i>Rw</i>
655	FINAL INSPECT	<i>4-10-00</i>	<i>Rw</i>
660	PACK		

QAR INSPECTION

SHIP DATE

Final Inspection

Sr: C6587626

DATE REC'D: 12-12-99

DATE RET'D:

AUDITOR:

RW

Item:

BARREL ASSY.

☒ BARREL

☒ RECEIVER

☒ FRONT SIGHT BLOCK

☒ REAR SIGHT BLOCK

☒ SCREWS

☒ FINISH

SCOPE ASSY.

☒ SCOPE

☒ SCOPE RINGS

☒ MOUNTING SCREWS

☒ MOUNTING BASE

☒ SCREWS

☒ FINISH

☒ LOOSENESS

☒ CLARITY

MISC.

☒ DD-250

☒ BAR CODE

☒ PACKAGING

Item:

STOCK ASSY.

☒ STOCK

☒ SLING SWIVEL STUDS

☒ ADJUSTABLE BUTT PLATE

☒ LOCK NUTS

☒ BARREL CLEARANCE

☒ COLOR/FINISH

SYSTEMS CASE

☒ SCOPE CASE

☒ IRON SIGHTS

☒ DEPLOYMENT KIT

TRIGGER

☒ SAFETY OPERATION

☒ SET

Comments:

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER

R 94-18214

INITIAL FDC CUSTOMER ORDER NO. DAAA09-92-C-0834

W/10X SCOPE, M-24 SNIPER, W/DEPLOYMENT KIT
ATTN: FRED MARTIN

SCOPE 90-0580

DATE RECEIVED 06/10/94	DATE OPENED 06/10/94	DATE CODE	SERIAL NUMBER C6587676	NEW SERIAL NUMBER	MODEL AND GRADE 700 7-62	NATO
ACCESSORIES SLING STRAP		HARD CASE		SCOPE MNTS		SCOPE BASE

FROM:

SHIP TO:

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON

AL 36201-5025

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTONAL
36201-5025

CUST NO: 098397 C-JO.DL

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

FRT

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

PARTS

Trigger Assy

COMMENTS

REPAIRMAN	PROOF	CLEAN	TEST	TARGET	PATTERN
GALLERY TESTER	DATE	DATE	DATE	DATE	DATE

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400025087

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6587676

DATE 12-13-94

TESTER B.M.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.57	2.59	2.50		MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.66	2.46	2.68		
PULL #3	2.49	2.43	2.39		
PULL #4	2.73	2.39	2.66		
PULL #5	2.69	2.44	2.70		
TOTAL	13.14	12.31	12.93		
AVG.	2.62	2.46	2.58		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.07	3.28		
PULL #2	3.25	3.25		
PULL #3	3.27	3.09		
PULL #4	3.21	3.30		
PULL #5	3.07	3.26		
TOTAL	15.87	16.18		
AVG.	3.17	3.23		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.03	4.22		3.98
PULL #2	4.23	4.29		3.99
PULL #3	4.28	4.28		4.16
PULL #4	3.94	4.21		4.05
PULL #5	4.12	4.19		4.06
TOTAL	20.60	21.19		20.24
AVG.	4.12	4.23		4.04

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6587676

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	5 1/2	5 1/2	5 1/2			11/30	WB
	G) Safety Off Force	3	3 1/2	3 1/4			11/30	WB
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent							
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test							
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo							
655	Final Inspection							
	A) Headspace							
	B) Trigger Pull	2.82	2.84	2.83	2.87	2.62	11/30	WB
	C) Function							
660	Pack							

Remington®



VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700TM M24

SERIAL NO.

C6587676

ORDER NO.

5716


20

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marqua Deposee.



5716 C6587676

LPC



0 4700 25716 2

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6587676

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	70 9 90		RW
600	Proof	70 9 90		RW
607	Check Headspace	76 9 90		RW
610	Dis-assemble Gun	70 9 90		RW
612	Magnaflux Barrel Action		10/17/90	KR
	Magnaflux Bolt		10/17/90	KR
615	Rollmark Caliber		10/17/90	L.S.
617	Drill and Tap Sight Holes		10/18/90	F.B.
618	Polish Barrel RIB		10/19/90	W.B.
620	Apply Coatings (Barrel Action)		11-5-90	JA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		12/12/90	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		12/12/90	RW
	C) Inspect Ejector Hole for Chamfer		12/12/90	RW
	D) Oil Firing Pin Ass'y		12/12/90	RW
	E) Adjust Trigger Pull to Min Setting and Stake		1-10-91	JY

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	4.25	4.25	4.00			1/8/91	KJ
	G) Safety Off Force	2.75	2.75	2.75			1/8/91	KJ
	H) Trigger Pull Test & Retainability						1-10-91	JH
	I) Firing Pin Indent	.020	.020	.021			1/8/91	KJ
	J) Assemble Stock						1/14/91	RW
	K) Assemble Swivel Studs						1-15-91	JH
	L) Attach Front and Rear Sight Assemblies						1/14/91	RW
	M) Iron Sight Alignment						1/14/91	RW
	N) Detach Front & Rear Sights & place in numbered container						1/14/91	RW
	O) Attach Scope to Rifle						1/14/91	RW
	P) Detach & Attach Scope 20 Times						1/14/91	RW
640	Gallery Target & Test						1-14-91	AF
	A) Time						"	AF
	B) Malfunctions						"	AF
	C) Pierced Primers						"	AF
	D) Optical Clarity of Scope						"	AF
645	Inspect for Live Ammo						1-14-91	AF
655	Final Inspection							
	A) Headspace						1-15-91	JH
	B) Trigger Pull	2.27	2.30	2.31	2.25	2.23	1-15-91	JH
	C) Function						1-15-91	JH
660	Pack						3-19-91	AF

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6587676
DATE 1-10-91
TESTER JR

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.43	2.41	2.28	2.27	MIN. SETTING,
PULL #2	2.49	2.21	2.34	2.30	NO AVG. OF 5
PULL #3	2.38	2.50	2.27	2.31	READINGS ACCEPT-
PULL #4	2.56	2.42	2.34	2.25	ABLE LESS THAN 2#
PULL #5	2.42	2.37	2.13	2.23	
TOTAL					
AVG.					

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.42	3.37		
PULL #2	3.45	3.39		
PULL #3	3.38	3.34		
PULL #4	3.35	3.36		
PULL #5	3.38	3.31		
TOTAL				
AVG.				

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.40	4.49		4.33
PULL #2	4.21	4.38		4.50
PULL #3	4.19	4.46		4.24
PULL #4	4.47	4.47		4.14
PULL #5	4.41	4.34		4.33
TOTAL				
AVG.				

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6587676
15 Jan 1991

CENTROIDAL DISTANCES

0 TO	1	.0797621
1 TO	2	.22912
1 TO	3	.285044
1 TO	4	.0712531
1 TO	5	.208022


34 <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0594
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0134
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0608927
THE AMR FOR THIS RIFLE IS: 1.094

15 Jan 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C8587676

CENTERFIRE PATTERNS # 1

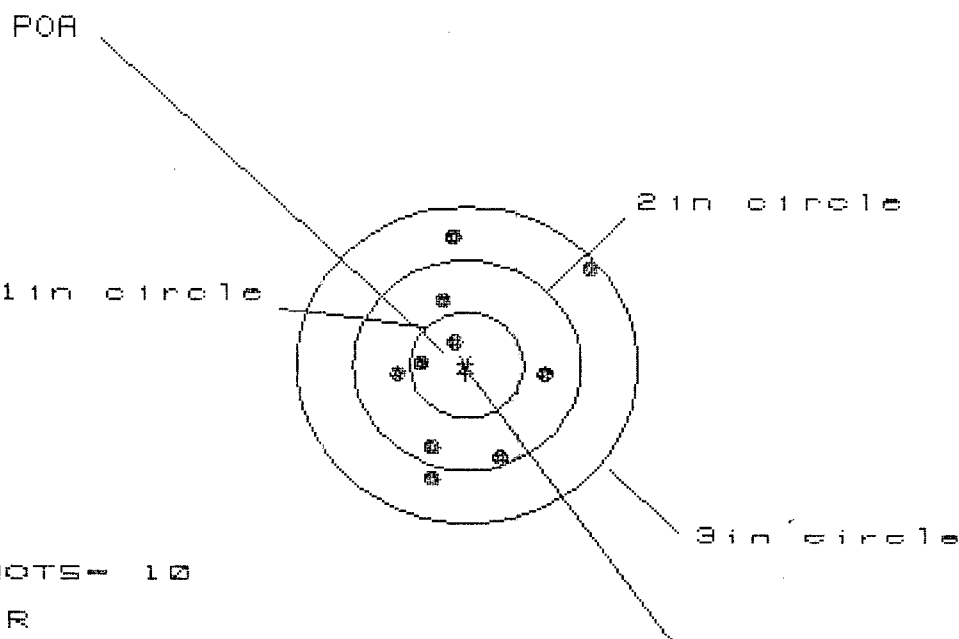

OF SHOTS- 10

IN CIR

1in = 2

2in = 7

3in = 10

HS= 1.697

VS= 2.292

GS= 2.500


CENTROID #

PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.126	.857	.860
MINIMUM X	:	-.571	-.446	-.443
MAXIMUM Y	:	1.215	1.319	.847
MINIMUM Y	:	-1.077	-.973	-.808
CENTROID X	:	.011	-.114	-.117
CENTROID Y	:	.079	-.025	-.190
POA TO CENTROID in.	:	.080	.117	.223
MIN RADIUS	:	.243	.283	.369
MEAN RADIUS	:	.821	.726	.654
MAX RADIUS	:	1.463	1.319	.886
HORIZONTAL SPREAD	:	1.697	1.303	1.303
VERTICAL SPREAD	:	2.292	2.292	1.655
EXTREME SPREAD	:	2.500	2.306	1.659
NUMBER IN ONE INCH CIRCLE =			2	
NUMBER IN TWO INCH CIRCLE =			7	
NUMBER IN THREE INCH CIRCLE =			10	

15 Jan 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C8587676

CENTERFIRE PATTERNS # 2

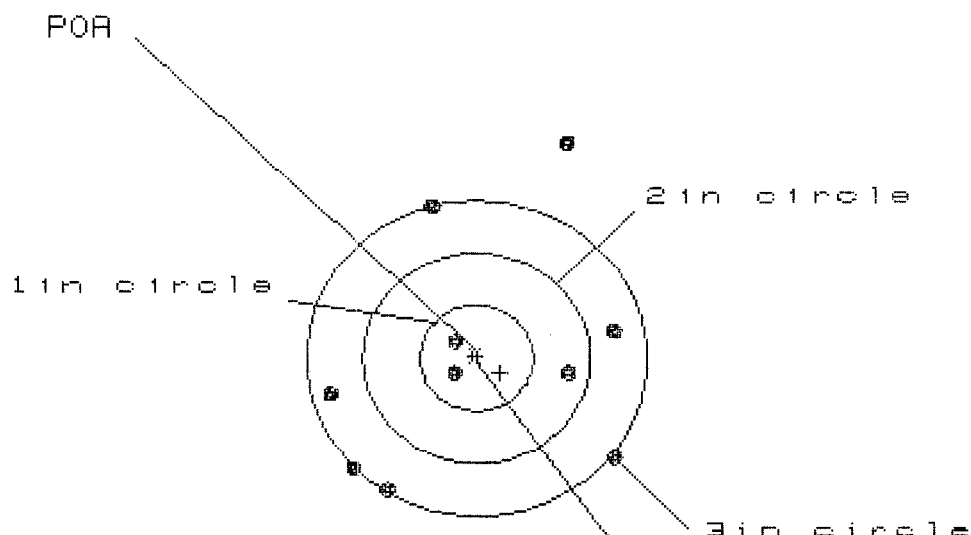

OF SHOTS- 10

IN CIR

1 in - 2

2 in - 3

3 in - 5

HS= 2.498

VS= 3.312

GS= 3.681


CENTROID #

PATTERN #	:	2	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.242	1.330	1.287
MINIMUM X	:	-1.256	-1.168	-1.211
MAXIMUM Y	:	2.037	1.729	.700
MINIMUM Y	:	-1.275	-1.048	-.832
CENTROID X	:	-.209	-.297	-.254
CENTROID Y	:	.143	-.084	-.300
POA TO CENTROID in.	:	.253	.309	.393
MIN RADIUS	:	.214	.142	.346
MEAN RADIUS	:	1.215	1.091	1.028
MAX RADIUS	:	2.185	1.763	1.405
HORIZONTAL SPREAD	:	2.498	2.498	2.498
VERTICAL SPREAD	:	3.312	2.777	1.532
EXTREME SPREAD	:	3.681	2.964	2.665
NUMBER IN ONE INCH CIRCLE	=	2		
NUMBER IN TWO INCH CIRCLE	=	3		
NUMBER IN THREE INCH CIRCLE	=	5		

15 Jan 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6587676

CENTERFIRE PATTERNS # 3

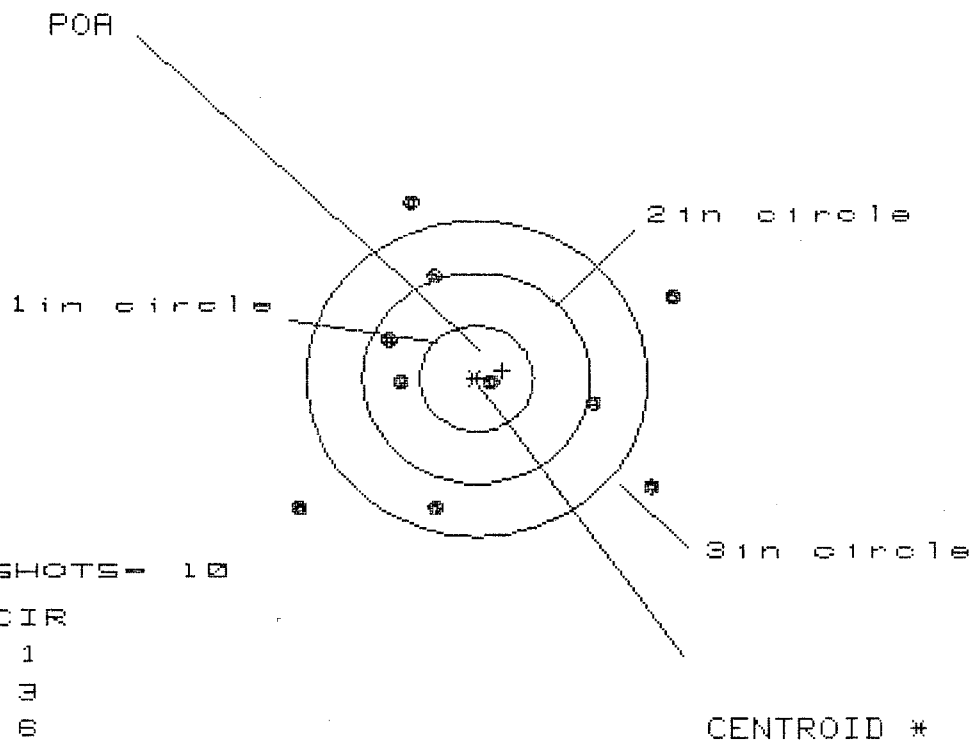

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 3

3 in = 6

HS= 3.329

VS= 2.887


GS= 3.848

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.766	1.592	1.541
MINIMUM X	:	-1.563	-.943	-.744
MAXIMUM Y	:	1.627	1.495	1.572
MINIMUM Y	:	-1.260	-1.392	-1.315
CENTROID X	:	-.232	-.058	-.257
CENTROID Y	:	-.070	.062	-.015
POA TO CENTROID in.	:	.242	.085	.258
MIN RADIUS	:	.084	.168	.127
MEAN RADIUS	:	1.239	1.169	1.062
MAX RADIUS	:	1.963	1.747	1.861
HORIZONTAL SPREAD	:	3.329	2.535	2.285
VERTICAL SPREAD	:	2.887	2.887	2.887
EXTREME SPREAD	:	3.848	3.327	3.327
NUMBER IN ONE INCH CIRCLE =			1	
NUMBER IN TWO INCH CIRCLE =			3	
NUMBER IN THREE INCH CIRCLE =			6	

15 Jan 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C8587676

CENTERFIRE PATTERNS # 4

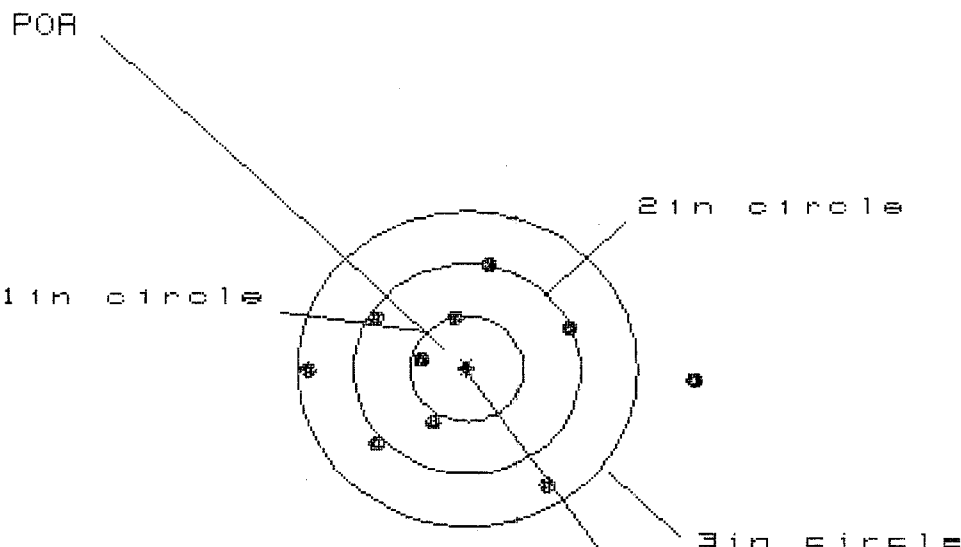

OF SHOTS- 10

IN CIR

1in = 1

2in = 6

3in = 9

HS= 3.337

VS= 2.057

GS= 3.340


PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.958	1.136	.991
MINIMUM X	:	-1.379	-1.162	-.769
MAXIMUM Y	:	.959	.943	.941
MINIMUM Y	:	-1.098	-1.114	-1.116
CENTROID X	:	.005	-.212	-.067
CENTROID Y	:	.008	.024	.026
POA TO CENTROID in.	:	.009	.214	.072
MIN RADIUS	:	.382	.167	.308
MEAN RADIUS	:	1.015	.861	.837
MAX RADIUS	:	1.963	1.440	1.354
HORIZONTAL SPREAD	:	3.337	2.298	1.760
VERTICAL SPREAD	:	2.057	2.057	2.057
EXTREME SPREAD	:	3.340	2.346	2.209
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

15 Jan 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6587676

CENTERFIRE PATTERNS

5

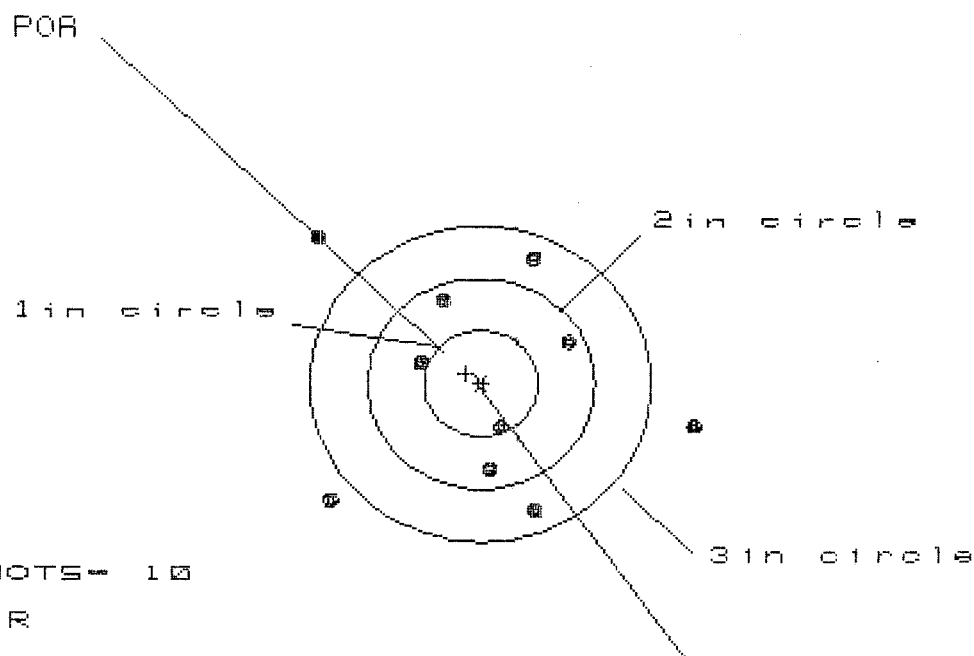

OF SHOTS - 10

IN CIR

1in = 1

2in = 5

3in = 7

HS = 3.299

VS = 2.641

GS = 3.793

CENTROID *

PATTERN #	:	5	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.879	1.721	.817
MINIMUM X	:	-1.420	-1.505	-1.290
MAXIMUM Y	:	1.418	1.389	1.352
MINIMUM Y	:	-1.223	-1.065	-1.102
CENTROID X	:	.128	.286	.071
CENTROID Y	:	-.093	-.251	-.214
POA TO CENTROID in.	:	.159	.381	.225
MIN RADIUS	:	.413	.233	.331
MEAN RADIUS	:	1.182	1.069	.975
MAX RADIUS	:	2.007	1.804	1.652
HORIZONTAL SPREAD	:	3.299	3.226	2.107
VERTICAL SPREAD	:	2.641	2.454	2.454
EXTREME SPREAD	:	3.793	3.301	2.976
NUMBER IN ONE INCH CIRCLE	=	1		
NUMBER IN TWO INCH CIRCLE	=	5		
NUMBER IN THREE INCH CIRCLE	=	7		