

C6523350

MODEL 700™ M24

Model **SMS**™

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: RE00136596

Serial: C6523350 Model M24 SWS Center Fire
Caliber: 7.62 NATO

Repairman:

Verify Repair

Status:

Closed 11/9/2007 8:16:43 AM

Address Information

Customer: ☒ Received From Return To: ☐ Received From

Name: 1/1 ADA 1/1 ADA

Address 1: LONGKNIFE LONGKNIFE

Address 2: PO Box: PO Box:

City: FORT BLISS FORT BLISS

State: TX Zip Code: 79916 Country: US State: TX Zip Code: 79916 Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NN

Fax:

Email:

Comments:

Received Condition

Fair

Condition
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A017	Scope Base	1
A026	Scope	1
A045	Bi Pod	1
A057	Frt and Rear Sgt Base	1

Repair Search

Refresh

Close

nagletj

11/9/2007

9:14 AM

CAPS

NUM

INS

SCRL

start

51

71

A...

31

P...

M...

2

M...

9:14 AM

Serial:
Number: C6523350

Model: M24 SWS



RE00136596

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6523350.___0
FILE DATE AND TIME: 02/14/2008 13:55


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.078
The Average Y Centroid of the Five Target Set:	0.060
The Average Point of Impact of the Five Target Set:	0.099
The Average Mean Radius of the Five Target Set:	0.864
The Distance from POA to Centroid Target #1:	0.128
The Distance from Centroid Target #2 to Centroid Target #1:	0.124
The Distance from Centroid Target #3 to Centroid Target #1:	0.118
The Distance from Centroid Target #4 to Centroid Target #1:	0.186
The Distance from Centroid Target #5 to Centroid Target #1:	0.092

SERIAL NUMBER: C6523350. __ 0
TARGET NUMBER: 1
FILE DATE: 02/14/2008
FILE TIME: 13:55

X CENTROID: -0.128
Y CENTROID: -0.003
POA TO CENTROID: 0.128
HORZ SPREAD: 1.644
VERT SPREAD: 3.256
GROUP SPREAD: 3.335
MIN RADIUS: 0.305
MAX RADIUS: 2.037
MEAN RADIUS: 0.863
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	-0.176	2.034
2:	0.035	0.751
3:	-0.724	0.484
4:	0.122	0.258
5:	-0.448	-0.059
6:	0.080	-0.227
7:	0.748	-0.397
8:	-0.031	-0.703
9:	0.014	-0.948
10:	-0.896	-1.222

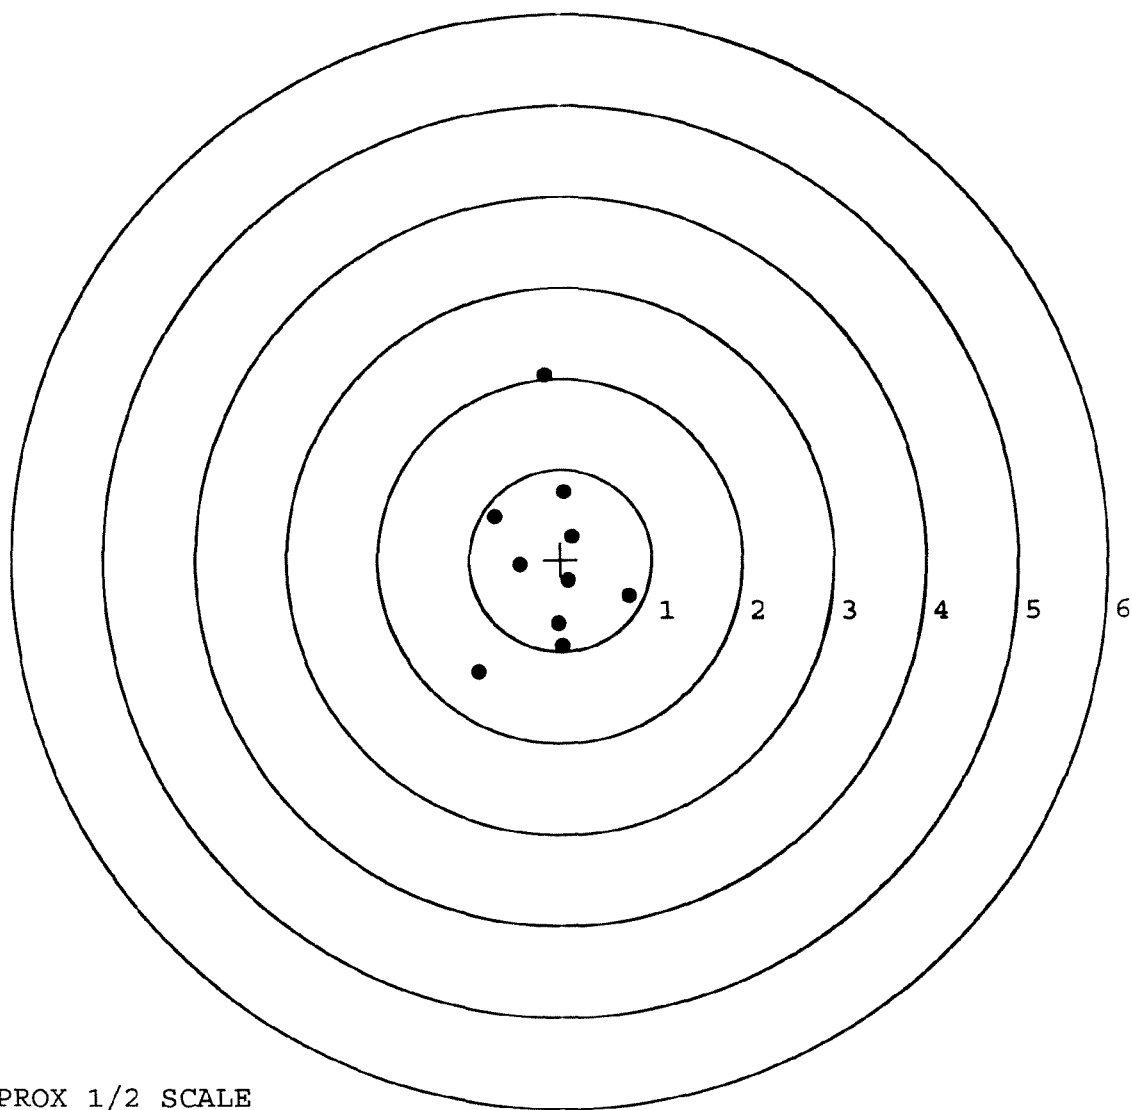


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523350. __0
TARGET NUMBER: 2
FILE DATE: 02/14/2008
FILE TIME: 13:55

X CENTROID: -0.037
Y CENTROID: 0.082
POA TO CENTROID: 0.090
HORZ SPREAD: 3.211
VERT SPREAD: 2.442
GROUP SPREAD: 3.293
MIN RADIUS: 0.156
MAX RADIUS: 1.764
MEAN RADIUS: 1.013
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 6
in 3 IN DIAMETER: 6

POINT#	X	Y
1:	1.627	-0.502
2:	1.280	-0.639
3:	0.632	-0.356
4:	-1.584	0.227
5:	-0.856	-0.458
6:	-0.547	-0.248
7:	-0.193	0.075
8:	0.172	0.425
9:	-0.478	0.496
10:	-0.423	1.803

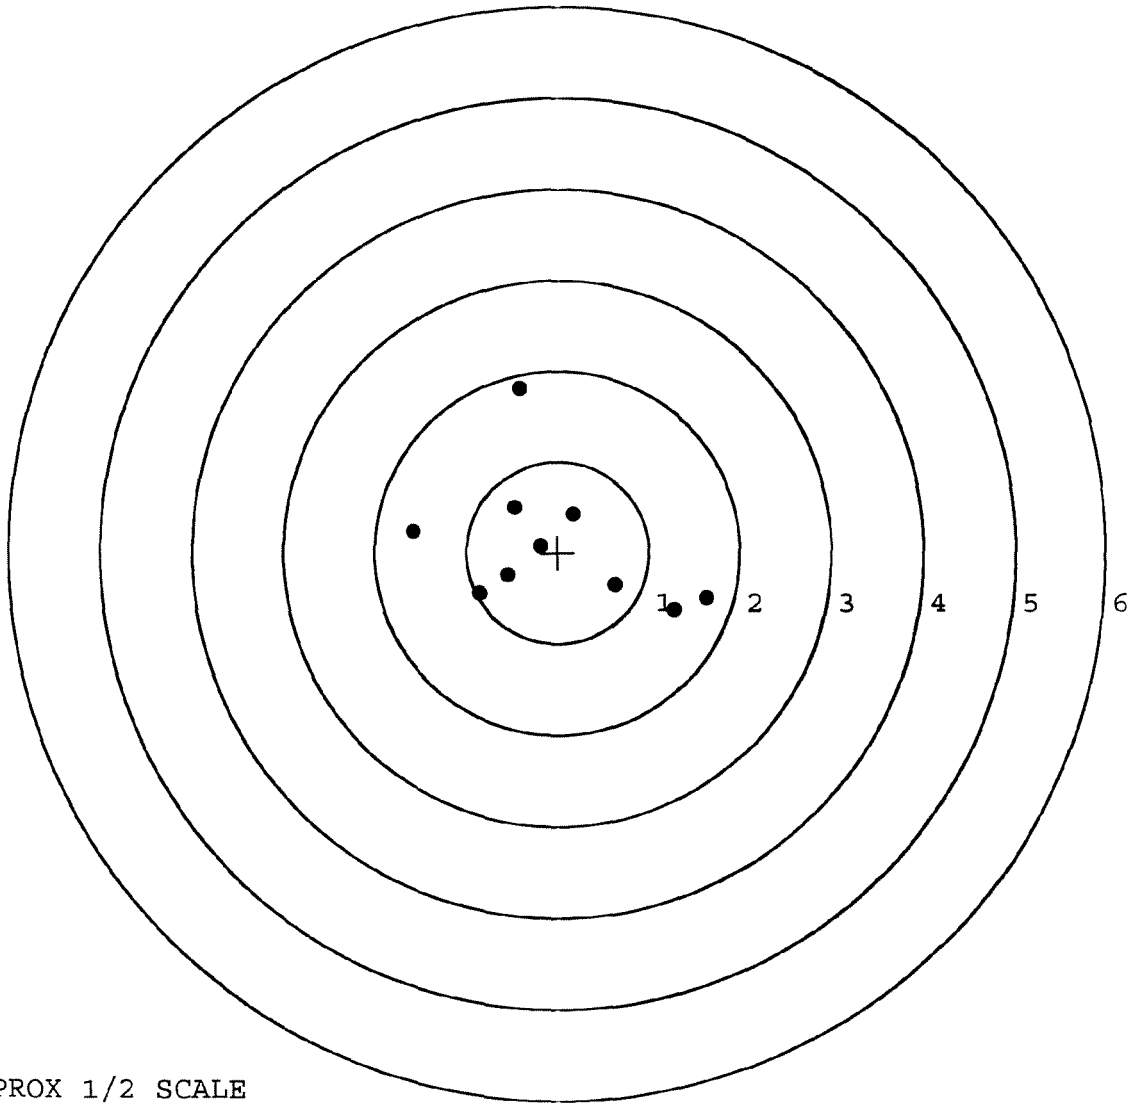


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523350. __0
TARGET NUMBER: 3
FILE DATE: 02/14/2008
FILE TIME: 13:55

X CENTROID: -0.128
Y CENTROID: 0.115
POA TO CENTROID: 0.172
HORZ SPREAD: 2.602
VERT SPREAD: 1.555
GROUP SPREAD: 2.780
MIN RADIUS: 0.291
MAX RADIUS: 1.523
MEAN RADIUS: 0.915
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 6
in 3 IN DIAMETER: 8

POINT#	X	Y
1:	1.016	0.298
2:	1.014	-0.423
3:	0.474	0.291
4:	-0.276	0.929
5:	-0.171	0.403
6:	-1.586	0.470
7:	0.209	-0.446
8:	0.059	-0.626
9:	-0.444	-0.328
10:	-1.578	0.583

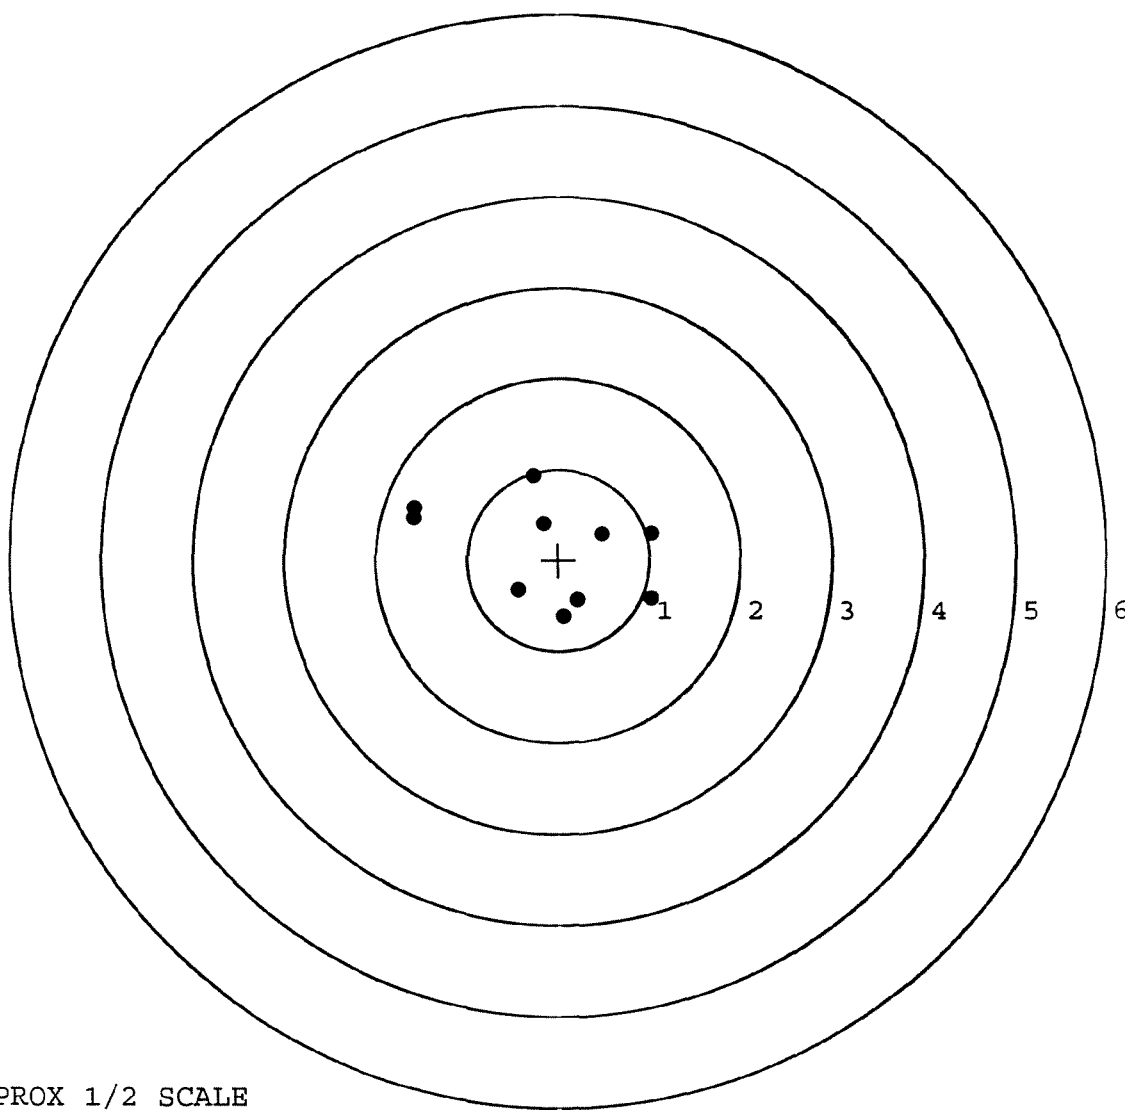

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523350. __0

TARGET NUMBER: 4

FILE DATE: 02/14/2008

FILE TIME: 13:55

X CENTROID: -0.046

Y CENTROID: 0.164

POA TO CENTROID: 0.170

HORZ SPREAD: 3.365

VERT SPREAD: 1.278

GROUP SPREAD: 3.386

MIN RADIUS: 0.162

MAX RADIUS: 1.809


MEAN RADIUS: 1.047

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 8

POINT#	X	Y
1:	1.552	0.155
2:	0.760	-0.176
3:	0.884	0.530
4:	0.669	0.763
5:	0.504	0.201
6:	-0.017	0.004
7:	-0.168	-0.501
8:	-1.431	0.108
9:	-1.397	0.777
10:	-1.813	-0.224

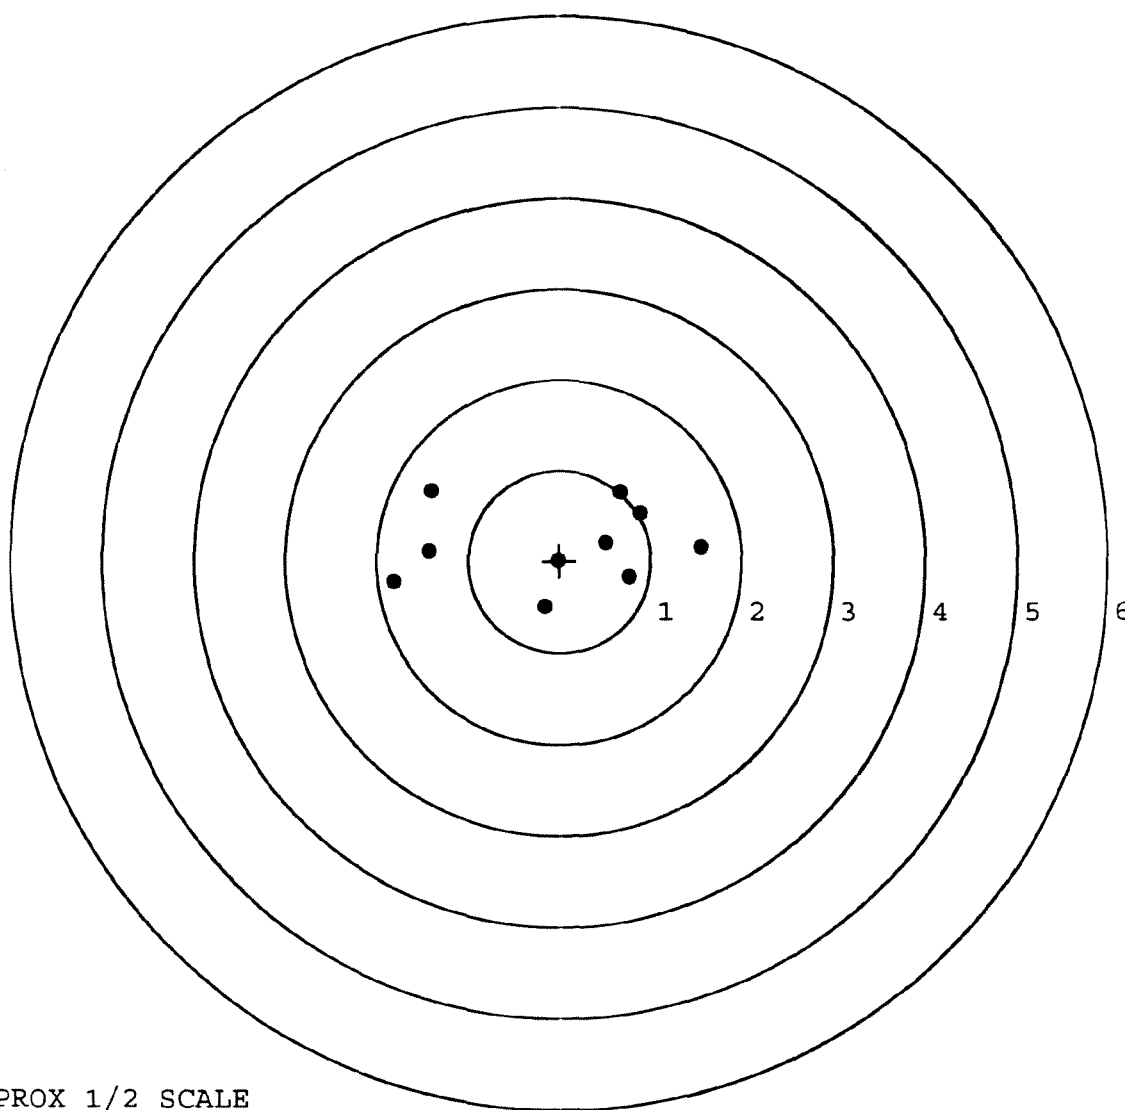


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523350. __0
TARGET NUMBER: 5
FILE DATE: 02/14/2008
FILE TIME: 13:55

X CENTROID: -0.052
Y CENTROID: -0.056
POA TO CENTROID: 0.077
HORZ SPREAD: 0.987
VERT SPREAD: 2.009
GROUP SPREAD: 2.018
MIN RADIUS: 0.144
MAX RADIUS: 1.031
MEAN RADIUS: 0.478
IN 1 IN DIAMETER: 6
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.095	-1.060
2:	0.369	-0.646
3:	-0.283	0.949
4:	-0.618	0.193
5:	0.225	0.196
6:	0.243	-0.200
7:	-0.234	-0.066
8:	-0.071	0.087
9:	0.146	-0.037
10:	-0.206	0.025

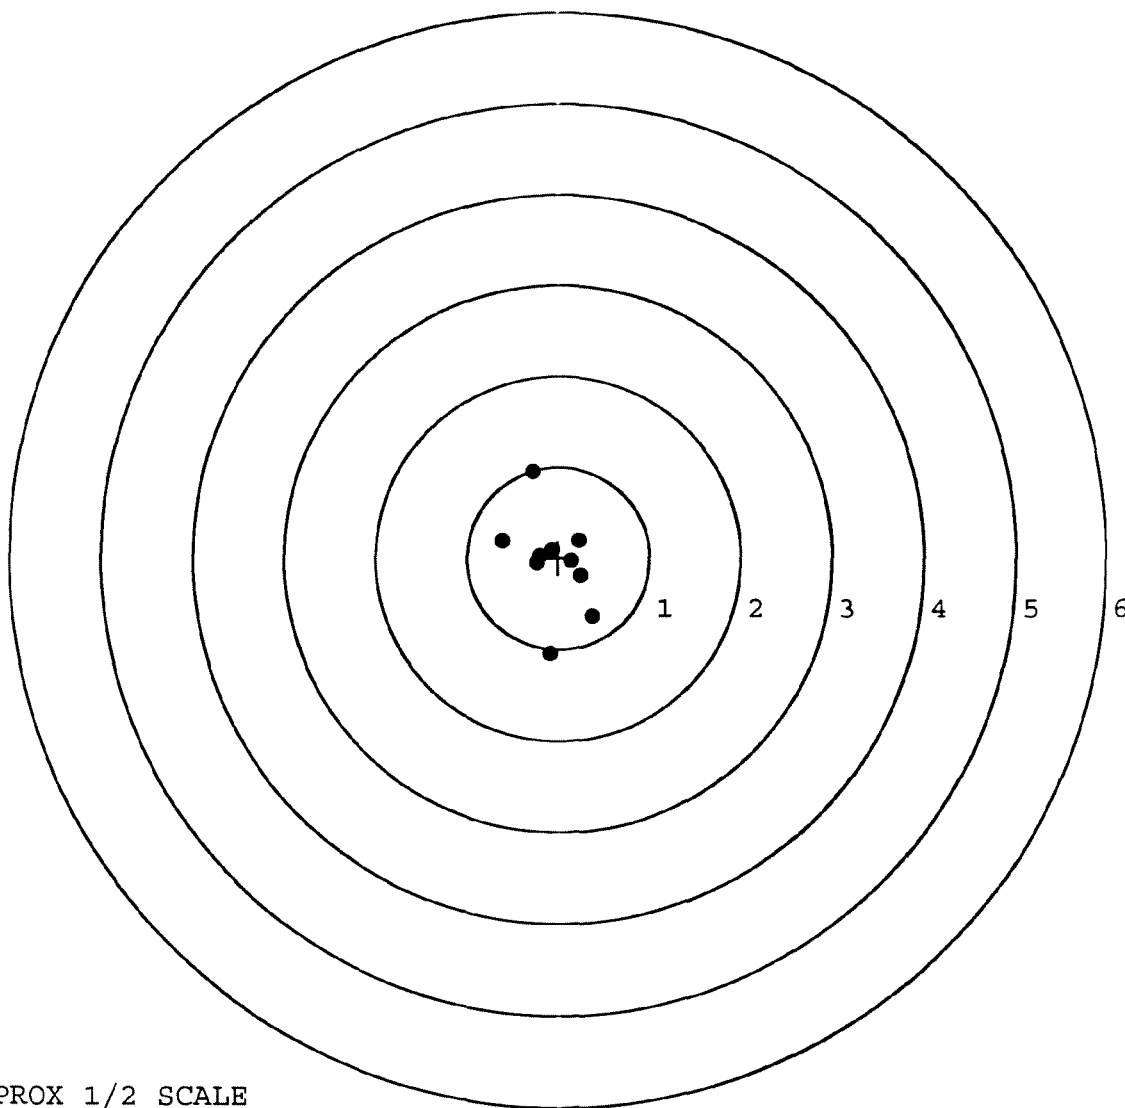

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-C-0149

R & E NUMBER <u>136596</u>			
SERIAL NUMBER <u>C6523350</u>			
LOG-IN DATE <u>11-9-07</u>			

OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	2-4-08	LTZ
505	RE-BARREL	2-5-08	J.P.D.
560	ASSEMBLE	2-5-08	J.P.D.
600	PROOF	2-6-08	TRW
605	CHECK HEADSPACE	2-6-08	TRW
610	DIS-ASSEMBLE GUN	2-6-08	J.P.D.
612	MAGNAFLUX	2-7-08	WWS
510	DRILL AND TAP	2-6-08	TRW
615	ROLLMARK CALIBER	2-6-08	CW
618	ROTO-BLAST	2-7-08	AG
620	APPLY COATINGS	2-11-08	CM
625	FINAL ASSEMBLY	2-12-08	J.P.D.
640	FUNCTION TEST AND	(PASS) FAIL	2-13-08 TRW
650	TARGET	(PASS) FAIL	2-13-08 TRW
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION	2-13-08	RP
	A) HEADSPACE	(PASS) FAIL	2-20-08 TRW
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	2.83 2.72 2.69 2.67 2.68 2-18-08 TRW
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	6.0 6.0 6.0 2-20-08 TRW
	G) SAFETY OFF FORCE	2 LBS MIN	3.5 3.75 3.25 2-20-08 TRW
	I) FIRING PIN INDENT	.020	.023 .0225 .0235 2-20-08 TRW
690	PACK		2-22-08 FM

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSP Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00092959** Serial: C6523350 Model: M24 SWS Center Fire
Caliber: 7.62 NATO Produced: 12/18/1990 Repairman: Status: Closed 2/10/2005 1:15:11 PM

Verify Repair

Address Information

Customer: ☒ Received From: ☐ Return To: ☐ Received From: ☐

Name: DEF DIST DEPOT ANNISTON DEF DIST DEPOT ANNISTON

Address 1: Address 2: PO Box: PO Box:

City: ANNISTON ANNISTON

State: AL Zip Code: 362014199 Country: US State: AL Zip Code: 362014199 Country: US

FPL:

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact information: Phone: Fax: Email: Comments:

Received Condition: Good Condition Notes: CSR Notes:

Accessories Received:

Code	Description	Qty
A007	With Stud	3
A010	Hard Case	1
A017	Scope Base	1
A026	Scope	1
A057	Front and Rear Sgt Base	1

Repair Search Refresh Close

Page 1 2/14/2005 9:19 AM CAPS TNUM INS SCRL

start 5 2 4 Arms Services

Serial Number: **C6523350**

Model: **M24 SWS**



RE00092959

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6523350.__0
FILE DATE AND TIME: 04/25/2005 08:17

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

ERROR - NOT POSSIBLE TO REPORT SWS STATS ON DATA
WHERE TOTAL TARGETS ARE NOT EQUAL TO FIVE

ave mean .958

SERIAL NUMBER: C6523350. 0

TARGET NUMBER: 1

FILE DATE: 04/25/2005

FILE TIME: 08:17

X CENTROID: 0.552

Y CENTROID: 0.096

POA TO CENTROID: 0.560

HORZ SPREAD: 2.035

VERT SPREAD: 2.692

GROUP SPREAD: 2.957

MIN RADIUS: 0.177

MAX RADIUS: 1.537


MEAN RADIUS: 0.939

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 5

in 3 IN DIAMETER: 9

POINT#	X	Y
1:	1.512	-0.757
2:	1.406	-1.182
3:	1.403	0.365
4:	0.719	0.648
5:	0.655	0.240
6:	0.321	0.915
7:	0.183	1.510
8:	0.294	-0.191
9:	-0.449	-0.162
10:	-0.523	-0.422

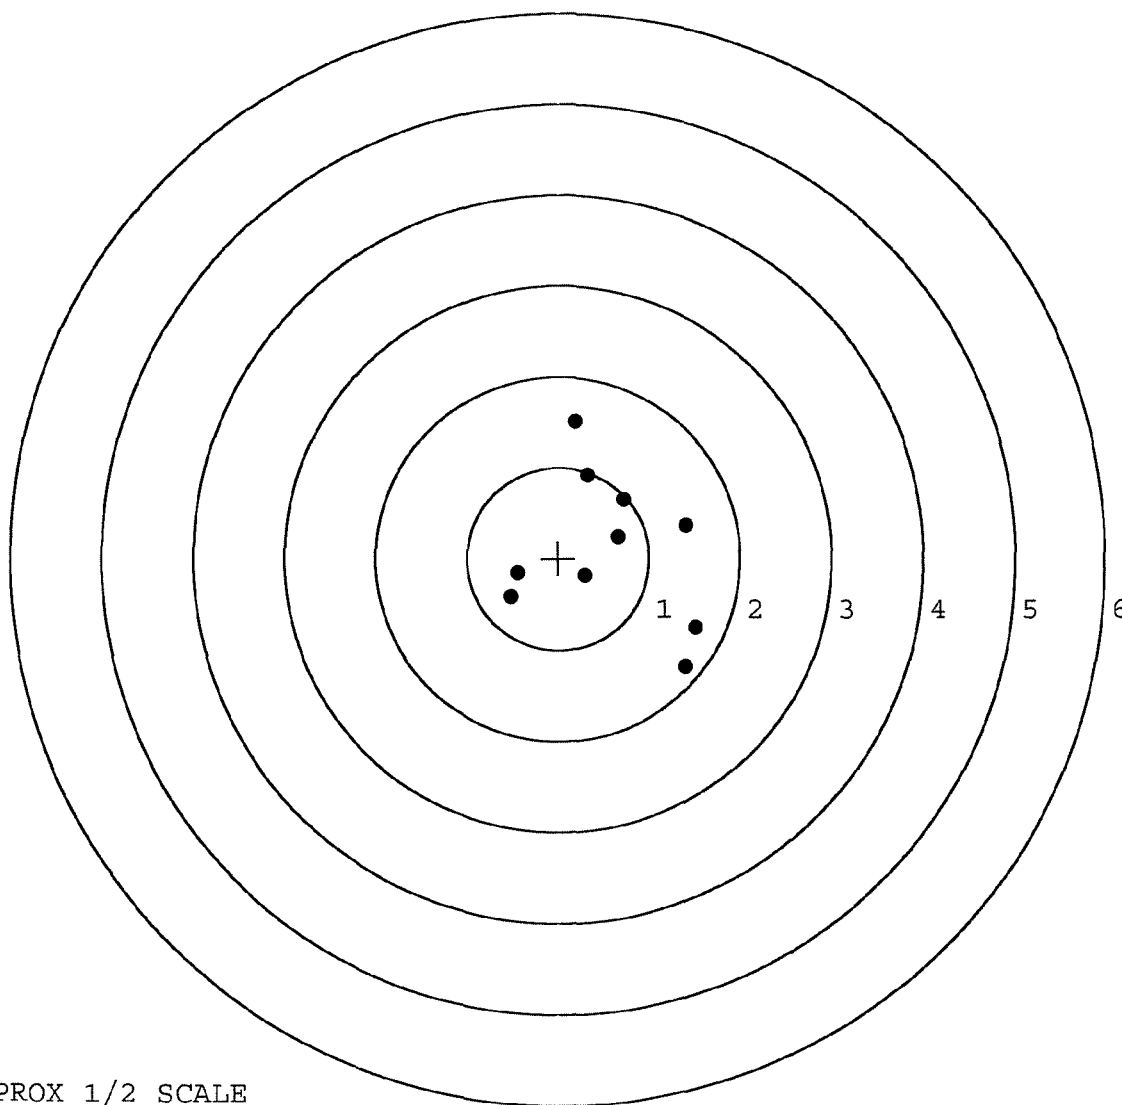


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523350. 0
TARGET NUMBER: 2
FILE DATE: 04/25/2005
FILE TIME: 08:17

X CENTROID: -0.286
Y CENTROID: 0.254
POA TO CENTROID: 0.383
HORZ SPREAD: 2.257
VERT SPREAD: 3.746
GROUP SPREAD: 4.120
MIN RADIUS: 0.708
MAX RADIUS: 2.437
MEAN RADIUS: 1.289
IN 1 IN DIAMETER: 0
IN 2 IN DIAMETER: 3
in 3 IN DIAMETER: 7

POINT#	X	Y
1:	0.879	-0.665
2:	0.725	0.179
3:	0.165	-0.291
4:	-0.344	-0.552
5:	-1.047	-0.085
6:	-1.378	-1.925
7:	-1.296	0.864
8:	-0.253	1.379
9:	0.349	1.816
10:	-0.662	1.821

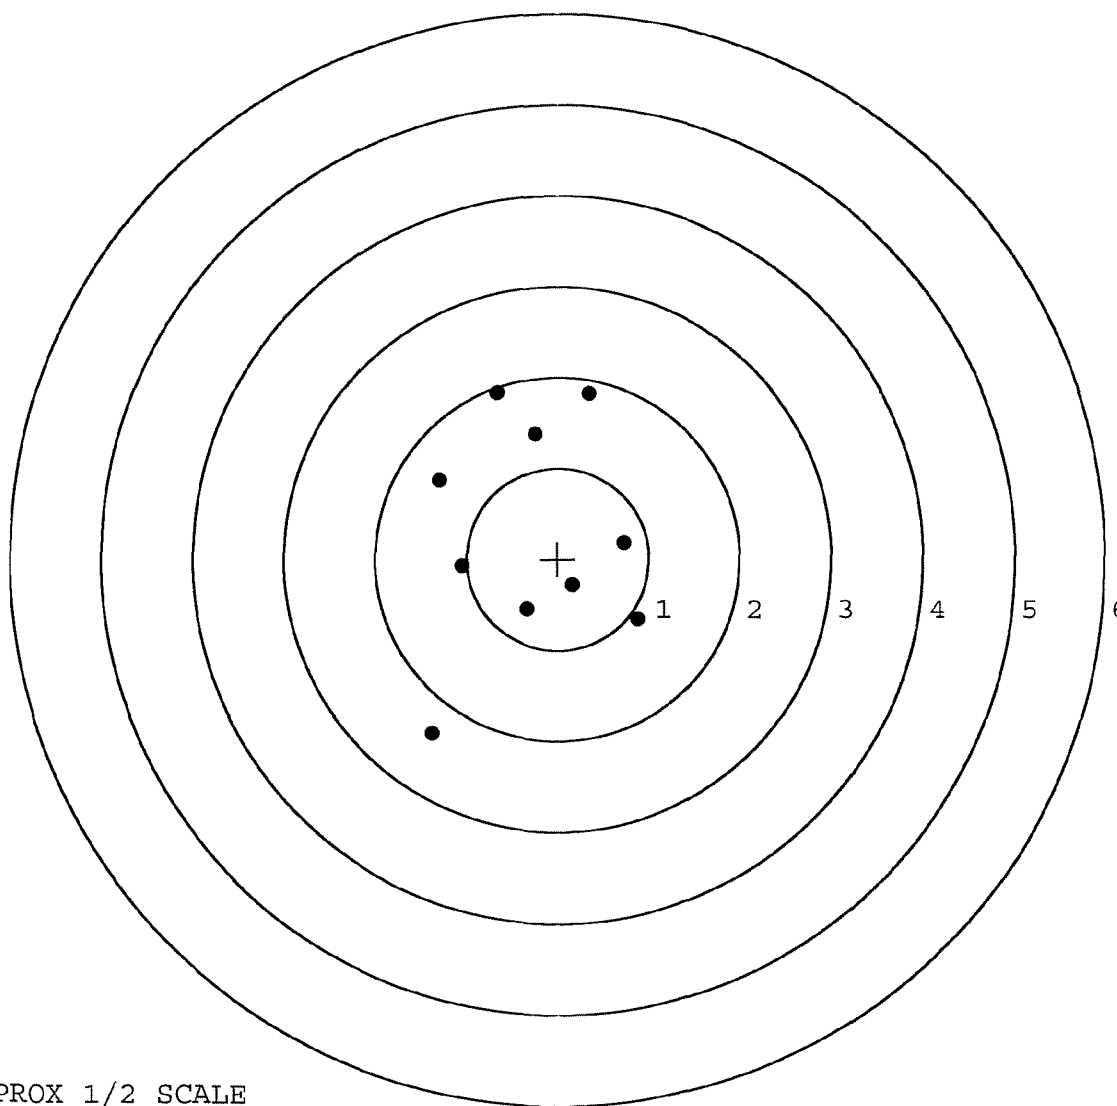

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523350. 0

TARGET NUMBER: 3

FILE DATE: 04/25/2005

FILE TIME: 08:17

X CENTROID: 0.072

Y CENTROID: -0.122

POA TO CENTROID: 0.141

HORZ SPREAD: 1.106

VERT SPREAD: 1.898

GROUP SPREAD: 2.018

MIN RADIUS: 0.199

MAX RADIUS: 1.028


MEAN RADIUS: 0.645

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.538	-1.038
2:	-0.134	-0.985
3:	-0.368	-0.790
4:	0.738	-0.054
5:	0.316	0.547
6:	-0.148	0.860
7:	0.117	0.301
8:	-0.020	0.190
9:	-0.033	-0.291
10:	-0.284	0.044

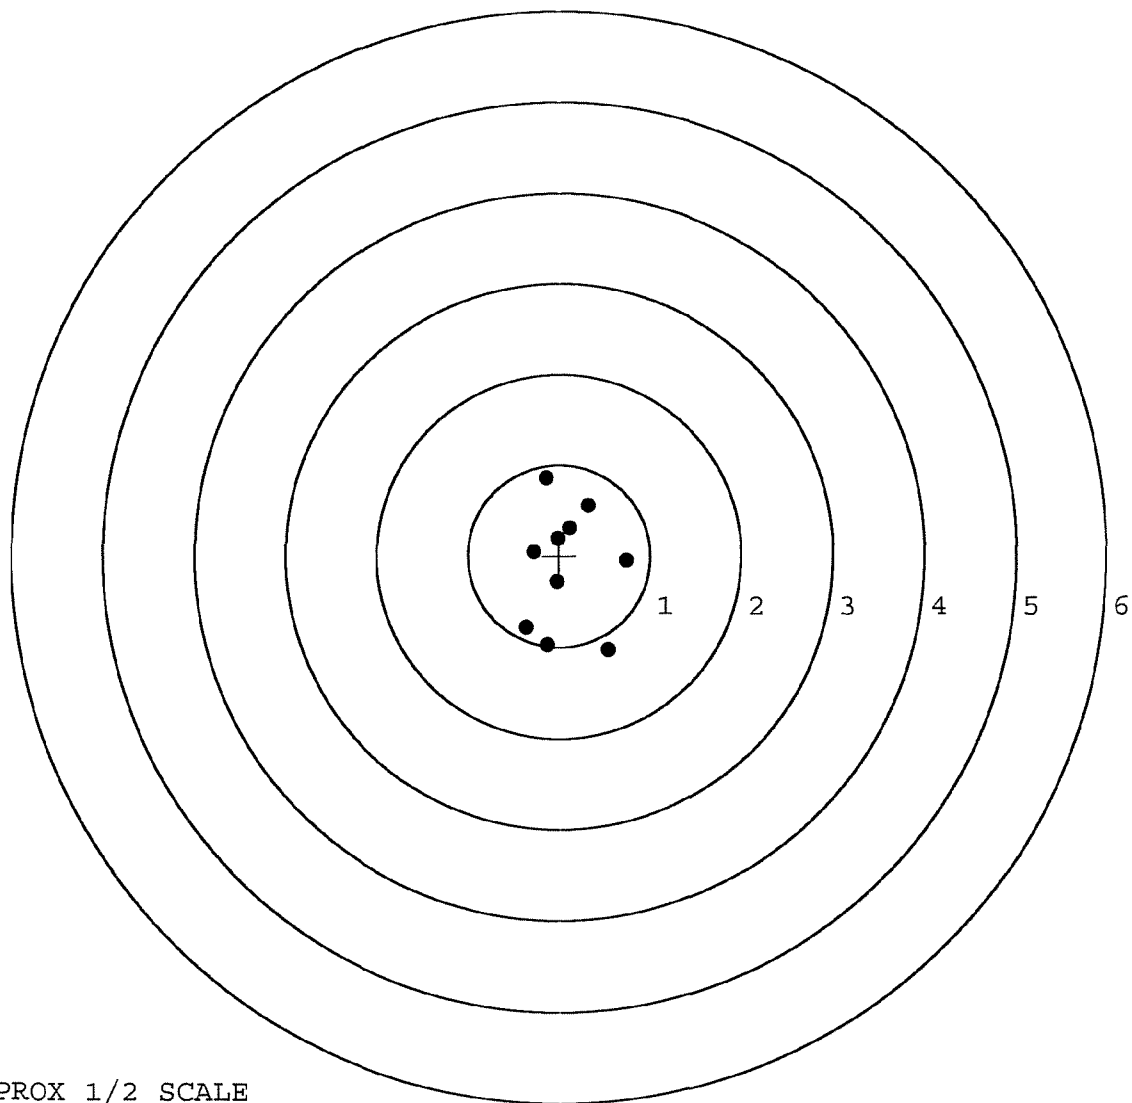

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R & E NUMBER	92959		
SERIAL NUMBER	C6523350		
LOG-IN DATE	2-10-05		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN		
560 A	RE-BARREL		
B	DRILL AND TAP		
575	ASSEMBLE		
600	PROOF		
605	CHECK HEADSPACE		
610	DIS-ASSEMBLE GUN		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS	4-26-05	AC
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT	4-26-05	AC
640	TARGET Test + Port	4-25-05	AC
655	FINAL INSPECT	4-26-05	AC
660	PACK	4-26-05	OA
		SHIP DATE	
QAR INSPECTION DATE			

Remington®

MODEL 700™ H24


MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm

DUPONT
REG. U.S. PAT. & T.M. OFF.


SERIAL NO. C6523350	ORDER NO. 5716
-------------------------------	--------------------------

Ø1



5716 C6523350

LPC



0 47700 25716 7

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C 6523350

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		10/2/90	KH
600	Proof		10/2/90	KH
607	Check Headspace		10/2/90	KH
610	Dis-assemble Gun		10/2/90	KH
612	Magnaflux Barrel Action		10/3/90	KR
	Magnaflux Bolt		10/5/90	KR
615	Rollmark Caliber		10/5/90	SS
617	Drill and Tap Sight Holes		10/8/90	FB
618	Polish Barrel ROB		10/9/90	WB
620	Apply Coatings (Barrel Action)		10-20-90	JA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		10/21/90	KH
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		10/21/90	KH
	C) Inspect Ejector Hole for Chamfer		10/21/90	KH
	D) Oil Firing Pin Ass'y		10/21/90	KH
	E) Adjust Trigger Pull to Min Setting and Stake		11/2/90	SS

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	4.5	4.5	4.25			11-2-90	K
	G) Safety Off Force	2.5	2.5	2.75			11-2-90	K-T
	H) Trigger Pull Test & Retainability						11/2/90	JH
	I) Firing Pin Indent	.021	.0215	.021			11-2-90	K-T
	J) Assemble Stock						11-3-90	KJ
	K) Assemble Swivel Studs						11-20-90	DA
	L) Attach Front and Rear Sight Assemblies						11-3-90	KJ
	M) Iron Sight Alignment						11-3-90	KJ
	N) Detach Front & Rear Sights & place in numbered container						11-3-90	KJ
	O) Attach Scope to Rifle						11-3-90	KJ
	P) Detach & Attach Scope 20 Times						11-3-90	KJ
640	Gallery Target & Test						11-5-90	AC
	A) Time						11-5-90	AC
	B) Malfunctions						11-5-90	AC
	C) Pierced Primers						11-5-90	AC
	D) Optical Clarity of Scope						11-5-90	AC
645	Inspect for Live Ammo						11-5-90	AC
655	Final Inspection							
	A) Headspace						11-20-90	DA
	B) Trigger Pull	266	263	262	253	259	11-20-90	DA
	C) Function						11-20-90	DA
660	Pack						12/14/90	AF

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6523350

DATE 11/2/90

TESTER JEP.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.49	2.34	2.49	266	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.31	2.27	2.30	263	
PULL #3	2.41	2.42	2.46	262	
PULL #4	2.32	2.45	2.34	253	
PULL #5	2.38	2.41	2.40	259	
TOTAL	11.91	11.89	11.99		
AVG.	2.382	2.378	2.398		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.50	3.37		
PULL #2	3.43	3.39		
PULL #3	3.42	3.26		
PULL #4	3.14	3.44		
PULL #5	3.36	3.39		
TOTAL	16.85	16.85		
AVG.	3.37	3.37		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.53	4.39		4.29
PULL #2	4.41	4.31		4.52
PULL #3	4.48	4.33		4.31
PULL #4	4.23	4.13		4.20
PULL #5	4.40	4.40		4.34
TOTAL	22.05	21.56		21.66
AVG.	4.41	4.312		4.332

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6523350
5 Nov 1990

CENTROIDAL DISTANCES

0 TO	1	.133004
1 TO	2	.091214
1 TO	3	.142172
1 TO	4	.201556
1 TO	5	.180369


POI <----POI

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .2032
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0425
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .207617
THE AMR FOR THIS RIFLE IS: .8422

5 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06523350

CENTERFIRE PATTERNS # 1

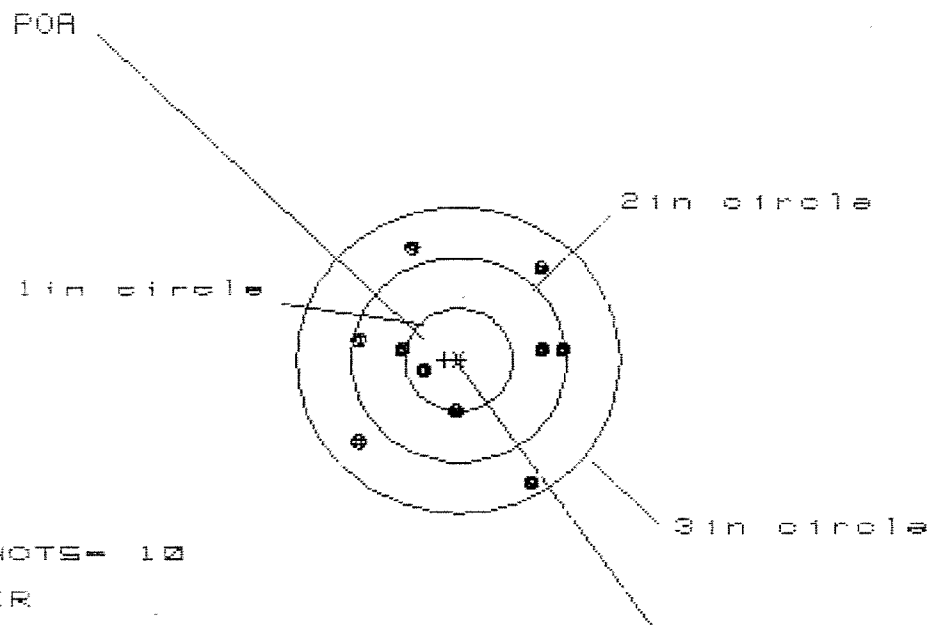

OF SHOTS = 10

IN CIR

1in = 1

2in = 6

3in = 10

SE = 1.904

VE = 2.287

GE = 2.578


CENTROID *

PATTERN #	1	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.929	1.008	.896
MINIMUM X	-.975	-.896	-.978
MAXIMUM Y	1.134	1.006	.884
MINIMUM Y	-1.153	-.976	-.789
CENTROID X	.133	.054	.166
CENTROID Y	-.001	.127	.249
FOR TO CENTROID in.	.133	.138	.299
MIN RADIUS	.308	.303	.469
MEAN RADIUS	.913	.855	.887
MAX RADIUS	1.354	1.325	1.022
HORIZONTAL SPREAD	1.904	1.904	1.874
VERTICAL SPREAD	2.287	1.982	1.673
EXTREME SPREAD	2.578	2.469	1.875
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	10		

5 May 1938

FILE:/PATTERNING/CENTERFIRE_PATT/06523350

CENTERFIRE PATTERNS # 2

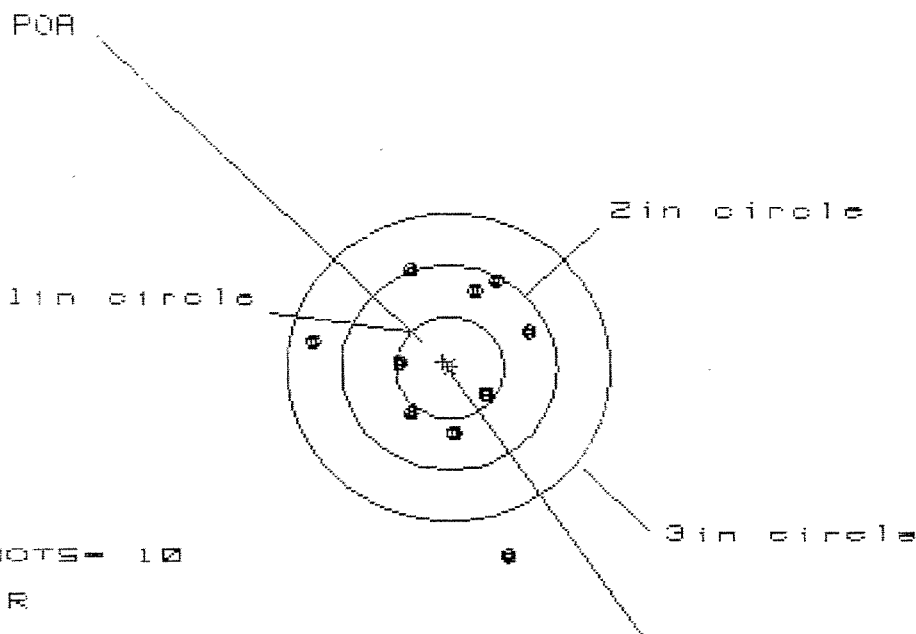

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 7

3 in = 9

US= 1.965

VS= 2.870

GS= 2.998


CENTROID #

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.736	.793	.646
MINIMUM X	:	-1.229	-1.172	-.565
MAXIMUM Y	:	.987	.777	.780
MINIMUM Y	:	-1.883	-.870	-.867
CENTROID X	:	.061	.004	.151
CENTROID Y	:	-.057	.153	.150
POA TO CENTROID in.	:	.083	.153	.213
MIN RADIUS	:	.400	.435	.497
MEAN RADIUS	:	.891	.762	.696
MAX RADIUS	:	1.951	1.172	.899
HORIZONTAL SPREAD	:	1.965	1.965	1.211
VERTICAL SPREAD	:	2.870	1.647	1.647
EXTREME SPREAD	:	2.998	1.970	1.762
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		9	

5 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C8523350

CENTERFIRE PATTERNS # 3

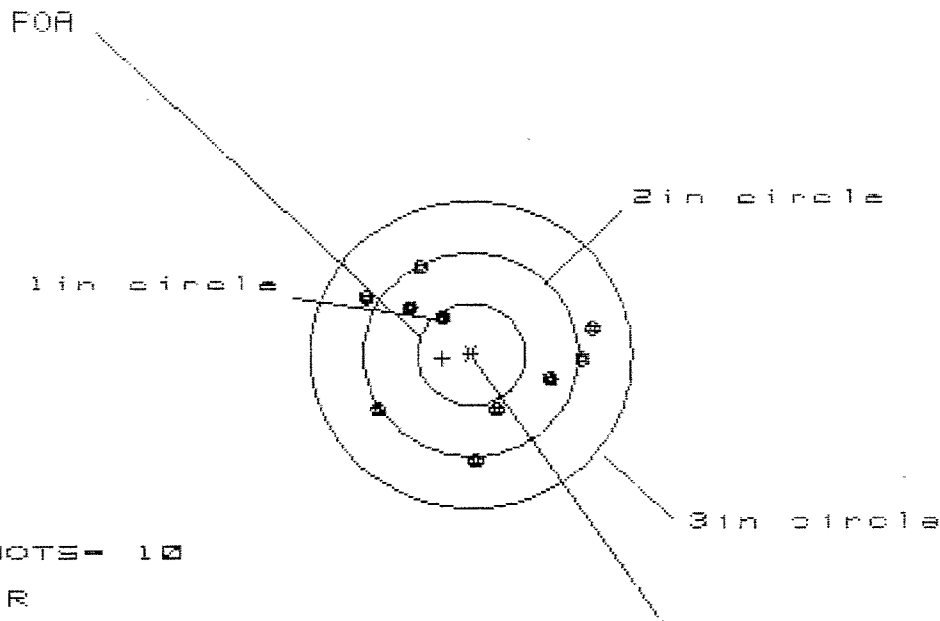

OF SHOTS- 10

IN CIR

1in = 1

2in = 5

3in = 10

HS= 2.020

VS= 1.886


CS= 2.166

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.087	1.171	1.072
MINIMUM X	:	-.933	-.812	-.911
MAXIMUM Y	:	.869	.895	.826
MINIMUM Y	:	-1.017	-.991	-1.060
CENTROID X	:	.270	.149	.248
CENTROID Y	:	.037	.011	.080
FOA TO CENTROID in.	:	.272	.149	.261
MIN RADIUS	:	.473	.438	.425
MEAN RADIUS	:	.892	.858	.837
MAX RADIUS	:	1.113	1.171	1.075
HORIZONTAL SPREAD	:	2.020	1.983	1.983
VERTICAL SPREAD	:	1.886	1.886	1.886
EXTREME SPREAD	:	2.166	2.069	2.069
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		10	

5 Nov 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C8523350

CENTERFIRE PATTERNS # 4

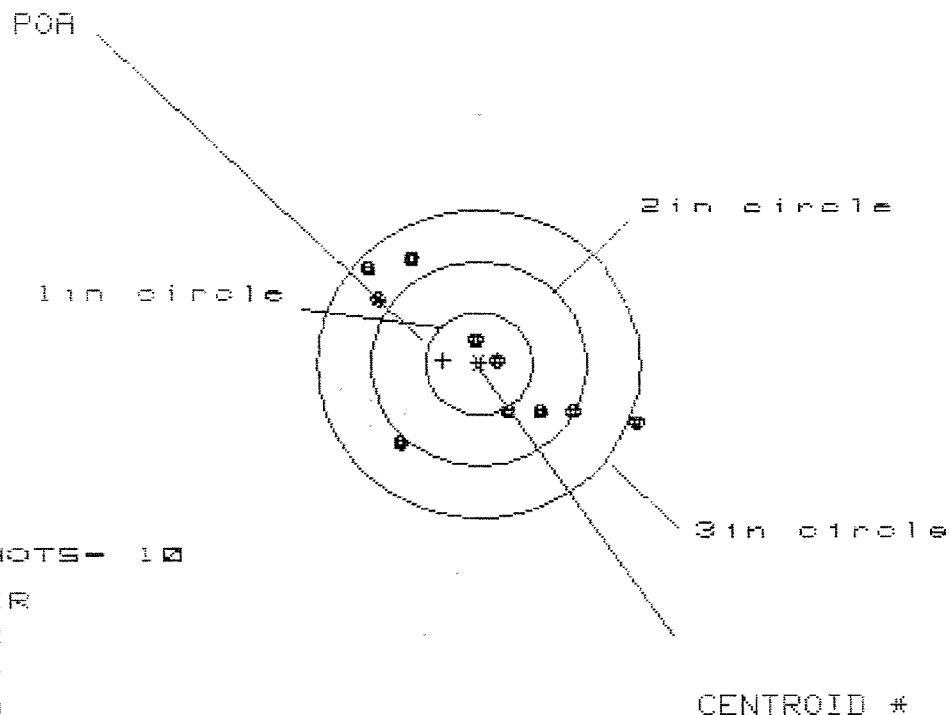

OF SHOTS- 10

IN CIR

1in = 2

2in = 4

3in = 8

SS= 2.501

VS= 1.843


ES= 2.878

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.472	1.062	.954
MINIMUM X	:	-1.029	-.865	-.881
MAXIMUM Y	:	1.044	.986	1.093
MINIMUM Y	:	-.799	-.857	-.750
CENTROID X	:	.332	.168	.276
CENTROID Y	:	-.033	.025	-.082
POA TO CENTROID in.	:	.333	.170	.298
MIN RADIUS	:	.196	.170	.247
MEAN RADIUS	:	.910	.848	.777
MAX RADIUS	:	1.561	1.214	1.254
HORIZONTAL SPREAD	:	2.501	1.927	1.835
VERTICAL SPREAD	:	1.843	1.843	1.843
EXTREME SPREAD	:	2.879	2.353	2.160
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		9	

5 Nov 1998

FILE: \PATTERNING\CENTERFIRE_PATT\06523350

CENTERFIRE PATTERNS # 5

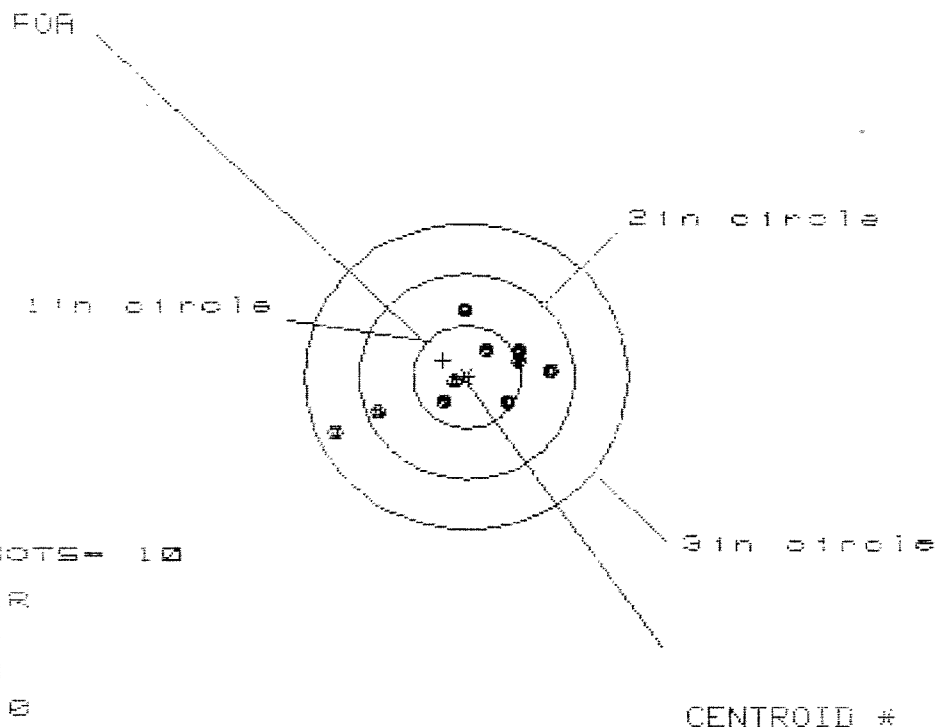

OF SHOTS = 10

IN 1" CIR

IN 2" CIR

IN 3" CIR

IN 4" CIR

ME = 1.0978

SD = 1.238

GD = 2.061

PATTERN #

5

SHOTS (BEST OF)

10

9

8

MAXIMUM X

.792

.660

.538

MINIMUM X

-1.186

-.974

-.518

MAXIMUM Y

.697

.637

.589

MINIMUM Y

-.541

-.384

-.359

CENTROID X

.220

.352

.474

CENTROID Y

-.159

-.099

-.051

POA TO CENTROID in.

.272

.366

.477

MIN RADIUS

.092

.226

.180

MEAN RADIUS

.605

.503

.489

MAX RADIUS

1.304

1.047

.642

HORIZONTAL SPREAD

1.978

1.634

1.056

VERTICAL SPREAD

1.238

1.021

.958

EXTREME SPREAD

2.061

1.673

1.097

NUMBER IN ONE INCH CIRCLE =

4

NUMBER IN TWO INCH CIRCLE =

9

NUMBER IN THREE INCH CIRCLE =

10

COMMENTS

R ORDER
94-18072

W/10X SCOPE M-24 SNIPER, W/DEPLOYMENT KIT
ATTN: FRED MARTIN

SCOPE 90-0054

DATE RECEIVED	DATE OPENED	DATE CODE	SERIAL NUMBER	NEW SERIAL NUMBER	MODEL AND GRADE
06/09/94	06/09/94		C6523350		700 7-62 NATO
ACCESSORIES	SLING STRAP	HARD CASE	SCOPE MNTS	SCOPE BASE	

FROM:

SHIP TO:

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON AL

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON AL

36201-5025

CUST NO: 698397 C.D.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE _____

PROM. DATE

ESTIMATED	
-----------	--

VIA

FRT

GUN CONDITION

☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
------------------	------	----------	--------	----------	-----	---------

CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

PARTS

COMMENTS

Trigger Assy \$173.31
CTI 50.00
\$223.31

REPAIRMAN	PROOF	CLEAN	TEST	TARGET	PATTERN
-----------	-------	-------	------	--------	---------

GALLERY TESTER	DATE	DATE	DATE	DATE	DATE
----------------	------	------	------	------	------

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400026532

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6523360

DATE 11-10-94

TESTER Bm

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.50	2.59	2.59	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.13	2.59	2.61	
PULL #3	2.30	2.61	2.42	
PULL #4	2.40	2.57	2.44	
PULL #5	2.28	2.83	2.62	
TOTAL	11.61	13.19	12.68	
AVG.	2.32	2.63	2.53	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.18	2.89	
PULL #2	3.01	3.06	
PULL #3	3.05	3.04	
PULL #4	3.06	3.10	
PULL #5	3.05	3.05	
TOTAL	15.35	15.14	
AVG.	3.07	3.02	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	3.90	3.99		4.15
PULL #2	3.91	4.03		4.20
PULL #3	3.92	3.97		4.20
PULL #4	3.93	4.02		4.13
PULL #5	3.95	4.04		3.79
TOTAL	19.61	20.05		20.47
AVG.	3.92	4.01		4.09

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6523350

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	6	6	6			12/14	WB
	G) Safety Off Force	4	4	4			12/14	WB
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent							
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test							
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo							
655	Final Inspection A) Headspace							
	B) Trigger Pull	2.63	2.73	2.73	2.78	2.70	12/14	WB
	C) Function							
660	Pack							