

06523412

MODEL 700TM N24

Model SMS

TM

Action

Barrel Length

Capacity

Order No. 5716

*Includes 1 in chamber.

Remington

Repair Number: **RE00080679**

Serial: C6523412 Model M24 SWS Center Fire
Caliber: 7.62 NATO

Repairman:

Status: Closed 5/6/2004 3:02:20 PM

Address Information

Customer:

Received From:

Return To:

Received From:

Name: A CO 3/3 SFG (A)

A CO 3/3 SFG (A)

Address 1: BLDG G1351 KUWAIT ST

BLDG G1351 KUWAIT ST

Address 2: PO Box:

PO Box:

City: FT BRAGG

FT BRAGG

State: NC Zip Code: 28310

Country: US

State: NC Zip Code: 28310

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone:

Fax:

Email:

Comments:

Received Condition

Good

Condition Notes:

CSR Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A010	Hard Case	1
A017	Scope Base	1
C000	FRT AND REAR BASE	1

Repair Search

Refresh

Close

magletj

5/6/2004

3:08 PM

CAPS

NUM

INS

SCPL

start

2

3

3

Serial Number: **C6523412**

Model: **M24 SWS**



RE00080679

FINAL INSPECTION CHECKLIST M-24 REPAIRS
CONTRACT #: DAAE-20-02-D-0127

SERIAL # C 6523412 INSPECTED BY: RTL

DATE REC'D: 5-6-04 DATE RET'D: 6-2-04

ITEM

BARREL ASSEMBLY

☒ BARREL
☒ RECEIVER
☒ FRONT SIGHT BASE
☒ REAR SIGHT BASE
☒ SCREWS
☒ FINISH

SCOPE ASSEMBLY

☐ SCOPE
☐ SCOPE RINGS
☐ MOUNTING SCREWS
☐ MOUNTING BASE
☐ SCREWS
☐ FINISH
☐ CLARITY

ITEM

STOCK ASSEMBLY

☒ STOCK
☒ SLING AWIVEL STUDS
☒ ADJUSTABLE
☒ BUTT PLATE
☒ LOCK NUTS
☒ BARREL CLEARANCE
☒ COLOR / FINISH

SYSTEMS CASE

☐ SCOPE CASE
☐ IRON SIGHTS
☐ DEPLOYMENT KIT

TRIGGER ASSEMBLY

☒ SAFETY OPERATION
☒ RE-SET TO FACTORY SPECS

COMMENTS:

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6523412.___0

FILE DATE AND TIME: 06/04/2004 06:14

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.077
The Average Y Centroid of the Five Target Set:	-0.069
The Average Point of Impact of the Five Target Set:	0.103
The Average Mean Radius of the Five Target Set:	0.647
The Distance from POA to Centroid Target #1:	0.181
The Distance from Centroid Target #2 to Centroid Target #1:	0.249
The Distance from Centroid Target #3 to Centroid Target #1:	0.281
The Distance from Centroid Target #4 to Centroid Target #1:	0.278
The Distance from Centroid Target #5 to Centroid Target #1:	0.314

SERIAL NUMBER: C6523412. __0

TARGET NUMBER: 1

FILE DATE: 06/04/2004

FILE TIME: 06:14

X CENTROID: 0.144

Y CENTROID: 0.109

POA TO CENTROID: 0.181

HORZ SPREAD: 2.157

VERT SPREAD: 1.806

GROUP SPREAD: 2.168

MIN RADIUS: 0.227

MAX RADIUS: 1.249


MEAN RADIUS: 0.713

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.221	1.252
2:	1.375	0.319
3:	0.634	-0.515
4:	0.309	-0.554
5:	0.511	-0.161
6:	0.236	-0.098
7:	-0.255	-0.073
8:	-0.409	0.268
9:	-0.782	0.533
10:	-0.399	0.123

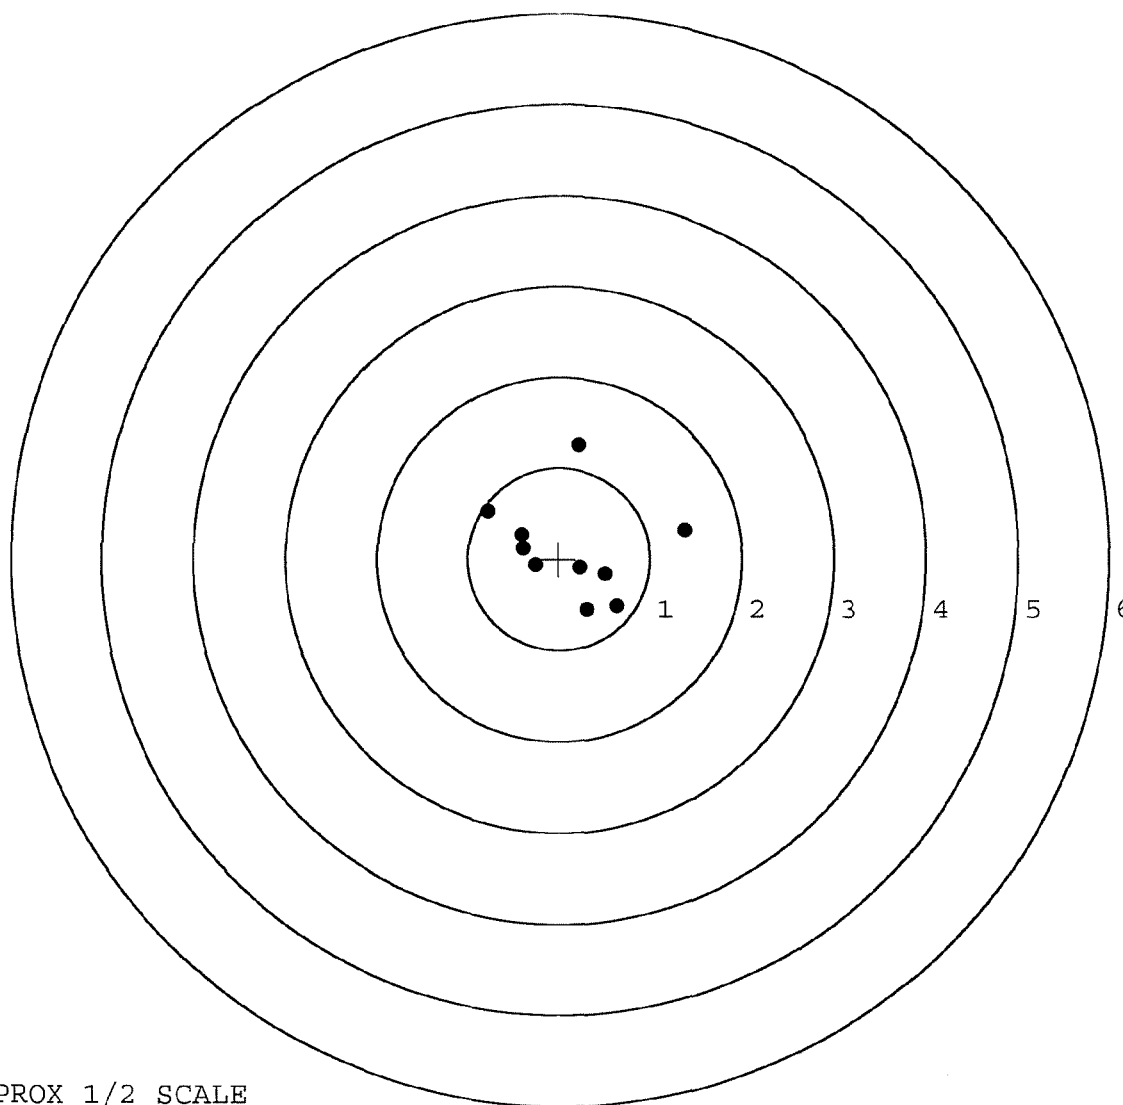


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523412. __0
TARGET NUMBER: 2
FILE DATE: 06/04/2004
FILE TIME: 06:14

X CENTROID: -0.032
Y CENTROID: -0.067
POA TO CENTROID: 0.074
HORZ SPREAD: 1.343
VERT SPREAD: 1.726
GROUP SPREAD: 1.747
MIN RADIUS: 0.463
MAX RADIUS: 1.161
MEAN RADIUS: 0.655
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.790	-0.946
2:	-0.522	0.780
3:	-0.613	0.020
4:	-0.298	0.316
5:	0.020	0.521
6:	0.177	-0.718
7:	0.253	-0.432
8:	0.553	0.117
9:	0.497	-0.062
10:	0.407	-0.267

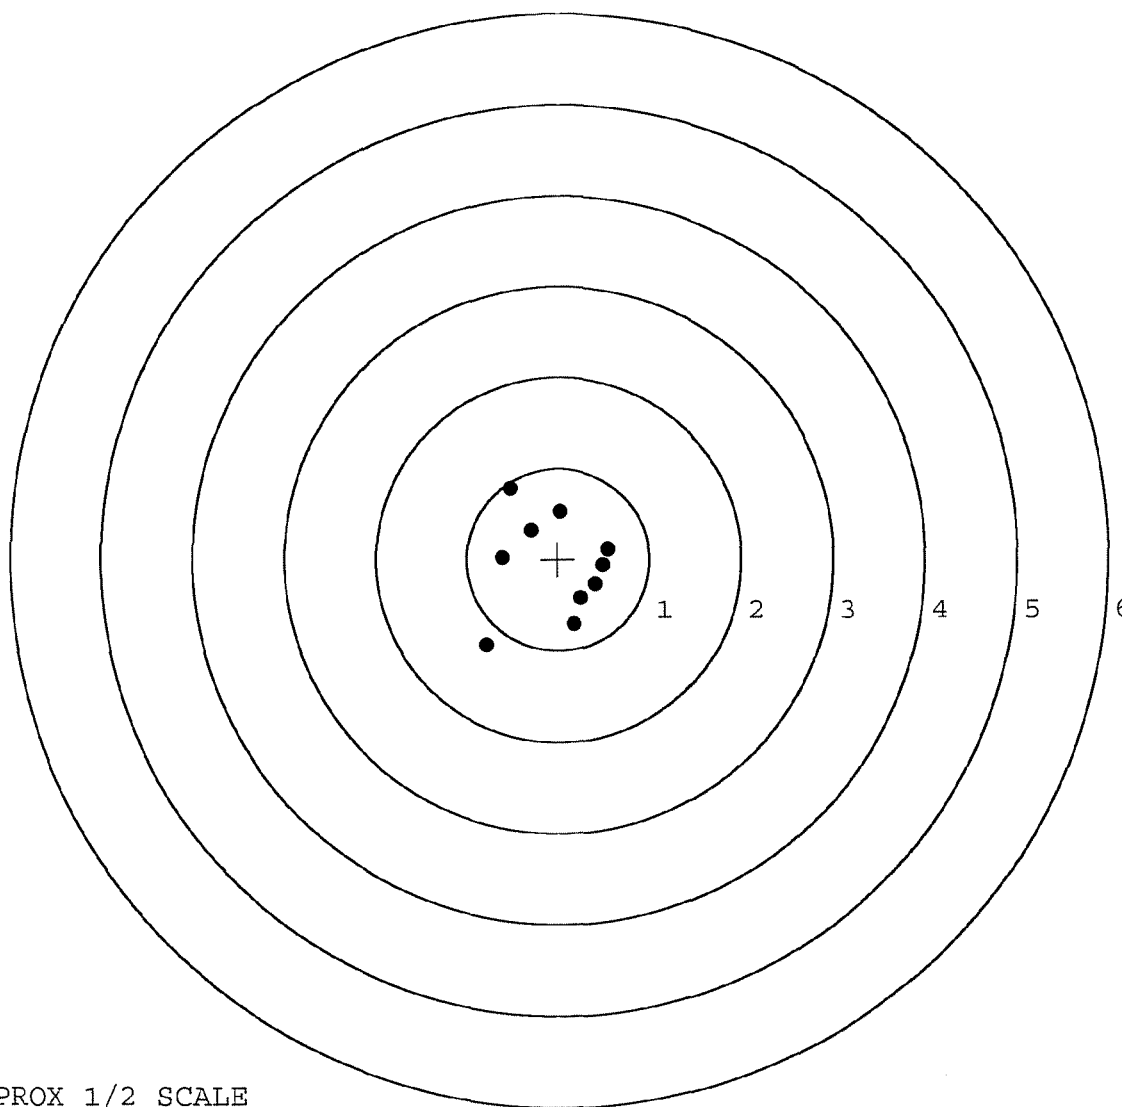

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523412. 0

TARGET NUMBER: 3

FILE DATE: 06/04/2004

FILE TIME: 06:14

X CENTROID: -0.034

Y CENTROID: -0.108

POA TO CENTROID: 0.113

HORZ SPREAD: 1.916

VERT SPREAD: 1.310

GROUP SPREAD: 1.943

MIN RADIUS: 0.018

MAX RADIUS: 1.010


MEAN RADIUS: 0.598

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.976	-0.092
2:	0.653	-0.659
3:	-0.508	-0.920
4:	-0.940	0.233
5:	-0.180	0.390
6:	-0.401	0.109
7:	0.185	0.389
8:	-0.359	-0.304
9:	-0.034	-0.126
10:	0.265	-0.098

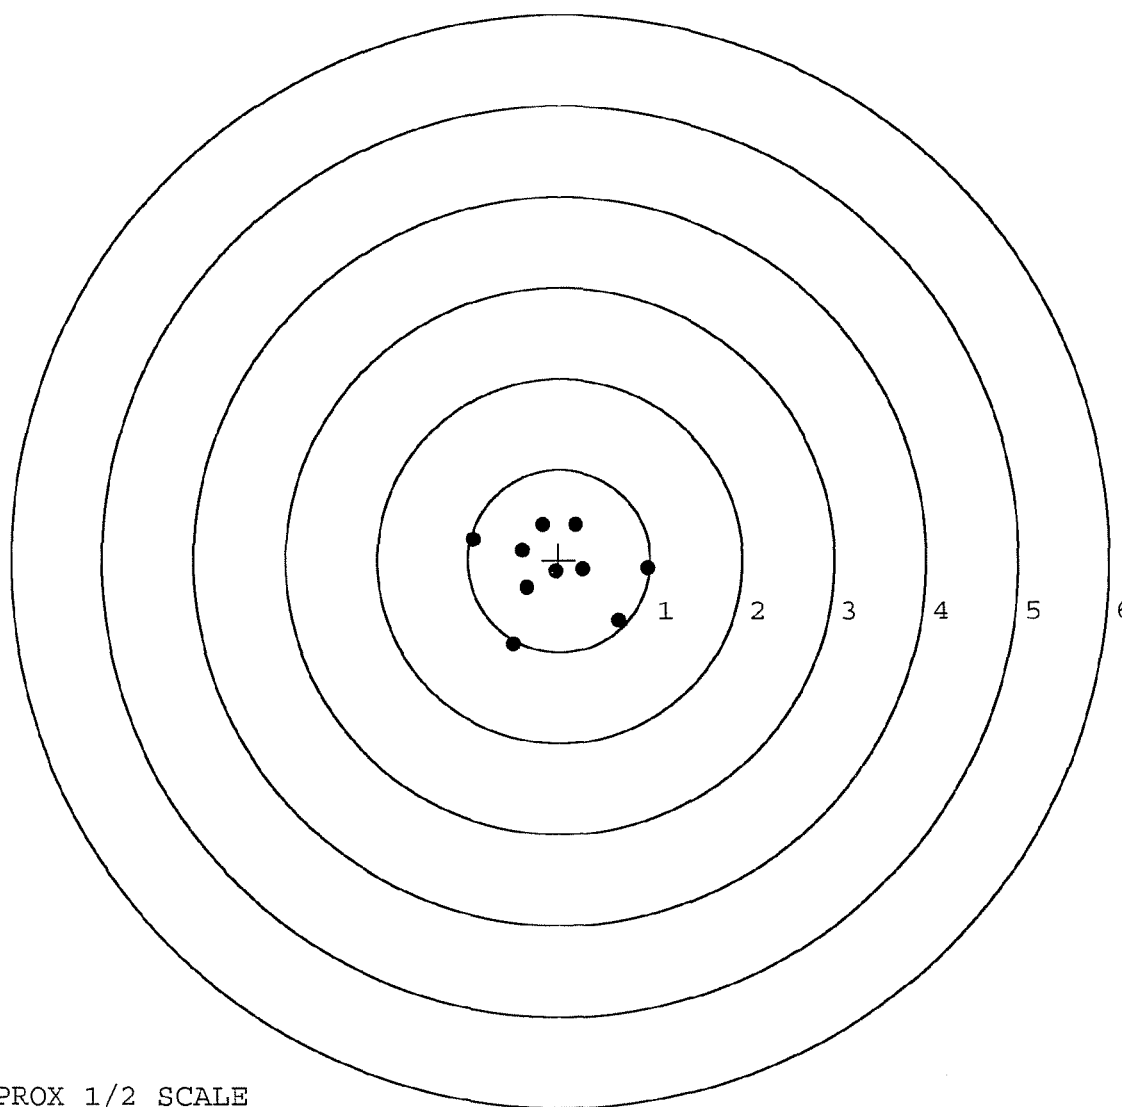


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523412. __ 0
TARGET NUMBER: 4
FILE DATE: 06/04/2004
FILE TIME: 06:14

X CENTROID: 0.312
Y CENTROID: -0.112
POA TO CENTROID: 0.332
HORZ SPREAD: 2.363
VERT SPREAD: 1.354
GROUP SPREAD: 2.366
MIN RADIUS: 0.307
MAX RADIUS: 1.342
MEAN RADIUS: 0.713
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	1.652	-0.026
2:	1.118	-0.321
3:	0.474	-0.820
4:	0.371	-0.414
5:	-0.013	-0.598
6:	0.033	-0.364
7:	-0.711	0.101
8:	-0.268	0.534
9:	0.105	0.498
10:	0.362	0.287

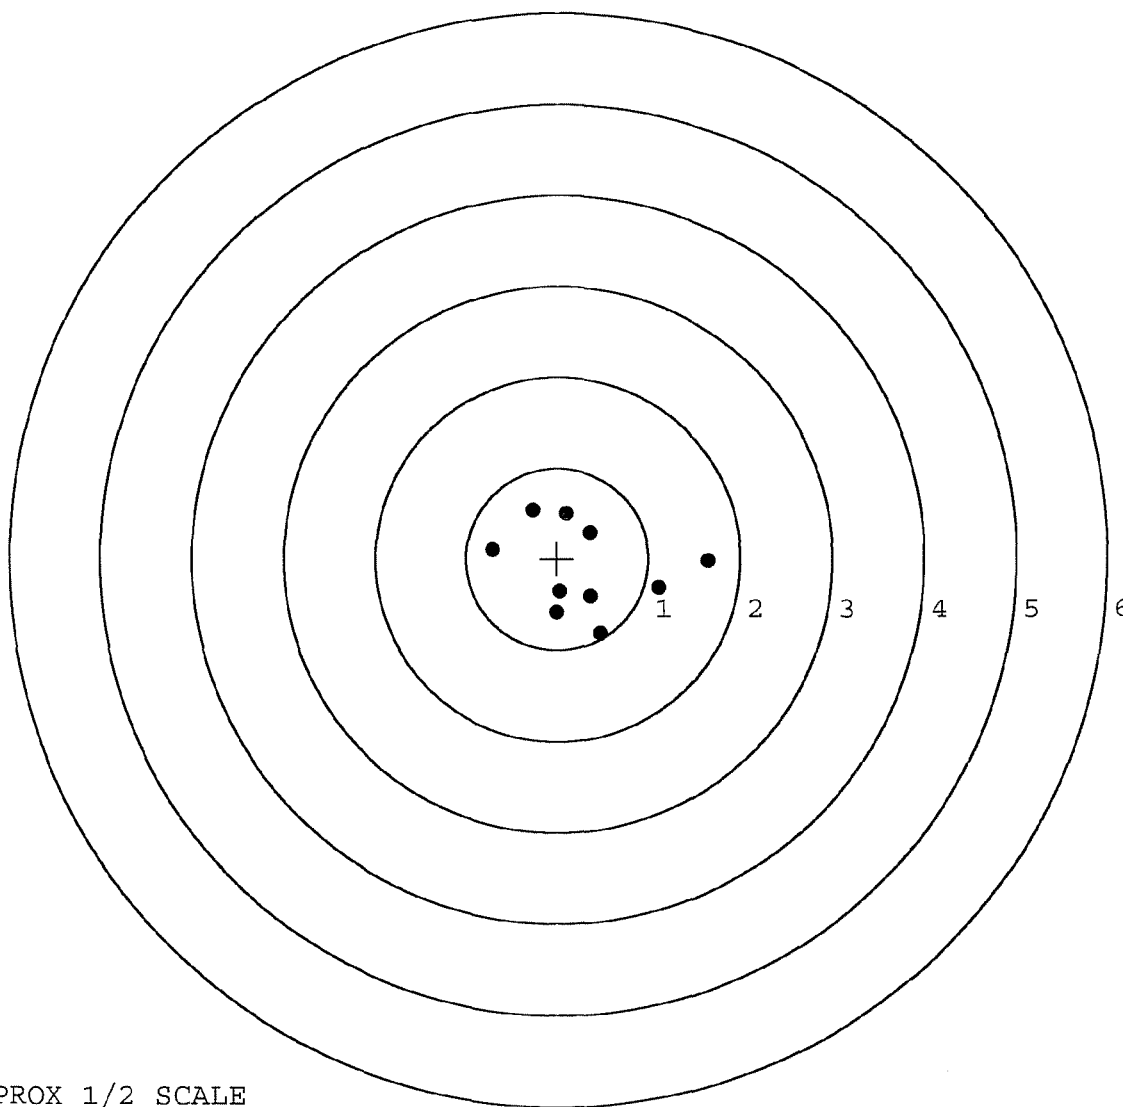


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523412. 0
TARGET NUMBER: 5
FILE DATE: 06/04/2004
FILE TIME: 06:14

X CENTROID: -0.006
Y CENTROID: -0.167
POA TO CENTROID: 0.167
HORZ SPREAD: 1.268
VERT SPREAD: 1.958
GROUP SPREAD: 1.989
MIN RADIUS: 0.134
MAX RADIUS: 1.139
MEAN RADIUS: 0.555
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.039	-1.305
2:	0.286	-0.751
3:	0.783	0.113
4:	0.308	0.653
5:	-0.265	0.300
6:	-0.485	0.076
7:	-0.049	0.046
8:	-0.300	-0.401
9:	-0.056	-0.291
10:	-0.244	-0.107

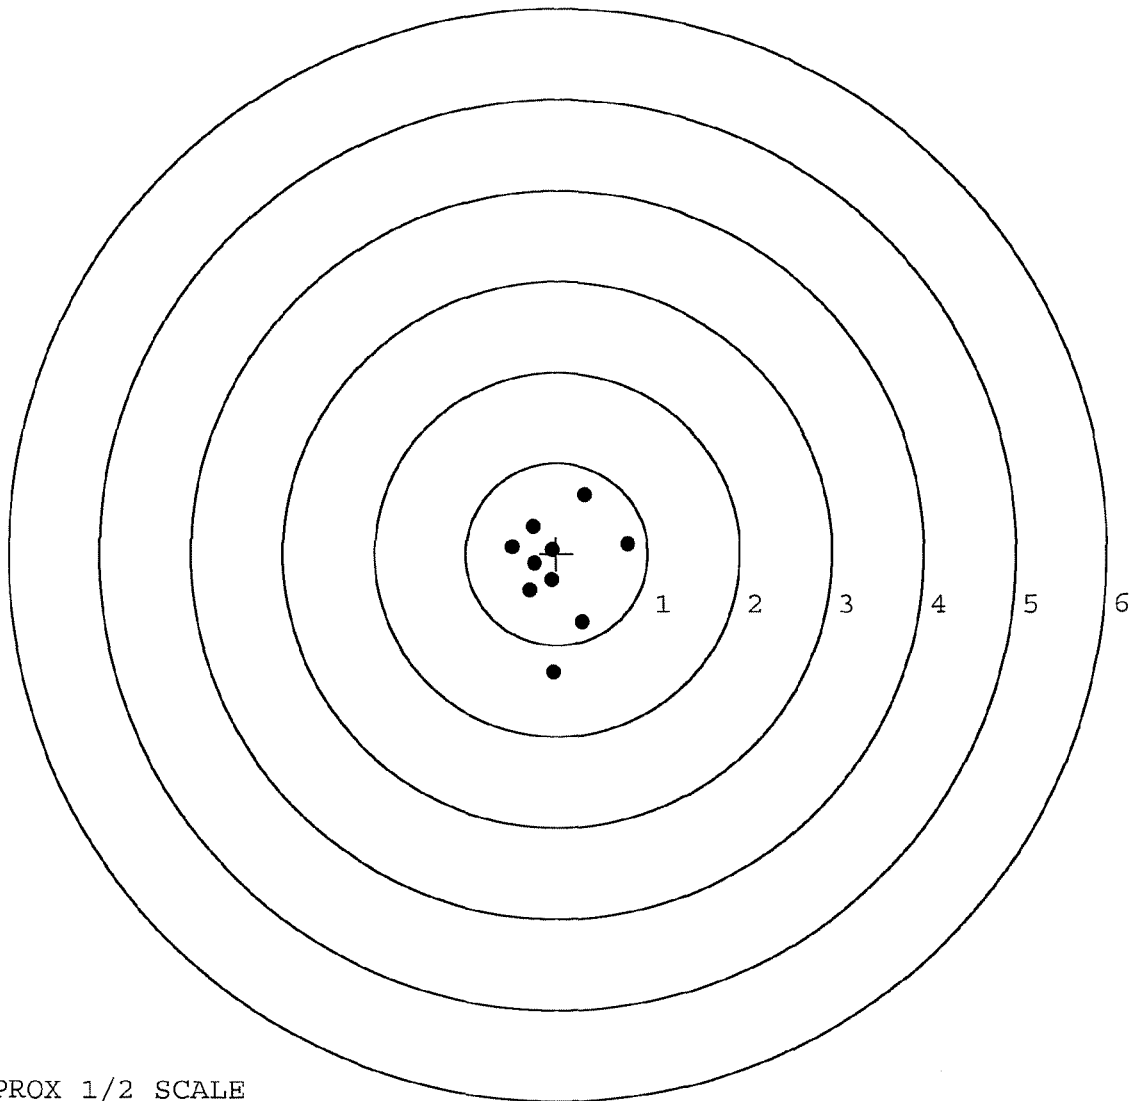

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R & E NUMBER	80679		
SERIAL NUMBER	C6523412		
LOG-IN DATE	5-6-04		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	5-10-04	RTL
560 A	RE-BARREL	5-14-04	RTL
B	DRILL AND TAP	5-20-04	TRW
575	ASSEMBLE	5-14-04	RTL
600	PROOF	5-18-04	AC
605	CHECK HEADSPACE	5-18-04	AC
610	DIS-ASSEMBLE GUN	5-18-04	RTL
612	MAGNAFLUX RATOR		
615	ROLLMARK CALIBER	5/28/04	AB
618	ROTO-BLAST	5/24/04	DG
620	APPLY COATINGS	6-1	TA
625 A	FINAL ASSEMBLY	6-3-04	RTL
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	6/3/04	AC
655	FINAL INSPECT	6-7-04	RTL
660	PACK	6-8-04	TA
		SHIP DATE	
QAR INSPECTION DATE			

GFM

CONTRACT # DAAA21-87-C-0086

Repair

GUN SERIAL # C6523412

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		2/15/93	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		2/15/93	RW
	C) Inspect Ejector Hole for Chamfer		2/15/93	RW
	D) Oil Firing Pin Ass'y		2/15/93	RW
	E) Adjust Trigger Pull to Min Setting and Stake		2/15/93	RW

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	4	4	4			2/15/93	RW
	G) Safety Off Force	3	3	3			2/15/93	RW
	H) Trigger Pull Test & Retainability						2/15/93	RW
	I) Firing Pin Indent							
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle						2/15/93	RW
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test						2/26/93	RW
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo						2/26/93	RW
655	Final Inspection							
	A) Headspace						3/4/93	RW
	B) Trigger Pull	2.62	2.56	2.60	2.60	2.57	3/4/93	RW
	C) Function						3/4/93	RW
660	Pack							

SWS TRIGGER PULL TEST

New Trigger Assy.

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6523412
DATE 2/15/93
TESTER RW

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.45	2.48	2.48	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.37	2.46	2.61	
PULL #3	2.37	2.48	2.64	
PULL #4	2.41	2.46	2.66	
PULL #5	2.43	2.25	2.60	
TOTAL	12.03	12.13	12.99	
AVG.	2.41	2.43	2.60	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.19	3.22	
PULL #2	3.17	3.14	
PULL #3	3.20	3.15	
PULL #4	3.17	3.14	
PULL #5	3.18	3.14	
TOTAL	15.91	15.79	
AVG.	3.18	3.16	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.08	4.06		4.16
PULL #2	4.02	4.08		4.20
PULL #3	4.06	4.00		4.20
PULL #4	4.06	4.07		4.23
PULL #5	4.07	4.08		4.21
TOTAL	20.29	20.29		21.00
AVG.	4.06	4.06		4.20

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER

R 93-02483

INITIAL CUSTOMER ORDER NO.

WDC 30 OF 30 W/10X SCOPE & DEPLOYMENT KIT

FPS

M-24

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

01/25/93

01/25/93

DK 9-90

C6523412

700 7-62

NATO

ACCESSORIES

W/STUDS

W/SWIVELS

SOFT CASE

SCOPE BASE

FROM:

SHIP TO:

MCHALE, EDWARD J CPT,SF

HSC 3RD BN 3RD SFG (A)

FT BRAGG

NC 28307

MCHALE, EDWARD J CPT,SF

HSC 3RD BN 3RD SFG (A)

FT BRAGG

NC

28307

CUST NO:073985 C.E.D L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE

CLEAN/TEST

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

☐ NEW

☐ LIGHTLY WORN

☐ WORN

☐ VERY WORN

☐ UNREPAIRABLE

☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

BOLT ASSY.

B3

BARREL ASSY.

B4

D1

REC. ASSY.

B5

D2

WOOD

C1

D3

METAL

C2

MAIN FAULT

PARTS

COMMENTS

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

RD6825 REV. 1/92

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400027666

Remington
 MODEL 700™ H24

VERY IMPORTANT:
 Instruction Book
 enclosed to assure
 safe use of this
 firearm.



DUPONT
 REG. U.S. PAT. & TM. OFF.

SERIAL NO. C6523412

ORDER NO. 5716

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada. Marque Deposee.

UPC



op. #	OP. NAME	READINGS					DATE	INIT
635 nt.	F) Safety On Force	4 1/2	4 1/2	4 1/2			10/10/90	WB
	G) Safety Off Force	3	3	3			10/10/90	WB
	H) Trigger Pull Test & Retainability						10/10/90	WB
	I) Firing Pin Indent	.024	.024	.024			10/10/90	WB
	J) Assemble Stock						10/10/90	RW
	K) Assemble Swivel Studs						2/18/90	YB
	L) Attach Front and Rear Sight Assemblies						10/10/90	RW
	M) Iron Sight Alignment						10/10/90	RW
	N) Detach Front & Rear Sights & place in numbered container						10/10/90	RW
	O) Attach Scope to Rifle						10/10/90	RW
	P) Detach & Attach Scope 20 Times						10/10/90	RW
640	Gallery Target & Test						10-11-90	DA
	A) Time						10-11-90	DA
	B) Malfunctions						10-11-90	DA
	C) Pierced Primers						10-11-90	DA
	D) Optical Clarity of Scope						10-11-90	DA
645	Inspect for Live Ammo						10-11-90	DA
655	Final Inspection							
	A) Headspace						2/18/90	YB
	B) Trigger Pull	238	216	211	213	214	2/18/90	YB
	C) Function						2/18/90	YB
660	Pack						12-17-90	DA

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6523412

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	9 24	90	RW
600	Proof	9 24	90	RW
607	Check Headspace	9 24	90	RW
610	Dis-assemble Gun	9 24	30	RW
612	Magnaflux Barrel Action		9-25-90	KR.
	Magnaflux Bolt		9-25-90	KR
615	Rollmark Caliber		9-25-90	RL
617	Drill and Tap Sight Holes		9-25-90	FB
618	Polish Barrel RB		9/28/90	WB
620	Apply Coatings (Barrel Action)		10-7-90	JA
	Apply Coating (Bolt)		10-7-90	JA
625	Final Assembly A) Clean inside of Bolt Assembly		10/8/90	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		10/8/90	RW
	C) Inspect Ejector Hole for Chamfer		10/8/90	RW
	D) Oil Firing Pin Ass'y		10/8/90	RW
	E) Adjust Trigger Pull to Min Setting and Stake		10/10/90	WB

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6523412

DATE 10/10/90

TESTER WB

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.36	2.54	2.46	2.38	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.35	2.53	2.43	2.16	
PULL #3	2.40	2.51	2.42	2.11	
PULL #4	2.49	2.48	2.32	2.13	
PULL #5	2.48	2.43	2.37	2.16	
TOTAL	12.08	12.49	12.00		
AVG.	2.42	2.50	2.40		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.09	3.03		
PULL #2	3.02	3.08		
PULL #3	3.10	3.09		
PULL #4	3.13	3.05		
PULL #5	3.14	3.05		
TOTAL	15.48	15.30		
AVG.	3.10	3.06		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.02	4.09		4.41
PULL #2	4.00	4.02		4.38
PULL #3	3.95	4.03		4.34
PULL #4	4.06	4.06		4.31
PULL #5	4.04	4.00		4.17
TOTAL	20.07	20.20		21.61
AVG.	4.01	4.04		4.32

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6523412
12 Oct 1990

CENTROIDAL DISTANCES

0 TO 1	.364967
1 TO 2	.194373
1 TO 3	.598767
1 TO 4	.779762
1 TO 5	.363593

$\frac{21}{3 \cdot 5}$ <----POA
4

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0656
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .085
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .10737
THE AMR FOR THIS RIFLE IS: .9506

12 Oct 1938

FILE:/PATTERNING/CENTERFIRE_PATT/06523412

CENTERFIRE PATTERNS # 1

POA

1 in circle

2 in circle

3 in circle

OF SHOTS = 10

IN CIR

1 in = 2

2 in = 7

3 in = 10

HS = 1.865

VS = 2.691

GS = 2.730


CENTROID #

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.636	.665	.644
MINIMUM X	-1.229	-1.200	-1.221
MAXIMUM Y	1.457	.643	.509
MINIMUM Y	-1.234	-1.073	-.578
CENTROID X	.100	.071	.092
CENTROID Y	.351	.190	.324
POA TO CENTROID in.	.365	.202	.336
MIN RADIUS	.134	.297	.162
MEAN RADIUS	.753	.684	.605
MAX RADIUS	1.480	1.201	1.235
HORIZONTAL SPREAD	1.865	1.865	1.865
VERTICAL SPREAD	2.691	1.716	1.087
EXTREME SPREAD	2.730	1.865	1.865
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	10		

12 Oct 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6523412

CENTERFIRE PATTERNS # 2

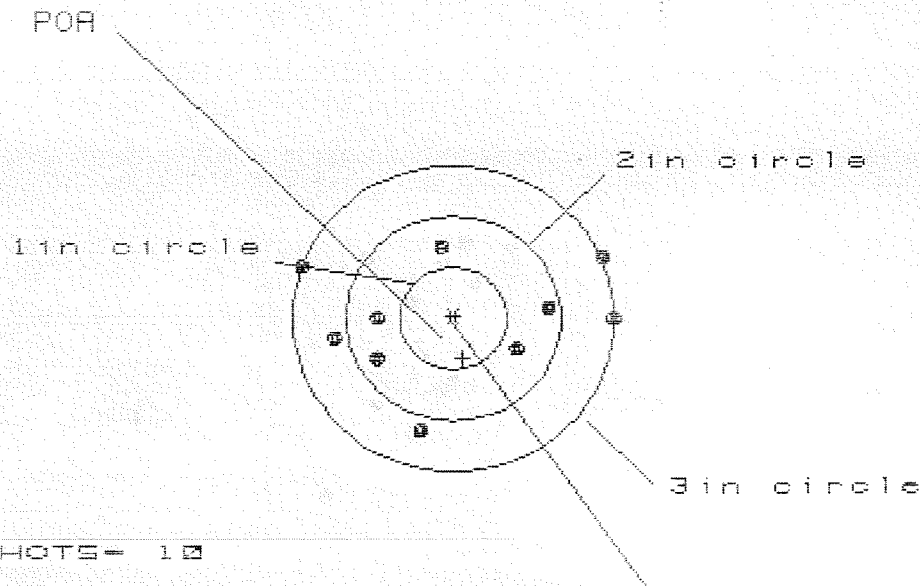

OF SHOTS- 10

IN CIR

1in = 0

2in = 5

3in = 9

HS= 2.843

VS= 1.747


GS= 2.881

PATTERN #	2		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.444	1.598	1.443
MINIMUM X	-1.399	-1.245	-1.077
MAXIMUM Y	.666	.729	.802
MINIMUM Y	-1.081	-1.018	-.944
CENTROID X	-.090	-.244	-.089
CENTROID Y	.392	.329	.256
POA TO CENTROID in.	.402	.410	.270
MIN RADIUS	.679	.577	.640
MEAN RADIUS	1.045	.972	.924
MAX RADIUS	1.501	1.603	1.455
HORIZONTAL SPREAD	2.843	2.843	2.519
VERTICAL SPREAD	1.747	1.747	1.747
EXTREME SPREAD	2.881	2.881	2.531
NUMBER IN ONE INCH CIRCLE =		0	
NUMBER IN TWO INCH CIRCLE =		5	
NUMBER IN THREE INCH CIRCLE =		9	

12 Oct 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6523412

CENTERFIRE PATTERNS # 3

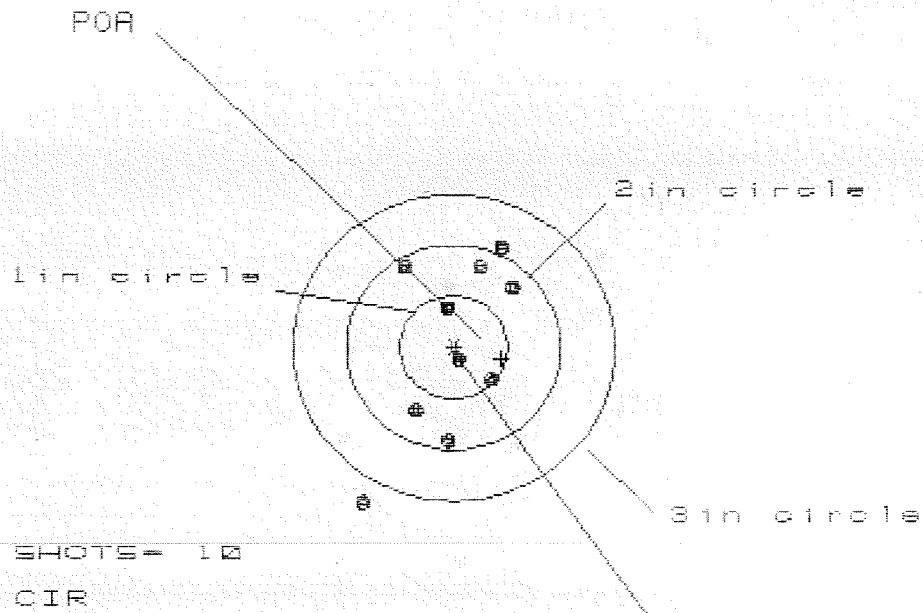

OF SHOTS= 10

IN CIR

1in = 3

2in = 8

3in = 9

HS= 1.335

VS= 2.543

GS= 2.866

CENTROID *

PATTERN #	3	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.507	.415	.465
MINIMUM X	-.828	-.582	-.532
MAXIMUM Y	1.015	.845	.759
MINIMUM Y	-1.528	-1.091	-.985
CENTROID X	-.449	-.357	-.407
CENTROID Y	.112	.282	.176
POA TO CENTROID in.	.463	.455	.444
MIN RADIUS	.132	.195	.165
MEAN RADIUS	.798	.671	.635
MAX RADIUS	1.738	1.098	.988
HORIZONTAL SPREAD	1.335	.997	.997
VERTICAL SPREAD	2.543	1.936	1.744
EXTREME SPREAD	2.866	2.006	1.803
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		8	
NUMBER IN THREE INCH CIRCLE =		9	


12 Oct 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06523412

CENTERFIRE PATTERNS

4

POA

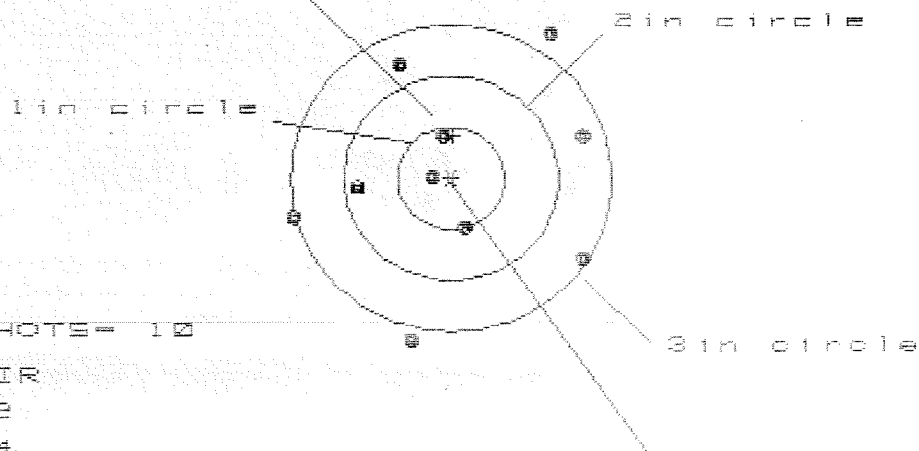

OF SHOTS= 10

IN CIR

1in = 2

2in = 4

3in = 7

HS= 2.686

VS= 2.997

GS= 3.257

CENTROID *

PATTERN #	4	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.219	1.318	1.281
MINIMUM X	-1.467	-1.368	-1.405
MAXIMUM Y	1.409	1.298	1.119
MINIMUM Y	-1.588	-1.431	-1.785
CENTROID X	-.023	-.122	-.085
CENTROID Y	-.419	-.576	-.397
POA TO CENTROID in.	.420	.588	.406
MIN RADIUS	.157	.150	.102
MEAN RADIUS	1.071	.994	.916
MAX RADIUS	1.664	1.461	1.502
HORIZONTAL SPREAD	2.686	2.686	2.686
VERTICAL SPREAD	2.997	2.729	1.984
EXTREME SPREAD	3.257	2.771	2.771
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	7		

12 Oct 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6523412

CENTERFIRE PATTERNS

5

FOR

1 in circle

2 in circle

3 in circle

OF SHOTS= 10

IN CIR

1 in = 0

2 in = 4

3 in = 9

HS= 2.788

VS= 2.493

GS= 2.901

CENTROID #

PATTERN #

5

SHOTS (BEST OF)

10

9

8

MAXIMUM X

1.618

.939

.949

MINIMUM X

-1.170

-.990

-.980

MAXIMUM Y

1.030

1.092

.917

MINIMUM Y

-1.463

-1.401

-.835

CENTROID X

.134

-.046

-.056

CENTROID Y

-.011

-.073

.102

FOR TO CENTROID in.

.134

.086

.117

MIN RADIUS

.575

.459

.631

MEAN RADIUS

1.086

.990

.933

MAX RADIUS

1.712

1.440

1.320

HORIZONTAL SPREAD

2.788

1.929

1.929

VERTICAL SPREAD

2.493

2.493

1.752

EXTREME SPREAD

2.901

2.637

2.311

NUMBER IN ONE INCH CIRCLE =

0

NUMBER IN TWO INCH CIRCLE =

4

NUMBER IN THREE INCH CIRCLE =

9

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER

R 93-02483

INITIAL
FPS

CUSTOMER ORDER NO.

WOG 30 OF 30 W/10X SCOPE & DEPLOYMENT KIT
M-24

DATE RECEIVED
01/25/93

DATE OPENED
01/25/93

DATE CODE
DK 9-90

SERIAL NUMBER
C6523412

NEW SERIAL NUMBER

MODEL AND GRADE
700 7-62

NATO

ACCESSORIES

W/STUDS

W/SWIVELS

SOFT CASE

SCOPE BASE

FROM:

SHIP TO:

MCHALE, EDWARD J CPT, SF
HSC 3RD BN 3RD SFG (A)
FT BRAGG NC 28307

MCHALE, EDWARD J CPT, SF
HSC 3RD BN 3RD SFG (A)
FT BRAGG NC 28307

CUST NO: 073985 C.O.D L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

CLEAN/TEST

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
- ☐ LIGHTLY WORN
- ☐ WORN
- ☐ VERY WORN
- ☐ UNREPAIRABLE
- ☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

Rust on Gun

PARTS

COMMENTS

Magazine Spring - 15677
Trigger Assy - 96024

Re-zinc phosphate Scope Base,
Scope Rings & Swivels & Swivel
Studs
Re-powder Coat Barrel Assy - 96001

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 1/92

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400027677