

C6523434

MODEL 700<sup>TM</sup> M24

Model **SWS** <sup>TM</sup>

Action

Barrel Length

Capacity

Order No. **5716**

\*Includes 1 in chamber.



M2400028063

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

## Repair Inquiry

Repair Number: RE00076017

Serial: C6523434 Model: 700 Center Fire Caliber: 7  
62 NATO M24 SWS

Repairman:

Status:

Closed 1/21/2004 8:00:18 AM

Verify Repair

## Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: BN 161 INF

BN 161 INF

Address 1: 81ST BRIGADE ATTN S4

81ST BRIGADE ATTN S4

Address 2: BOX 339548

PO Box:

BOX 339548

PO Box:

City: FORT LEWIS

FORT LEWIS

State: WA

Zip Code: 98433

Country: US

State: WA

Zip Code: 98433

Country: US

FFL:

## Contact / Condition

## Problems

## Estimate

## History / Status

## Shipping / Billing

## Contact Information

Phone:

Fax:

Email:

Comments:

## Received Condition

Fair

Condition

Notes:

CSR

Notes:

## Accessories Received

| Code | Desc        | Qty |
|------|-------------|-----|
| A007 | With Studs  | 3   |
| A017 | Scope Bases | 2   |
| A026 | Scope       | 1   |

Repair Search

Refresh

Close

naglej

1/21/2004

8:04 AM

CAPS

NUM

INS

SCPL

start

2

2

2

2

Link Serv

280M

Serial Number: C6523434

Model: 700



RE00076017

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6523434.\_\_\_0  
FILE DATE AND TIME: 02/02/2004 07:13

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

|                                                             |        |
|-------------------------------------------------------------|--------|
| The Average X Centroid of the Five Target Set:              | 0.053  |
| The Average Y Centroid of the Five Target Set:              | -0.011 |
| The Average Point of Impact of the Five Target Set:         | 0.054  |
| The Average Mean Radius of the Five Target Set:             | 0.610  |
| The Distance from POA to Centroid Target #1:                | 0.037  |
| The Distance from Centroid Target #2 to Centroid Target #1: | 0.202  |
| The Distance from Centroid Target #3 to Centroid Target #1: | 0.052  |
| The Distance from Centroid Target #4 to Centroid Target #1: | 0.160  |
| The Distance from Centroid Target #5 to Centroid Target #1: | 0.167  |

SERIAL NUMBER: C6523434. \_\_0

TARGET NUMBER: 1

FILE DATE: 02/02/2004

FILE TIME: 07:13

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.544  | -0.740 |
| 2:     | 0.205  | -0.825 |
| 3:     | 0.418  | -0.299 |
| 4:     | 0.672  | 0.159  |
| 5:     | 0.286  | 0.429  |
| 6:     | -0.170 | 0.242  |
| 7:     | -0.196 | 0.680  |
| 8:     | -0.554 | 0.574  |
| 9:     | -0.496 | -0.185 |
| 10:    | -1.004 | 0.181  |

X CENTROID: -0.030

Y CENTROID: 0.022

POA TO CENTROID: 0.037

HORZ SPREAD: 1.676

VERT SPREAD: 1.505

GROUP SPREAD: 1.801

MIN RADIUS: 0.261


MAX RADIUS: 0.987

MEAN RADIUS: 0.681

# IN 1 IN DIAMETER: 1

# IN 2 IN DIAMETER: 10

# in 3 IN DIAMETER: 10

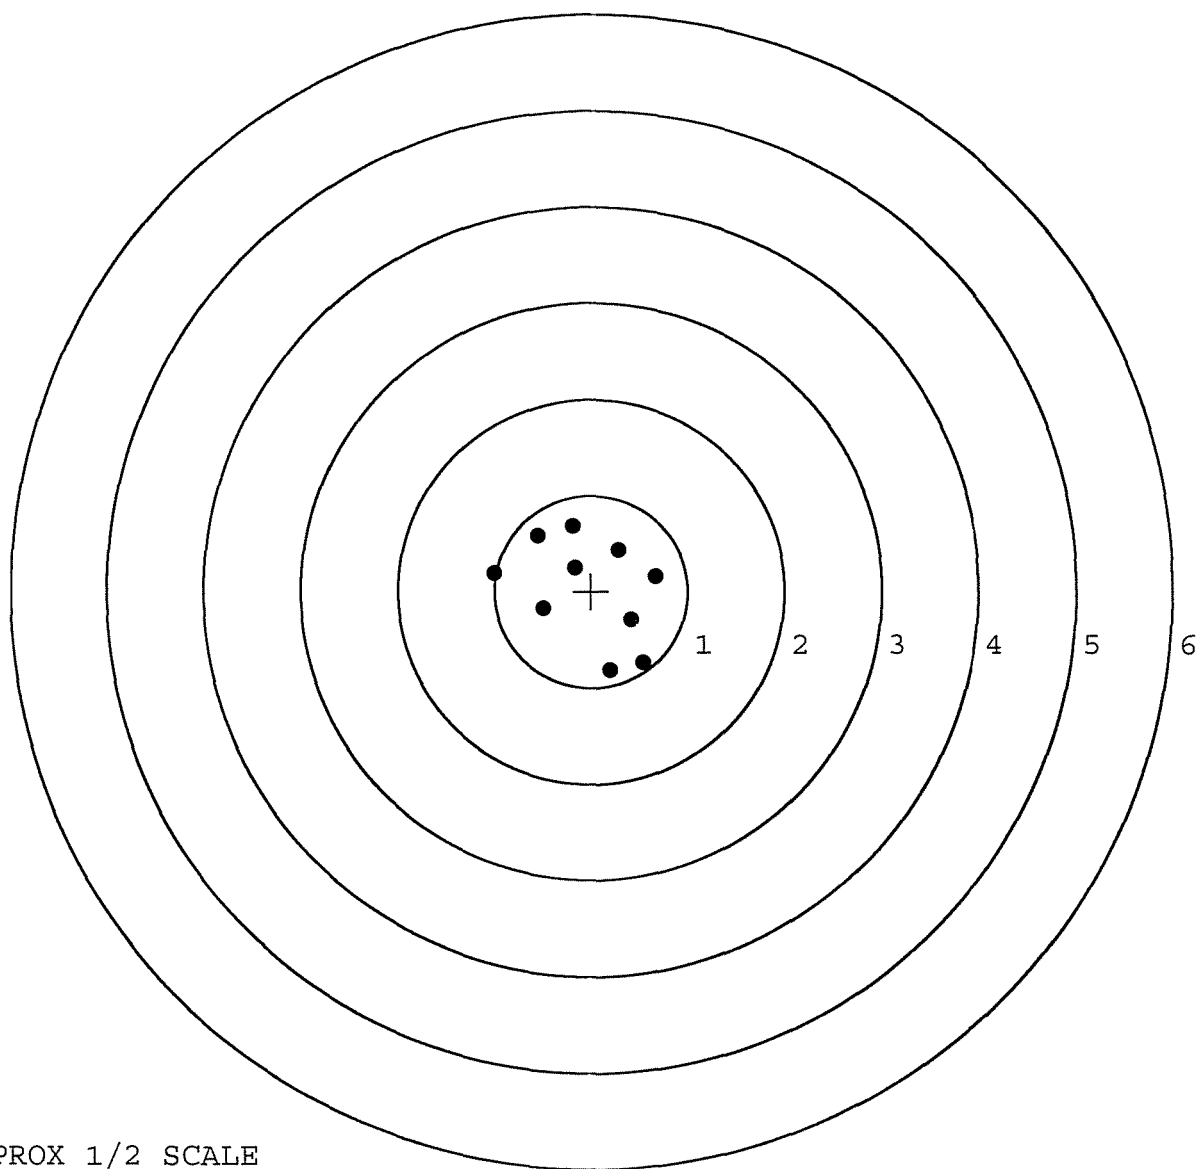

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523434. \_\_0

TARGET NUMBER: 2

FILE DATE: 02/02/2004

FILE TIME: 07:13

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.497  | -0.626 |
| 2:     | 0.833  | 0.229  |
| 3:     | 1.013  | 0.418  |
| 4:     | 0.662  | 0.618  |
| 5:     | -0.441 | 0.540  |
| 6:     | -0.673 | -0.113 |
| 7:     | -0.014 | -0.283 |
| 8:     | 0.130  | -0.073 |
| 9:     | -0.066 | 0.157  |
| 10:    | -0.349 | 0.076  |

X CENTROID: 0.159

Y CENTROID: 0.094

POA TO CENTROID: 0.185

HORZ SPREAD: 1.686

VERT SPREAD: 1.244

GROUP SPREAD: 1.768

MIN RADIUS: 0.170


MAX RADIUS: 0.913

MEAN RADIUS: 0.605

# IN 1 IN DIAMETER: 3

# IN 2 IN DIAMETER: 10

# in 3 IN DIAMETER: 10

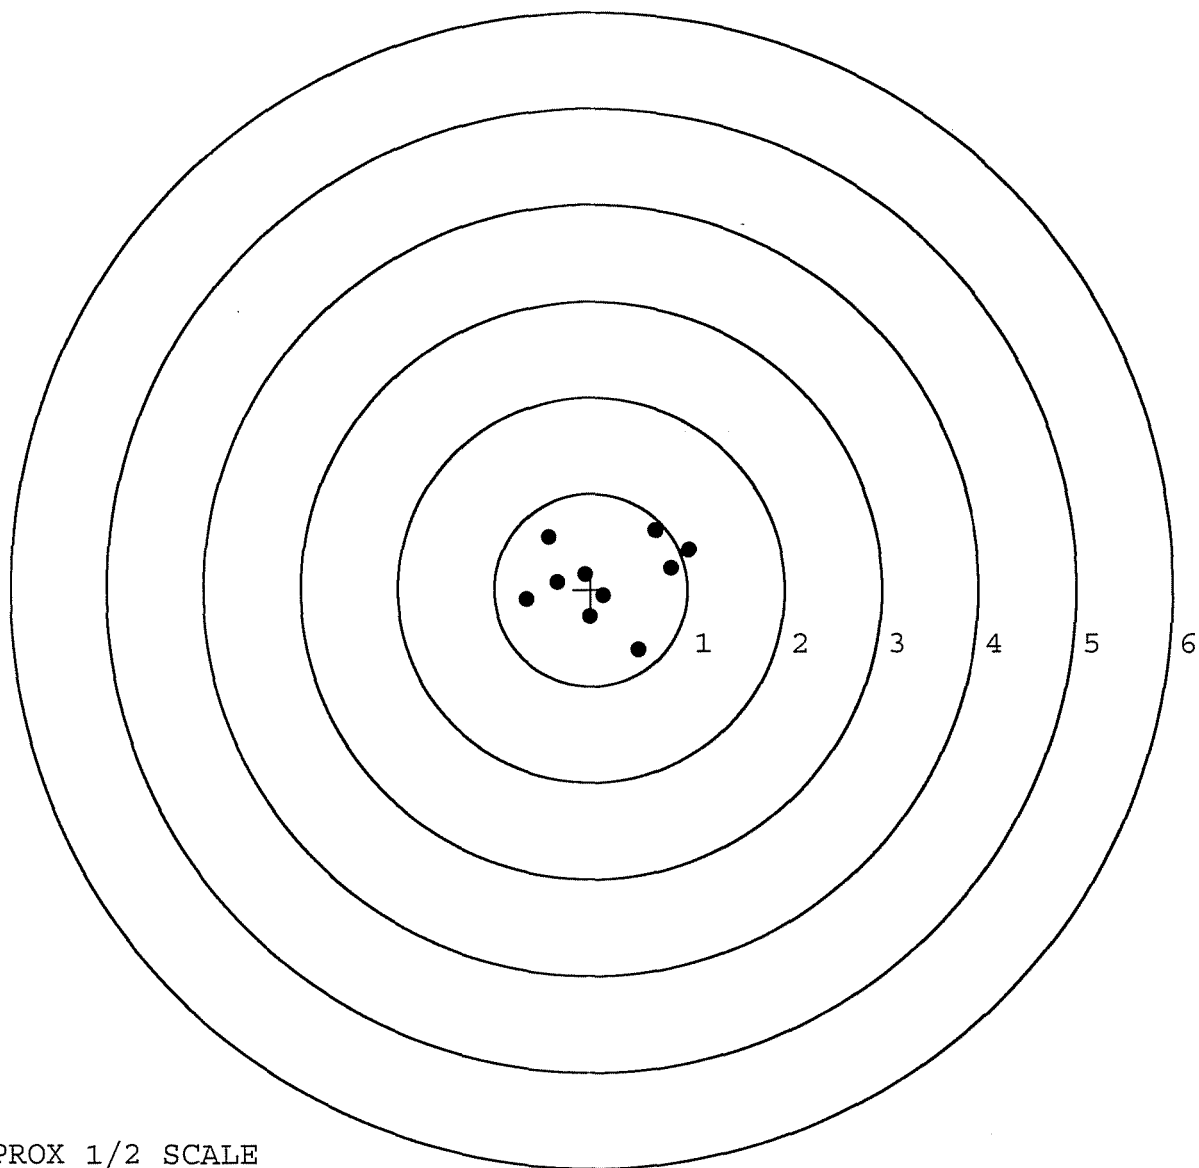


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523434. \_\_0  
TARGET NUMBER: 3  
FILE DATE: 02/02/2004  
FILE TIME: 07:13

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.773  | -0.316 |
| 2:     | 1.237  | 0.541  |
| 3:     | 0.163  | -0.558 |
| 4:     | -1.189 | -0.381 |
| 5:     | -0.826 | 0.396  |
| 6:     | -0.412 | 0.358  |
| 7:     | 0.111  | 0.171  |
| 8:     | 0.107  | -0.109 |
| 9:     | -0.262 | -0.048 |
| 10:    | -0.210 | -0.307 |

X CENTROID: -0.051  
Y CENTROID: -0.025  
POA TO CENTROID: 0.057  
HORZ SPREAD: 2.426  
VERT SPREAD: 1.099  
GROUP SPREAD: 2.595  
MIN RADIUS: 0.179  
MAX RADIUS: 1.407  
MEAN RADIUS: 0.642  
# IN 1 IN DIAMETER: 4  
# IN 2 IN DIAMETER: 8  
# in 3 IN DIAMETER: 10

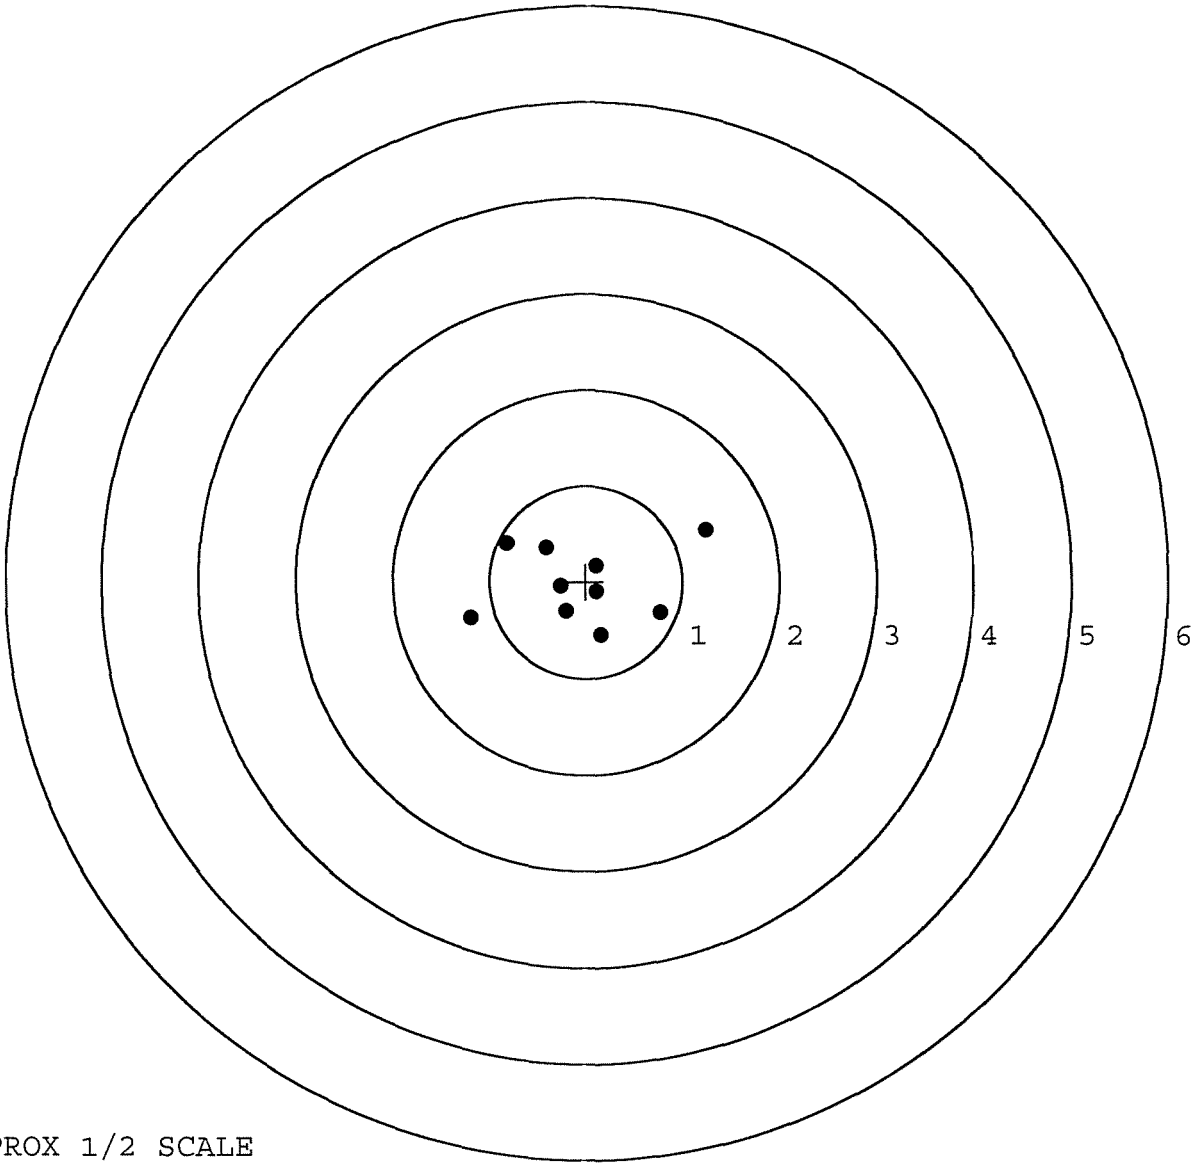


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523434. \_\_0  
TARGET NUMBER: 4  
FILE DATE: 02/02/2004  
FILE TIME: 07:13

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -0.036 | -0.751 |
| 2:     | 0.070  | -0.468 |
| 3:     | -0.498 | -0.626 |
| 4:     | -0.245 | -0.210 |
| 5:     | -0.765 | 0.030  |
| 6:     | 0.647  | -0.125 |
| 7:     | 0.597  | 0.139  |
| 8:     | 0.509  | 0.232  |
| 9:     | 0.225  | 0.198  |
| 10:    | 0.080  | 0.455  |

X CENTROID: 0.058  
Y CENTROID: -0.113  
POA TO CENTROID: 0.127  
HORZ SPREAD: 1.412  
VERT SPREAD: 1.206  
GROUP SPREAD: 1.420  
MIN RADIUS: 0.319  
MAX RADIUS: 0.836  
MEAN RADIUS: 0.558  
# IN 1 IN DIAMETER: 3  
# IN 2 IN DIAMETER: 10  
# in 3 IN DIAMETER: 10

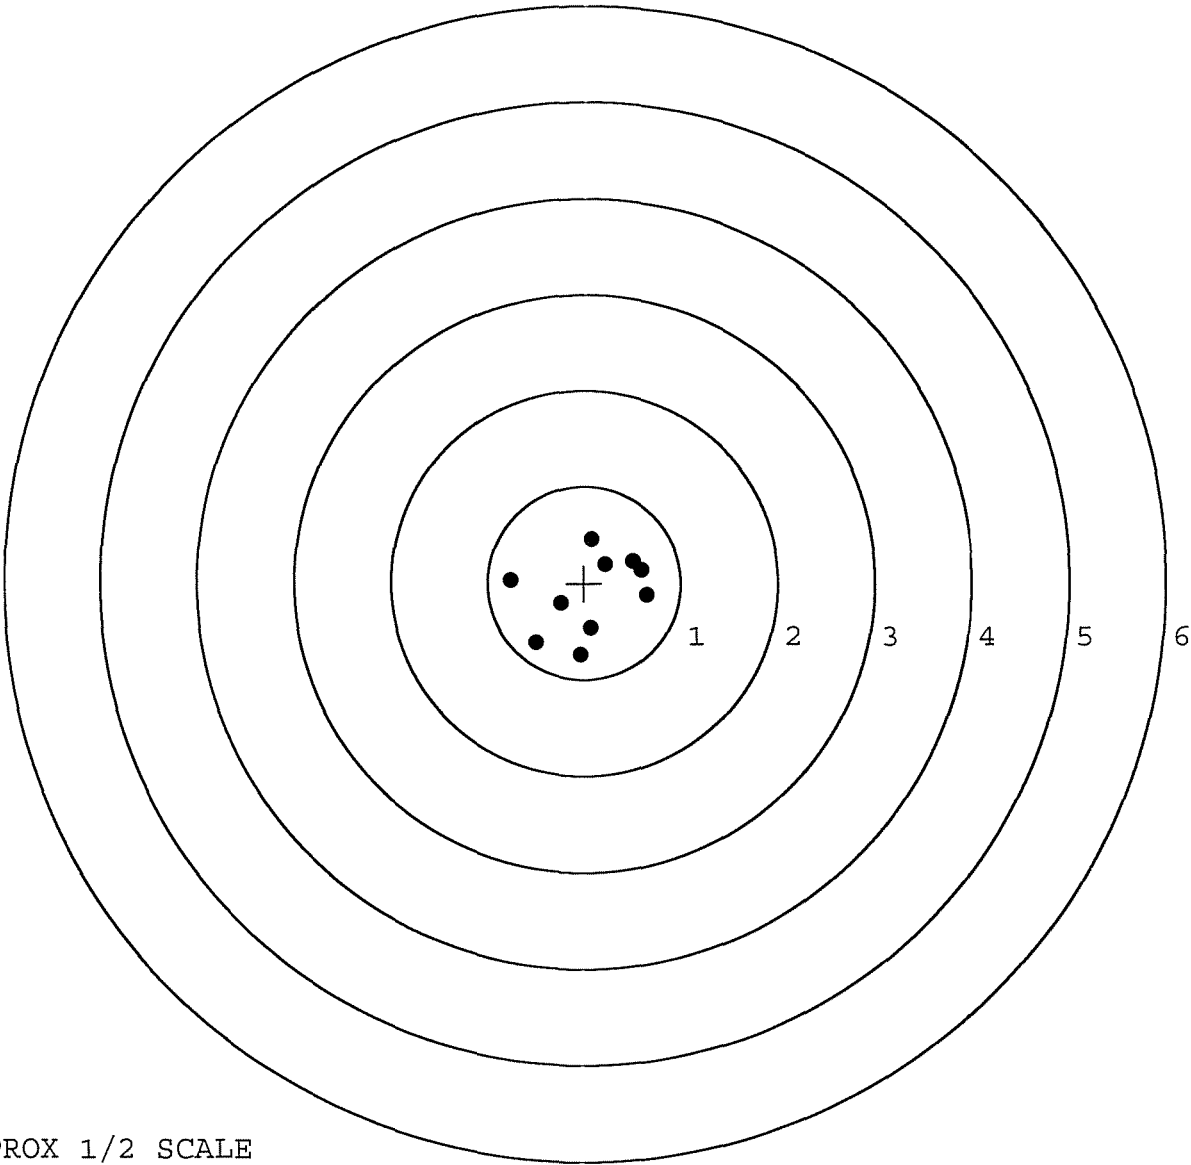


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6523434. \_\_0  
TARGET NUMBER: 5  
FILE DATE: 02/02/2004  
FILE TIME: 07:13

X CENTROID: 0.128  
Y CENTROID: -0.032  
POA TO CENTROID: 0.132  
HORZ SPREAD: 1.443  
VERT SPREAD: 1.615  
GROUP SPREAD: 1.628  
MIN RADIUS: 0.258  
MAX RADIUS: 1.046  
MEAN RADIUS: 0.564  
# IN 1 IN DIAMETER: 5  
# IN 2 IN DIAMETER: 9  
# in 3 IN DIAMETER: 10

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -0.280 | -0.877 |
| 2:     | -0.910 | -0.159 |
| 3:     | 0.074  | 0.628  |
| 4:     | 0.448  | 0.738  |
| 5:     | 0.312  | 0.149  |
| 6:     | -0.123 | 0.075  |
| 7:     | 0.445  | 0.064  |
| 8:     | 0.443  | -0.166 |
| 9:     | 0.533  | -0.339 |
| 10:    | 0.343  | -0.430 |

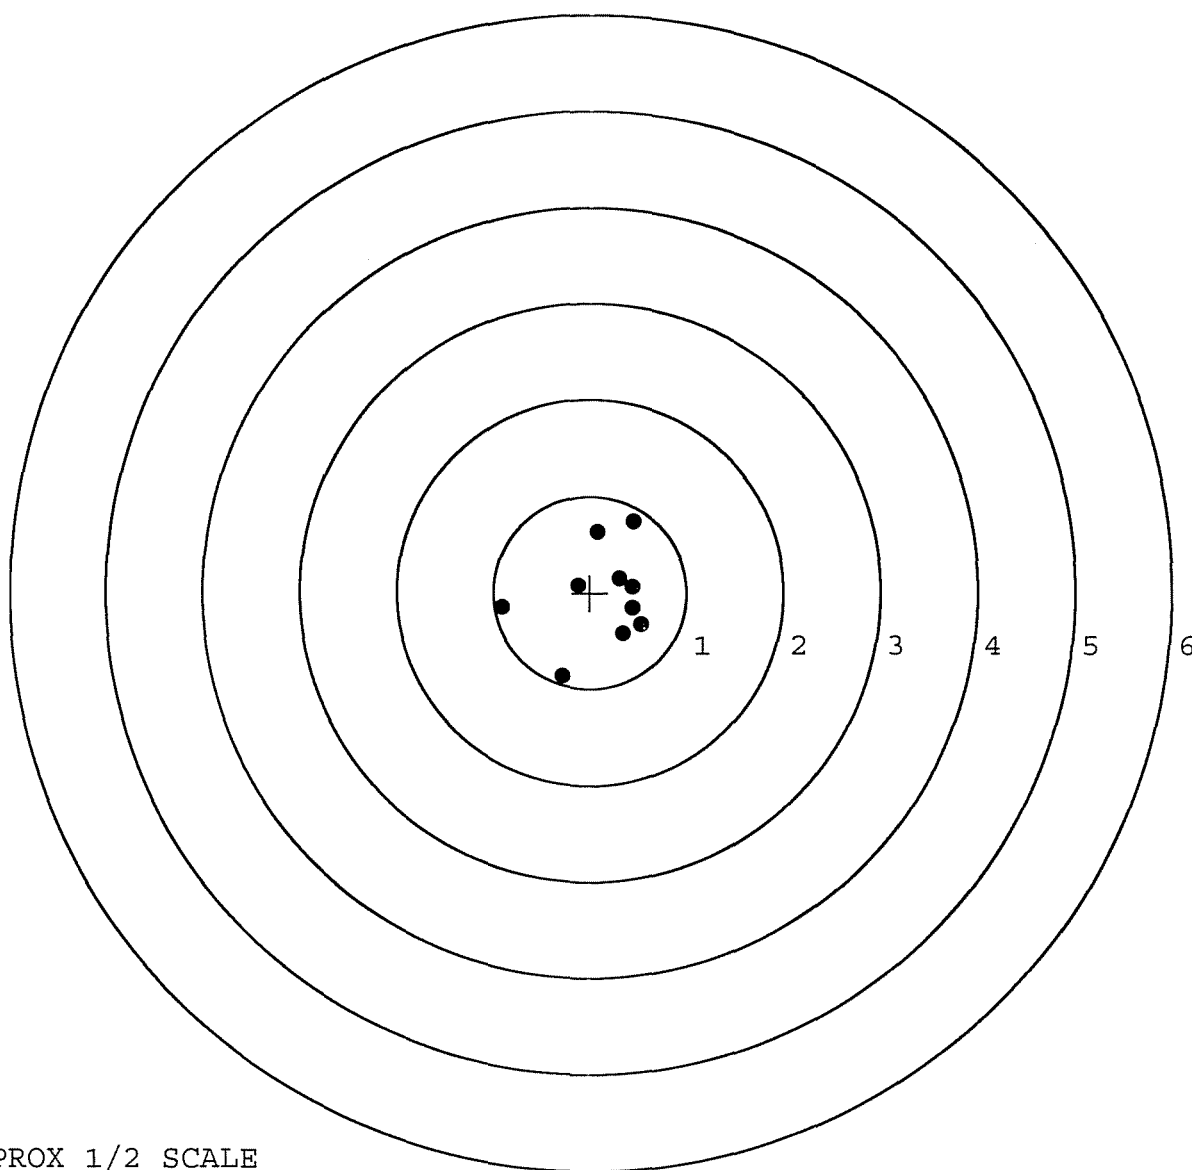

TARGET APPROX 1/2 SCALE



**M2400028071**

**Remington**



VERY IMPORTANT:  
Instruction Book  
enclosed to assure  
safe use of this  
firearm.

**MODEL 700™ H24**

**SERIAL NO.**  
C6523434

**ORDER NO.**  
**5716**

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off, Marca Registrada Marque Deposee.

01



5716 C6523434

**UPC**



0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6523434

| OP. #        | OP. NAME                                                       | READINGS | DATE     | INIT |
|--------------|----------------------------------------------------------------|----------|----------|------|
| 575 &<br>580 | Assemble Action<br>and Stock                                   | 10 3     | 90       | RW   |
| 600          | Proof                                                          | 10 3     | 90       | RW   |
| 607          | Check Headspace                                                | 10 3     | 90       | RW   |
| 610          | Dis-assemble Gun                                               | 10 3     | 90       | RW   |
| 612          | Magnaflux Barrel<br>Action                                     |          | 10/11/90 | KR   |
|              | Magnaflux Bolt                                                 |          | 10/11/90 | KR   |
| 615          | Rollmark Caliber                                               |          | 10/11/90 | GL   |
| 617          | Drill and Tap Sight Holes                                      |          | 10/11/90 | FB   |
| 618          | Polish Barrel RWB                                              |          | 10/12/90 | WB   |
| 620          | Apply Coatings<br>(Barrel Action)                              |          | 10-18-90 | TH   |
|              | Apply Coating (Bolt)                                           |          |          |      |
| 625          | Final Assembly<br>A) Clean inside of<br>Bolt Assembly          |          | 10/22/90 | RW   |
|              | B) Inspect Rear Firing<br>Pin Hole for Chamfer<br>in Bolt Head |          | 10/22/90 | RW   |
|              | C) Inspect Ejector Hole<br>for Chamfer                         |          | 10/22/90 | RW   |
|              | D) Oil Firing Pin Ass'y                                        |          | 10/22/90 | RW   |
|              | E) Adjust Trigger Pull to<br>Min Setting and Stake             |          | 11/5/90  | TH   |

| op. #        | OP. NAME                                                    | READINGS |       |       | DATE     | INIT |          |     |
|--------------|-------------------------------------------------------------|----------|-------|-------|----------|------|----------|-----|
| 625<br>cont. | F) Safety On Force                                          | 3 1/2    | 3 1/2 | 3 1/2 | 11/5/90  | WB   |          |     |
|              | G) Safety Off Force                                         | 2        | 2     | 2     | 11/5/90  | WB   |          |     |
|              | H) Trigger Pull Test & Retainability                        |          |       |       | 11/5/90  | JH   |          |     |
|              | I) Firing Pin Indent                                        | .0215    | .020  | .0215 | 11/5/90  | WB   |          |     |
|              | J) Assemble Stock                                           |          |       |       | 11/5/90  | RW   |          |     |
|              | K) Assemble Swivel Studs                                    |          |       |       | 11/19/90 | 928  |          |     |
|              | L) Attach Front and Rear Sight Assemblies                   |          |       |       | 11/5/90  | RW   |          |     |
|              | M) Iron Sight Alignment                                     |          |       |       | 11/5/90  | RW   |          |     |
|              | N) Detach Front & Rear Sights & place in numbered container |          |       |       | 11/5/90  | RW   |          |     |
|              | O) Attach Scope to Rifle                                    |          |       |       | 11/5/90  | RW   |          |     |
|              | P) Detach & Attach Scope 20 Times                           |          |       |       | 11/5/90  | RW   |          |     |
| 640          | Gallery Target & Test                                       |          |       |       | 11-8-90  | AC   |          |     |
|              | A) Time                                                     |          |       |       | 11-8-90  | AC   |          |     |
|              | B) Malfunctions                                             |          |       |       | 11-8-90  | AC   |          |     |
|              | C) Pierced Primers                                          |          |       |       | 11-8-90  | AC   |          |     |
|              | D) Optical Clarity of Scope                                 |          |       |       | 11-8-90  | AC   |          |     |
| 645          | Inspect for Live Ammo                                       |          |       |       | 11-8-90  | AC   |          |     |
| 655          | Final Inspection                                            |          |       |       | 11/19/90 | 928  |          |     |
|              | A) Headspace                                                |          |       |       | 11/19/90 | 928  |          |     |
|              | B) Trigger Pull                                             | 2.12     | 2.12  | 2.09  | 2.02     | 2.12 | 11/19/90 | 928 |
|              | C) Function                                                 |          |       |       |          |      | 11/19/90 | 928 |
| 660          | Pack                                                        |          |       |       |          |      | 12/18/90 | RF  |

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN  
INITIAL & CYCLE TESTS  
2.50# ± .50#  
3.00# ± .75#  
4.00# ± 1.00#

SERIAL NO 06523434  
DATE 11-5-90  
TESTER JEL

|         | 2.50#<br>INITIAL | 2.50# AFTER<br>50 CYCLES | FINAL TEST &<br>TO RESET 2.50# |      | COMMENTS                                                               |
|---------|------------------|--------------------------|--------------------------------|------|------------------------------------------------------------------------|
| PULL #1 | 2.46             | 2.48                     | 2.41                           | 2.12 | MIN. SETTING,<br>NO AVG. OF 5<br>READINGS ACCEPT-<br>ABLE LESS THAN 2# |
| PULL #2 | 2.49             | 2.46                     | 2.46                           | 2.12 |                                                                        |
| PULL #3 | 2.44             | 2.44                     | 2.44                           | 2.09 |                                                                        |
| PULL #4 | 2.51             | 2.39                     | 2.46                           | 2.02 |                                                                        |
| PULL #5 | 2.51             | 2.40                     | 2.43                           | 2.13 |                                                                        |
| TOTAL   | 12.41            | 12.17                    | 12.2                           |      |                                                                        |
| AVG.    | 2.482            | 2.434                    | 2.44                           |      |                                                                        |

|         | 3.00#<br>INITIAL | 3.00# AFTER<br>20 CYCLES |  | COMMENTS |
|---------|------------------|--------------------------|--|----------|
| PULL #1 | 3.47             | 3.48                     |  |          |
| PULL #2 | 3.50             | 3.47                     |  |          |
| PULL #3 | 3.31             | 3.48                     |  |          |
| PULL #4 | 3.51             | 3.50                     |  |          |
| PULL #5 | 3.41             | 3.16                     |  |          |
| TOTAL   | 17.2             | 17.09                    |  |          |
| AVG.    | 3.44             | 3.418                    |  |          |

|         | 4.00#<br>INITIAL | 4.00# AFTER<br>20 CYCLES | MAX SETTING<br>GREATER THAN 4# | RESET TO 4# FOR<br>TARGET & ACCURACY |
|---------|------------------|--------------------------|--------------------------------|--------------------------------------|
| PULL #1 | 4.38             | 4.32                     |                                | 4.24                                 |
| PULL #2 | 4.19             | 4.35                     |                                | 4.25                                 |
| PULL #3 | 4.24             | 4.29                     |                                | 4.28                                 |
| PULL #4 | 4.27             | 4.30                     |                                | 4.26                                 |
| PULL #5 | 4.33             | 4.18                     |                                | 4.30                                 |
| TOTAL   | 21.41            | 21.44                    |                                | 21.33                                |
| AVG.    | 4.282            | 4.288                    |                                | 4.266                                |

CENTROIDAL DISTANCE CALCULATIONS  
FOR RIFLE # C6523434  
8 Nov 1990

CENTROIDAL DISTANCES

|      |   |         |
|------|---|---------|
| 0 TO | 1 | .164615 |
| 1 TO | 2 | .214394 |
| 1 TO | 3 | .189589 |
| 1 TO | 4 | .198275 |
| 1 TO | 5 | .10373  |

-----FOR


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0032  
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0552  
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0552927  
THE AMR FOR THIS RIFLE IS: .9172

8 May 1998

FILE:/PATTERNING/CENTERFIRE\_PATT/08523434

# CENTERFIRE PATTERNS

# 1

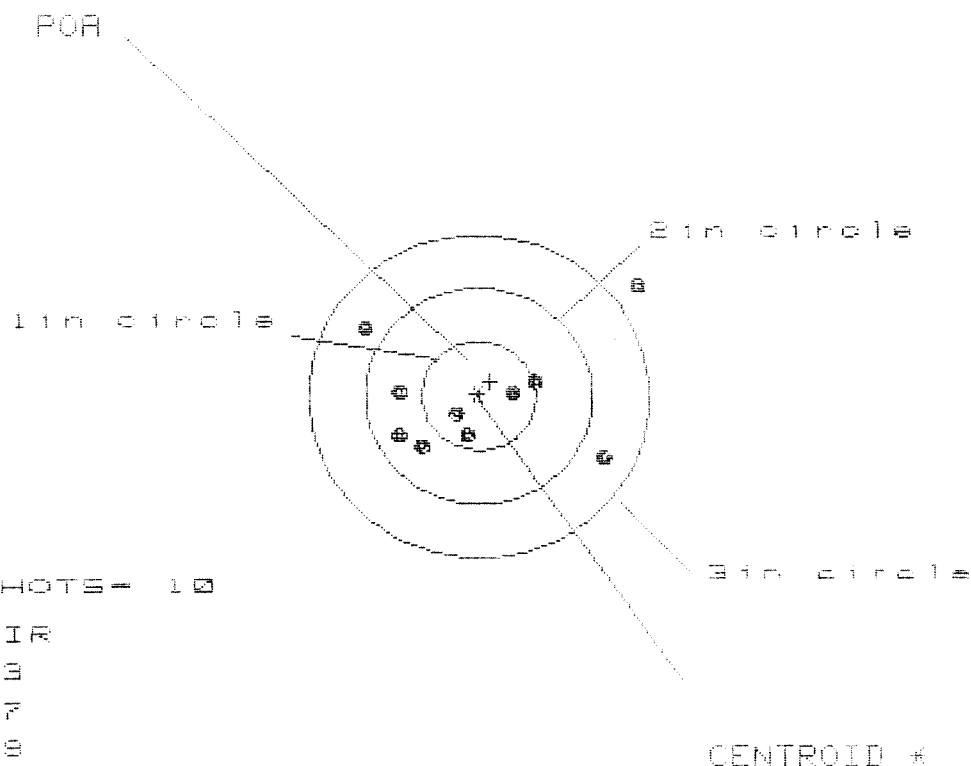

# OF SHOTS = 10

# IN CIR

1in = 3

2in = 7

3in = 8

HS = 0.447

VS = 1.556


QS = 2.563

| PATTERN #                     | 1      | 2     | 3     |
|-------------------------------|--------|-------|-------|
| SHOTS (BEST OF)               | 10     | 9     | 8     |
| MAXIMUM X                     | 1.427  | 1.219 | .797  |
| MINIMUM X                     | -1.020 | -.861 | -.709 |
| MAXIMUM Y                     | 1.024  | .702  | .650  |
| MINIMUM Y                     | -.532  | -.418 | -.404 |
| CENTROID X                    | -.097  | -.256 | -.408 |
| CENTROID Y                    | -.133  | -.247 | -.195 |
| POA TO CENTROID in.           | .165   | .356  | .452  |
| MIN RADIUS                    | .228   | .035  | .134  |
| MEAN RADIUS                   | .770   | .612  | .528  |
| MAX RADIUS                    | 1.757  | 1.288 | .962  |
| HORIZONTAL SPREAD             | 2.447  | 2.080 | 1.506 |
| VERTICAL SPREAD               | 1.556  | 1.120 | 1.054 |
| EXTREME SPREAD                | 2.563  | 2.362 | 1.566 |
| NUMBER IN ONE INCH CIRCLE =   | 3      |       |       |
| NUMBER IN TWO INCH CIRCLE =   | 7      |       |       |
| NUMBER IN THREE INCH CIRCLE = | 9      |       |       |

8 Nov 1998

FILE:/PATTERNING/CENTERFIRE\_PATT/06523434

# CENTERFIRE PATTERNS # 2

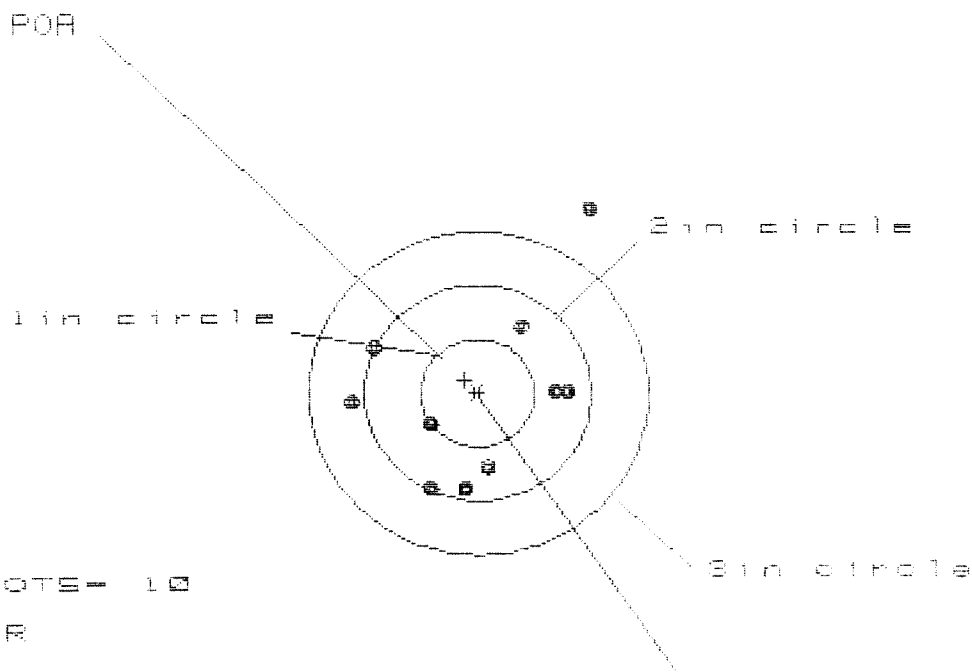

# OF SHOTS- 10

# IN CIR

1 in = 1

2 in = 5

3 in = 9

HS= 2.101

VS= 2.677

GS= 3.018

CENTROID \*


|                             |   |        |       |       |
|-----------------------------|---|--------|-------|-------|
| PATTERN #                   | : | 2      |       |       |
| SHOTS (BEST OF)             | : | 10     | 9     | 8     |
| MAXIMUM X                   | : | 1.013  | .859  | .737  |
| MINIMUM X                   | : | -1.088 | -.975 | -.967 |
| MAXIMUM Y                   | : | 1.752  | .820  | .832  |
| MINIMUM Y                   | : | -.925  | -.731 | -.719 |
| CENTROID X                  | : | .117   | .004  | .126  |
| CENTROID Y                  | : | -.120  | -.314 | -.326 |
| POA TO CENTROID in.         | : | .167   | .314  | .349  |
| MIN RADIUS                  | : | .497   | .295  | .405  |
| MEAN RADIUS                 | : | .938   | .773  | .740  |
| MAX RADIUS                  | : | 2.024  | 1.027 | 1.135 |
| HORIZONTAL SPREAD           | : | 2.101  | 1.834 | 1.704 |
| VERTICAL SPREAD             | : | 2.677  | 1.551 | 1.551 |
| EXTREME SPREAD              | : | 3.018  | 1.841 | 1.743 |
| NUMBER IN ONE INCH CIRCLE   | = |        | 1     |       |
| NUMBER IN TWO INCH CIRCLE   | = |        | 6     |       |
| NUMBER IN THREE INCH CIRCLE | = |        | 9     |       |



6 Nov 1988

FILE:/PATTERNING/CENTERFIRE\_PATT/C8523434

# CENTERFIRE PATTERNS # 3

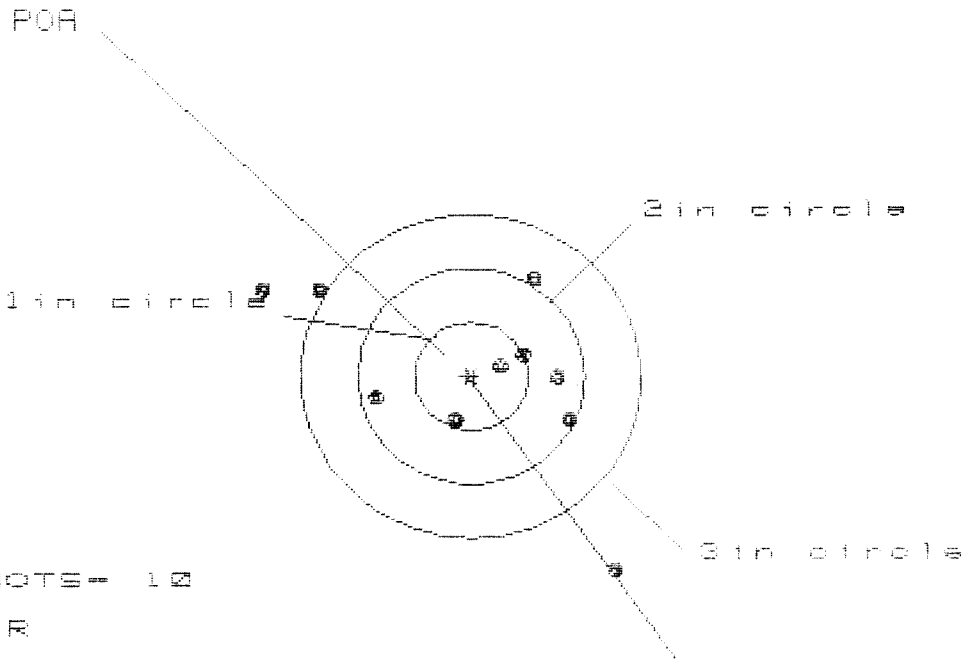

# OF SHOTS= 10

# IN CIR

1in = 2

2in = 6

3in = 7

HS= 3.114

VS= 2.690

GS= 4.081


| PATTERN #                     | 3      | 3      | 3      |
|-------------------------------|--------|--------|--------|
| SHOTS (BEST OF)               | 10     | 9      | 8      |
| MAXIMUM X                     | 1.246  | 1.021  | .805   |
| MINIMUM X                     | -1.868 | -1.729 | -1.408 |
| MAXIMUM Y                     | .864   | .662   | .738   |
| MINIMUM Y                     | -1.826 | -.643  | -.567  |
| CENTROID X                    | .041   | -.098  | .118   |
| CENTROID Y                    | -.003  | .199   | .123   |
| POA TO CENTROID in.           | .041   | .222   | .171   |
| MIN RADIUS                    | .246   | .385   | .156   |
| MEAN RADIUS                   | 1.067  | .964   | .782   |
| MAX RADIUS                    | 2.211  | 1.833  | 1.555  |
| HORIZONTAL SPREAD             | 3.114  | 2.750  | 2.213  |
| VERTICAL SPREAD               | 2.690  | 1.305  | 1.305  |
| EXTREME SPREAD                | 4.081  | 3.015  | 2.522  |
| NUMBER IN ONE INCH CIRCLE =   | 2      |        |        |
| NUMBER IN TWO INCH CIRCLE =   | 6      |        |        |
| NUMBER IN THREE INCH CIRCLE = | 7      |        |        |

8 Nov 1998

FILE:/PATTERNING/CENTERFIRE\_PATT/06523434

# CENTERFIRE PATTERNS # 4

FOR

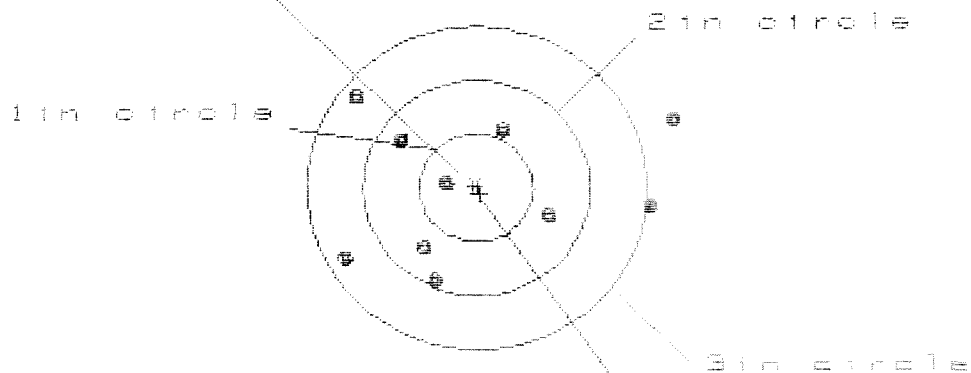

# OF SHOTS= 10

# IN CIR

1 in = 1

2 in = 6

3 in = 9

HS= 2.921

VS= 1.710

GS= 3.196

CENTROID #


| PATTERN #                   | : | 4      |        |        |
|-----------------------------|---|--------|--------|--------|
| SHOTS (BEST OF)             | : | 10     | 9      | 8      |
| MAXIMUM X                   | : | 1.714  | 1.677  | 1.830  |
| MINIMUM X                   | : | -1.207 | -1.016 | -1.807 |
| MAXIMUM Y                   | : | .818   | .886   | .872   |
| MINIMUM Y                   | : | -.892  | -.824  | -.838  |
| CENTROID X                  | : | -.034  | -.225  | -.434  |
| CENTROID Y                  | : | .055   | -.014  | .000   |
| FOR TO CENTROID in.         | : | .064   | .225   | .435   |
| MIN RADIUS                  | : | .273   | .165   | .194   |
| MEAN RADIUS                 | : | 1.015  | .892   | .775   |
| MAX RADIUS                  | : | 1.823  | 1.681  | 1.111  |
| HORIZONTAL SPREAD           | : | 2.921  | 2.693  | 1.837  |
| VERTICAL SPREAD             | : | 1.710  | 1.710  | 1.710  |
| EXTREME SPREAD              | : | 3.196  | 2.764  | 2.032  |
| NUMBER IN ONE INCH CIRCLE   | = |        | 1      |        |
| NUMBER IN TWO INCH CIRCLE   | = |        | 6      |        |
| NUMBER IN THREE INCH CIRCLE | = |        | 9      |        |

8 May 1998

FILE:/PATTERNING/CENTERFIRE\_PATT/C6523434

# CENTERFIRE PATTERNS # 5

POB

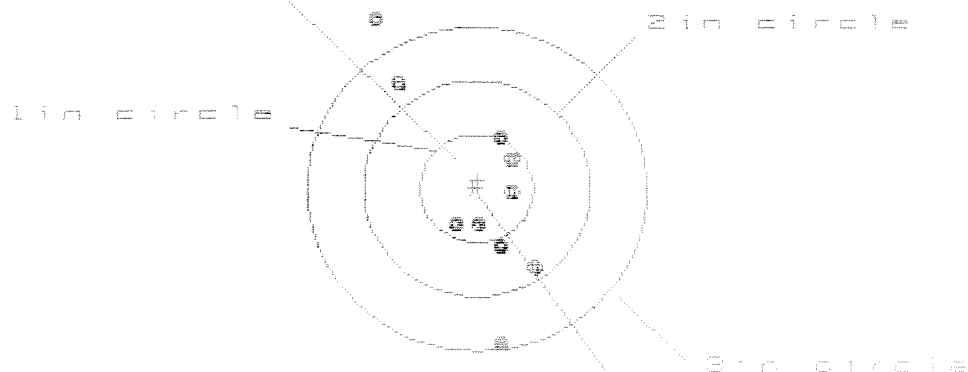

# OF SHOTS= 10

# IN CIR

1 in = 4

2 in = 7

3 in = 9

HE= 1.371

VS= 3.052

GS= 3.253

CENTROID #

|                             |   |        |        |       |
|-----------------------------|---|--------|--------|-------|
| PATTERN #                   | : | 5      |        |       |
| SHOTS (BEST OF)             | : | 10     | 9      | 8     |
| MAXIMUM X                   | : | .465   | .364   | .379  |
| MINIMUM X                   | : | -.906  | -.774  | -.759 |
| MAXIMUM Y                   | : | 1.617  | 1.141  | .984  |
| MINIMUM Y                   | : | -1.435 | -1.256 | -.743 |
| CENTROID X                  | : | -.011  | .090   | .075  |
| CENTROID Y                  | : | -.075  | -.254  | -.097 |
| POB TO CENTROID in.         | : | .075   | .270   | .123  |
| MIN RADIUS                  | : | .309   | .147   | .224  |
| MEAN RADIUS                 | : | .796   | .635   | .563  |
| MAX RADIUS                  | : | 1.853  | 1.379  | 1.243 |
| HORIZONTAL SPREAD           | : | 1.371  | 1.138  | 1.138 |
| VERTICAL SPREAD             | : | 3.052  | 2.397  | 1.727 |
| EXTREME SPREAD              | : | 3.253  | 2.558  | 2.068 |
| NUMBER IN ONE INCH CIRCLE   | = |        | 4      |       |
| NUMBER IN TWO INCH CIRCLE   | = |        | 7      |       |
| NUMBER IN THREE INCH CIRCLE | = |        | 9      |       |

## RECEIVING AND ESTIMATING REPORT

R 97-08710

|               |                    |                       |               |                   |                 |                   |      |
|---------------|--------------------|-----------------------|---------------|-------------------|-----------------|-------------------|------|
| INITIAL       | CUSTOMER ORDER NO. | W/ULTRA 10X-M3A SCOPE |               |                   |                 | Scope 3/4 90 0261 |      |
| DATE RECEIVED | DATE OPENED        | DATE CODE             | SERIAL NUMBER | NEW SERIAL NUMBER | MODEL AND GRADE |                   |      |
| 04/25/97      | 04/28/97           | EK 10-90              | C6523434      |                   | 700             | 7.62              | NATO |
| ACCESSORIES   |                    |                       |               |                   |                 |                   |      |
| HARD CASE     |                    | SCOPE MNTS            |               | SCOPE BASE        |                 | W/STUDS           |      |
|               |                    |                       |               |                   |                 | W/SWIVELS         |      |

FROM:

SHIP TO:

U S ARMY  
CO A 3/161 INF  
24410 MILITARY RD  
KENT

WA 98032

U S ARMY  
CO A 3/161 INF  
24410 MILITARY RD  
KENT

WA

98032

|                                       |                    |                                |            |           |               |
|---------------------------------------|--------------------|--------------------------------|------------|-----------|---------------|
| ACCOUNT NUMBER                        | ACCOUNT NUMBER N/C | CUST NO: 166221 C.O.D.         | PROM. DATE | ESTIMATED | VIA           |
|                                       |                    | WRITE <input type="checkbox"/> |            |           | UPS           |
| GUN CONDITION                         |                    |                                |            |           | REPAIR CHARGE |
| <input type="checkbox"/> NEW          |                    |                                |            |           | EXCISE        |
| <input type="checkbox"/> LIGHTLY WORN |                    |                                |            |           | TAX           |
| <input type="checkbox"/> WORN         |                    |                                |            |           | INSURANCE     |
| <input type="checkbox"/> VERY WORN    |                    |                                |            |           | UPS           |
| <input type="checkbox"/> UNREPAIRABLE |                    |                                |            |           | PARCEL POST   |
| <input type="checkbox"/> MARRED       |                    |                                |            |           | TOTAL         |

| CUSTOMER CONCERN | AMMO | FUNCTION | FINISH | ACCURACY | FIT | INSPECT |
|------------------|------|----------|--------|----------|-----|---------|
| CYCLE            | A1   | B1       |        |          |     |         |
| TRIGGER GROUP    |      | B2       |        |          | E1  | F1      |
| BOLT ASSY.       |      | B3       |        |          | E2  | F2      |
| BARREL ASSY.     |      | B4       |        | D1       | E3  | F3      |
| REC. ASSY.       |      | B5       |        | D2       | E4  | F4      |
| WOOD             |      |          | C1     | D3       | E5  | F5      |
| METAL            |      |          | C2     |          |     |         |

MAIN FAULT

Scope Needs Repair  
Butt Stock Adj Screw Broken  
Tough & long Trigger pull  
7160 H

|       |                                          |       |       |        |        |         |
|-------|------------------------------------------|-------|-------|--------|--------|---------|
| PARTS | COMMENTS                                 |       |       |        |        |         |
|       | Scope Sent back To Leypa for Repair      |       |       |        |        |         |
|       | Repaired Butt Stock Adjustment           |       |       |        |        |         |
|       | Readjust Trigger pull                    |       |       |        |        |         |
|       | Clean & <del>INSPEC</del> INSPEC Trigger |       |       |        |        |         |
|       | REPAIRMAN                                | PROOF | CLEAN | TEST   | TARGET | PATTERN |
|       | Rw                                       |       |       |        |        |         |
|       | GALLERY TESTER                           | DATE  | DATE  | DATE   | DATE   | DATE    |
|       | A                                        |       |       | 6/5/97 |        |         |

OFFICE COPY

RD6925 REV. 11/96

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

M2400028082

RETURN TO: 24410 MILITARY RD  
KENT, WA

98032  
ANY QUESTIONS DIRECT TO:  
SFC TOM GRIFFIN  
(253) 512-8919 ARMORMENT SHOP

DATE: 24-APR-97

MAINTENANCE REQUEST

DA FORM 5996-E

----- CUSTOMER DATA -----

UIC: WOYJA0  
UTIL CODE: 7

A 3/161 IN (M)-OMS 5

PHONE: (206)839-0932

----- ACTIVITY DATA -----

SUP WON:  
SUP UIC: WTDX99

CSMS

PHONE: 512-8282  
SHOP SEC:

----- EQUIPMENT DATA -----

TYPE MNT REQ: 1 ID: A NSN: 1005012402136 MODEL: M24

NOUN: SNIPER RIFLE *W/SCOPE* SER NUM: C6523434 QTY: 00001  
*W/CASE*

ORG WON: QYJA01700068 PRIORITY: 03 FAILURE DETECTED: F

MI/KM: ----- HOURS: ----- ROUNDS:

IN WARRANTY: LEVEL OF WORK: F ADMIN NUM:

DEFICIENCY: SHIPREMTN.TGRDRAG/SCPINOP

PO AUTHENTICATING SIGNATURE: \_\_\_\_\_

----- SIGNATURE DATA -----

SUBMITTED BY: *[Signature]* ORD DATE: 97114 MIL TIME: 1022

ACCEPTED BY: *[Signature]* STATUS: \_\_\_\_\_ ORD DATE: 97114 MIL TIME: 1030

----- ACTION DATA -----

WORK STARTED BY: \_\_\_\_\_ STATUS: \_\_\_\_\_ ORD DATE: \_\_\_\_\_ MIL TIME: \_\_\_\_\_

INSPECTED BY: \_\_\_\_\_ STATUS: \_\_\_\_\_ ORD DATE: \_\_\_\_\_ MIL TIME: \_\_\_\_\_

PICKED UP BY: \_\_\_\_\_ STATUS: \_\_\_\_\_ ORD DATE: \_\_\_\_\_ MIL TIME: \_\_\_\_\_

----- COMPLETION DATA -----

QTY RPR: \_\_\_\_\_ QTY CONDEMNED: \_\_\_\_\_ ARTS: \_\_\_\_\_

EVAC WON: \_\_\_\_\_ EVAC UNIT NAME: \_\_\_\_\_

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                   |                                                           |                             |                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|-----------------------------|-----------------------------|
| 7. <span style="float: right;">APPLICABLE REFERENCE</span>                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                   |                                                           |                             |                             |
| TM NUMBER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | TM DATE                                                                                                                                                                                                                                                                                                                                           |                                                           |                             |                             |
| TM NUMBER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | TM DATE                                                                                                                                                                                                                                                                                                                                           |                                                           |                             |                             |
| COLUMN a — Enter TM item number.<br>COLUMN b — Enter the applicable condition status symbol.<br>COLUMN c — Enter deficiencies and shortcomings.                                                                                                                                                                                                                                                                                                                                                                                  | COLUMN d — Show corrective action for deficiency or shortcoming listed in Column c.<br>COLUMN e — Individual ascertaining completed corrective action initial in this column.                                                                                                                                                                     |                                                           |                             |                             |
| STATUS SYMBOLS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                   |                                                           |                             |                             |
| "X"—Indicates a deficiency in the equipment that places it in an inoperable status.<br><br>CIRCLED "X"—Indicates a deficiency, however, the equipment may be operated under specific limitations as directed by higher authority or as prescribed locally, until corrective action can be accomplished.<br><br>HORIZONTAL DASH "(—)"—Indicates that a required inspection, component replacement, maintenance operation check, or test flight is due but has not been accomplished, or an overdue MWO has not been accomplished. | DIAGONAL "(/)"—Indicates a materiel defect other than a deficiency which must be corrected to increase efficiency or to make the item completely serviceable.<br><br>LAST NAME INITIAL IN BLACK, BLUE-BLACK INK, OR PENCIL—Indicates that a completely satisfactory condition exists.<br><br>FOR AIRCRAFT—Status symbols will be recorded in red. |                                                           |                             |                             |
| ALL INSPECTIONS AND EQUIPMENT CONDITIONS RECORDED ON THIS FORM HAVE BEEN DETERMINED IN ACCORDANCE WITH DIAGNOSTIC PROCEDURES AND STANDARDS IN THE TM CITED HEREON.                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                   |                                                           |                             |                             |
| 8a. SIGNATURE (Person (s) performing inspection)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 8b. TIME                                                                                                                                                                                                                                                                                                                                          |                                                           |                             |                             |
| 9a. SIGNATURE (Maintenance Supervisor)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 9b. TIME                                                                                                                                                                                                                                                                                                                                          |                                                           |                             |                             |
| 10. MANHOURS REQUIRED                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                   |                                                           |                             |                             |
| TM ITEM NO.<br>a                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | STATUS<br>b                                                                                                                                                                                                                                                                                                                                       | DEFICIENCIES AND SHORTCOMINGS<br>c                        | CORRECTIVE ACTION<br>d      | INITIAL WHEN CORRECTED<br>e |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | X                                                                                                                                                                                                                                                                                                                                                 | scope drop compensator slips                              |                             |                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                   | Windage knob on scope does not click                      | THESE ARE THE DISCREPANCIES |                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                   | Trigger rough and has a long draw                         |                             |                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                   | Butt stock adjustment screw does not hold                 |                             |                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | (M)                                                                                                                                                                                                                                                                                                                                               | Missing sling swivels                                     |                             |                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | (M)                                                                                                                                                                                                                                                                                                                                               | Deployment case                                           |                             |                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | (M)                                                                                                                                                                                                                                                                                                                                               | Firing pin assembly                                       |                             |                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | (M)                                                                                                                                                                                                                                                                                                                                               | Front guard screw                                         |                             |                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | (M)                                                                                                                                                                                                                                                                                                                                               | rear guard screw                                          |                             |                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | (M)                                                                                                                                                                                                                                                                                                                                               | Front sight base screw                                    |                             |                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | (M)                                                                                                                                                                                                                                                                                                                                               | rear sight base screw                                     |                             |                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | (M)                                                                                                                                                                                                                                                                                                                                               | trigger pull adj. screw                                   |                             |                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | (M)                                                                                                                                                                                                                                                                                                                                               | socket wrench attachment, 3/8" drive, 5/32"               |                             |                             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | (M)                                                                                                                                                                                                                                                                                                                                               | 1/16", 5/64", 3/32", 7/64", 1/8", 5/32" socket head screw |                             |                             |

- | a | b   | c                                       | d | e |
|---|-----|-----------------------------------------|---|---|
|   | (M) | T-handle comb. wrench                   |   |   |
|   | (M) | Day optic sight windage dial w/screws   |   |   |
|   | (M) | Day optic sight elevation dial w/screws |   |   |
|   | (M) | Day optic focus dial w/screws           |   |   |
|   | (M) | Day optic sight adj. dial dust cover    |   |   |
|   | (M) | Day optic sight ring screws             |   |   |
|   | (M) | Day optic sight base / screws           |   |   |
|   | (M) | Day optic sight base rear               |   |   |
|   | (M) | Brush, chamber                          |   |   |
|   | (M) | Brush, bore                             |   |   |
|   | (M) | oil bottle                              |   |   |
|   | (M) | Magazine spring                         |   |   |
|   | (M) | Magazine follower                       |   |   |
|   | (M) | Socket, socket wrench Head screw 1/2"   |   |   |
|   | (M) | T-handle torque wrench                  |   |   |
|   | (M) | wrench, box and open 1/2"               |   |   |
|   | (M) | rear sight base plug screw              |   |   |
|   | (M) | swabs, cleaning, small arms             |   |   |
|   | (M) | cleaning rod kit                        |   |   |

ULTRA

10X-M3A

SN 900261

C-6523434

SENT BACK 4-29-97

A.M.M.



LOCAL  
CONTROL # M17411  
P.O. # \_\_\_\_\_  
ROM/ROC # \_\_\_\_\_  
PKG. LIST # \_\_\_\_\_  
DATE: APR 29 1997

**COPY DISTRIBUTION:**  
1. SHIP W/ITEM (PACKING LIST)  
2. A/P (LOCAL)  
3. STORES  
4. REGIONAL PUR.  
5. SITE SUSPENSE

**Remington Arms Co., Inc.**  
14 Hoefler Ave.  
Ilion, NY 13357

REC'D FROM/RETURN TO (VENDOR)

## LEADERS & STRINGS

REASON FOR RETURN ☐ DAMAGED ☐ OVERAGE ☐ SHORTAGE ☐ NOT AS ORDERED ☐ PACKING LIST DISCREPANCY ☐ OFF-PLANT SHIPMENT

☐ OTHER

### **MATERIAL ORDERED**

| ITEM/STORES # | QUANTITY | DESCRIPTION | UNIT PRICE<br>(FROM P.O.) |
|---------------|----------|-------------|---------------------------|
|               |          |             |                           |
|               |          |             |                           |
|               |          |             |                           |

**MATERIAL RECEIVED AND/OR MATERIAL TO BE RETURNED-OR MATERIAL TO BE SHIPPED OFF SITE**

[illegible]

MATERIAL \_\_\_\_\_ ACCEPTABLE  
(Is - Is Not)

☐ AS SUBSTITUTE      ☐ ORIGINAL ITEM \_\_\_\_\_ REQUIRED  
☐ AS OVERAGE  
☐ AS ADDITIONAL ITEM

(Is - Is Not) \_\_\_\_\_  
REQUISITIONER OR R \_\_\_\_\_

REQUISITIONER OR REC'G. SUPERVISOR

## SITE APPROVAL

**DISPOSITION**

Basis FOR TEST AND COST OF REPAIR QUOTE?

☐ RETURN FOR CREDIT ONLY  
(SITE ROM REQUIRED)      ☐ RETURN FOR REPLACEMENT ONLY      ☐ RETURN FOR CREDIT AND REPLACEMENT  
(SITE ROM REQUIRED)      ☒ OFF PLANT SHIPMENT      ☐ REPAIR AND RETURN      ☐ OTHER

SHIP TO LEUPOLD & STENZEL CHARGE TO \_\_\_\_\_  
STREET AND NO. 14400 N.W. GREENBAUM PIKE STREET AND NO. \_\_\_\_\_  
CITY AND STATE BEAVERTON, OR 97075 CITY AND STATE \_\_\_\_\_  
ATTENTION OF ROSS ANDERSON AUTHORIZED BY: \_\_\_\_\_ LETTER/VERBAL, DATE: \_\_\_\_\_  
MARK PACKAGE \_\_\_\_\_

ROUTE VIA \_\_\_\_\_ PPD. CHGS. \_\_\_\_\_ F.O.B. \_\_\_\_\_ CASH TERMS \_\_\_\_\_  
☒ PREPAID ☐ COLLECT ☐ CHARGE TRANSPORTATION TO 1-1-71

**X**

(Signature of Carrier)

(Initials - Security)

ID # 7022

## STORES

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER**

**M2400028087**

STEVE MORRIS

## Final Inspection

Sn: C6523434

DATE REC'D: 4-25-97

DATE RET'D:

Auditor: RW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☒ Scope☒ Scope Rings☒ Mounting Screws☒ Mounting Base☒ Screws☒ Finish☒ Looseness☒ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ Stock☒ Sling Swivel Studs☒ ADJUSTABLE Butt PLATE☒ Lock Nuts☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ Scope Case☐ Iron SIGHTS☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

# LEUPOLD & STEVENS, INC.

MAILING: PO BOX 688  
BEAVERTON OR 97075-0688  
(503) 646-9171

SHIPPING: 14400 NW GREENBRIER PARKWAY  
BEAVERTON OR 97006-5934  
FAX (503) 526-1455

TELEX 15-1227

MAIL REMITTANCE IN U.S.  
FUNDS TO:

LEUPOLD & STEVENS, INC.  
PO BOX 4985  
BEAVERTON OR 97076-4985 USA

**B  
I  
L  
L  
T  
O**  
REMINGTON ARMS COMPANY INC  
Attn:  
14 HOEFLER AVE  
PO BOX 179  
ILION, NY 13357

**S  
H  
I  
P  
T  
O**  
REMINGTON ARMS COMPANY INC  
Attn:  
14 HOEFLER AVE  
PO BOX 179  
ILION, NY 13357

|                                                                                                                                                  |          |                 |            |
|--------------------------------------------------------------------------------------------------------------------------------------------------|----------|-----------------|------------|
| Invoice No.                                                                                                                                      | Date     | Type of Service | Via        |
| 0124357                                                                                                                                          | 05/13/97 | WARRANTY        |            |
| 1 ea ULTRA M3A-10X S/N# 900261                                                                                                                   |          |                 | Charge     |
| Complaints/Requests<br>WARRANTY- INSPECTION                                                                                                      |          |                 |            |
| Service Activity:<br>REPLACED ADJUSTMENT ELEVATION<br>REFILLED/WATER TESTED<br>MECHANICAL INSPECTION<br>CLEANED OPTICS<br>VISUAL INSPECTION 100% |          |                 |            |
| SHIPPING & HANDLING                                                                                                                              |          |                 | AMOUNT DUE |
|                                                                                                                                                  |          |                 | NO CHG     |

## For Customer Use Only:

Charge/Debit Card Payment: ☐ Visa ☐ Master Card Card # \_\_\_\_\_

Expiration Date: \_\_\_\_\_ Signature: \_\_\_\_\_

VALUE FOR CUSTOMS PURPOSES ONLY \$ \_\_\_\_\_ THESE COMMODITIES ARE EXITING THE U.S.A. UNDER GENERAL LICENSE \_\_\_\_\_

"THESE COMMODITIES LICENSED BY THE UNITED STATES FOR ULTIMATE DESTINATION USA DIVERSION CONTRARY TO UNITED STATES LAW PROHIBITED."

EXPORTER/MANUFACTURER: LEUPOLD & STEVENS INC.  
PLACE: BEAVERTON, OREGON USA

ECCN: 0A985

SIGNATURE: \_\_\_\_\_  
NAME: \_\_\_\_\_ EXPORT/INVOICING SPECIALIST

I.D. 93-0372974

## Final Inspection

Sn: C6523434 DATE REC'D: 4/25/97 DATE RET'D:

Auditor: RW

Item:

BARREL ASSY.

☒ BARREL

☒ RECEIVER

☒ FRONT SIGHT BLOCK

☒ REAR SIGHT BLOCK

☒ SCREWS

☒ FINISH

SCOPE ASSY.

☒ SCOPE

☒ SCOPE RINGS

☒ MOUNTING SCREWS

☒ MOUNTING BASE

☒ SCREWS

☒ FINISH

☒ LOOSENESS

☒ CLARITY

MISC.

☐ DD-250

☐ BAR CODE

☐ PACKAGING

Item:

STOCK ASSY.

☒ STOCK

☒ SLING SWIVEL STUDS

☒ ADJUSTABLE BUTT PLATE

☒ LOCK NUTS

☒ BARREL CLEARANCE

☒ COLOR/FINISH

SYSTEMS CASE

☐ SCOPE CASE

☐ IRON SIGHTS

☐ DEPLOYMENT KIT

TRIGGER

☒ SAFETY OPERATION

☒ SET

☒

Comments: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_