

06636332

MODEL 760™ M24

Model 545™

Action

Barrel Length

Capacity

Order No. 5716

* Includes 1 in chamber.

Remington




VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700TM M24


REGISTERED TRADE MARK

SERIAL NO.
C8606332


ORDER NO.
5716

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

UPC



0 47700 25716 7



5716 C8606332

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6636332

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	4 30	91	RW
600	Proof	4 30	91	RW
607	Check Headspace	4 30	91	RW
610	Dis-assemble Gun	4 30	91	RW
612	Magnaflux Barrel Action	5 6	91	KCD
	Magnaflux Bolt	5 6	91	KCD
615	Rollmark Caliber	5 6	91	GB
617	Drill and Tap Sight Holes	5 10	91	FB
618	Polish Barrel	5 10	91	WB
620	Apply Coatings (Barrel Action)		5-70-91	FB
	Apply Coating (Bolt)		5-70-91	FB
625	Final Assembly A) Clean inside of Bolt Assembly		6/19/91	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		6/19/91	RW
	C) Inspect Ejector Hole for Chamfer		6/19/91	RW
	D) Oil Firing Pin Ass'y		6/19/91	RW
	E) Adjust Trigger Pull to Min Setting and Stake		7-17-91	SW

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	6	6	6			7-17-91	JH
	G) Safety Off Force	3	3	3			7-17-91	JH
	H) Trigger Pull Test & Retainability						7-17-91	JH
	I) Firing Pin Indent	.023	.023	.023			7-17-91	JH
	J) Assemble Stock						7/26/91	RW
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies						7/26/91	RW
	M) Iron Sight Alignment						7/26/91	RW
	N) Detach Front & Rear Sights & place in numbered container						7/26/91	RW
	O) Attach Scope to Rifle						7/26/91	RW
	P) Detach & Attach Scope 20 Times						7/26/91	RW
640	Gallery Target & Test						7-27-91	DH
	A) Time						7-27-91	DH
	B) Malfunctions						7-27-91	DH
	C) Pierced Primers						7-27-91	DH
	D) Optical Clarity of Scope						7-27-91	DH
645	Inspect for Live Ammo						7-27-91	DH
655	Final Inspection							
	A) Headspace						8-6-91	AC
	B) Trigger Pull	2.21	2.28	2.20	2.20	2.15	8-5-91	JH
	C) Function						8-6-91	AC
660	Pack						9-19-91	VF

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. 0-6636332
DATE 7-17-91
TESTER JM

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.30	2.26	2.34	2.21	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.28	2.27	2.25	2.28	
PULL #3	2.26	2.26	2.30	2.20	
PULL #4	2.21	2.20	2.37	2.20	
PULL #5	2.26	2.16	2.35	2.15	
TOTAL					
AVG.					

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.19	3.32		
PULL #2	3.20	3.29		
PULL #3	3.32	3.14		
PULL #4	3.36	3.33		
PULL #5	3.21	3.39		
TOTAL				
AVG.				

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.22	4.48		4.36
PULL #2	4.26	4.48		4.51
PULL #3	4.26	4.40		4.19
PULL #4	4.22	4.48		4.51
PULL #5	4.17	4.50		4.19
TOTAL				
AVG.				

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06636332
30 Jul 1991

CENTROIDAL DISTANCES

0 TO	1	.22205
1 TO	2	.440202
1 TO	3	.153847
1 TO	4	.196499
1 TO	5	.239253


96 <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .125
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .032
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .129031
THE AMR FOR THIS RIFLE IS: 1.064

30 Jul 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6636332

CENTERFIRE PATTERNS, # 1

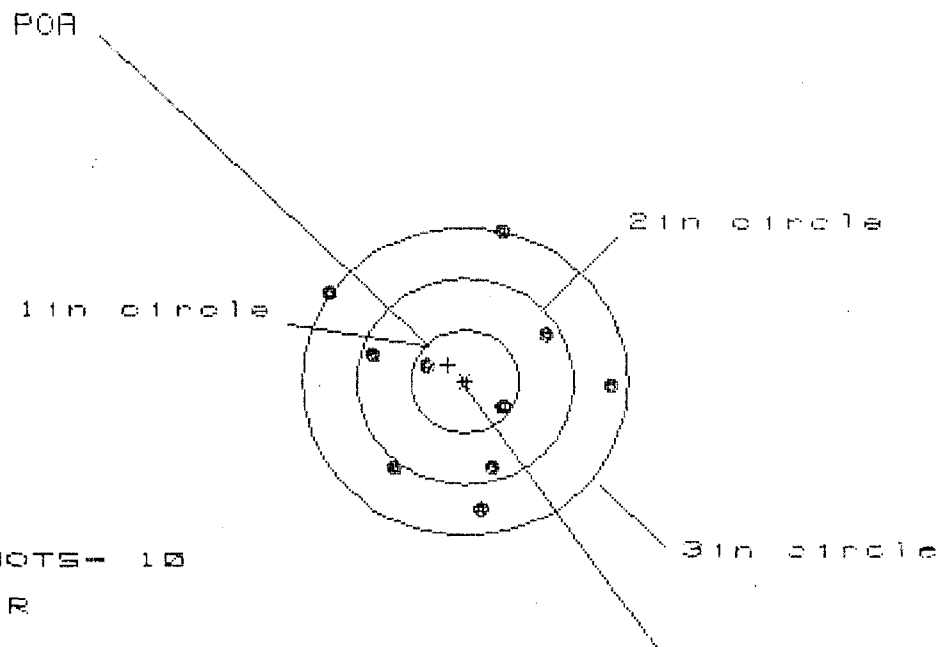

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 5

3 in = 9

HS= 2.520

VS= 2.646

GS= 2.696

CENTROID #

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.308	1.173	1.195
MINIMUM X	-1.212	-.957	-.935
MAXIMUM Y	1.435	1.535	.719
MINIMUM Y	-1.211	-1.111	-.919
CENTROID X	.155	.290	.268
CENTROID Y	-.159	-.259	-.451
POA TO CENTROID in.	.223	.389	.525
MIN RADIUS	.407	.240	.191
MEAN RADIUS	.995	.918	.813
MAX RADIUS	1.510	1.545	1.218
HORIZONTAL SPREAD	2.520	2.130	2.130
VERTICAL SPREAD	2.646	2.646	1.639
EXTREME SPREAD	2.696	2.649	2.149
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	9		

30 Jul 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6636332


CENTERFIRE PATTERNS # 2

POA

1 in circle

2 in circle

3 in circle



OF SHOTS- 10

IN CIR

1 in = 2

2 in = 5

3 in = 3

HS= 2.276

VS= 2.646

GS= 2.949


CENTROID *

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.296	.839	.828
MINIMUM X	:	-.980	-.836	-.847
MAXIMUM Y	:	1.112	1.222	1.044
MINIMUM Y	:	-1.534	-1.424	-1.176
CENTROID X	:	-.062	-.206	-.195
CENTROID Y	:	.224	.114	.292
POA TO CENTROID in.	:	.232	.235	.351
MIN RADIUS	:	.375	.301	.231
MEAN RADIUS	:	1.001	.908	.820
MAX RADIUS	:	1.631	1.427	1.189
HORIZONTAL SPREAD	:	2.276	1.675	1.675
VERTICAL SPREAD	:	2.646	2.646	2.220
EXTREME SPREAD	:	2.949	2.697	2.299
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		8	

30 Jul 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6636332

CENTERFIRE PATTERNS # 3

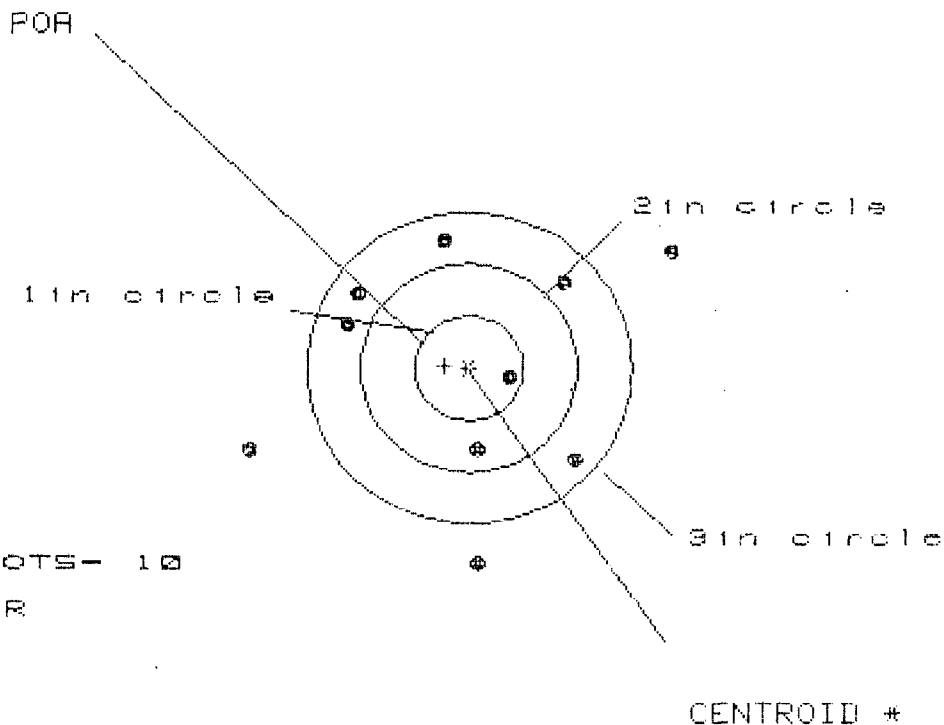

OF SHOTS- 10

IN CIR

1in = 1

2in = 2

3in = 7

HS= 3.960

VS= 3.036


GS= 4.369

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.920	1.201	.972
MINIMUM X	:	-2.040	-1.026	-1.175
MAXIMUM Y	:	1.197	1.319	1.242
MINIMUM Y	:	-1.839	-1.717	-1.794
CENTROID X	:	.225	.011	.240
CENTROID Y	:	-.022	-.144	-.066
POA TO CENTROID in.	:	.226	.145	.249
MIN RADIUS	:	.429	.632	.406
MEAN RADIUS	:	1.365	1.275	1.156
MAX RADIUS	:	2.214	1.929	1.795
HORIZONTAL SPREAD	:	3.960	3.027	2.147
VERTICAL SPREAD	:	3.036	3.036	3.036
EXTREME SPREAD	:	4.369	3.332	3.045
NUMBER IN ONE INCH CIRCLE	=	1		
NUMBER IN TWO INCH CIRCLE	=	2		
NUMBER IN THREE INCH CIRCLE	=	7		

30 Jul 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6636332

CENTERFIRE PATTERNS # 4

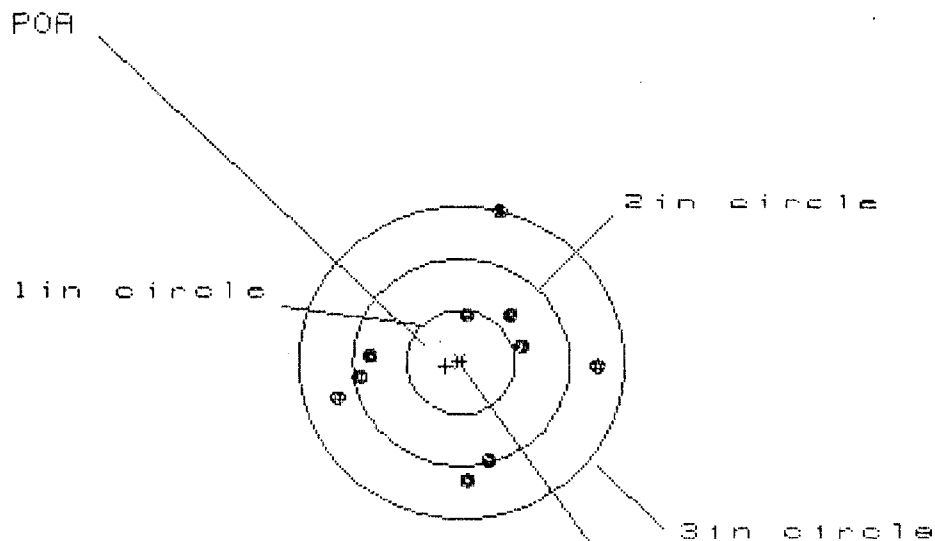

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 5

3 in = 10

HS= 2.426

VS= 2.568

GS= 2.586

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.300	1.336	.809
MINIMUM X	:	-1.126	-1.090	-.923
MAXIMUM Y	:	1.431	.671	.684
MINIMUM Y	:	-1.137	-.979	-.966
CENTROID X	:	.141	.105	-.062
CENTROID Y	:	.037	-.122	-.135
POA TO CENTROID in.	:	.146	.161	.149
MIN RADIUS	:	.420	.582	.637
MEAN RADIUS	:	.954	.898	.831
MAX RADIUS	:	1.468	1.340	.992
HORIZONTAL SPREAD	:	2.426	2.426	1.732
VERTICAL SPREAD	:	2.568	1.650	1.650
EXTREME SPREAD	:	2.586	2.437	1.790
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		10	

30 Jul 1991

FILE:/PATTERNING/CENTERFIRE_PATT/06636332

CENTERFIRE PATTERNS # 5

POA

1in circle

2in circle

3in circle

OF SHOTS- 10

IN CIR

1in = 2

2in = 5

3in = 8

HS= 2.929

VS= 2.374

GS= 2.930

CENTROID #

PATTERN #	5
SHOTS (BEST OF)	10
MAXIMUM X	1.195
MINIMUM X	-1.734
MAXIMUM Y	.926
MINIMUM Y	-1.448
CENTROID X	.166
CENTROID Y	.080
POA TO CENTROID in.	.184
MIN RADIUS	.066
MEAN RADIUS	1.006
MAX RADIUS	1.763
HORIZONTAL SPREAD	2.929
VERTICAL SPREAD	2.374
EXTREME SPREAD	2.930
NUMBER IN ONE INCH CIRCLE =	2
NUMBER IN TWO INCH CIRCLE =	5
NUMBER IN THREE INCH CIRCLE =	8