

C6611684

MODEL 700™ NSA

Model **SWS**™

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington

M2400034329

CONFIDENTIAL SUBJECT TO PROTECTIVE ORDER

R 94-19832

FROM:	SHIP TO:
COMMANDER (W52H094138H226) DEFENSE DIST DEPOT ANNISTON ATTN DDAA-UR BLDG 112 ANNISTON AL 36201-5025	COMMANDER (W52H094138H226) DEFENSE DIST DEPOT ANNISTON ATTN DDAA-UR BLDG 112 ANNISTON AL 36201-5025

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

PARTS	COMMENTS					
✓ Trigger ASSy ✓ Front & Rear Sight ASSy						
	REPAIRMAN	PROOF	CLEAN	TEST	TARGET	PATTERN
	GALLERY TESTER	DATE	DATE	DATE <i>AC</i> <i>2/23</i>	DATE	DATE

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

M2400034330

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6611684DATE 2-17-96TESTER DA

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.50	2.48	2.55		MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.57	2.44	2.47		
PULL #3	2.54	2.53	2.41		
PULL #4	2.63	2.63	2.41		
PULL #5	2.61	2.58	2.34		
TOTAL	1285	1246	1218		
AVG.	2.57	2.53	2.43		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.19	3.20		
PULL #2	3.19	3.04		
PULL #3	3.20	3.11		
PULL #4	3.19	3.06		
PULL #5	3.19	3.19		
TOTAL	1596	1560		
AVG.	3.19	3.12		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.06	4.08		4.19
PULL #2	4.09	4.00		4.03
PULL #3	4.00	3.96		4.00
PULL #4	4.00	4.02		4.01
PULL #5	4.00	4.07		4.01
TOTAL	2015	2013		2024
AVG.	4.03	4.02		4.04

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C 6611684

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	4 ³ / ₄	4 ³ / ₄	4 ³ / ₄			2/27/96	WGB
	G) Safety Off Force	3	3	3			2/27/96	WGB
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent							
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test							
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo							
655	Final Inspection							
	A) Headspace							
	B) Trigger Pull	2.36	2.35	2.32	2.32	2.34	2/27/96	WGB
	C) Function							
660	Pack							




VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

REG. U.S. PAT. & TM. OFF.



MODEL 700™ H24

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

SERIAL NO.
C6611684

ORDER NO.
5716

LPC

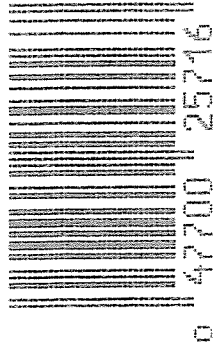

5716 C6611684

GFM

GUN SERIAL # C6611684

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	1 25 91		RW
600 LOCK	Proof	1 25 91		RW
607	Check Headspace	1 25 91		RW
610	Dis-assemble Gun	1 25 91		RW
612	Magnaflux Barrel Action			KR
	Magnaflux Bolt	1 25		KR
615	Rollmark Caliber	1 25		LS
617	Drill and Tap Sight Holes	1 30 91		EB
618	Polish Barrel - RBB	1 30 91		EB
620	Apply Coatings (Barrel Action)		2-10-91	1/4
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		2/11/91	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		2/11/91	RW
	C) Inspect Ejector Hole for Chamfer		2/11/91	RW
	D) Oil Firing Pin Ass'y		2/11/91	RW
	E) Adjust Trigger Pull to Min Setting and Stake		2/15/91	JS

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	4	4	4			2/15/91	WB
	G) Safety Off Force	2	2	2			2/15/91	WB
	H) Trigger Pull Test & Retainability						2/15/91	JV
	I) Firing Pin Indent	1021	1020	10205			2/15/91	WB
	J) Assemble Stock						2/16/91	RW
	K) Assemble Swivel Studs						2-22-91	AC
	L) Attach Front and Rear Sight Assemblies						2/16/91	RW
	M) Iron Sight Alignment						2/16/91	RW
	N) Detach Front & Rear Sights & place in numbered container						2/16/91	RW
	O) Attach Scope to Rifle						2/16/91	RW
	P) Detach & Attach Scope 20 Times						2/16/91	RW
640	Gallery Target & Test						2-18-91	NF
	A) Time						"	NF
	B) Malfunctions						"	NF
	C) Pierced Primers						"	NF
	D) Optical Clarity of Scope						"	NF
645	Inspect for Live Ammo						2-18-91	NF
655	Final Inspection						2-22-91	A
	A) Headspace							
	B) Trigger Pull	2.33	2.31	2.36	2.29	2.34	2/21/91	JV
	C) Function						2-22-91	AC
660	Pack						3-18-91	NF

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6611684
DATE 2/15/91
TESTER J. E.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.25	2.38	2.37	2.33	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.49	2.34	2.31	2.31	
PULL #3	2.49	2.29	2.31	2.36	
PULL #4	2.51	2.39	2.40	2.29	
PULL #5	2.28	2.31	2.42	2.34	
TOTAL					
AVG.					

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.29	3.25		
PULL #2	3.25	3.36		
PULL #3	3.31	3.23		
PULL #4	3.37	3.33		
PULL #5	3.34	3.23		
TOTAL				
AVG.				

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.21	4.50		4.36
PULL #2	4.30	4.33		4.50
PULL #3	4.34	4.46		4.53
PULL #4	4.28	4.40		4.50
PULL #5	4.28	4.43		4.52
TOTAL				
AVG.				

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6111684
19 Feb 1991

CENTROIDAL DISTANCES

0 TO	1	.19542
1 TO	2	.394058
1 TO	3	.268972
1 TO	4	.336074
1 TO	5	.350091


2
15 <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0298
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0484
THE RESULTING AVERAGE PLI RADIOS FOR THIS RIFLE IS: .0568384
THE AMR FOR THIS RIFLE IS: .3360

19 Feb 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C8611684

CENTERFIRE PATTERNS # 1

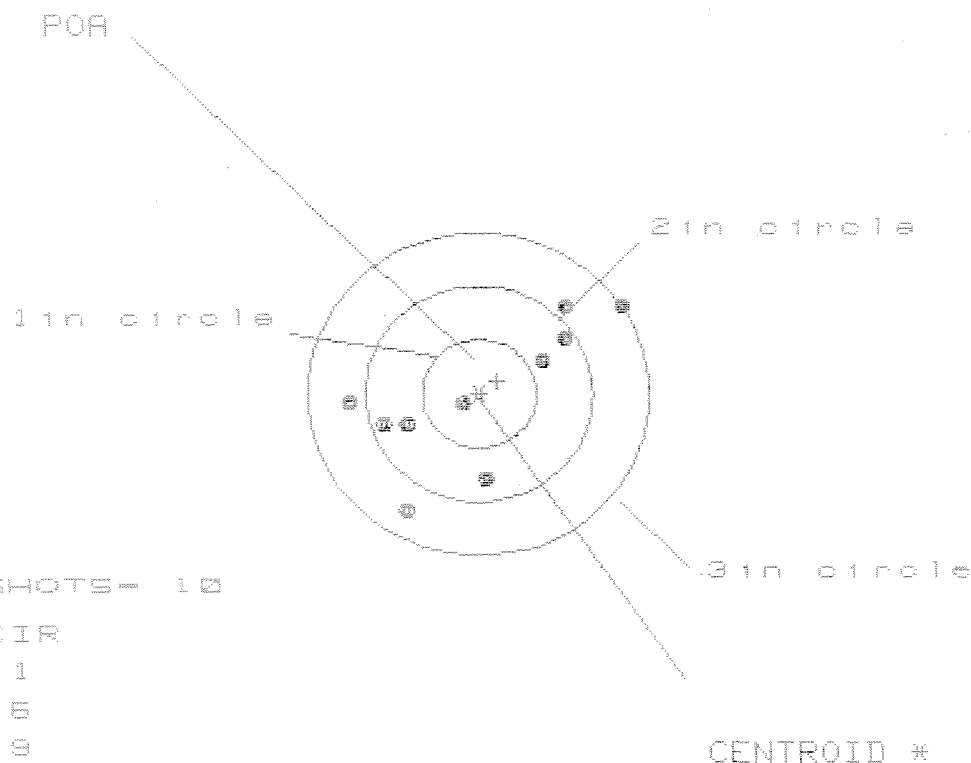

OF SHOTS- 10

IN CIR

1in = 1

2in = 6

3in = 9

HS= 2.484

VS= 1.958


GS= 2.744

PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.301	.922	.858
MINIMUM X	:	-1.183	-1.038	-1.102
MAXIMUM Y	:	.857	.948	.822
MINIMUM Y	:	-1.101	-1.010	-.770
CENTROID X	:	-.158	-.303	-.239
CENTROID Y	:	-.115	-.206	-.080
POA TO CENTROID in.	:	.195	.366	.252
MIN RADIUS	:	.183	.025	.163
MEAN RADIUS	:	.931	.825	.807
MAX RADIUS	:	1.538	1.312	1.177
HORIZONTAL SPREAD	:	2.484	1.960	1.960
VERTICAL SPREAD	:	1.958	1.958	1.592
EXTREME SPREAD	:	2.744	2.418	2.140
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

19 Feb 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C8611684

CENTERFIRE PATTERNS # 2

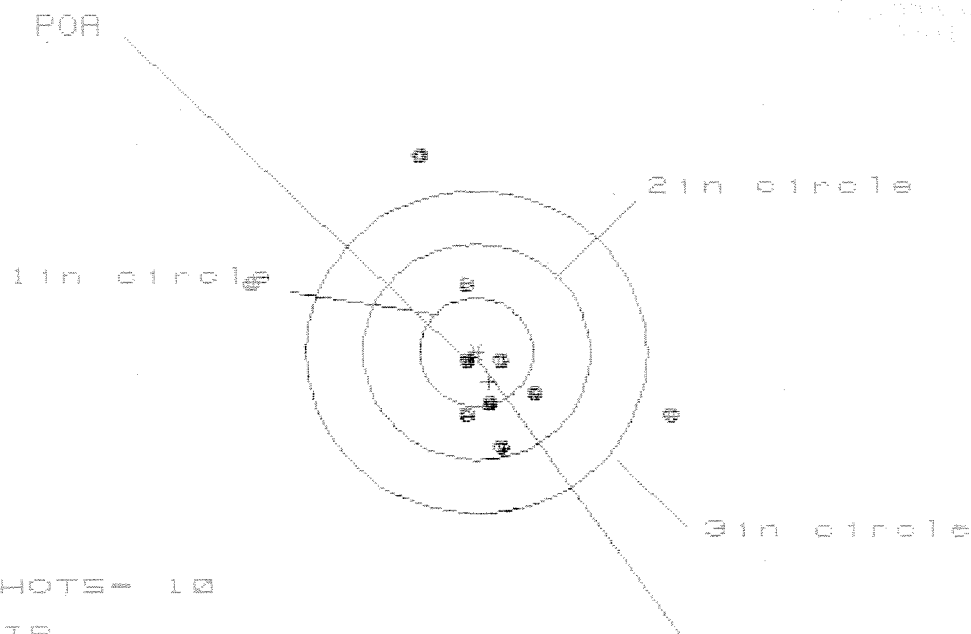

OF SHOTS- 10

IN CIR

1in = 2

2in = 7

3in = 7

HS= 3.677

VS= 2.690

GS= 3.872

CENTROID *


PATTERN #	2	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.710	1.492	1.406
MINIMUM X	-1.967	-.684	-.433
MAXIMUM Y	1.852	1.923	.886
MINIMUM Y	-.838	-.767	-.527
CENTROID X	-.109	.109	.195
CENTROID Y	.276	.205	-.035
POA TO CENTROID in.	.297	.232	.198
MIN RADIUS	.154	.052	.214
MEAN RADIUS	.942	.780	.592
MAX RADIUS	2.068	2.041	1.430
HORIZONTAL SPREAD	3.677	2.176	1.839
VERTICAL SPREAD	2.690	2.690	1.413
EXTREME SPREAD	3.872	3.257	2.128
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	7		

19 Feb 1931

FILE:/PATTERNING/CENTERFIRE_PATT/C66116B4

CENTERFIRE PATTERNS

3

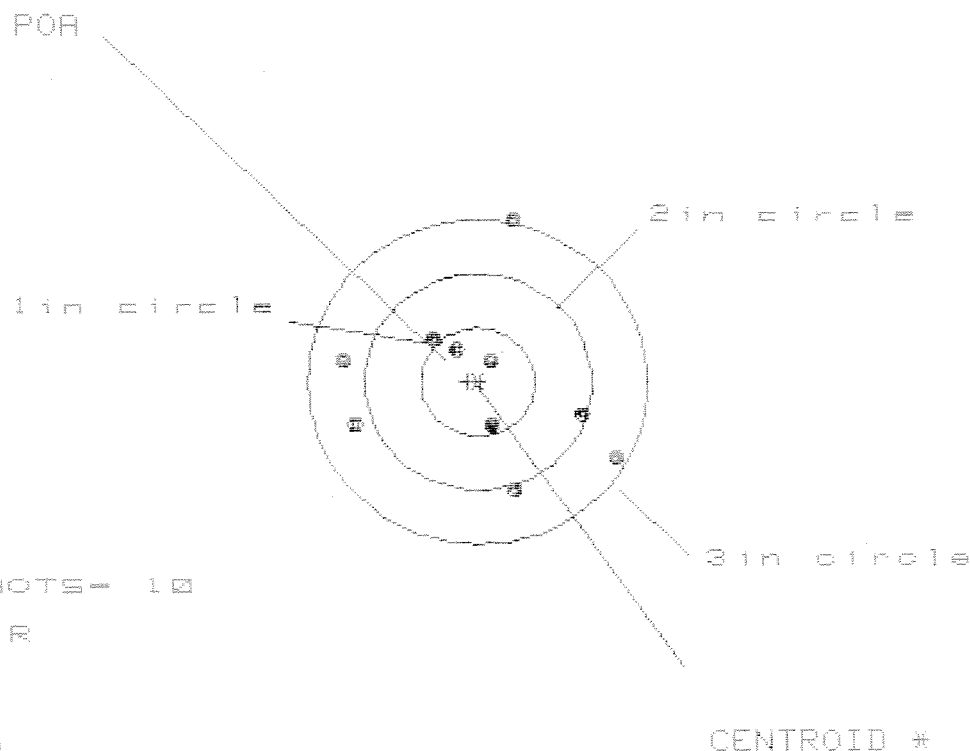

OF SHOTS- 10

IN CIR

1in = 3

2in = 5

3in = 9

HS= 2.407

VS= 2.553

GS= 2.568

PATTERN #

3


SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.179	1.210	1.060
MINIMUM X	-1.228	-1.197	-1.046
MAXIMUM Y	1.536	.574	.512
MINIMUM Y	-1.017	-.846	-.988
CENTROID X	.087	.056	-.095
CENTROID Y	-.004	-.175	-.113
POA TO CENTROID in.	.087	.183	.148
MIN RADIUS	.267	.209	.353
MEAN RADIUS	.885	.812	.745
MAX RADIUS	1.562	1.307	1.099
HORIZONTAL SPREAD	2.407	2.407	2.106
VERTICAL SPREAD	2.553	1.420	1.420
EXTREME SPREAD	2.568	2.568	2.183
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		5	
NUMBER IN THREE INCH CIRCLE =		9	

19 Feb 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C8611684

13-00000-0000

CENTERFIRE PATTERNS # 4

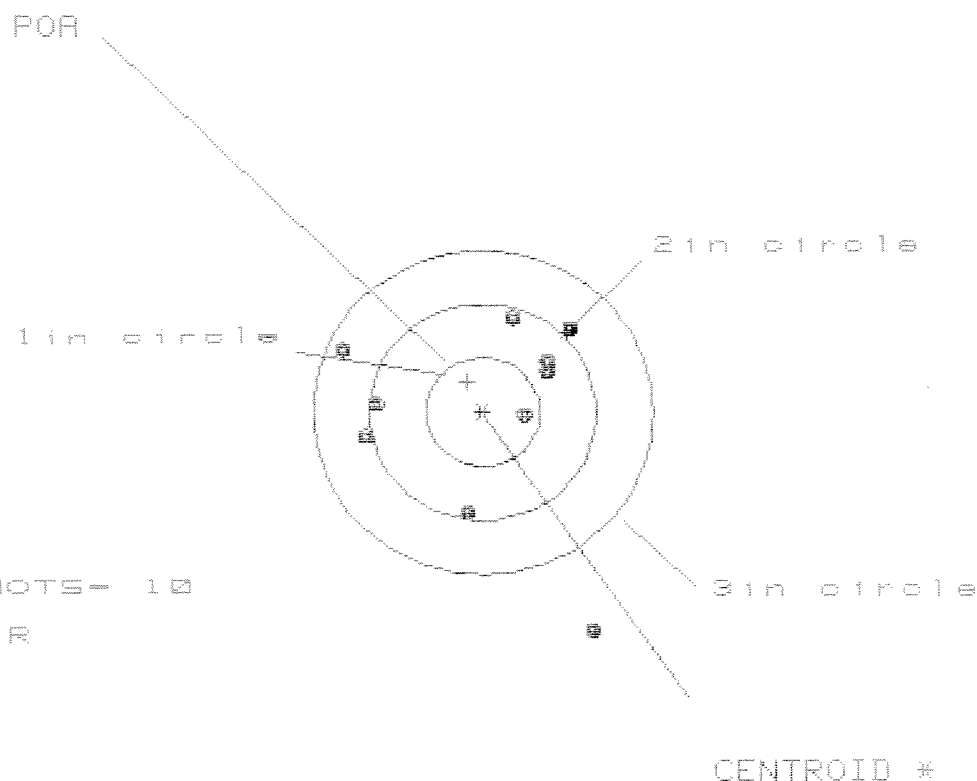

OF SHOTS- 10

IN CIR

1in = 1

2in = 5

3in = 9

HS= 2.246

VS= 2.882

GS= 3.437


CENTROID *

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.972	.859	.714
MINIMUM X	:	-1.274	-1.166	-1.058
MAXIMUM Y	:	.878	.656	.703
MINIMUM Y	:	-2.004	-1.147	-1.100
CENTROID X	:	.137	.029	.174
CENTROID Y	:	-.276	-.054	-.101
POR TO CENTROID in.	:	.308	.061	.201
MIN RADIUS	:	.339	.522	.375
MEAN RADIUS	:	1.028	.876	.800
MAX RADIUS	:	2.227	1.225	1.143
HORIZONTAL SPREAD	:	2.246	2.025	1.772
VERTICAL SPREAD	:	2.882	1.803	1.903
EXTREME SPREAD	:	3.437	2.052	2.052
NUMBER IN ONE INCH CIRCLE =			1	
NUMBER IN TWO INCH CIRCLE =			6	
NUMBER IN THREE INCH CIRCLE =			9	

15 Feb 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6611684

CENTERFIRE PATTERNS # 5

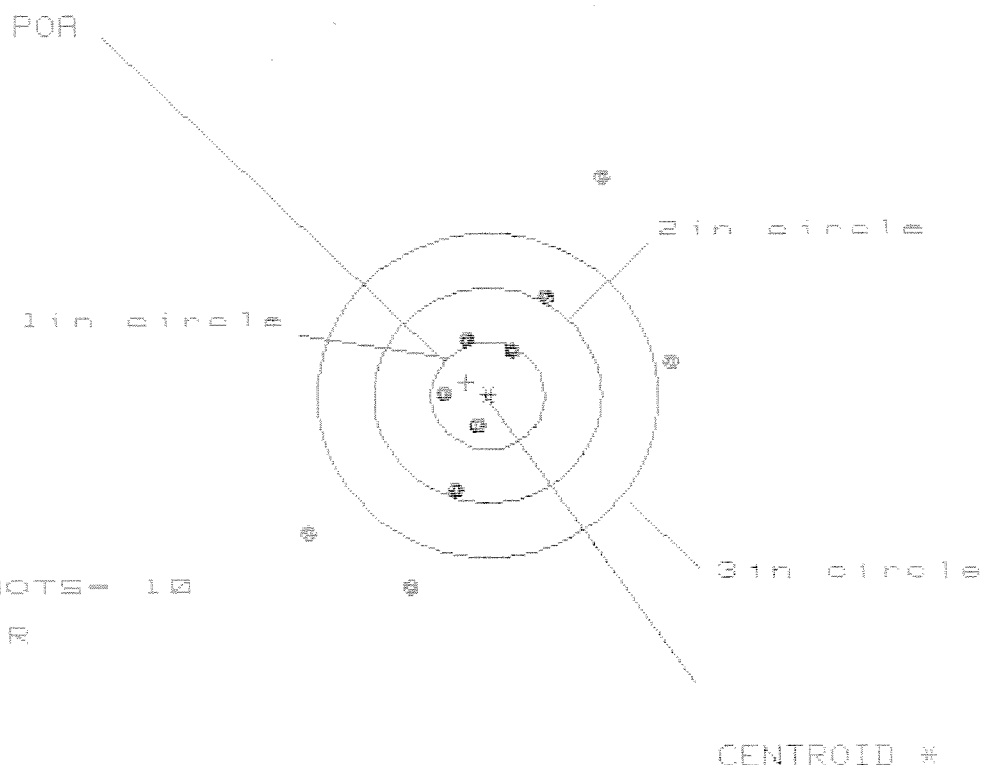

OF SHOTS- 10

IN CIR

1in = 3

2in = 5

3in = 8

HS= 3.181

VS= 3.751

GS= 4.179

PATTERN #

5

SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.606	1.714	1.531
MINIMUM X	-1.575	-1.467	-.801
MAXIMUM Y	2.015	1.133	.999
MINIMUM Y	-1.736	-1.512	-1.646
CENTROID X	.192	.084	.267
CENTROID Y	-.123	-.347	-.213
POA TO CENTROID in.	.228	.357	.342
MIN RADIUS	.328	.102	.274
MEAN RADIUS	1.147	1.013	.912
MAX RADIUS	2.238	1.817	1.830
HORIZONTAL SPREAD	3.181	3.181	2.332
VERTICAL SPREAD	3.751	2.645	2.645
EXTREME SPREAD	4.179	3.583	3.130

NUMBER IN THREE INCH CIRCLE =

6