

C6348844

MODEL 700TM M24

Model **SWS** TM

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.



M2400039628

SUBJECT TO PROTECTIVE ORDER

Smear

Repair Inquiry

Repair Number: RE00144413

Serial: C6348844 Model M24 SWS Center Fire
Caliber: 7.62 NATO

Repairman:

Status:

Closed 4/14/2008 1:19:23 PM

Verify Repair

Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: BROCK BUDDLES

BROCK BUDDLES

Address 1: C CO 1ST BN

C CO 1ST BN

Address 2: 7TH SFG (A)

PO Box:

7TH SFG (A)

PO Box:

City: FT. BRAGG

FT. BRAGG

State: NC

Zip Code: 28310

Country: US

State: NC

Zip Code: 28310

Country: US

FPL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NN

Fax:

Email:

Comments:

Received Condition

Fair

Condition:
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A008	With Swivel	1
A010	Hard Case	1
A057	Fit and Rear Sgt Base	1
D000	DRAG BAG	1

Repair Search

Refresh

Close

nagletj

4/14/2008

3:27 PM

NUM



Serial Number:

C6348844

Model: M24 SWS



RE00144413

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6348844.___0

FILE DATE AND TIME: 05/07/2008 04:56

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.110
The Average Y Centroid of the Five Target Set:	-0.114
The Average Point of Impact of the Five Target Set:	0.158
The Average Mean Radius of the Five Target Set:	0.568
The Distance from POA to Centroid Target #1:	0.255
The Distance from Centroid Target #2 to Centroid Target #1:	0.220
The Distance from Centroid Target #3 to Centroid Target #1:	0.241
The Distance from Centroid Target #4 to Centroid Target #1:	0.255
The Distance from Centroid Target #5 to Centroid Target #1:	0.146

SERIAL NUMBER: C6348844. __0

TARGET NUMBER: 1

FILE DATE: 05/07/2008

FILE TIME: 04:56

X CENTROID: -0.254

Y CENTROID: -0.019

POA TO CENTROID: 0.255

HORZ SPREAD: 1.482

VERT SPREAD: 1.103

GROUP SPREAD: 1.513

MIN RADIUS: 0.181

MAX RADIUS: 0.921


MEAN RADIUS: 0.521

IN 1 IN DIAMETER: 5

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.018	-0.828
2:	0.425	-0.291
3:	0.666	-0.068
4:	-0.084	0.044
5:	-0.236	0.261
6:	-0.808	0.275
7:	-0.816	0.160
8:	-0.694	0.147
9:	-0.544	0.160
10:	-0.466	-0.054

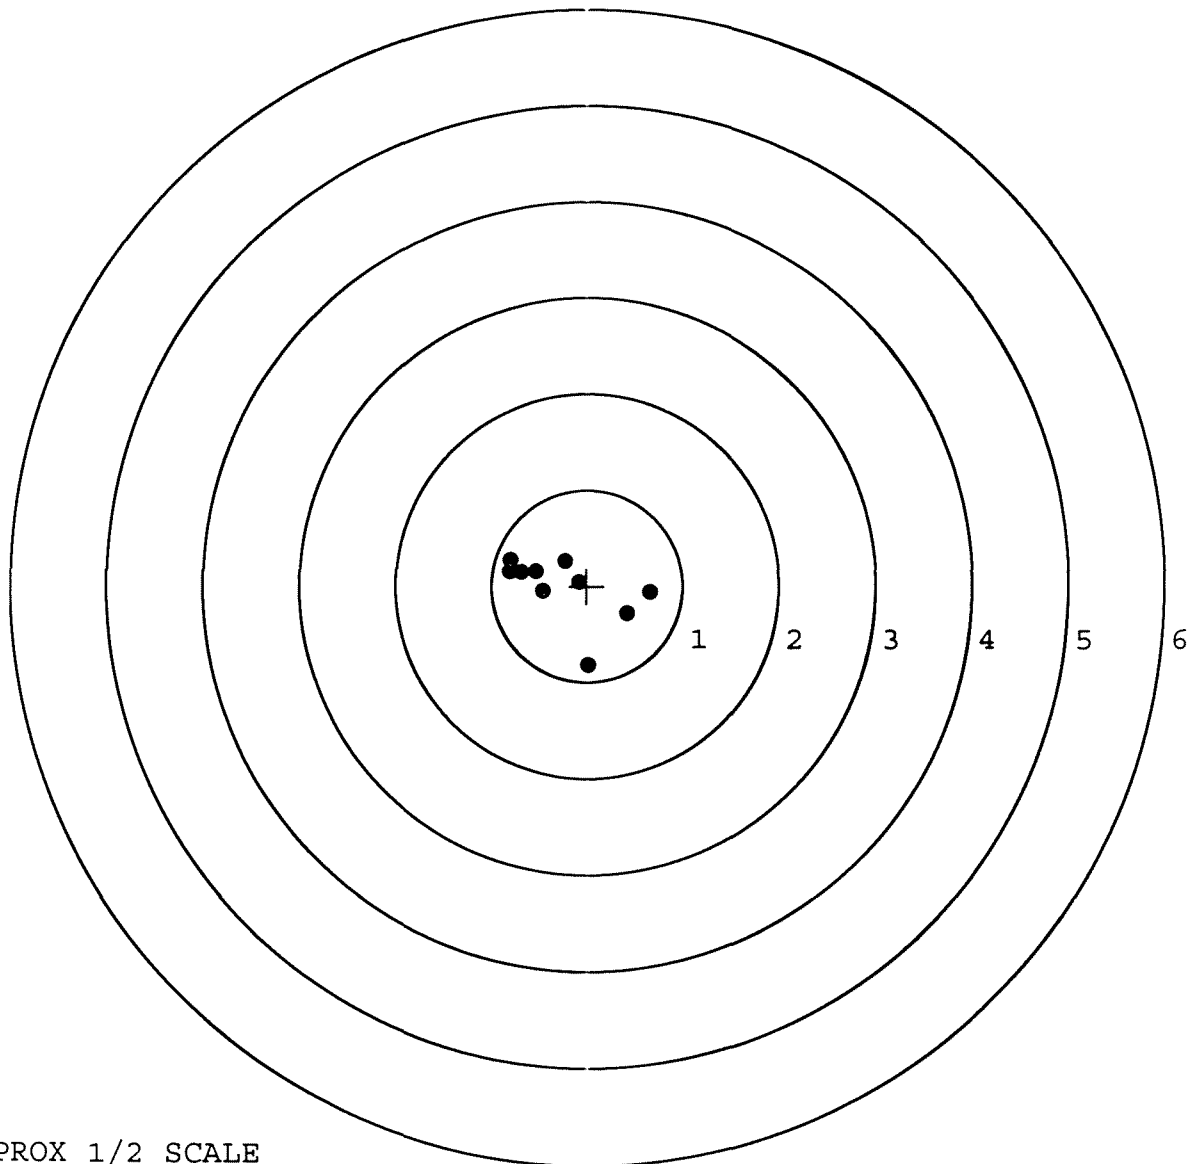


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348844. __0
TARGET NUMBER: 2
FILE DATE: 05/07/2008
FILE TIME: 04:56

X CENTROID: -0.078
Y CENTROID: -0.152
POA TO CENTROID: 0.171
HORZ SPREAD: 1.171
VERT SPREAD: 2.046
GROUP SPREAD: 2.102
MIN RADIUS: 0.176
MAX RADIUS: 1.195
MEAN RADIUS: 0.558
IN 1 IN DIAMETER: 5
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.166	-1.148
2:	0.402	-0.568
3:	-0.769	-0.522
4:	-0.648	0.898
5:	0.244	0.482
6:	0.233	0.031
7:	-0.165	0.051
8:	0.122	-0.325
9:	-0.086	-0.386
10:	0.053	-0.035

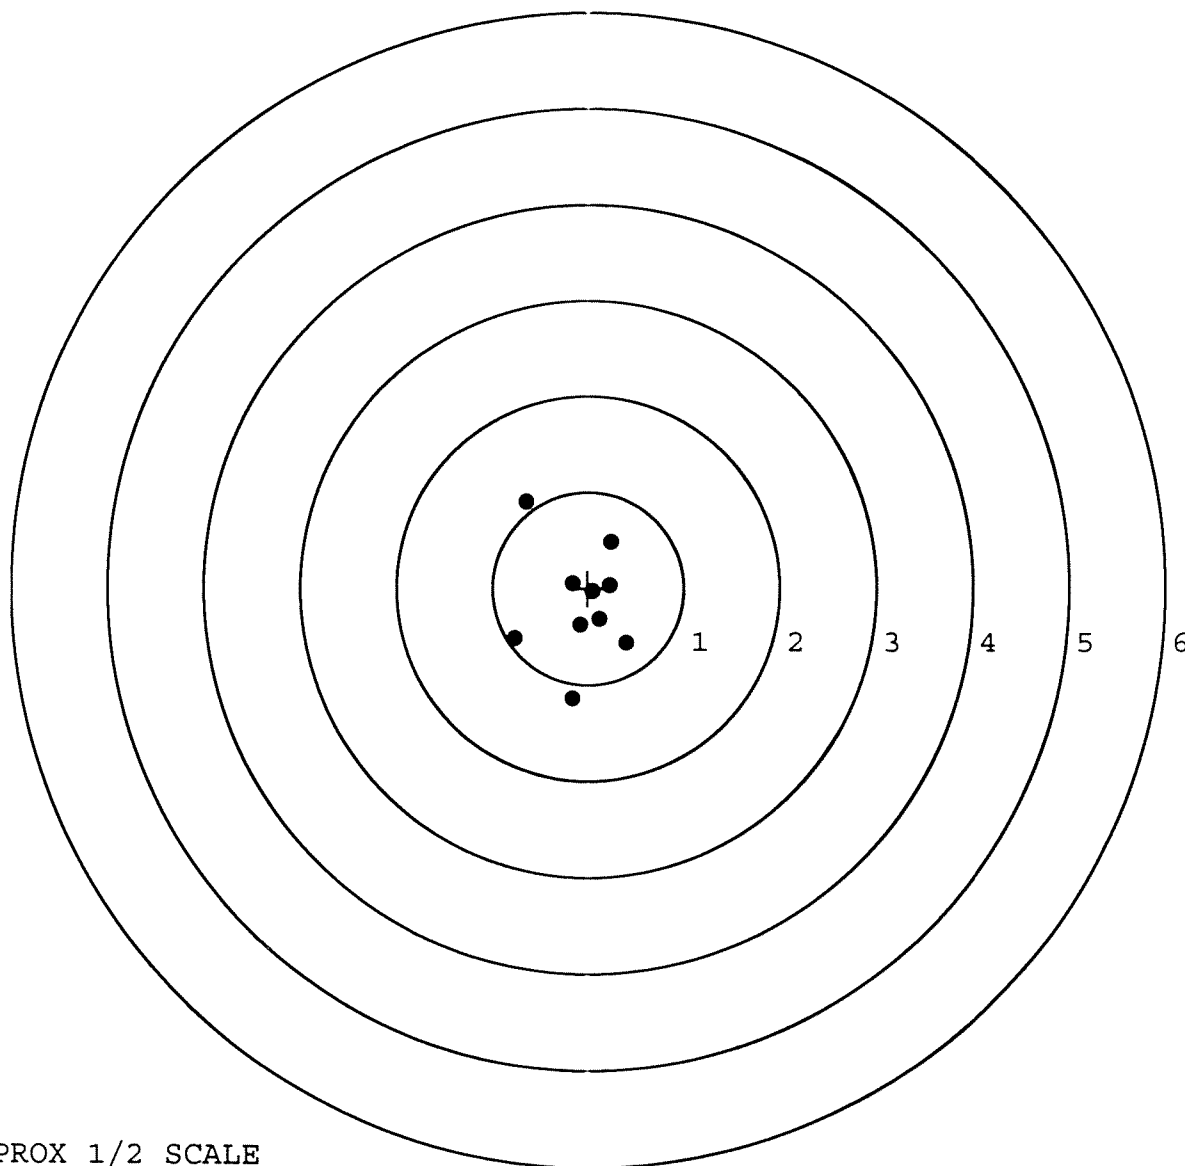

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348844. __0

TARGET NUMBER: 3

FILE DATE: 05/07/2008

FILE TIME: 04:56

X CENTROID: -0.058

Y CENTROID: -0.161

POA TO CENTROID: 0.171

HORZ SPREAD: 1.223

VERT SPREAD: 1.489

GROUP SPREAD: 1.846

MIN RADIUS: 0.120

MAX RADIUS: 1.106


MEAN RADIUS: 0.550

IN 1 IN DIAMETER: 5

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.812	-0.221
2:	-0.711	-1.054
3:	0.235	-0.873
4:	0.179	-0.395
5:	-0.140	-0.248
6:	-0.079	-0.011
7:	0.253	0.129
8:	-0.165	0.435
9:	0.246	0.220
10:	0.411	0.412

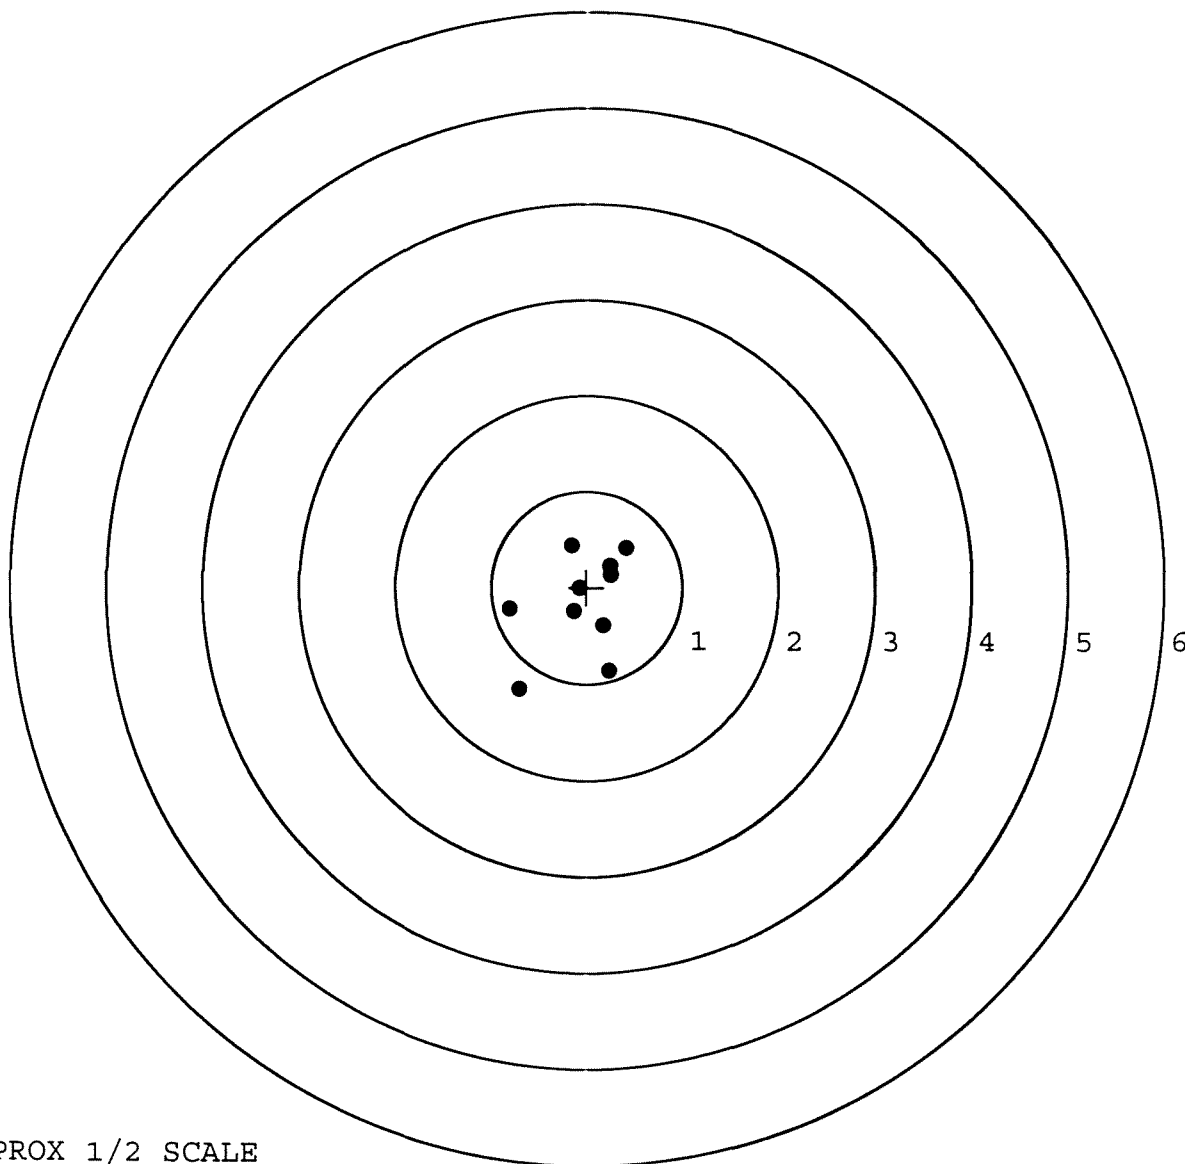


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348844. __0
TARGET NUMBER: 4
FILE DATE: 05/07/2008
FILE TIME: 04:56

POINT#	X	Y
1:	0.818	-0.151
2:	0.747	-1.211
3:	0.329	-0.691
4:	0.304	0.122
5:	-0.013	-0.238
6:	-0.344	-0.511
7:	-0.121	0.214
8:	-0.428	0.266
9:	-0.314	-0.064
10:	-1.404	0.637

X CENTROID: -0.043
Y CENTROID: -0.163
POA TO CENTROID: 0.168
HORZ SPREAD: 2.222
VERT SPREAD: 1.848
GROUP SPREAD: 2.836
MIN RADIUS: 0.081
MAX RADIUS: 1.579
MEAN RADIUS: 0.664
IN 1 IN DIAMETER: 5
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 9

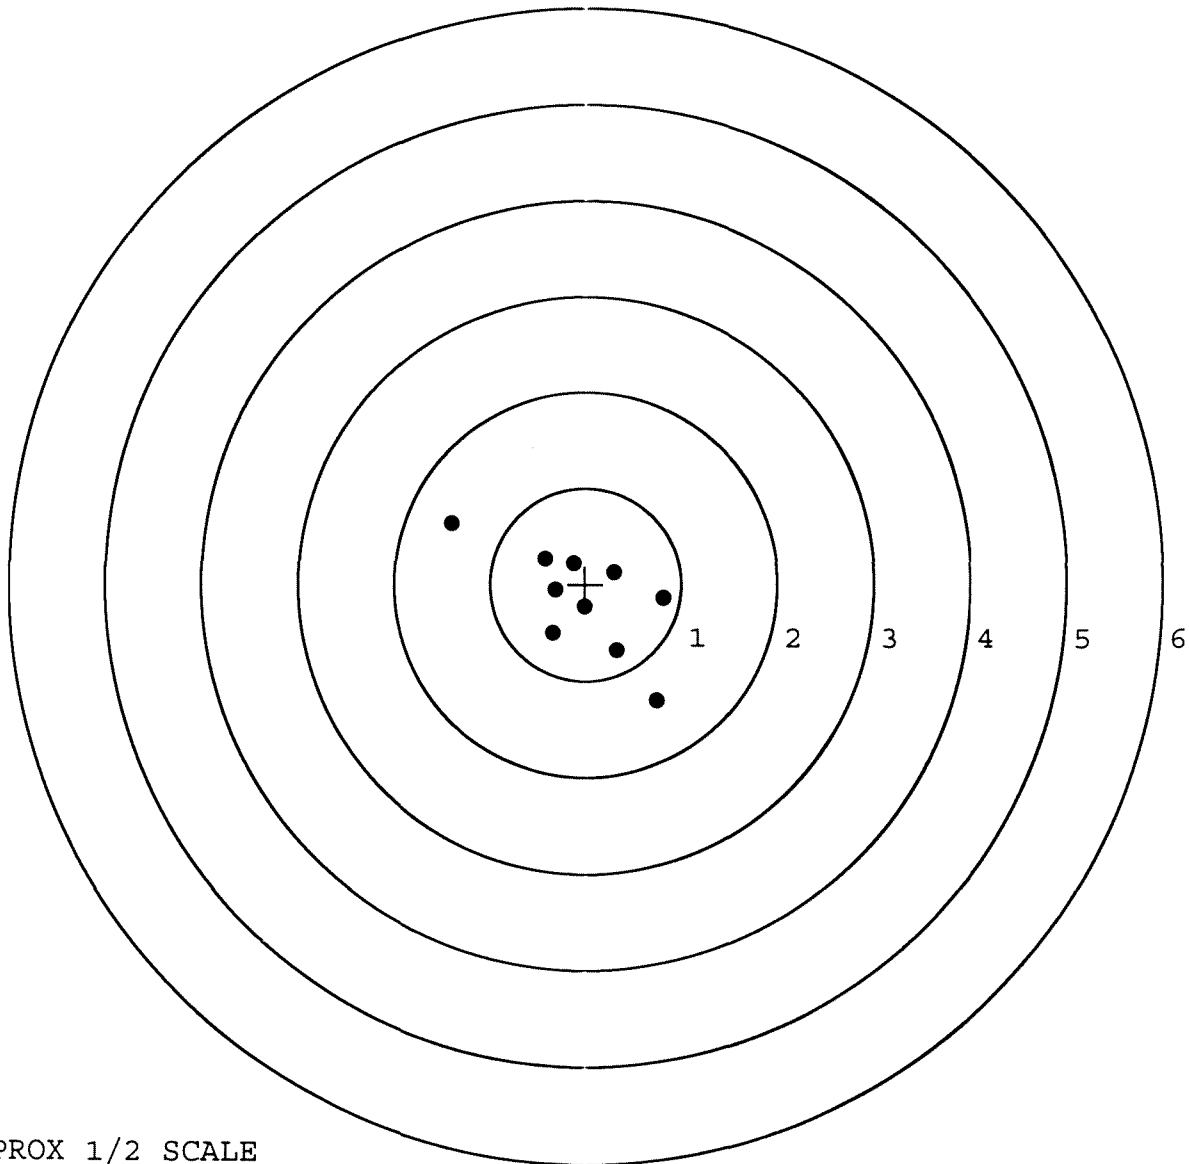


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348844. __0
TARGET NUMBER: 5
FILE DATE: 05/07/2008
FILE TIME: 04:56

X CENTROID: -0.118
Y CENTROID: -0.073
POA TO CENTROID: 0.138
HORZ SPREAD: 1.777
VERT SPREAD: 1.303
GROUP SPREAD: 2.143
MIN RADIUS: 0.093
MAX RADIUS: 1.334
MEAN RADIUS: 0.550
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-1.339	0.463
2:	-0.621	-0.074
3:	-0.033	0.569
4:	-0.031	0.267
5:	0.217	0.060
6:	-0.198	-0.027
7:	-0.117	-0.282
8:	0.154	-0.558
9:	0.354	-0.413
10:	0.438	-0.734

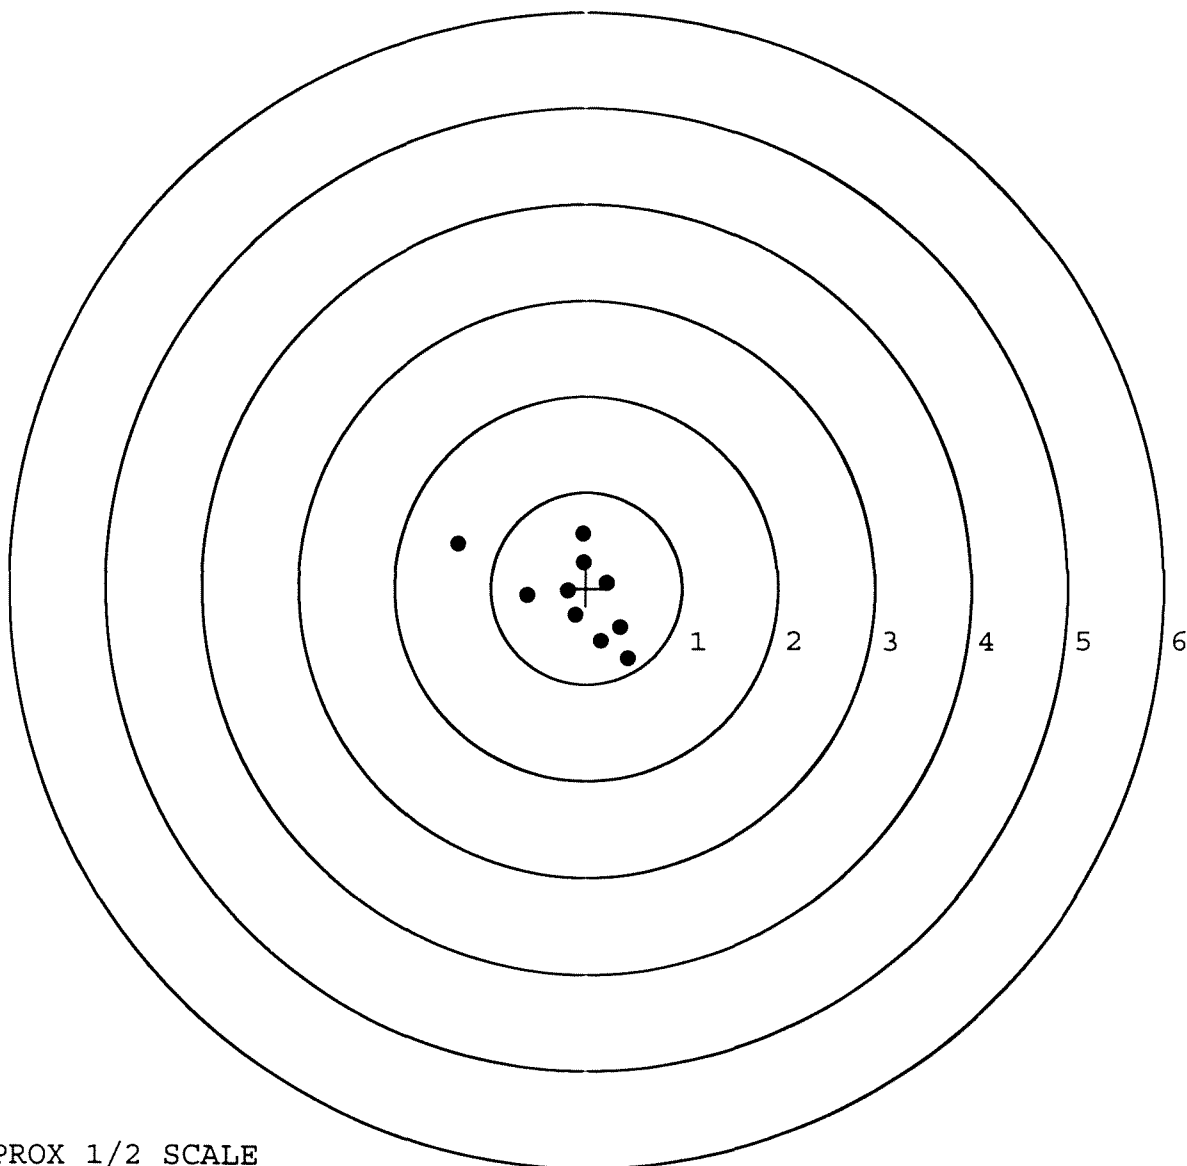

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-C-0149

R & B NUMBER 144413
SERIAL NUMBER 06348844
LOG-IN DATE 4-14-08

OPERATION #	OPERATION NAME		DATE	INITIAL
500	DIS-ASSEMBLE GUN		4-17-08	RTZ
505	RE-BARREL		4-22-08	RTZ
560	ASSEMBLE		4-22-08	RTZ
600	PROOF	MAGNA - FLUX APR 24 2008 OPERATOR <u>imms</u>	4-22-08	TRW
605	CHECK HEADSPACE		4-22-08	TRW
610	DIS-ASSEMBLE GUN		4-22-08	RTZ
612	MAGNAFLUX		4/24/08	imms
510	DRILL AND TAP		4-22-08	TRW
615	ROLLMARK CALIBER		4-23-08	CW
618	ROTO-BLAST		4-24-08	DA
620	APPLY COATINGS		4-28-08	CV7
625	FINAL ASSEMBLY		4-29-08	RP
640	FUNCTION TEST AND	PASS FAIL	5-6-08	RP
650	TARGET	PASS FAIL	5-6-08	RP
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION	5-6-08	RP
670	FINAL INSPECTION A) HEADSPACE	PASS FAIL	5-7-08	TRW
	B) TRIGGER PULL + 1.5 LBS MIN 2.50 LBS MAX 4.0 LBS	2.84 2.88 2.95 2.80 2.98	5/7/08	FW
	F SAFETY ON FORCE 2 LBS MIN. 10 LBS MAX	4.5 4.5 4.75	5-7-08	TRW
	G) SAFETY OFF FORCE 2 LBS MAX	3.0 3.0 3.5	5-7-08	TRW
	H) FIRING PIN INDENT 0.020	.022 .021 .022	5-7-08	TRW
690	PACK		5/8/08	FW

Remington®



VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700™ H24

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off. Marca Registrada Marque Deposee.

Ø1


SERIAL NO.
C6348844

ORDER NO.
5716



5716 C6348844

UPC



0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6348844

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	7 11	89	RW
600	Proof	7 11	89	RW
607	Check Headspace			RW
610	Dis-assemble Gun			RW
612	Magnaflux Barrel Action		7/13	KCK
	Magnaflux Bolt		7/13	KCK
615	Rollmark Caliber		7/13	DS.
617	Drill and Tap Sight Holes	7 13	89	
618	Polish Barrel 11/13	7 13	89	
620	Apply Coatings (Barrel Action)		7/21/89	
	Apply Coating (Bolt)			
625	Final Assembly			
	A) Clean inside of Bolt Assembly		7/25/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		7/25/89	RW
	C) Inspect Ejector Hole for Chamfer		7/25/89	RW
	D) Oil Firing Pin Ass'y		7/25/89	RW
	E) Adjust Trigger Pull to Min Setting and Stake		7/25/89	DS

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	0	5	5			7/27/89	LS
	G) Safety Off Force	4	4	4			7/27/89	LS
	H) Trigger Pull Test & Retainability						7/27/89	LS
	I) Firing Pin Indent	.021	.021	.0215			7/27/89	LS
	J) Assemble Stock						7/27/89	RW
	K) Assemble Swivel Studs						7/27/89	LS
	L) Attach Front and Rear Sight Assemblies						7/27/89	RW
	M) Iron Sight Alignment						7/27/89	RW
	N) Detach Front & Rear Sights & place in numbered container						7/27/89	RW
	O) Attach Scope to Rifle						7/27/89	WB
	P) Detach & Attach Scope 20 Times						7/28/89	WB
640	Gallery Target & Test	75K	77L				7-31-89	PH
	A) Time						7-31-89	PH
	B) Malfunctions						7-31-89	PH
	C) Pierced Primers						7-31-89	PH
	D) Optical Clarity of Scope						7-31-89	PH
645	Inspect for Live Ammo						7-31-89	PH
655	Final Inspection							
	A) Headspace						10/2/89	LS
	B) Trigger Pull	264	270	257	255	251	10/2/89	LS
	C) Function						10/2/89	LS
660	Pack						9/20/89	AC

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. 8844

DATE 4/3/90

TESTER D.H.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.23	2.24	2.26		MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.23	2.26	2.24		
PULL #3	2.10	2.25	2.28		
PULL #4	2.24	2.26	2.30		
PULL #5	2.16	2.25	2.32		
TOTAL	10.96	11.26	11.40		
AVG.	2.19	2.25	2.28		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.11	3.12		
PULL #2	3.10	3.06		
PULL #3	3.03	3.11		
PULL #4	3.07	3.11		
PULL #5	3.01	3.12		
TOTAL	15.32	15.52		
AVG.	3.06	3.11		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.14	4.10		
PULL #2	4.12	4.10		
PULL #3	4.17	4.08		
PULL #4	4.16	4.12		
PULL #5	4.13	4.07		
TOTAL	20.72	20.47		
AVG.	4.14	4.09		

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6348844
1 Aug 1989

CENTROIDAL DISTANCES

0 TO 1	.401781
1 TO 2	.775242
1 TO 3	.423136
1 TO 4	.742405
1 TO 5	.477189

3.4' ←---POA
4.1'


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.2
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .1672
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .260683
THE AMR FOR THIS RIFLE IS: 1.082

31 Jul 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C634B044

CENTERFIRE PATTERNS

1

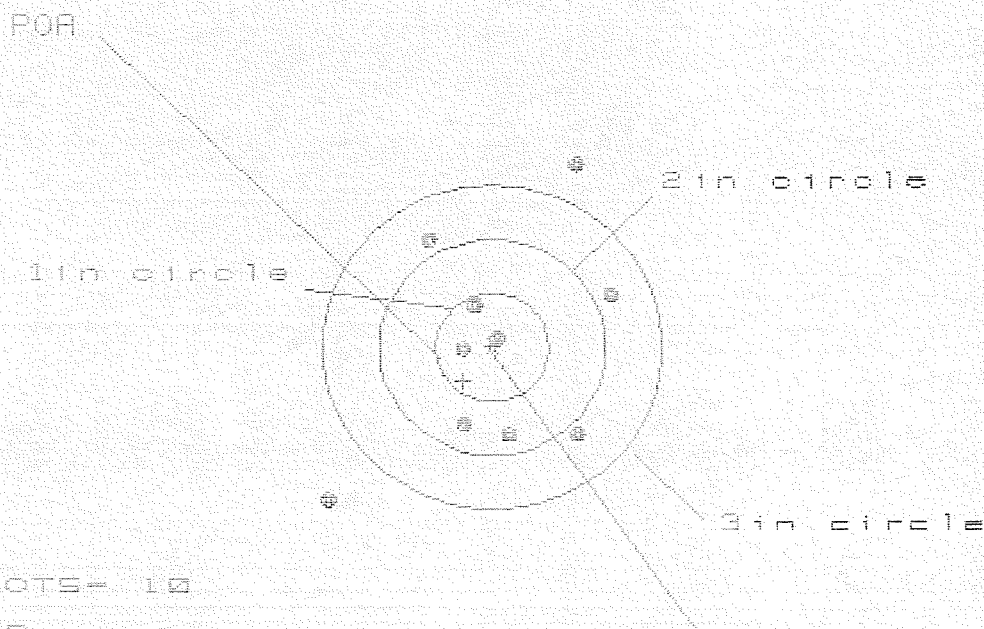

OF SHOTS= 10

IN CIR

1in = 3

2in = 5

3in = 8

HS= 2.530

VS= 3.132

GS= 3.821

CENTROID *


PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.055	.892	.960
MINIMUM X	-1.475	-.724	-.655
MAXIMUM Y	1.716	1.559	.980
MINIMUM Y	-1.416	-.993	-.798
CENTROID X	.258	.421	.353
CENTROID Y	.308	.465	.270
POA TO CENTROID in.	.401	.628	.444
MIN RADIUS	.148	.114	.182
MEAN RADIUS	.957	.842	.720
MAX RADIUS	2.044	1.653	1.179
HORIZONTAL SPREAD	2.530	1.616	1.616
VERTICAL SPREAD	3.132	2.552	1.778
EXTREME SPREAD	3.821	2.615	2.130
NUMBER IN ONE INCH CIRCLE =	3		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	8		

31 Jul 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C8348844

CENTERFIRE PATTERNS

2

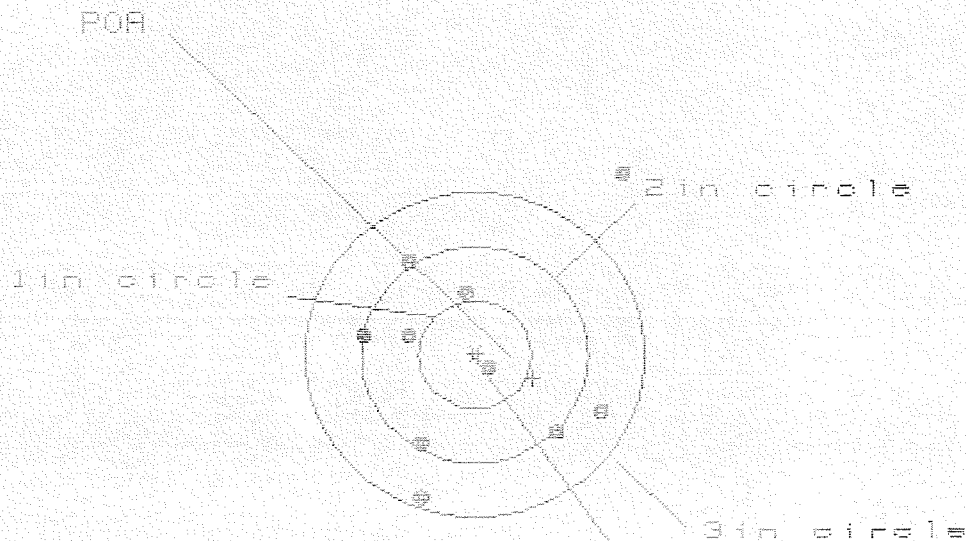

OF SHOTS= 10

IN CIR

1in = 1

2in = 5

3in = 8

HS= 2.233

VS= 2.947

GS= 3.429


CENTROID *

PATTERN #	2
SHOTS (BEST OF)	10
MAXIMUM X	1.280
MINIMUM X	-1.953
MAXIMUM Y	1.673
MINIMUM Y	-1.274
CENTROID X	-1.512
CENTROID Y	.218
POA TO CENTROID in.	.557
MIN RADIUS	.169
MEAN RADIUS	1.002
MAX RADIUS	2.107
HORIZONTAL SPREAD	2.233
VERTICAL SPREAD	2.947
EXTREME SPREAD	3.429
NUMBER IN ONE INCH CIRCLE =	1
NUMBER IN TWO INCH CIRCLE =	5
NUMBER IN THREE INCH CIRCLE =	8

31 Jul 1989

FILE:/PATTERNING/CENTERFIRE_PATT/CS34B344

CENTERFIRE PATTERNS # 3

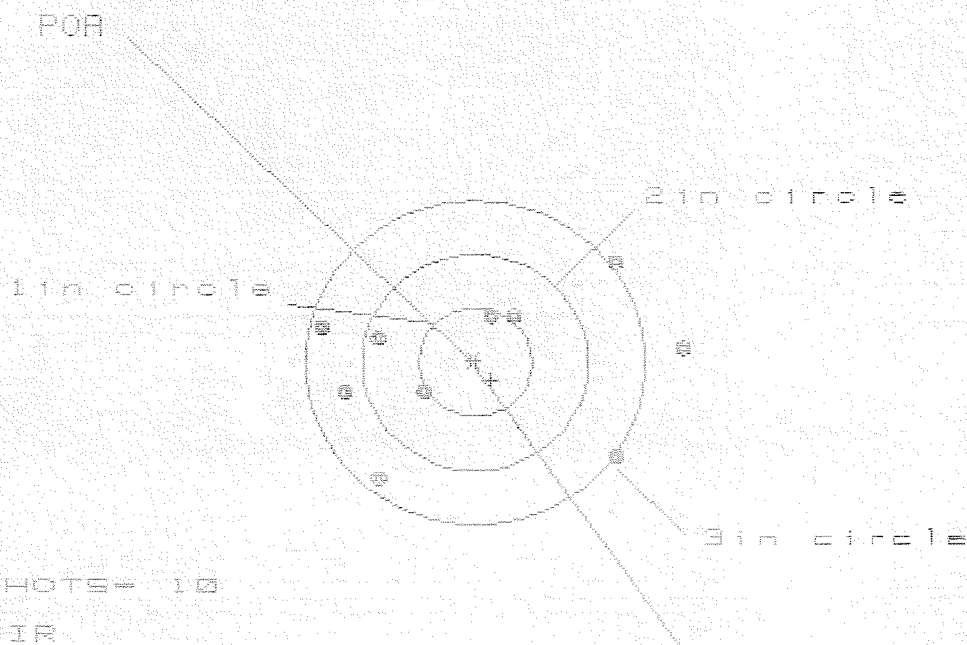

OF SHOTS= 10

IN CIR

1in = 1

2in = 4

3in = 7

HS= 3.192

VS= 1.937

GS= 3.195

PATTERN #

2


SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.802	1.475	1.644
MINIMUM X	-1.390	-1.190	-1.006
MAXIMUM Y	.904	.921	.869
MINIMUM Y	-1.033	-1.016	-1.128
CENTROID X	-.142	-.343	-.527
CENTROID Y	.170	.153	.265
POA TO CENTROID in	.222	.375	.590
MIN RADIUS	.403	.377	.365
MEAN RADIUS	1.128	1.018	.893
MAX RADIUS	1.808	1.726	1.832
HORIZONTAL SPREAD	3.192	2.665	2.650
VERTICAL SPREAD	1.937	1.937	1.937
EXTREME SPREAD	3.195	2.926	2.849
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	7		

31 Jul 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C8348844

CENTERFIRE PATTERNS

4

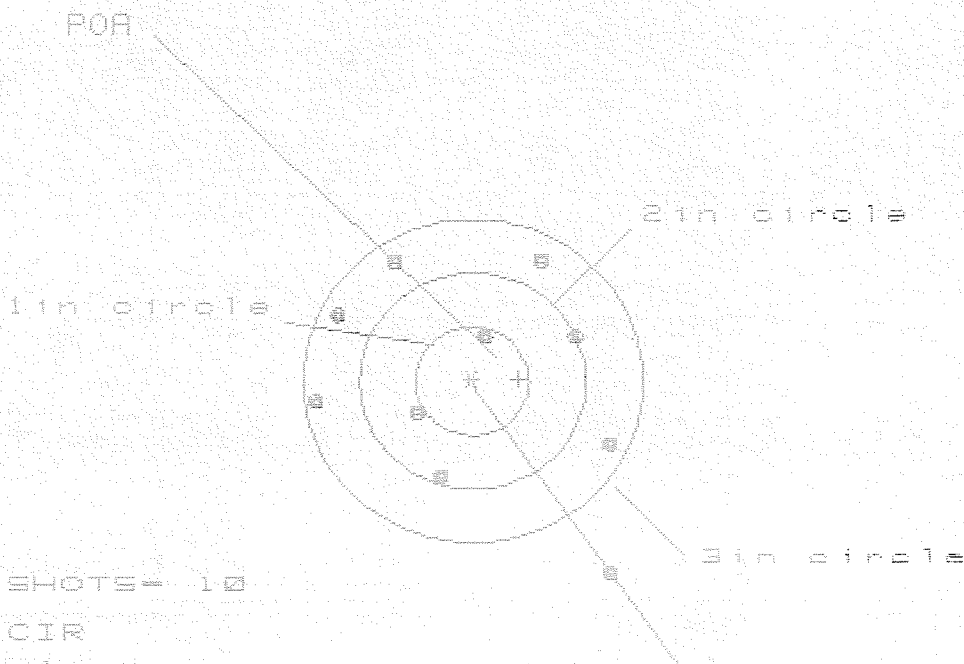

OF SHOTS= 10

IN CIR

1in = 1

2in = 3

3in = 6

HS= 2.595

VS= 2.926

GS= 3.432

CENTROID #


PATTERN #	:	4	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.217	1.349	1.194
MINIMUM X	:	-1.378	-1.246	-1.198
MAXIMUM Y	:	1.162	.966	.914
MINIMUM Y	:	-1.764	-1.028	-1.080
CENTROID X	:	-.409	-.541	-.386
CENTROID Y	:	-.018	.178	.230
POA TO CENTROID in.	:	.410	.570	.449
MIN RADIUS	:	.406	.297	.161
MEAN RADIUS	:	1.173	1.038	.988
MAX RADIUS	:	2.126	1.579	1.479
HORIZONTAL SPREAD	:	2.595	2.595	2.391
VERTICAL SPREAD	:	2.926	1.994	1.994
EXTREME SPREAD	:	3.432	2.700	2.700
NUMBER IN ONE INCH CIRCLE	=	1		
NUMBER IN TWO INCH CIRCLE	=	3		
NUMBER IN THREE INCH CIRCLE	=	9		

31 Jul 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C834B841

CENTERFIRE PATTERNS

5

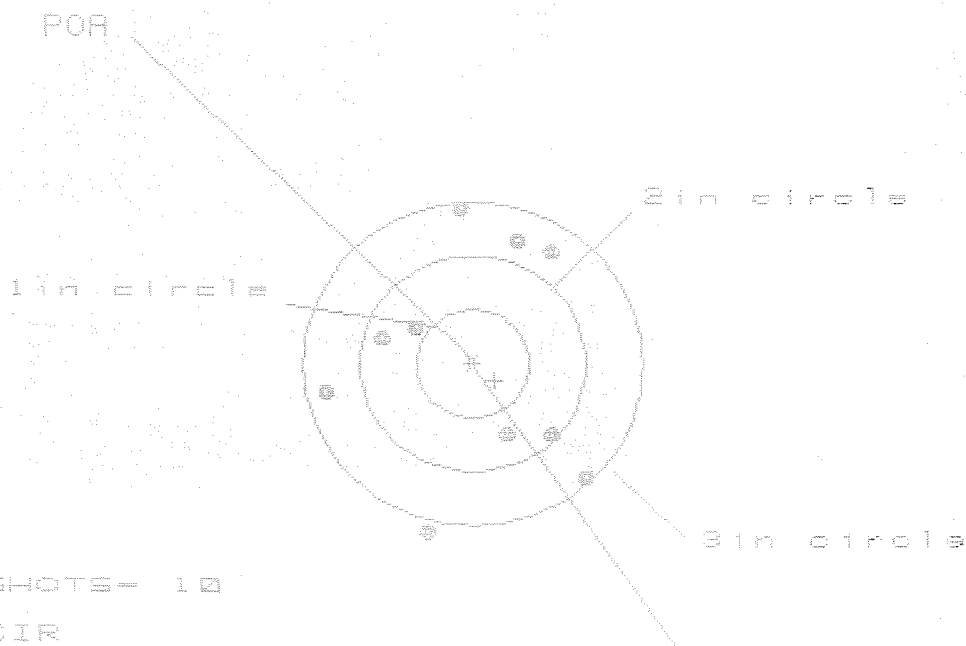

OF SHOTS- 10

IN CIR

1 in = 0

2 in = 4

3 in = 9

HS= 2.375

VS= 2.960

GS= 2.979

CENTROID *

PATTERN #	5
SHOTS (BEST OF)	10
MAXIMUM X	1.022
MINIMUM X	-1.353
MAXIMUM Y	1.431
MINIMUM Y	-1.529
CENTROID X	-.195
CENTROID Y	.158
POA TO CENTROID in.	.251
MIN RADIUS	.588
MEAN RADIUS	1.148
MAX RADIUS	1.580
HORIZONTAL SPREAD	2.375
VERTICAL SPREAD	2.960
EXTREME SPREAD	2.979
NUMBER IN ONE INCH CIRCLE =	0
NUMBER IN TWO INCH CIRCLE =	4
NUMBER IN THREE INCH CIRCLE =	9

R 97-05081

FROM:		SHIP TO:
CDR, HSC		CDR, HSC
1/7 SFG (A)		1/7 SFG (A)
FT BRAGG	NC 28307	FT BRAGG
		NC 28307

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

PARTS	COMMENTS
Barrel	Repeater Coat Trigger Guard Assy ; Front & Rear Sight Bases Rezinc Scope Base & Swivel Studs

OFFICE COPY

RD6925 REV. 11/96

M2400039647

Final Inspection

Sn: C6348844

DATE REC'D: 2/25/97

DATE RET'D:

Auditor: RW

Item:

Barrel Assy.

☒ BARREL

☒ RECEIVER

☒ FRONT SIGHT BLOCK

☒ REAR SIGHT BLOCK

☒ SCREWS

☒ FINISH

Scope Assy.

☐ Scope

☐ Scope Rings

☐ MOUNTING SCREWS

☒ MOUNTING BASE

☒ SCREWS

☐ FINISH

☐ LOOSENESS

☐ CLARITY

Misc.

☐ DD-250

☐ BAR CODE

☐ PACKAGING

Item:

Stock Assy.

☒ STOCK

☒ SLING SWIVEL STUDS

☒ ADJUSTABLE BUTT PLATE

☒ LOCK NUTS

☒ BARREL CLEARANCE

☒ COLOR/FINISH

Systems Case

☐ Scope Case

☐ Iron SIGHTS

☐ Deployment Kit

Trigger

☒ SAFETY OPERATION

☒ SET

Comments:

21 DAY TURN - AROUND

Barrel

M-24

CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO. *C6348844*

LOG IN DATE: / /

DATE

INT.

INSPECT & VERIFY:

OP. #

OP. NAME

550

DIS-ASSEMBLE GUN

560 A

RE-BARREL AT CUSTOM SHOP

B

DRILL & TAP

C

POLISH

575

ASSEMBLE

600

PROOF

3/3/97

[Signature]

605

CHECK HEADSPACE

610

DIS-ASSEMBLE

612

MAGNAFLUX

615

ROLLMARK CALIBER

618

ROTO-BLAST

620

APPLY COATINGS

625 A

FINAL ASSEMBLY

B

TRIGGER PULL TEST

C

SAFETY ON FORCE

D

SAFETY OFF FORCE

E

FIRING PIN INDENT

640

TARGET

4/1/97

[Signature]

655

FINAL INSPECT

4/10/97

[Signature]

660

PACK

QAR INSPECTION

SHIP DATE

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6348848
4 Apr 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .3872

THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .204

THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .437653

THE AMR FOR THIS RIFLE IS: 1.13

CENTROIDAL DISTANCES

0 TO 1	.923542
1 TO 2	.116
1 TO 3	.946597
1 TO 4	.890001
1 TO 5	.844038

5
4
3
1₂
←----POA


PATTERN #: ☐ 1 ☐

POA TO CENTROID: .924
MIN RADIUS : .380
MEAN RADIUS : 1.436
MAX RADIUS : 3.108
CENTROID X : .891
CENTROID Y : .243

3 Apr 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6348848

CENTERFIRE PATTERN # 1

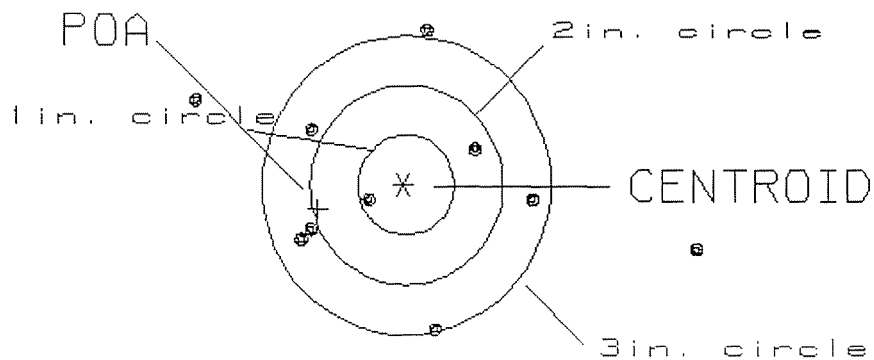

OF SHOTS= 10

IN CIRCLE

HS= 5.22

1

VS= 2.96

2

GS= 5.43

7


PATTERN #: 2

POA TO CENTROID: .988
 MIN RADIUS : .281
 MEAN RADIUS : 1.168
 MAX RADIUS : 2.557
 CENTROID X : .975
 CENTROID Y : .163

3 Apr 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6348848

CENTERFIRE PATTERN # 2

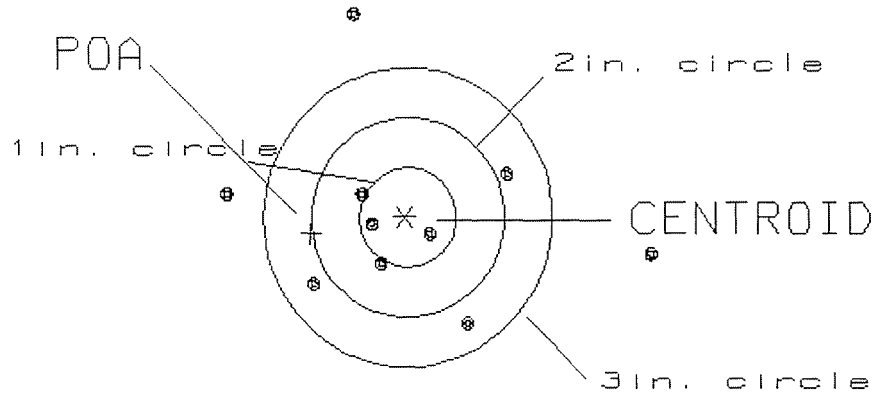

OF SHOTS= 10

IN CIRCLE

HS= 4.37
 VS= 3.06
 GS= 4.42


3
 4
 7

PATTERN #: ☐ 3 ☐
 POA TO CENTROID: .071
 MIN RADIUS : .606
 MEAN RADIUS : 1.171
 MAX RADIUS : 2.298
 CENTROID X : -.002
 CENTROID Y : -.071

3 Apr 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6348848

CENTERFIRE PATTERN # 3

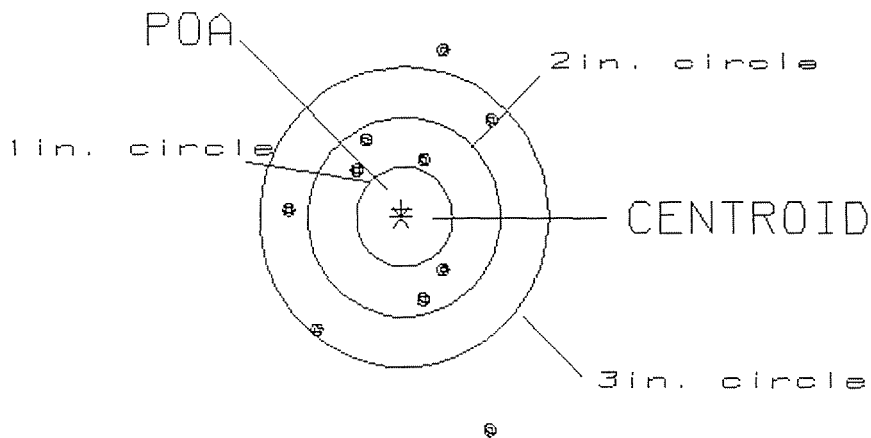

OF SHOTS= 10

IN CIRCLE

HS= 2.15
 VS= 3.83
 GS= 3.86


0
 5
 8

PATTERN #: ☐ 4 ☐
 POA TO CENTROID: .242
 MIN RADIUS : .310
 MEAN RADIUS : .835
 MAX RADIUS : 1.666
 CENTROID X : .001
 CENTROID Y : .242

3 Apr 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6348848

CENTERFIRE PATTERN # 4

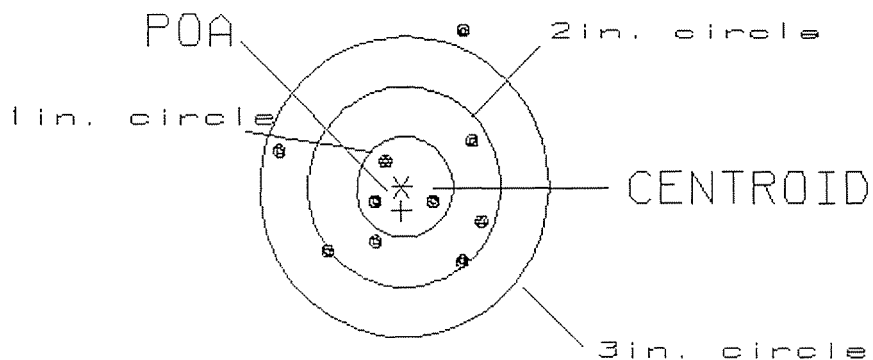

OF SHOTS= 10

IN CIRCLE

HS= 2.09
 VS= 2.29
 GS= 2.59

3
 6
 9


PATTERN #: 5

POA TO CENTROID: .449
 MIN RADIUS : .580
 MEAN RADIUS : 1.042
 MAX RADIUS : 1.618
 CENTROID X : .071
 CENTROID Y : .443

3 Apr 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6348848

CENTERFIRE PATTERN # 5

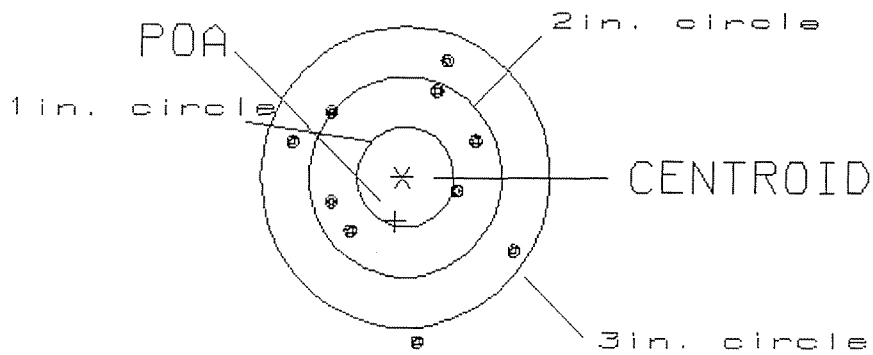

OF SHOTS= 10

IN CIRCLE

HS= 2.25
 VS= 2.75
 GS= 2.77

0
 5
 9