

C6348938

MODEL 700TM M24

Model **SWS** TM

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington

M24000042082

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

Repair Inquiry

Repair Number: RE00144834

Serial: C6348938 Model M24 SWS Center Fire
Caliber: 7.62 NATO

Repairman:

Verify Repair

Status:

Closed 4/24/2008 10:56:38 AM

Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: B/210TH BSB

B/210TH BSB

Address 1: 2 BCT

2 BCT

Address 2: 10 TH MTN DIV

PO Box:

10 TH MTN DIV

PO Box:

City: FORT DRUM

FORT DRUM

State: NY

Zip Code: 13602

Country: US

State: NY

Zip Code: 13602

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NN

Fax:

Email:

Comments:

Received Condition

Fair

Condition
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A008	With Swivel	2
A010	Hard Case	1
A026	Scope	1
A057	Fit and Rear Sgt Base	1

nagletj

4/24/2008

12:25 PM

TCAPS

NUM

PSP

BOL



12:25 PM

Serial Number:

C6348938

Model: M24 SWS



RE00144834

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6348938.___0

FILE DATE AND TIME: 05/22/2008 05:36


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.031
The Average Y Centroid of the Five Target Set:	-0.105
The Average Point of Impact of the Five Target Set:	0.110
The Average Mean Radius of the Five Target Set:	0.730
The Distance from POA to Centroid Target #1:	0.170
The Distance from Centroid Target #2 to Centroid Target #1:	0.198
The Distance from Centroid Target #3 to Centroid Target #1:	0.172
The Distance from Centroid Target #4 to Centroid Target #1:	0.295
The Distance from Centroid Target #5 to Centroid Target #1:	0.291

SERIAL NUMBER: C6348938. 0
TARGET NUMBER: 1
FILE DATE: 05/22/2008
FILE TIME: 05:36

X CENTROID: 0.054
Y CENTROID: -0.161
POA TO CENTROID: 0.170
HORZ SPREAD: 2.125
VERT SPREAD: 1.298
GROUP SPREAD: 2.285
MIN RADIUS: 0.082
MAX RADIUS: 1.212
MEAN RADIUS: 0.670
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	1.120	-0.413
2:	0.546	-0.806
3:	0.502	-0.451
4:	0.612	0.001
5:	-0.178	-0.355
6:	-0.756	-0.575
7:	-0.336	0.163
8:	-0.064	0.492
9:	-1.005	0.427
10:	0.101	-0.094

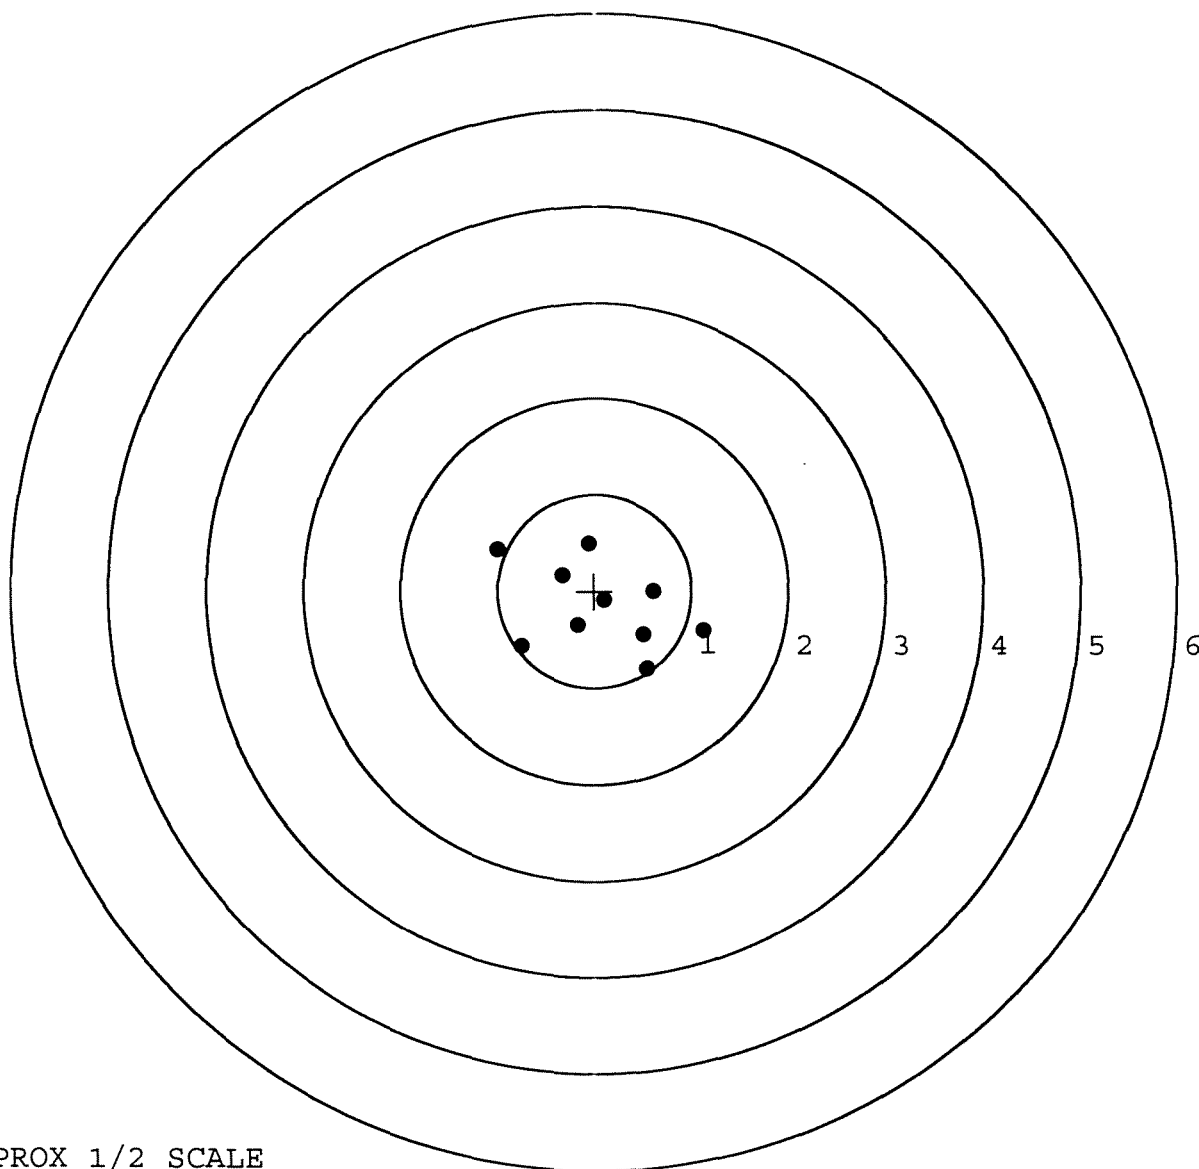


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348938.____0
TARGET NUMBER: 2
FILE DATE: 05/22/2008
FILE TIME: 05:36

X CENTROID: 0.252
Y CENTROID: -0.151
POA TO CENTROID: 0.294
HORZ SPREAD: 2.729
VERT SPREAD: 1.390
GROUP SPREAD: 2.730
MIN RADIUS: 0.269
MAX RADIUS: 1.414
MEAN RADIUS: 0.779
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	1.576	-0.242
2:	1.397	-0.152
3:	0.736	-0.421
4:	0.572	-0.231
5:	0.101	-0.801
6:	0.150	0.098
7:	-0.216	0.204
8:	-0.275	-0.244
9:	-0.366	0.589
10:	-1.153	-0.308

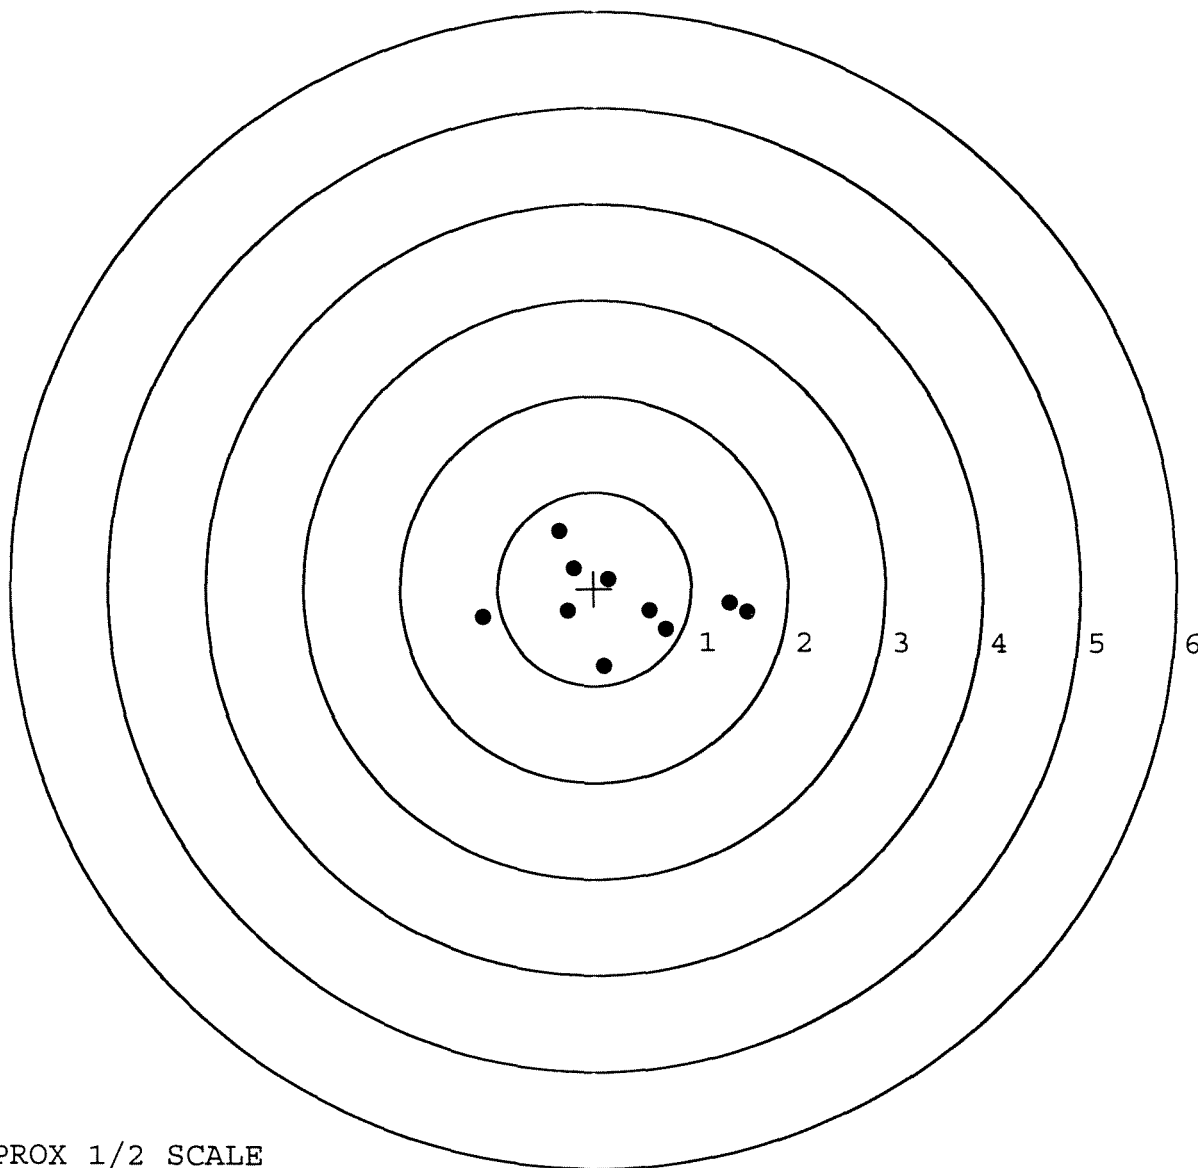


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348938.___0
TARGET NUMBER: 3
FILE DATE: 05/22/2008
FILE TIME: 05:36

X CENTROID: -0.107
Y CENTROID: -0.220
POA TO CENTROID: 0.245
HORZ SPREAD: 2.328
VERT SPREAD: 1.610
GROUP SPREAD: 2.337
MIN RADIUS: 0.189
MAX RADIUS: 1.511
MEAN RADIUS: 0.597
IN 1 IN DIAMETER: 5
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	-0.251	-1.139
2:	-1.612	-0.083
3:	-0.237	0.471
4:	-0.238	0.055
5:	0.277	-0.530
6:	0.081	-0.310
7:	-0.144	-0.405
8:	-0.011	-0.416
9:	0.344	0.041
10:	0.716	0.117

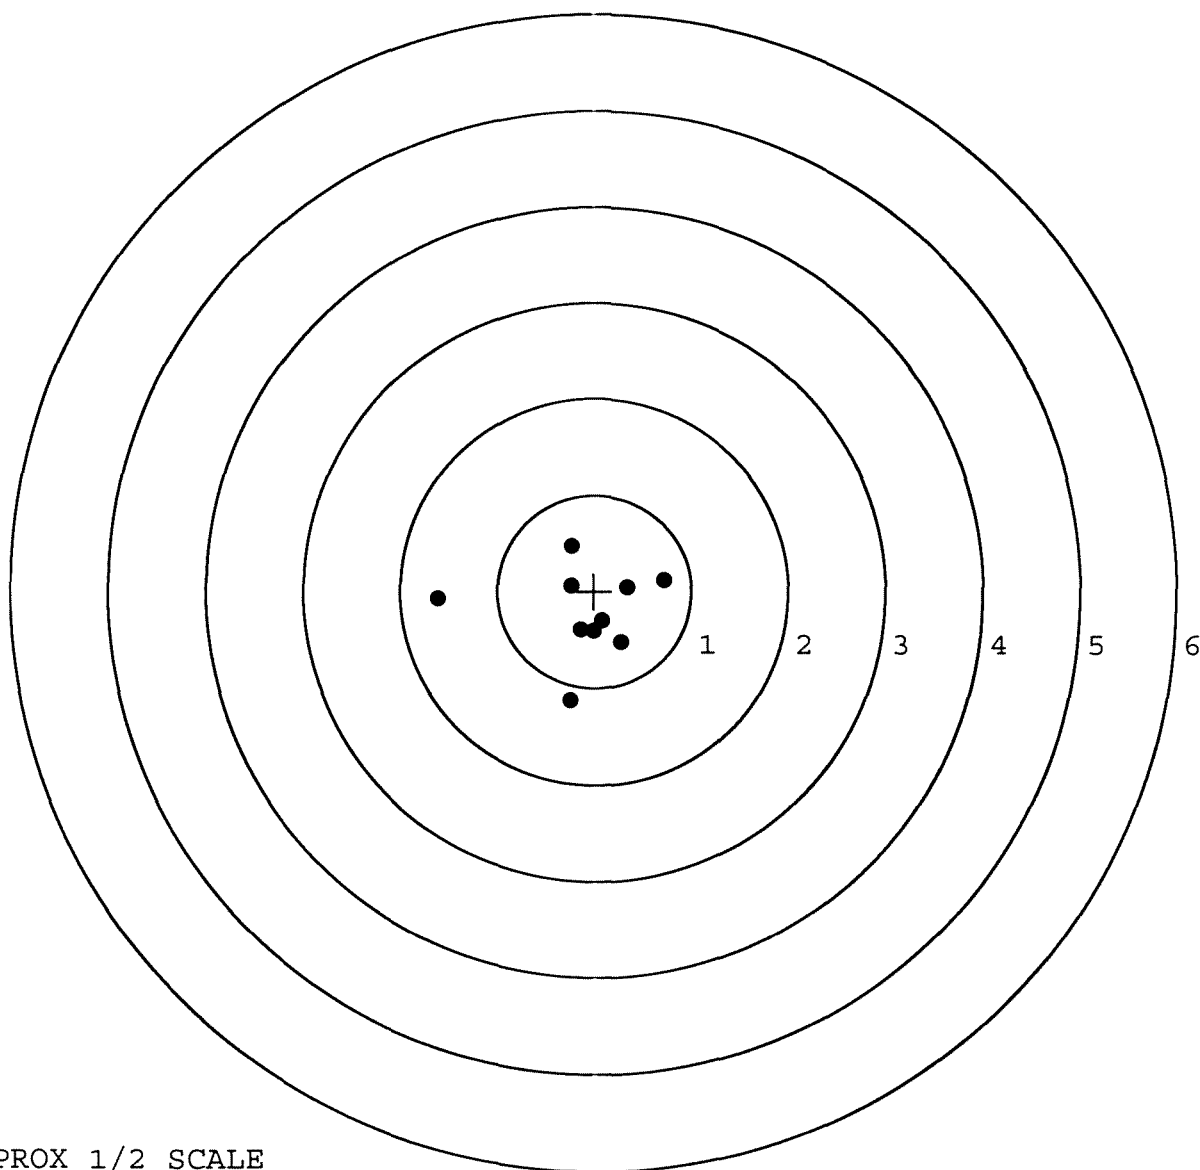


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348938.___0
TARGET NUMBER: 4
FILE DATE: 05/22/2008
FILE TIME: 05:36

X CENTROID: -0.222
Y CENTROID: -0.058
POA TO CENTROID: 0.229
HORZ SPREAD: 3.032
VERT SPREAD: 1.712
GROUP SPREAD: 3.042
MIN RADIUS: 0.188
MAX RADIUS: 1.553
MEAN RADIUS: 0.821
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	1.259	0.110
2:	0.734	-0.252
3:	0.305	0.346
4:	-0.399	0.686
5:	-0.432	0.420
6:	-0.037	-0.091
7:	-0.350	-0.499
8:	-0.639	-0.131
9:	-0.886	-1.026
10:	-1.773	-0.139

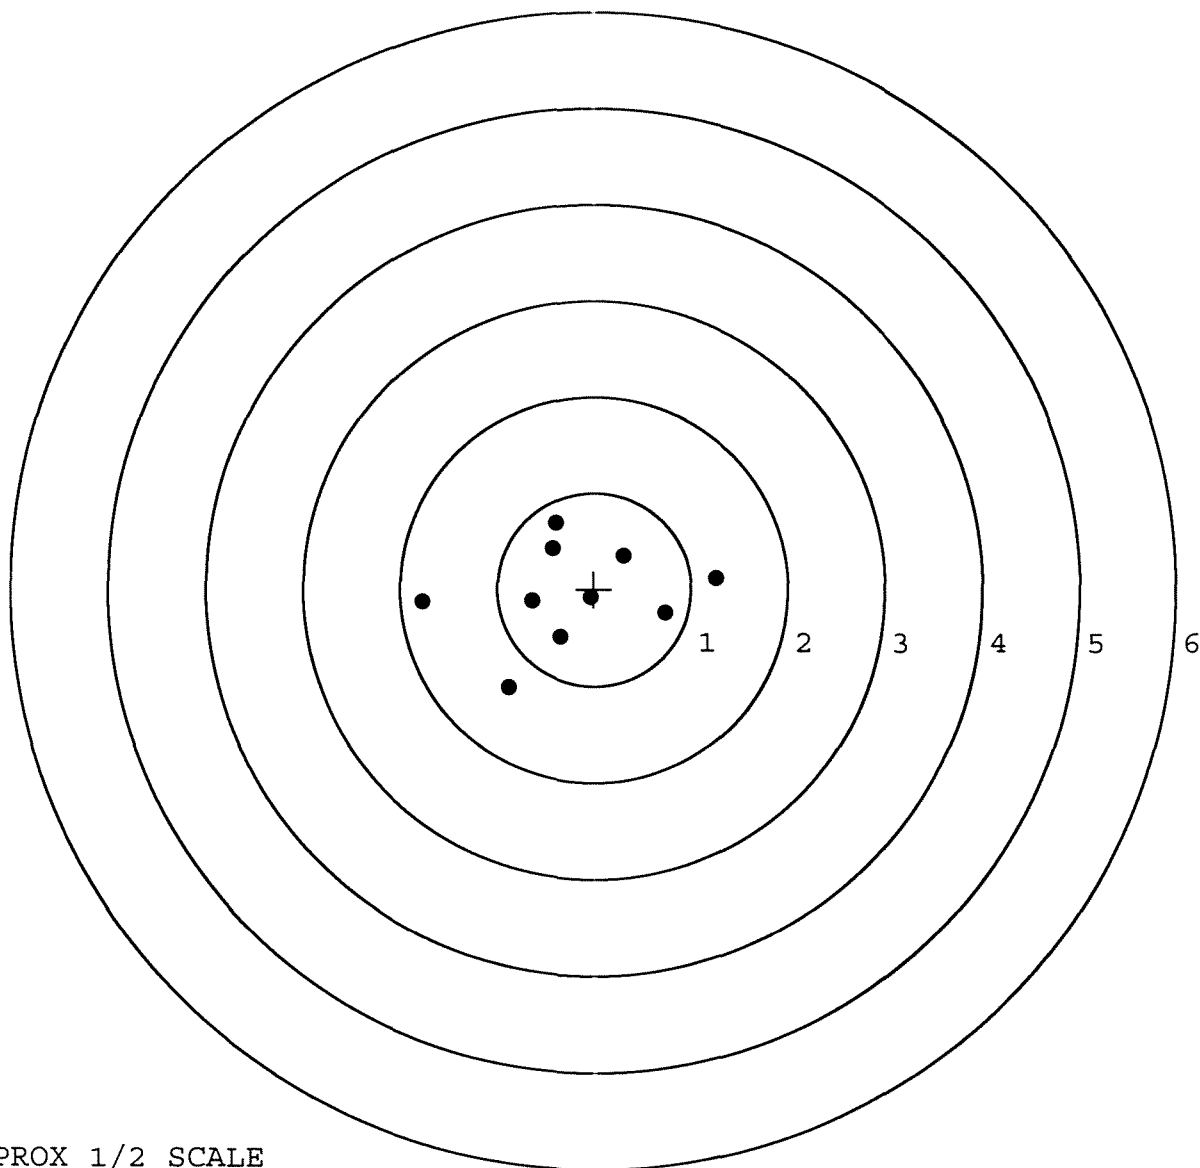


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348938.___0
TARGET NUMBER: 5
FILE DATE: 05/22/2008
FILE TIME: 05:36

X CENTROID: -0.132
Y CENTROID: 0.062
POA TO CENTROID: 0.146
HORZ SPREAD: 2.197
VERT SPREAD: 1.986
GROUP SPREAD: 2.431
MIN RADIUS: 0.312
MAX RADIUS: 1.469
MEAN RADIUS: 0.781
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-1.600	0.116
2:	-0.433	0.313
3:	-0.177	0.371
4:	0.261	1.001
5:	0.597	1.156
6:	0.492	0.001
7:	-0.263	-0.292
8:	0.108	-0.528
9:	-0.023	-0.684
10:	-0.284	-0.830

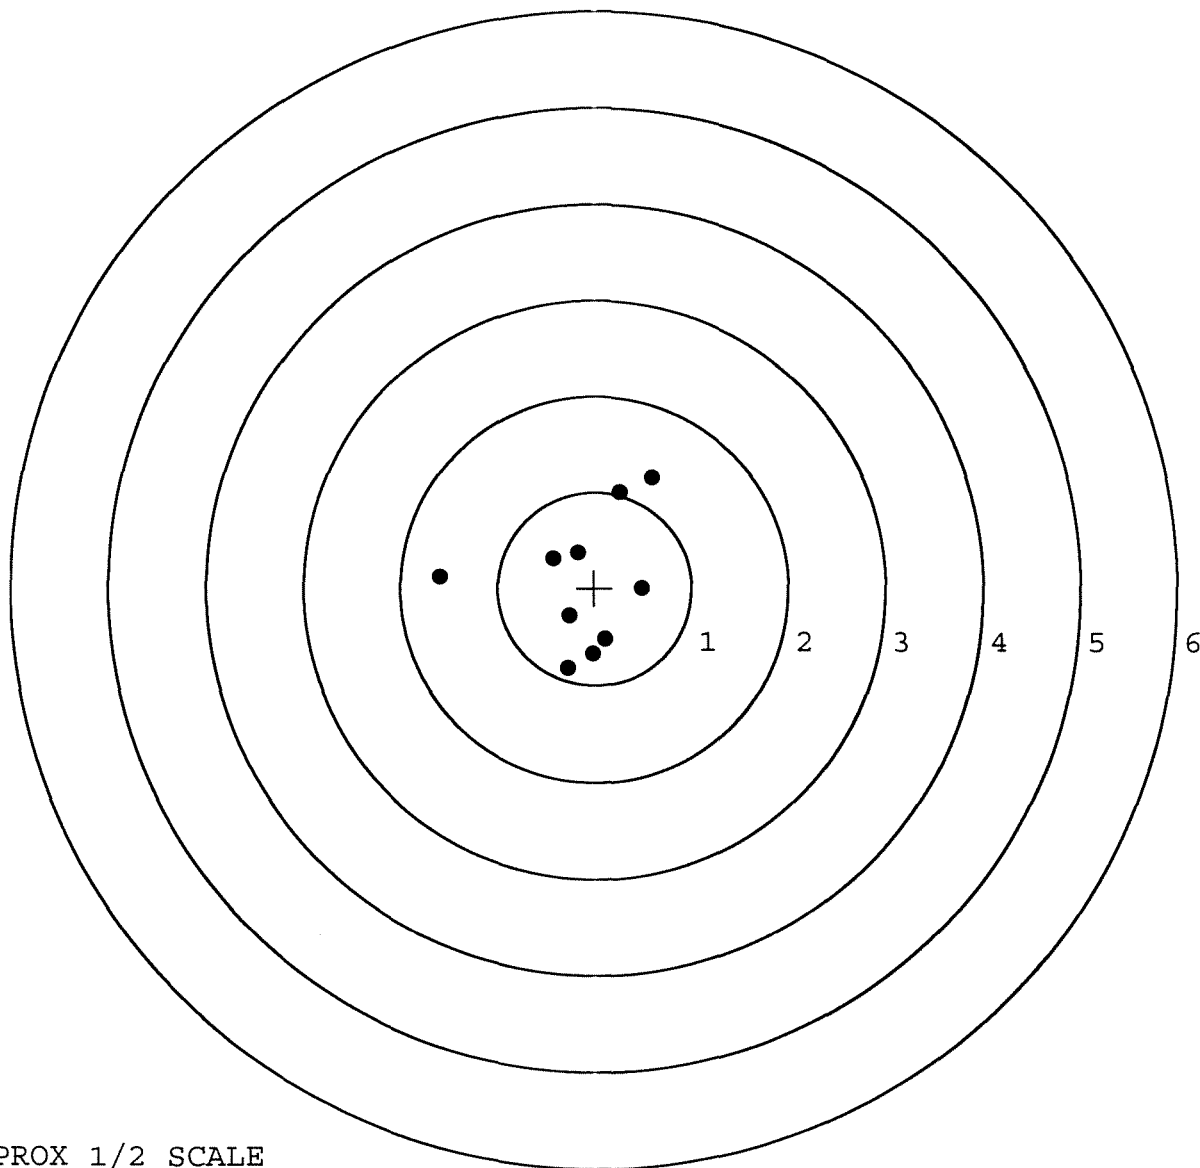

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-C-0149

R & E NUMBER 00144834

SERIAL NUMBER C 6348938

LOG-IN DATE 4-24-08

OPERATION #	OPERATION NAME		DATE	INITIAL
500	DIS-ASSEMBLE GUN		5-2-08	RPD
505	RE-BARREL		5-6-08	RTZ
560	ASSEMBLE		5-6-08	RTZ
600	PROOF	MAGNA - FLUX MAY 09 2008 OPERATOR <u>unub</u>	5-7-08	TRW
605	CHECK HEADSPACE		5-7-08	TRW
610	DIS-ASSEMBLE GUN		5-7-08	RTZ
612	MAGNAFLUX		5/1/08	unub
510	DRILL AND TAP		5-7-08	TRW
615	ROLLMARK CALIBER		5-7-08	CW
618	ROTO-BLAST		5-9-08	DG
620	APPLY COATINGS		5/19/08	unub
625	FINAL ASSEMBLY		5-21-08	RTZ
640	FUNCTION TEST AND	<u>PASS</u> FAIL	5-21-08	SD
650	TARGET	<u>PASS</u> FAIL	5-21-08	SD
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION	5-21-08	RP
670	FINAL INSPECTION		5/22/08	Fm
	A) HEADSPACE	<u>PASS</u> FAIL	5/22/08	Fm
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	2.45 2.43 2.35 2.37 2.33 5-22-08	TRW
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	5- 5- 5 5/22/08	Fm
	G) SAFETY OFF FORCE	2 LBS MIN	5- 5- 4.5 5/22/08	Fm
	I) FIRING PIN INDENT	.020	.021 .021 .022 5/22/08	Fm
690	PACK		5/23/08	Fm

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00092978** Serial: C6348938 Model: M24 SWS Center Fire
 Caliber: 7.62 NATO Produced: 06/19/1990 Repairman: Status: Closed 2/11/2005 7:36:38 AM

Verify Repair

Address Information

Customer: ☒ Received From Return To: ☐ Received From

Name: DEF DIST DEPOT ANNISTON DEF DIST DEPOT ANNISTON

Address 1: Address 2: PO Box PO Box

City: ANNISTON ANNISTON

State: AL Zip Code: 362014199 Country: US State: AL Zip Code: 362014199 Country: US

FPI:

Contact / Condition	Problems	Estimate	History / Status	Shipping / Billing																		
Contact Information Phone: Fax: Email: Comments:	Received Condition Good Condition Notes: CSR Notes:	Accessories Received <table border="1"> <thead> <tr> <th>Code</th> <th>Desc</th> <th>Qty</th> </tr> </thead> <tbody> <tr> <td>A007</td> <td>With Stud</td> <td>3</td> </tr> <tr> <td>A010</td> <td>Hard Case</td> <td>1</td> </tr> <tr> <td>A017</td> <td>Scope Base</td> <td>1</td> </tr> <tr> <td>A026</td> <td>Scope</td> <td>1</td> </tr> <tr> <td>A057</td> <td>Frt and Rear Sgt Base</td> <td>1</td> </tr> </tbody> </table>			Code	Desc	Qty	A007	With Stud	3	A010	Hard Case	1	A017	Scope Base	1	A026	Scope	1	A057	Frt and Rear Sgt Base	1
Code	Desc	Qty																				
A007	With Stud	3																				
A010	Hard Case	1																				
A017	Scope Base	1																				
A026	Scope	1																				
A057	Frt and Rear Sgt Base	1																				

Repair Search Refresh Close

nav[e] 2/14/2005 9:11 AM CAPS NUM HNS SCRL

start 5 2 3 Arms Service

Serial Number: **C6348938**

Model: **M24 SWS**



RE00092978

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6348938.___0

FILE DATE AND TIME: 04/04/2005 06:51

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.061
The Average Y Centroid of the Five Target Set:	-0.170
The Average Point of Impact of the Five Target Set:	0.180
The Average Mean Radius of the Five Target Set:	0.998
The Distance from POA to Centroid Target #1:	0.070
The Distance from Centroid Target #2 to Centroid Target #1:	0.201
The Distance from Centroid Target #3 to Centroid Target #1:	0.135
The Distance from Centroid Target #4 to Centroid Target #1:	0.554
The Distance from Centroid Target #5 to Centroid Target #1:	0.148

SERIAL NUMBER: C6348938. __0

TARGET NUMBER: 1

FILE DATE: 04/04/2005

FILE TIME: 06:51

X CENTROID: -0.033

Y CENTROID: -0.062

POA TO CENTROID: 0.070

HORZ SPREAD: 0.626

VERT SPREAD: 2.175

GROUP SPREAD: 2.198

MIN RADIUS: 0.156

MAX RADIUS: 1.312


MEAN RADIUS: 0.662

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 8

POINT#	X	Y
1:	-0.168	1.243
2:	0.081	0.745
3:	0.141	0.241
4:	0.108	0.006
5:	0.129	-0.321
6:	0.088	-0.694
7:	-0.156	-0.787
8:	-0.485	-0.932

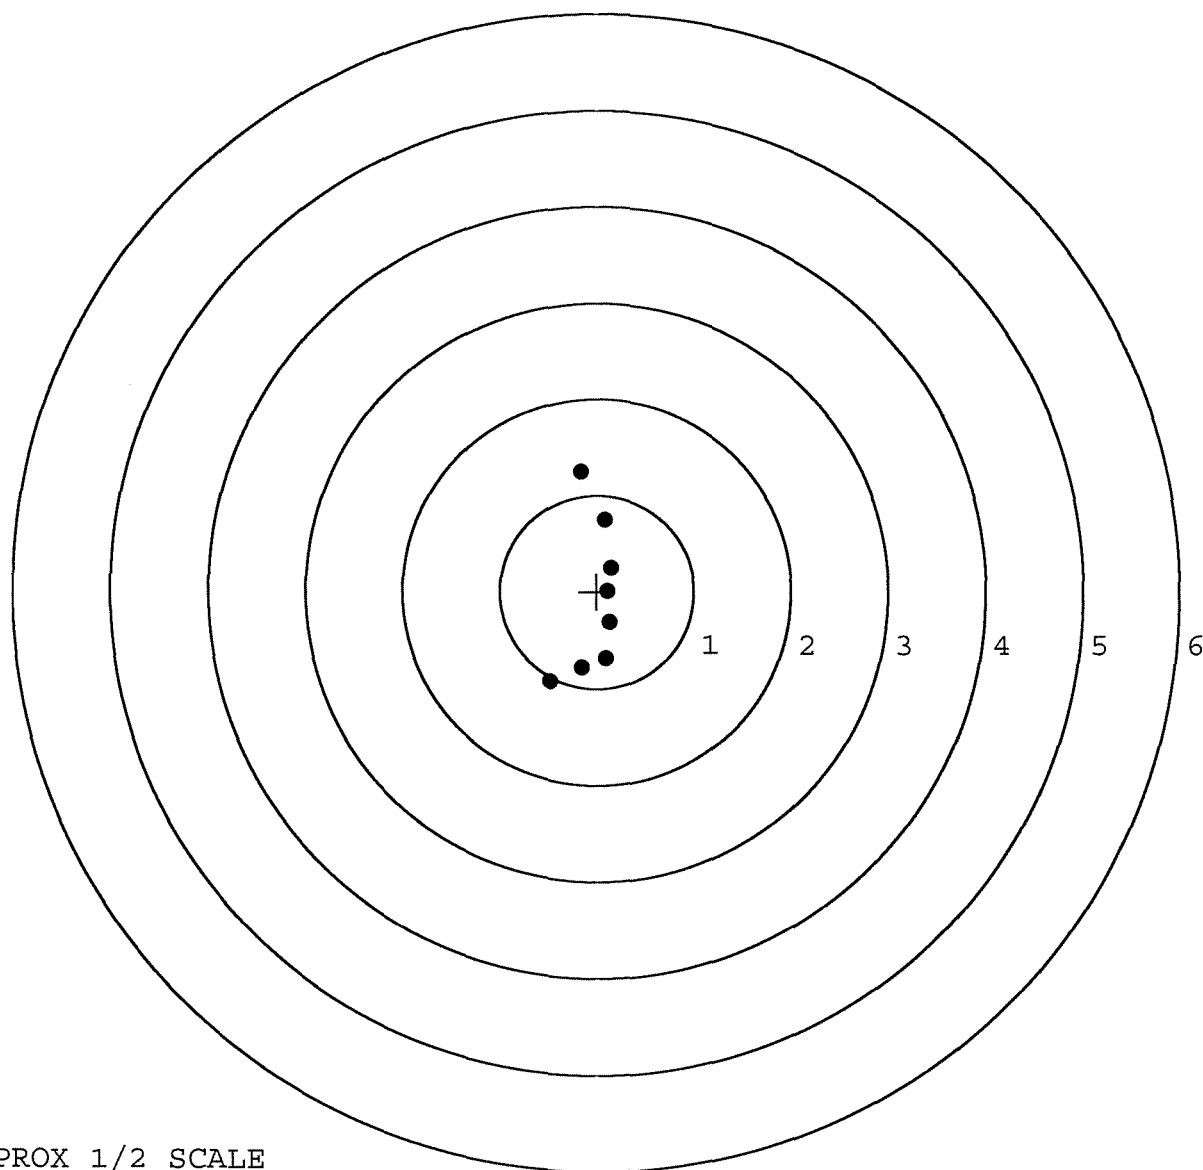


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348938. __0
TARGET NUMBER: 2
FILE DATE: 04/04/2005
FILE TIME: 06:51

X CENTROID: 0.100
Y CENTROID: -0.214
POA TO CENTROID: 0.236
HORZ SPREAD: 3.068
VERT SPREAD: 3.735
GROUP SPREAD: 4.285
MIN RADIUS: 0.186
MAX RADIUS: 2.335
MEAN RADIUS: 1.164
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 4
in 3 IN DIAMETER: 7

POINT#	X	Y
1:	0.785	-2.091
2:	1.753	-0.648
3:	0.417	-0.995
4:	0.075	-0.398
5:	-0.833	-0.852
6:	0.952	0.389
7:	0.437	0.280
8:	-0.399	0.332
9:	-0.869	0.202
10:	-1.315	1.644

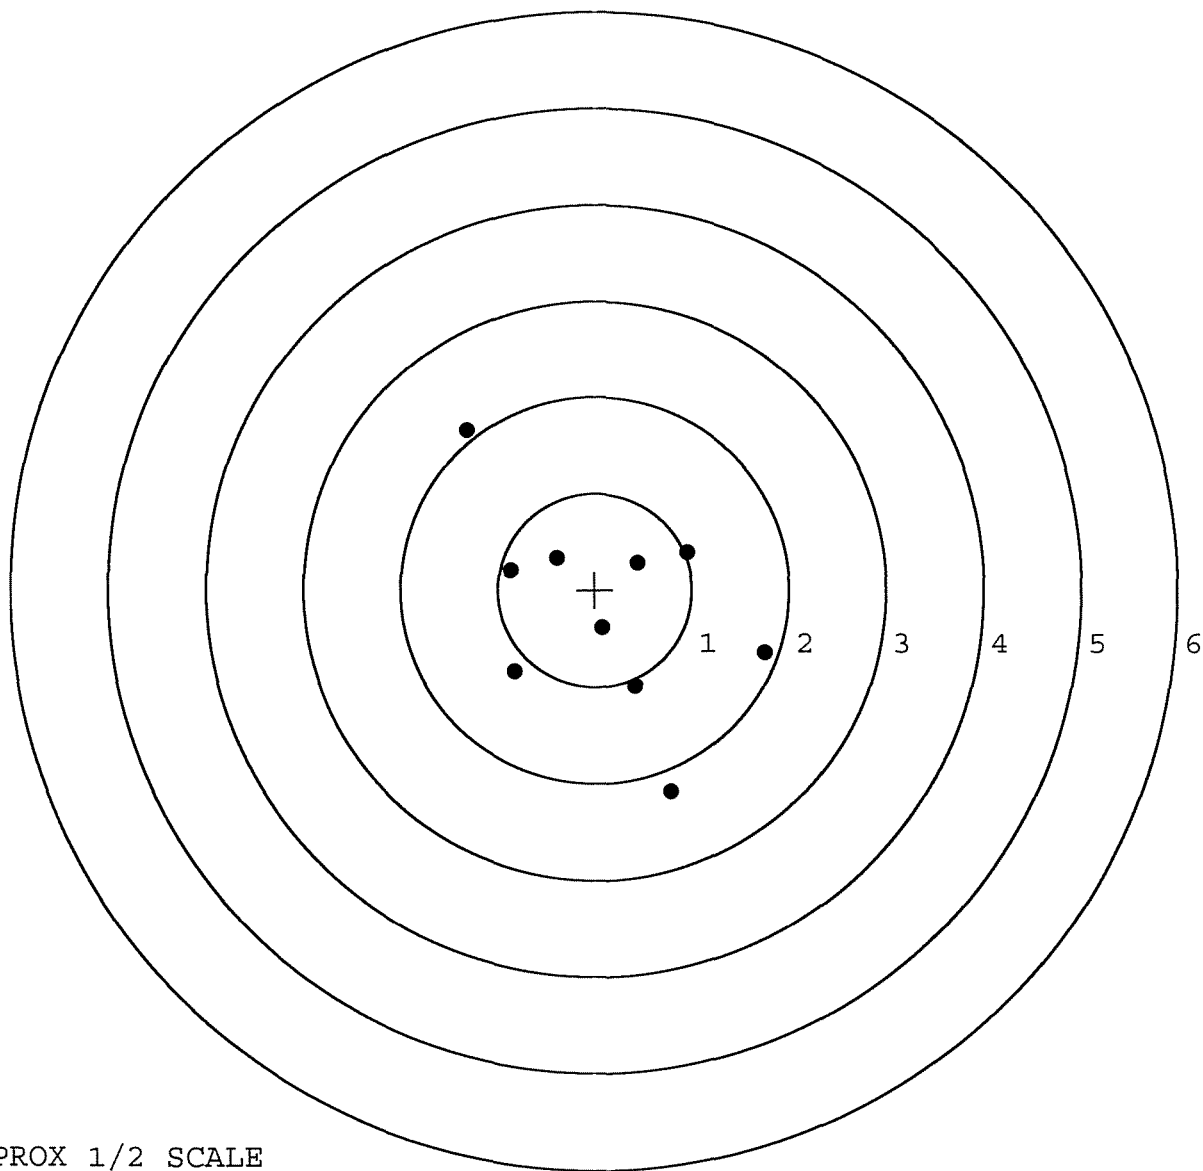


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348938. __0
TARGET NUMBER: 3
FILE DATE: 04/04/2005
FILE TIME: 06:51

X CENTROID: -0.019
Y CENTROID: -0.197
POA TO CENTROID: 0.198
HORZ SPREAD: 2.083
VERT SPREAD: 3.059
GROUP SPREAD: 3.062
MIN RADIUS: 0.217
MAX RADIUS: 1.826
MEAN RADIUS: 1.073
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 4
in 3 IN DIAMETER: 8

POINT#	X	Y
1:	0.847	-1.805
2:	0.346	-1.503
3:	-0.306	-1.209
4:	0.470	-0.222
5:	-0.107	0.001
6:	-1.049	-0.234
7:	-1.236	0.423
8:	-0.120	0.683
9:	0.256	0.643
10:	0.710	1.254

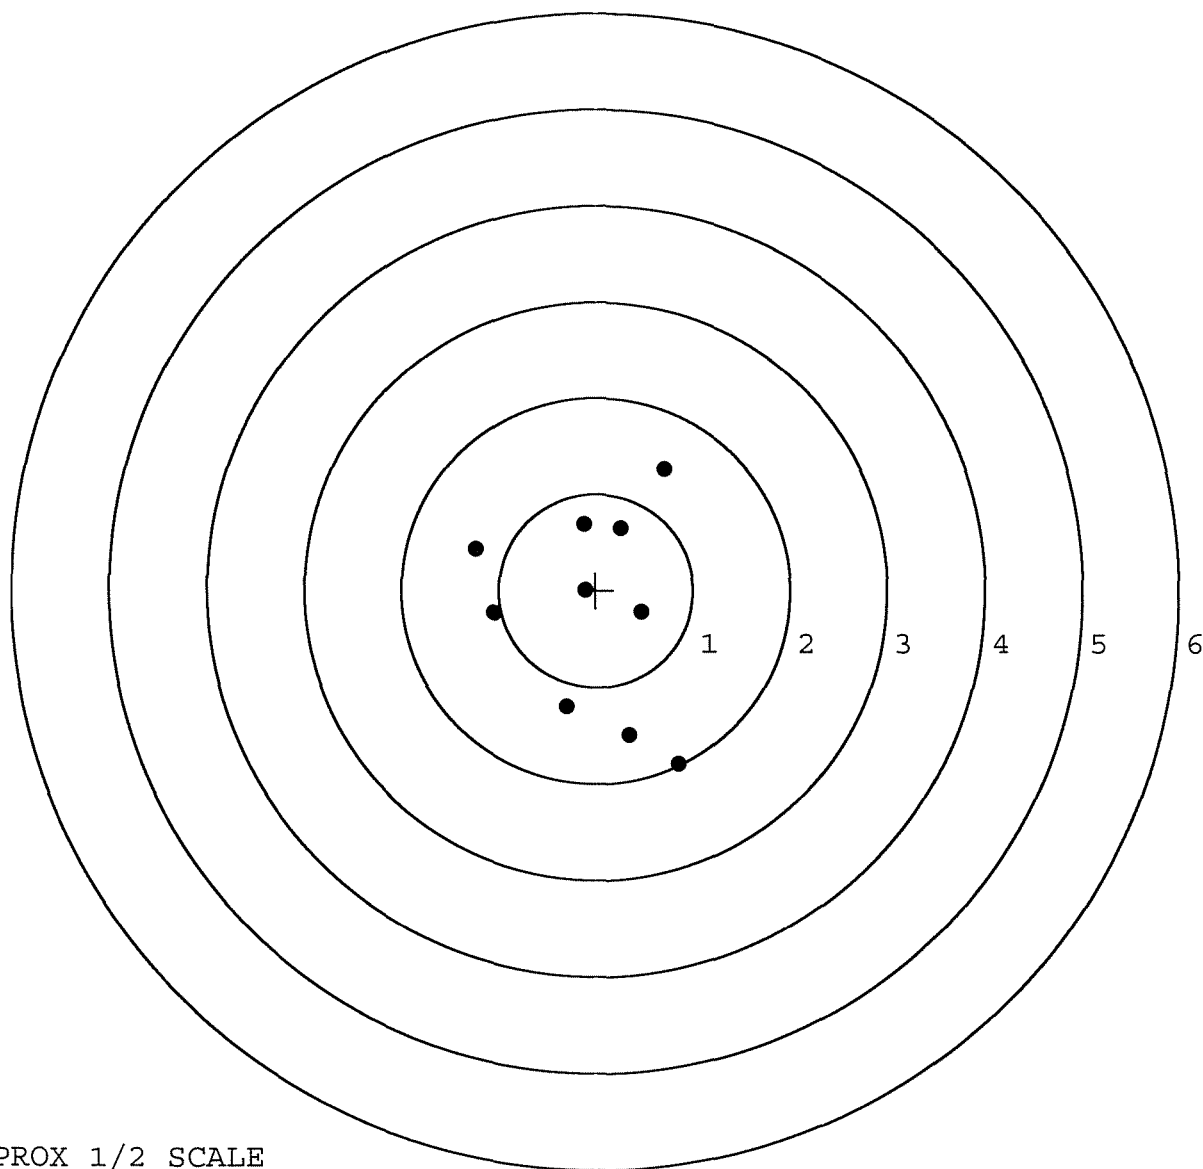


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348938. __0
TARGET NUMBER: 4
FILE DATE: 04/04/2005
FILE TIME: 06:51

X CENTROID: 0.395
Y CENTROID: -0.415
POA TO CENTROID: 0.573
HORZ SPREAD: 1.938
VERT SPREAD: 3.208
GROUP SPREAD: 3.243
MIN RADIUS: 0.631
MAX RADIUS: 2.036
MEAN RADIUS: 1.196
IN 1 IN DIAMETER: 0
IN 2 IN DIAMETER: 3
in 3 IN DIAMETER: 7

POINT#	X	Y
1:	1.369	0.543
2:	1.026	1.086
3:	0.308	0.588
4:	-0.187	0.404
5:	0.062	0.267
6:	-0.394	-0.725
7:	-0.434	-1.175
8:	0.411	-1.046
9:	0.283	-1.970
10:	1.504	-2.122

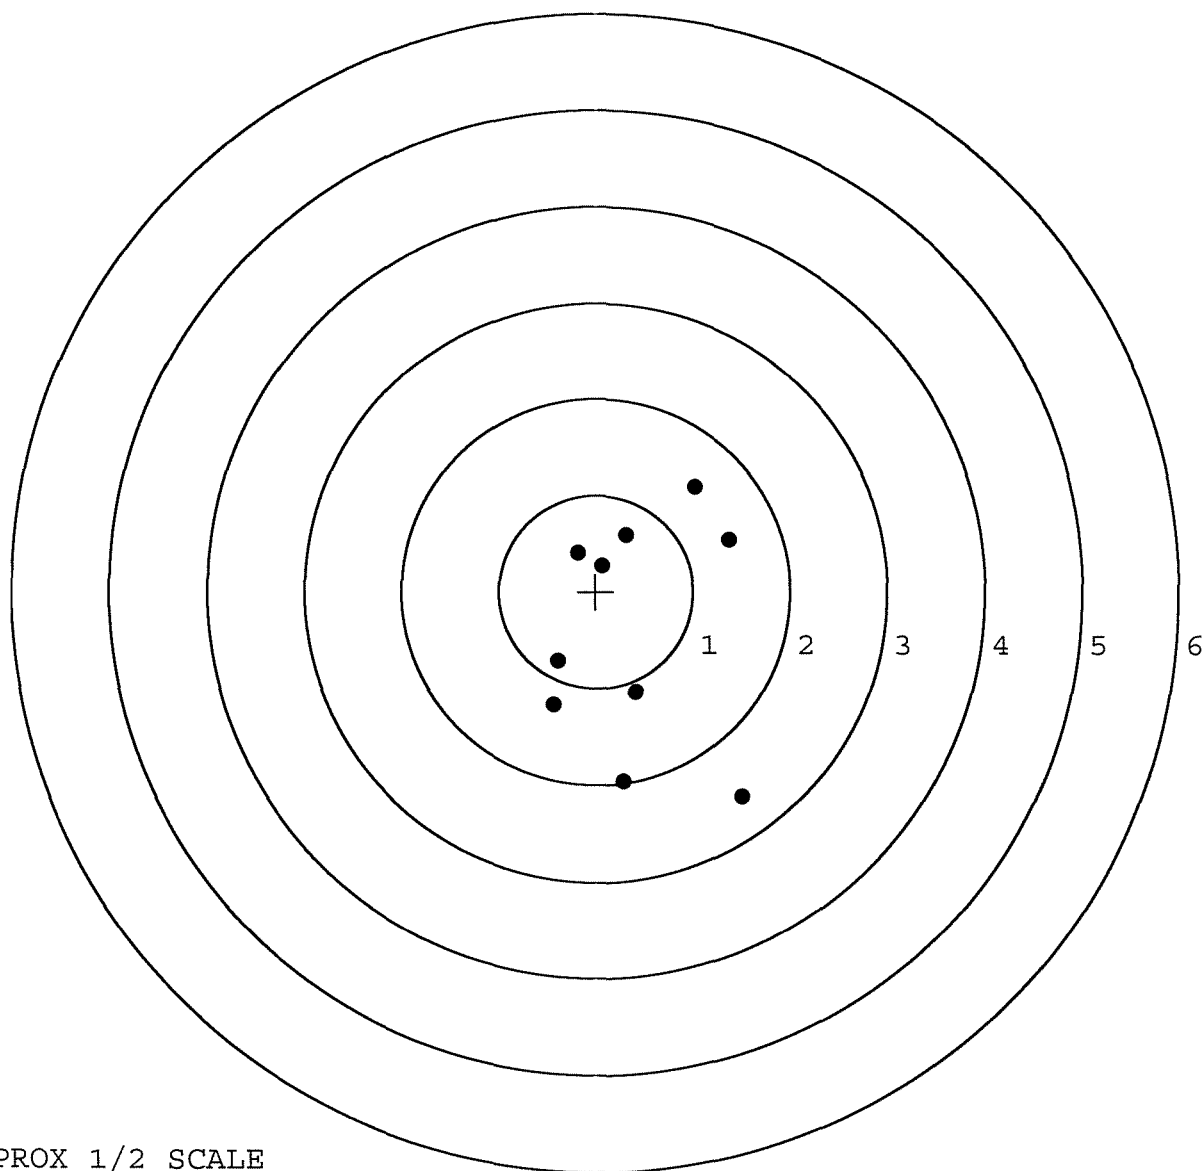


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348938. __0
TARGET NUMBER: 5
FILE DATE: 04/04/2005
FILE TIME: 06:51

X CENTROID: -0.140
Y CENTROID: 0.039
POA TO CENTROID: 0.146
HORZ SPREAD: 2.027
VERT SPREAD: 1.987
GROUP SPREAD: 2.422
MIN RADIUS: 0.504
MAX RADIUS: 1.261
MEAN RADIUS: 0.893
IN 1 IN DIAMETER: 0
IN 2 IN DIAMETER: 5
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.758	-0.715
2:	0.308	-0.977
3:	0.481	-0.248
4:	0.202	-0.331
5:	0.374	0.404
6:	0.259	1.010
7:	-0.533	0.491
8:	-0.735	0.455
9:	-1.248	0.642
10:	-1.269	-0.338

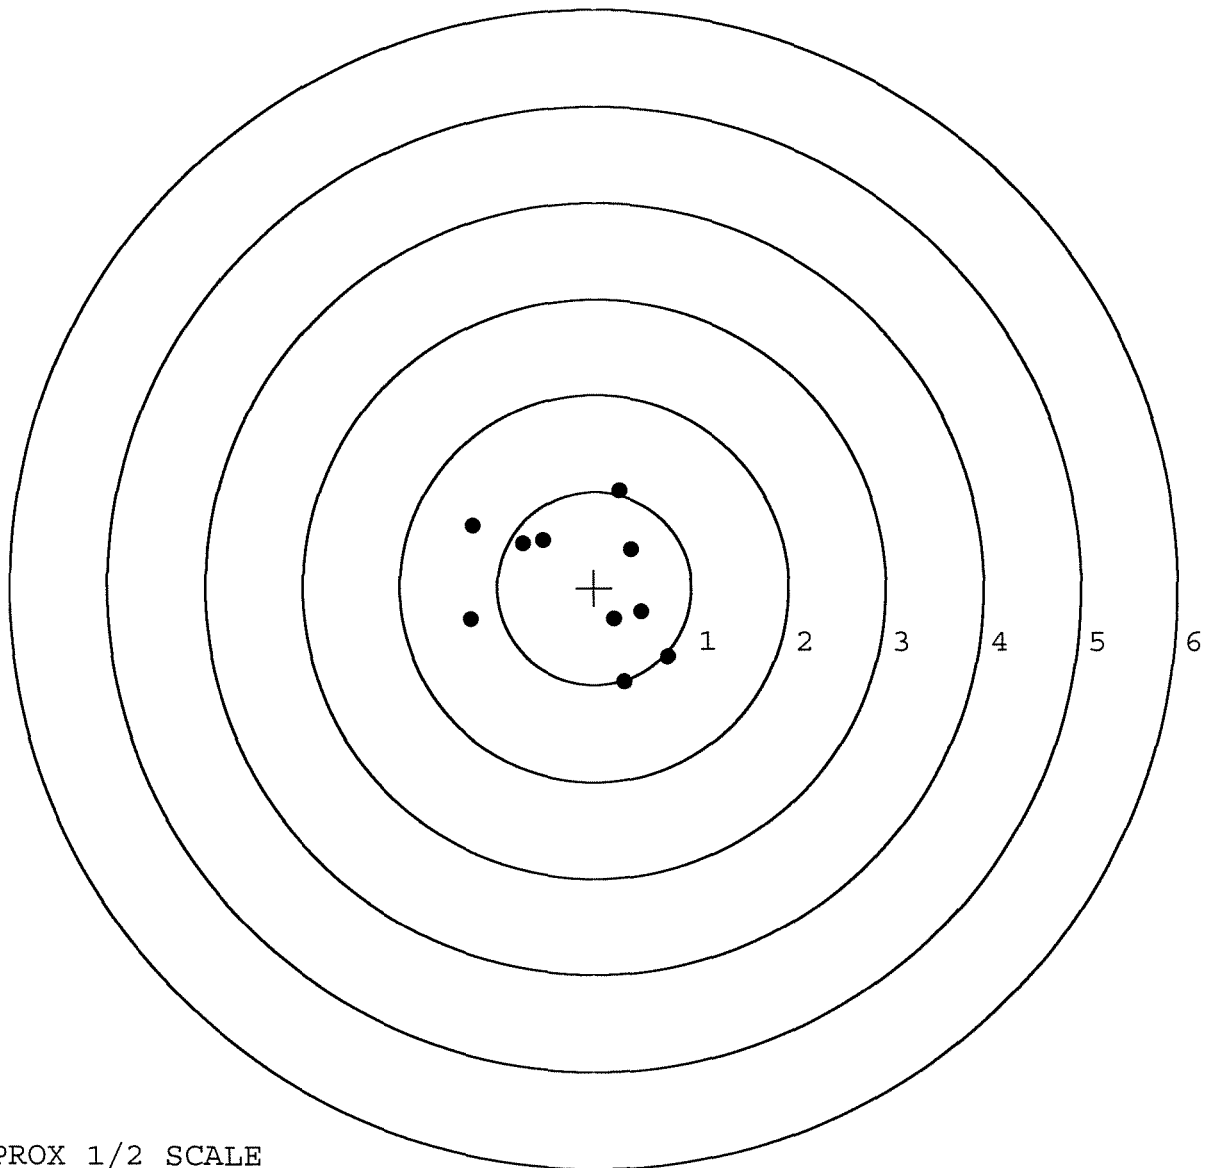

TARGET APPROX 1/2 SCALE

INITIAL & CYCLE TESTS
 2.50 LBS (plus or minus 0.50 LBS)
 3.00 LBS (plus or minus 0.75 LBS)
 4.00 LBS (plus or minus 1.00 LBS)

DATE 2-15-05

TESTER TRW

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.50	2.57		2.41	
PULL #2	2.65	2.59		2.24	
PULL #3	2.59	2.66		2.19	
PULL #4	2.65	2.62		2.08	
PULL #5	2.63	2.49		2.19	
TOTAL	13.02	12.93		11.11	
AVERAGE	2.60	2.58		2.22	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.24	3.13		
PULL #2	3.15	3.18		
PULL #3	3.30	3.06		
PULL #4	3.32	3.14		
PULL #5	3.34	3.10		
TOTAL	16.35	15.61		
AVERAGE	3.27	3.12		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.03	4.04		4.57
PULL #2	4.29	4.17		4.81
PULL #3	4.46	4.12		4.43
PULL #4	4.28	4.14		3.76
PULL #5	3.97	4.21		3.95
TOTAL	21.03	20.68		21.52
AVERAGE	4.20	4.13		4.30

R & E NUMBER	92978		
SERIAL NUMBER	06348938		
LOG-IN DATE	2-11-05		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	2-18-05	RTZ
560 A	RE-BARREL	2-22-05	RTZ
B	DRILL AND TAP	2-28-05	TRW
575	ASSEMBLE	2-23-05	RTZ
600	PROOF	2-24-05	AC
605	CHECK HEADSPACE	2-24-05	AC
610	DIS-ASSEMBLE GUN	2-24-05	RTZ
612	MAGNAFLUX	OPERATOR	
615	ROLLMARK CALIBER	3-1-05	CW
618	ROTO-BLAST	3-3-05	LB
620	APPLY COATINGS	3/16/05	HP
625 A	FINAL ASSEMBLY	3-31-05	RTZ
B	TRIGGER PULL TEST	4-8-05	TRW
C	SAFETY "ON" FORCE	4-11-05	AC
D	SAFETY "OFF" FORCE	4-11-05	AC
E	FIRING PIN INDENT	4-11-05	AC
640	TARGET	4-4-05	TRW
655	FINAL INSPECT	4-11-05	AC
660	PACK	4-25-05	DA
		SHIP DATE	
		QAR INSPECTION DATE	




VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.



MODEL 700™ H24

REG. U.S. PAT. & TM. OFF.

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off, Marca Registrada Marque Deposee.

Ø1

SERIAL NO.	C6348938
ORDER NO.	5716

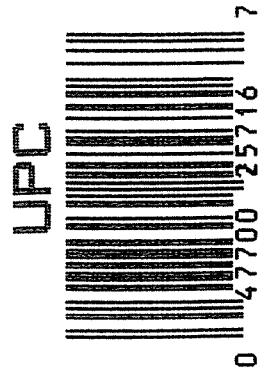

MOD. _____ GA. _____ GUN. # 6348938
 CAL. _____

# TEST	DATE	MALFUNCTION/DEFECT	ASSEM. #
	1st		
T&A	5 MAR 90	SHAVE BRASS	
	2nd	Recum Ejector Hole + polish Ejector	1/14 1/90 RW
	3rd	March 19, 1990 100 R.L. OK AC	
	4th		
		FUNCTION	RD 6654 Rev 1

TEST INIT. ACTION TO CORRECT		ASSEM. #
PROOF		
TEST		
TGT		
PROOF		
TEST		
TGT		
PROOF	ENGINEER	
TEST		
TGT		
PROOF	ENGINEER	
TEST		
TGT		

GUN SERIAL #

C6348938

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	9 26	89	RW
600	Proof	9 26	89	RW
607	Check Headspace	9 26	89	RW
610	Dis-assemble Gun	9 26	89	RW
612	Magnaflux Barrel Action	REJECTED 9/29/89		KCR
	Magnaflux Bolt	9/29/89		KCR
615	Rollmark Caliber			
7	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS			DATE	INIT
625 cont.	F) Safety On Force					
	G) Safety Off Force					
	H) Trigger Pull Test & Retainability					
	I) Firing Pin Indent					
	J) Assemble Stock					
	K) Assemble Swivel Studs					
	L) Attach Front and Rear Sight Assemblies					
	M) Iron Sight Alignment					
	N) Detach Front & Rear Sights & place in numbered container					
	O) Attach Scope to Rifle					
	P) Detach & Attach Scope 20 Times					
640	Gallery Target & Test					
	A) Time					
	B) Malfunctions					
	C) Pierced Primers					
	D) Optical Clarity of Scope					
645	Inspect for Live Ammo					
655	Final Inspection					
	A) Headspace					
	B) Trigger Pull					
	C) Function					
660	Pack					

GUN SERIAL #

C6348938

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	10-9	89	RW
600	Proof	10-9	89	A.
607	Check Headspace	10-9	89	RW
610	Dis-assemble Gun	10-9	89	RW
612	Magnaflux Barrel Action	REJECTED	11/2/89	KCR
	Magnaflux Bolt		11/4/89	KCR
615	Rollmark Caliber			
7	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS			DATE	INIT
625 cont.	F) Safety On Force					
	G) Safety Off Force					
	H) Trigger Pull Test & Retainability					
	I) Firing Pin Indent					
	J) Assemble Stock					
	K) Assemble Swivel Studs					
	L) Attach Front and Rear Sight Assemblies					
	M) Iron Sight Alignment					
	N) Detach Front & Rear Sights & place in numbered container					
	O) Attach Scope to Rifle					
	P) Detach & Attach Scope 20 Times					
640	Gallery Target & Test					
	A) Time					
	B) Malfunctions					
	C) Pierced Primers					
	D) Optical Clarity of Scope					
645	Inspect for Live Ammo					
655	Final Inspection					
	A) Headspace					
	B) Trigger Pull					
	C) Function					
660	Pack					

GUN SERIAL # C6348938

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	11-2	89	RW
600	Proof	11-2	89	A
607	Check Headspace	11-2	89	RW
610	Dis-assemble Gun	11-2	89	RW
612	Magnaflux Barrel Action	11-9-89		KER
	Magnaflux Bolt	11-9-89		KER
615	Rollmark Caliber	11-9-89		GS
17	Drill and Tap Sight Holes	11 9	89	JB
618	Polish Barrel <i>JB</i>	11 9	89	BT
620	Apply Coatings (Barrel Action)		11-17-89	JA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		1/8/90	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		1/8/90	RW
	C) Inspect Ejector Hole for Chamfer		1/8/90	RW
	D) Oil Firing Pin Ass'y		1/8/90	RW
	E) Adjust Trigger Pull to Min Setting and Stake		10 Jan 90	JB

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	4	4	4			1-11-90	JS
	G) Safety Off Force	3	3	3			1-11-90	JS
	H) Trigger Pull Test & Retainability						10/11/90	JS
	I) Firing Pin Indent	.0205	.020	.020			1-11-90	JS
	J) Assemble Stock						1/16/90	RW
	K) Assemble Swivel Studs						3/13/90	WB
	L) Attach Front and Rear Sight Assemblies						1-26-90	AC
	M) Iron Sight Alignment						1-26-90	AC
	N) Detach Front & Rear Sights & place in numbered container						1-26-90	AC
	O) Attach Scope to Rifle						3/2/90	WB
	P) Detach & Attach Scope 20 Times						3/2/90	WB
640	Gallery Target & Test						3-5-90	J.S Temp. Help
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo							
655	Final Inspection						3/13/90	WB
	A) Headspace							
	B) Trigger Pull	2.32	2.45	2.42	2.43	2.44	3/13/90	JS
	C) Function						3/13/90	WB
660	Pack						6-19-90	DH

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6348938
5 Mar 1990

CENTROIDAL DISTANCES

0 TO	1	.616157
1 TO	2	.389515
1 TO	3	.0801664
1 TO	4	.518811
1 TO	5	.251205


$\frac{2^8}{4^5} + \text{----POR}$

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.7218
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .1246
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .732476
THE AMR FOR THIS RIFLE IS: 1.076

5 Mar 1998

FILE:/PATTERNING/CENTERFIRE_PATT/08348938

CENTERFIRE PATTERNS # 1

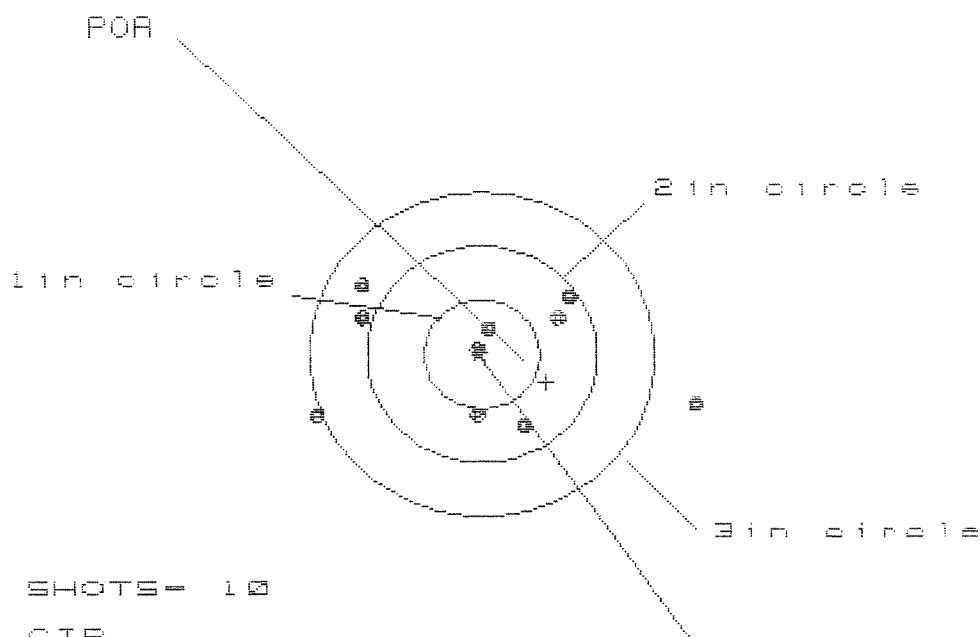

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 5

3 in = 8

HS= 3.278

VS= 1.228

GS= 3.278


CENTROID #

PATTERN #	:	1	2	3
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.854	.985	.833
MINIMUM X	:	-1.424	-1.218	-1.033
MAXIMUM Y	:	.619	.567	.496
MINIMUM Y	:	-.609	-.661	-.732
CENTROID X	:	-.568	-.766	-.614
CENTROID Y	:	.257	.309	.380
POA TO CENTROID in.	:	.617	.826	.722
MIN RADIUS	:	.069	.144	.103
MEAN RADIUS	:	.899	.797	.692
MAX RADIUS	:	1.913	1.342	1.103
HORIZONTAL SPREAD	:	3.278	2.203	1.866
VERTICAL SPREAD	:	1.228	1.228	1.228
EXTREME SPREAD	:	3.278	2.449	1.893
IN ONE INCH CIRCLE	=	2		
IN TWO INCH CIRCLE	=	5		
IN THREE INCH CIRCLE	=	8		

5 Mar 1998

FILE:/PATTERNING/CENTERFIRE_PATT/0834B938

CENTERFIRE PATTERNS # 2

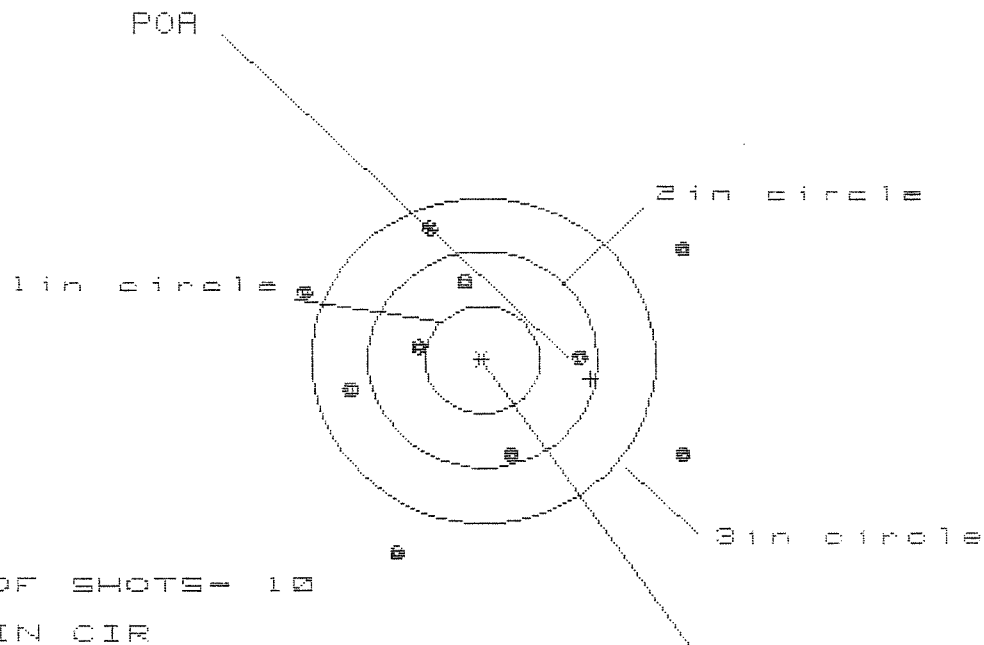

OF SHOTS= 10

IN CIR

1 in = 0

2 in = 4

3 in = 6

HS= 3.316

VS= 2.983

GS= 3.773


CENTROID *

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.751	1.932	1.863
MINIMUM X	:	-1.565	-1.371	-1.440
MAXIMUM Y	:	1.187	1.301	1.091
MINIMUM Y	:	-1.796	-1.682	-1.952
CENTROID X	:	-.941	-1.135	-1.066
CENTROID Y	:	.176	.062	.272
POA TO CENTROID in.	:	.957	1.137	1.100
MIN RADIUS	:	.527	.401	.386
MEAN RADIUS	:	1.315	1.214	1.119
MAX RADIUS	:	2.031	2.059	2.079
HORIZONTAL SPREAD	:	3.316	3.303	3.303
VERTICAL SPREAD	:	2.983	2.983	2.043
EXTREME SPREAD	:	3.773	3.610	3.610
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		6	

5 Mar 1998

FILE:/PATTERNING/CENTERFIRE_PATT/0834B938

CENTERFIRE PATTERNS # 3

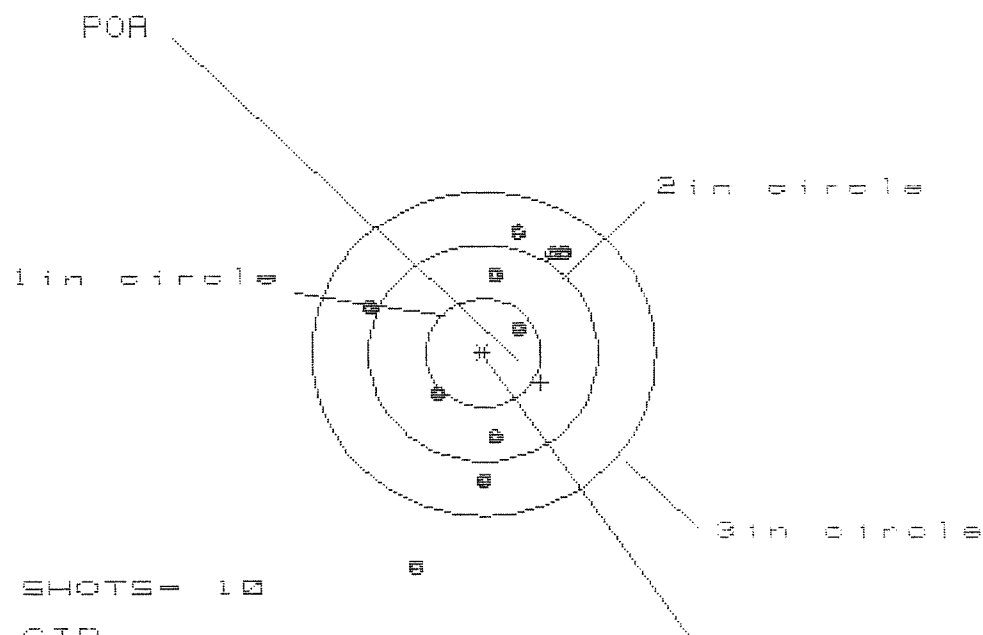

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 4

3 in = 5

HS= 1.731

VS= 3.133

GS= 3.251

CENTROID *


PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.714	.645	.635
MINIMUM X	:	-1.017	-1.086	-1.096
MAXIMUM Y	:	1.168	.950	.772
MINIMUM Y	:	-1.965	-1.422	-1.207
CENTROID X	:	-.502	-.433	-.423
CENTROID Y	:	.273	.491	.669
POR TO CENTROID in.	:	.571	.655	.791
MIN RADIUS	:	.363	.252	.303
MEAN RADIUS	:	1.029	.876	.777
MAX RADIUS	:	2.059	1.425	1.207
HORIZONTAL SPREAD	:	1.731	1.731	1.731
VERTICAL SPREAD	:	3.133	2.372	1.979
EXTREME SPREAD	:	3.251	2.387	1.988
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		9	

5 Mar 1998

FILE:/PATTERNING/CENTERFIRE_PATT/08340938

CENTERFIRE PATTERNS

4

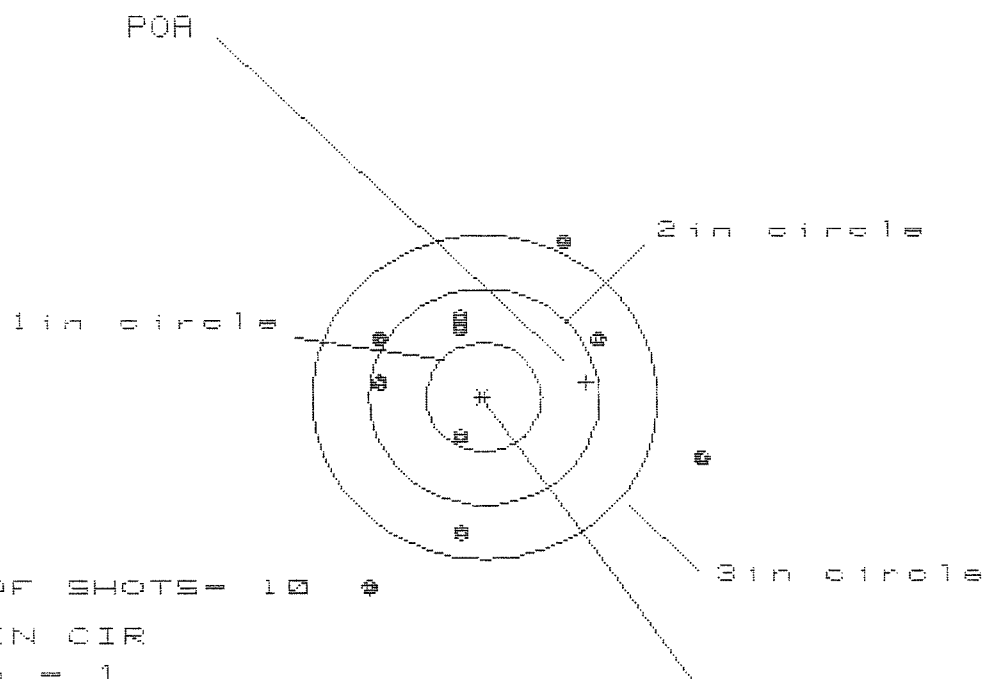

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 4

3 in = 7

HS= 2.956

VS= 3.170

GS= 3.589


CENTROID #

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.938	1.824	1.121
MINIMUM X	:	-1.018	-1.062	-.833
MAXIMUM Y	:	1.410	1.214	1.119
MINIMUM Y	:	-1.760	-1.455	-1.550
CENTROID X	:	-.894	-.780	-1.009
CENTROID Y	:	-.140	.056	.151
POR TO CENTROID in.	:	.905	.782	1.020
MIN RADIUS	:	.407	.525	.341
MEAN RADIUS	:	1.184	1.073	.898
MAX RADIUS	:	2.033	1.977	1.553
HORIZONTAL SPREAD	:	2.956	2.886	1.954
VERTICAL SPREAD	:	3.170	2.669	2.669
EXTREME SPREAD	:	3.599	3.012	2.816
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		7	

5 Mar 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C8348938

CENTERFIRE PATTERNS # 5

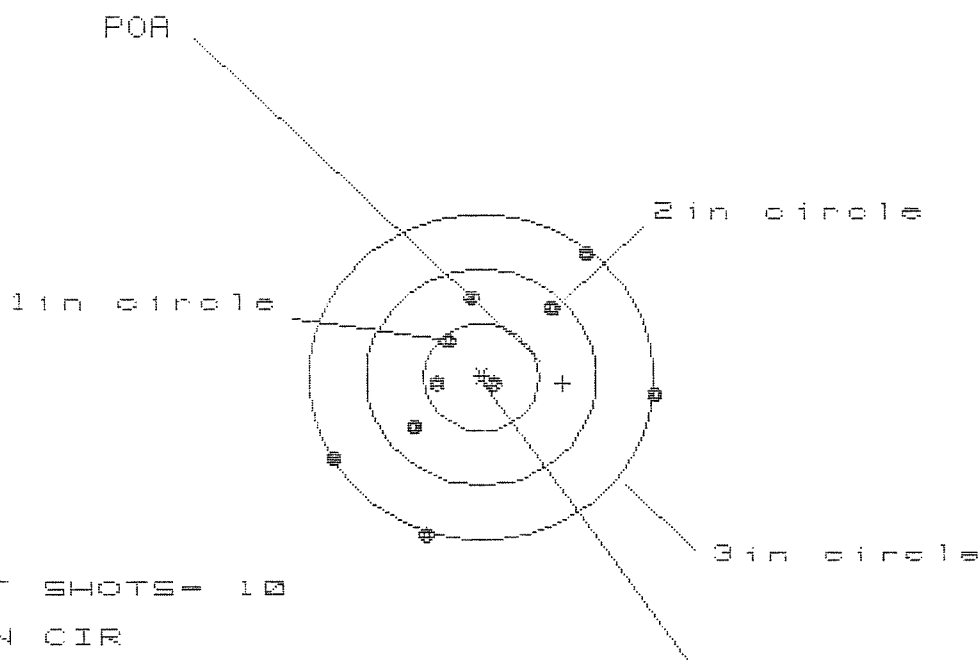

OF SHOTS= 10

IN CIR

1 in = 3

2 in = 6

3 in = 7

HS= 2.859

VS= 2.563

GS= 2.938

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.558	1.097	1.058
MINIMUM X	:	-1.300	-1.127	-1.166
MAXIMUM Y	:	1.109	1.096	.913
MINIMUM Y	:	-1.454	-1.467	-.983
CENTROID X	:	-.712	-.885	-.846
CENTROID Y	:	.057	.070	.253
POA TO CENTROID in.	:	.714	.887	.883
MIN RADIUS	:	.172	.217	.210
MEAN RADIUS	:	.951	.859	.764
MAX RADIUS	:	1.562	1.551	1.525
HORIZONTAL SPREAD	:	2.859	2.224	2.224
VERTICAL SPREAD	:	2.563	2.563	1.896
EXTREME SPREAD	:	2.938	2.924	2.922
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		7	

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. C6348938

DATE 10 Jan 90

TESTER JJS

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.49	2.42	2.48	2.32	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.48	2.45	2.41	2.45	
PULL #3	2.58	2.45	2.45	2.42	
PULL #4	2.57	2.40	2.45	2.43	
PULL #5	2.53	2.38	2.42	2.44	
TOTAL	12.65	12.10	12.21		
AVG.	2.53	2.42	2.442		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.11	3.04		
PULL #2	3.00	2.97		
PULL #3	3.04	2.99		
PULL #4	3.01	2.99		
PULL #5	2.99	2.98		
TOTAL	15.15	14.97		
AVG.	3.03	2.994		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.13	4.05		4.16
PULL #2	4.14	3.99		4.07
PULL #3	4.10	4.00		4.01
PULL #4	4.06	4.02		4.03
PULL #5	4.08	4.02		4.04
TOTAL	20.51	20.08		20.31
AVG.	4.102	4.016		4.062