

C6348993

MODEL 700TM M24

Model **SMS** TM

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.



Remington



VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700™ H24

SERIAL NO.

C6348993

ORDER NO.

5716


Q1

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.



5716 C6348993

UPC



0 47700 25716 7

RC-28
Replace

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6348993

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	1 12	90	fw
600	Proof	1 12	90	K
607	Check Headspace	1 12	90	K
610	Dis-assemble Gun	1 12	90	KW
612	Magnaflux Barrel Action	1-16-90		KCR
	Magnaflux Bolt	1-17-90		KCR
615	Rollmark Caliber		1/17/90	JS
617	Drill and Tap Sight Holes		1/19/90	LB
618	Polish Barrel RB		1/22/90	WB
620	Apply Coatings (Barrel Action)		2-20-90	JA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		2/2/90	WB
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		2/2/90	RW
	C) Inspect Ejector Hole for Chamfer		2/2/90	RW
	D) Oil Firing Pin Ass'y		2/2/90	RW
	E) Adjust Trigger Pull to Min Setting and Stake		2-2-90	JH

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	4 1/2	4 1/2	4 1/2			2/8/90	WB
	G) Safety Off Force	2 1/4	2 1/4	2 1/4			2/8/90	WB
	H) Trigger Pull Test & Retainability						2-7-90	JH
	I) Firing Pin Indent	0.022	0.022	0.022			2/8/90	WB
	J) Assemble Stock						3/15/90	RW
	K) Assemble Swivel Studs						16 MAR 90	JS
	L) Attach Front and Rear Sight Assemblies						3/15/90	RW
	M) Iron Sight Alignment						3/15/90	RW
	N) Detach Front & Rear Sights & place in numbered container						3/15/90	RW
	O) Attach Scope to Rifle						15 MAR 90	JS
	P) Detach & Attach Scope 20 Times						15 MAR 90	JS
640	Gallery Target & Test						3-15-9	AC
	A) Time						↑	AC
	B) Malfunctions						↑	AC
	C) Pierced Primers						↑	AC
	D) Optical Clarity of Scope						✓	AC
645	Inspect for Live Ammo						3-15-90	AC
655	Final Inspection						16 MAR 90	JS
	A) Headspace						16 MAR 90	JS
	B) Trigger Pull	250	242	248	247	244	16 MAR 90	JS
	C) Function						16 MAR 90	JS
660	Pack						19 MAR 90	JS

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6348993

DATE 2-7-90

TESTER JM

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.35	2.41	2.47	2.50	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.24	2.47	2.47	2.42	
PULL #3	2.28	2.41	2.52	2.48	
PULL #4	2.37	2.50	2.46	2.47	
PULL #5	2.45	2.44	2.52	2.44	
TOTAL	11.69	12.23	12.44	12.31	
AVG.	2.338	2.446	2.488	2.462	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.15	3.13		
PULL #2	3.21	3.22		
PULL #3	3.25	3.23		
PULL #4	3.12	3.25		
PULL #5	3.13	3.19		
TOTAL	15.86	16.02		
AVG.	3.172	3.204		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.22	4.21		4.27
PULL #2	4.02	4.22		4.22
PULL #3	4.17	4.26		4.11
PULL #4	4.16	4.19		4.21
PULL #5	4.20	4.18		4.14
TOTAL	20.77	21.06		20.95
AVG.	4.154	4.212		4.19

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6348993
15 Mar 1990

CENTROIDAL DISTANCES

0 TO	1	.10401
1 TO	2	.381241
1 TO	3	.120208
1 TO	4	.0360139
1 TO	5	.423954

<----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0668
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0798
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .104069

THE AMR FOR THIS RIFLE IS: .838

15 Mar 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C834B993

CENTERFIRE PATTERNS # 1

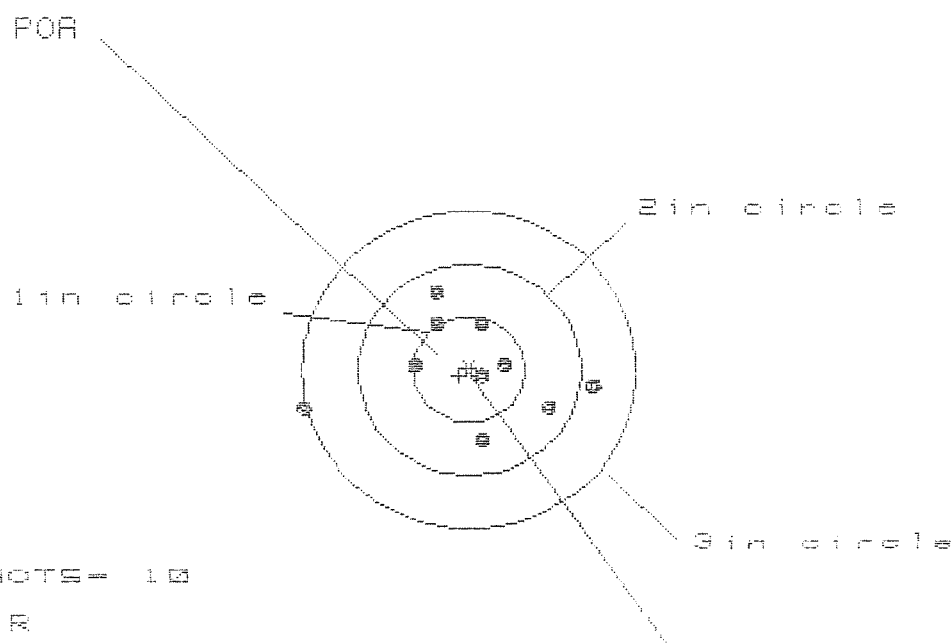

OF SHOTS= 10

IN CIR

1in = 4

2in = 8

3in = 8

HE= 2.553

VS= 1.445

GS= 2.594


CENTROID *

PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.094	.928	.675
MINIMUM X	:	-1.489	-.619	-.583
MAXIMUM Y	:	.740	.697	.675
MINIMUM Y	:	-.786	-.748	-.770
CENTROID X	:	.087	.253	.137
CENTROID Y	:	.057	.100	.122
POA TO CENTROID in.	:	.105	.272	.183
MIN RADIUS	:	.103	.140	.139
MEAN RADIUS	:	.681	.569	.515
MAX RADIUS	:	1.537	.946	.813
HORIZONTAL SPREAD	:	2.583	1.547	1.178
VERTICAL SPREAD	:	1.445	1.445	1.445
EXTREME SPREAD	:	2.594	1.625	1.566
NUMBER IN ONE INCH CIRCLE	=		4	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		9	

15 Mar 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06348993

CENTERFIRE PATTERNS # 2

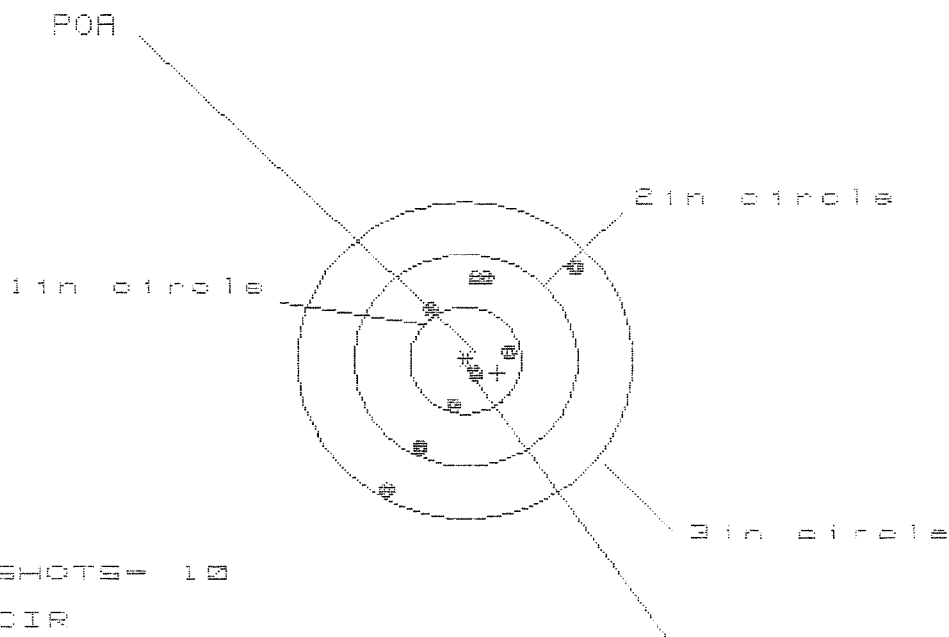

OF SHOTS= 10

IN CIR

1in = 4

2in = 8

3in = 10

HS= 1.741

VS= 2.031

GS= 2.675


CENTROID *

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.989	.905	.420
MINIMUM X	:	-.752	-.502	-.388
MAXIMUM Y	:	.861	.731	.734
MINIMUM Y	:	-1.170	-.926	-.835
CENTROID X	:	-.289	-.205	-.319
CENTROID Y	:	.120	.250	.159
POA TO CENTROID in.	:	.313	.323	.356
MIN RADIUS	:	.132	.245	.180
MEAN RADIUS	:	.710	.636	.555
MAX RADIUS	:	1.391	1.164	.920
HORIZONTAL SPREAD	:	1.741	1.407	.808
VERTICAL SPREAD	:	2.031	1.657	1.568
EXTREME SPREAD	:	2.675	2.174	1.654
NUMBER IN ONE INCH CIRCLE	=		4	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		10	

15 Mar 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6348333

CENTERFIRE PATTERNS # 3

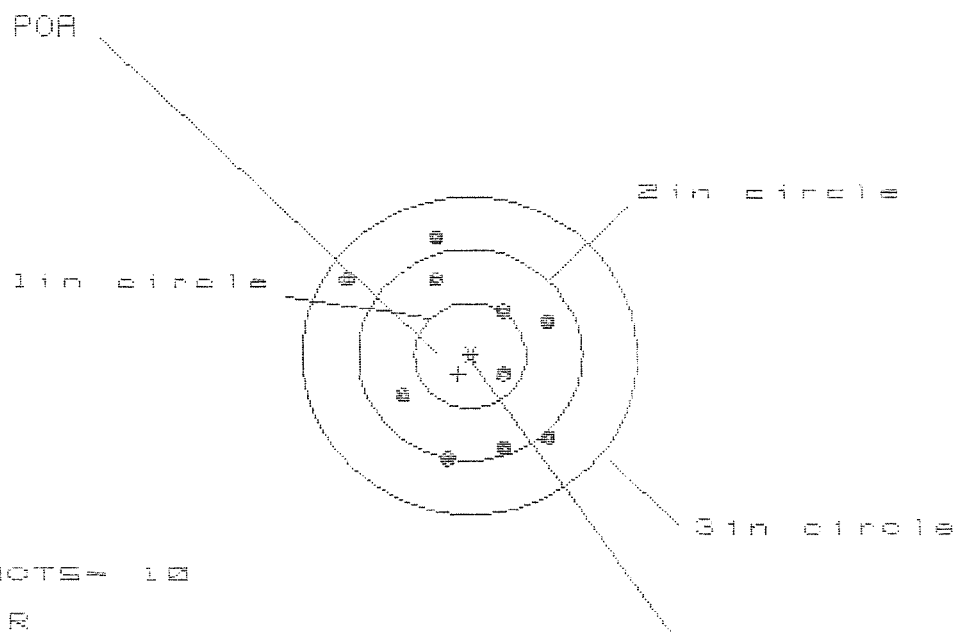

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 6

3 in = 10

HS= 1.886

VS= 2.099

GS= 2.449

CENTROID *


PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.740	.612	.562
MINIMUM X	:	-1.146	-.685	-.735
MAXIMUM Y	:	1.112	1.196	.943
MINIMUM Y	:	-.987	-.903	-.753
CENTROID X	:	.104	.232	.282
CENTROID Y	:	.176	.092	-.058
POA TO CENTROID in.	:	.205	.249	.288
MIN RADIUS	:	.385	.234	.173
MEAN RADIUS	:	.868	.787	.709
MAX RADIUS	:	1.375	1.262	1.050
HORIZONTAL SPREAD	:	1.886	1.297	1.297
VERTICAL SPREAD	:	2.099	2.099	1.696
EXTREME SPREAD	:	2.449	2.174	1.830
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		10	

15 Mar 1988

FILE:/PATTERNING/CENTERFIRE_PATT/08340893

CENTERFIRE PATTERNS

4

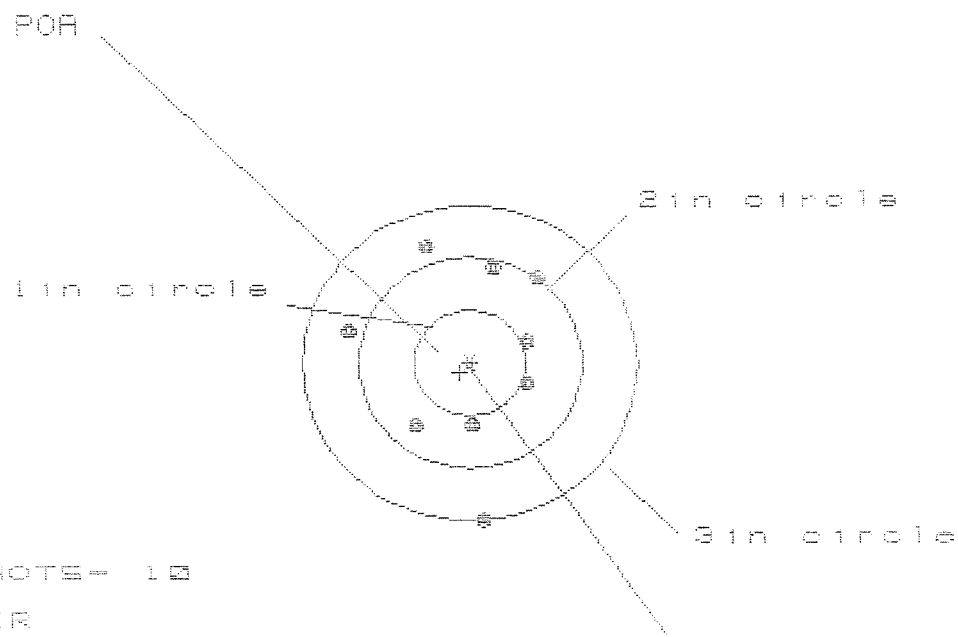

OF SHOTS- 10

IN CIR

1 in = 0

2 in = 6

3 in = 10

HS= 1.642

VS= 2.685

GS= 2.647


CENTROID #

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.590	.597	.549
MINIMUM X	-1.053	-1.046	-1.094
MAXIMUM Y	1.115	.949	.878
MINIMUM Y	-1.490	-.754	-.635
CENTROID X	.088	.081	.129
CENTROID Y	.093	.259	.140
POA TO CENTROID in.	.128	.271	.191
MIN RADIUS	.503	.548	.484
MEAN RADIUS	.878	.813	.762
MAX RADIUS	1.492	1.055	1.125
HORIZONTAL SPREAD	1.643	1.643	1.643
VERTICAL SPREAD	2.685	1.703	1.513
EXTREME SPREAD	2.647	1.812	1.812
NUMBER IN ONE INCH CIRCLE =		0	
NUMBER IN TWO INCH CIRCLE =		6	
NUMBER IN THREE INCH CIRCLE =		10	

15 Mar 1988

FILE:/PATTERNING/CENTERFIRE_PATT/05846393

CENTERFIRE PATTERNS # 5

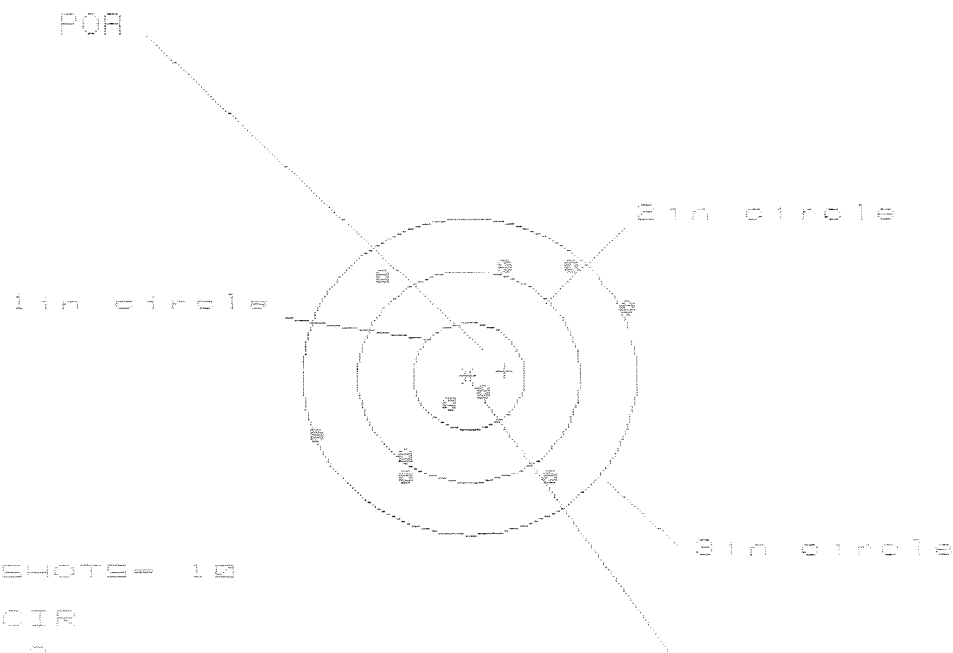

OF SHOTS= 10

IN CIR

1in = 2

2in = 3

3in = 5

HS= 2.811

VS= 2.827

GS= 3.052

CENTROID *

PATTERN #	5
SHOTS (BEST OF)	10
MAXIMUM X	1.460
MINIMUM X	-1.351
MAXIMUM Y	1.046
MINIMUM Y	-0.981
CENTROID X	-0.324
CENTROID Y	-0.047
POA TO CENTROID in.	.327
MIN RADIUS	.168
MEAN RADIUS	1.053
MAX RADIUS	1.591
HORIZONTAL SPREAD	2.811
VERTICAL SPREAD	2.827
EXTREME SPREAD	3.052
NUMBER IN ONE INCH CIRCLE =	2
NUMBER IN TWO INCH CIRCLE =	3
NUMBER IN THREE INCH CIRCLE =	5

09/16/08 13:26:03

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: RE00151218

Serial: C6348993 Model M24 SWS Center Fire
Caliber: 7.62 NATO

Repairman:

Status: Closed 9/16/2008 2:27:11 PM

Verify Repair

Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: ISD ARMSROOM

ISD ARMSROOM

Address 1: 8TH DESERT STORM

8TH DESERT STORM

Address 2: BLDG 5210 BAY DOOR #30

PO Box:

BLDG 5210 BAY DOOR #30

PO Box:

City: FORT CAMPBELL

FORT CAMPBELL

State: KY

Zip Code: 42223

Country: US

State: KY

Zip Code: 42223

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NN

Fax:

Email:

Comments:

Received Condition

Fair

Condition
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A017	Scope Base	1
A057	Fit and Rear Sgt Base	1

Repair Search

Refresh

Close

nagletj

9/16/2008

3:26 PM

CAPS

NUM

INS

SCRL



Serial Number:

C6348993

Model M24 SWS



RE00151218

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400043493

M-24 INSPECTION CHECKLIST
CONTRACT NO. DAAE-20-02-0-0145

WPN NUMBER 151218
SERIAL NUMBER C6348993
LOAN DATE 9-16-08

OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	9-18-08	RTZ
505	RE-BARREL	9-22-08	RTZ
560	ASSEMBLE	9-22-08	RTZ
600	PROOF	9-22-08	SPH
605	CHECK HEADSPACE	9-22-08	SPH
610	DIS-ASSEMBLE GUN	9-22-08	SPH
612	MAGNAFLUX	9-22-08	RTZ
610	DRILL AND TAP	9-23-08	SP
615	ROLLMARK CALIBER	9-30-08	RT
616	ROTO-BLAST		
620	APPLY COATINGS	10-1	
625	FINAL ASSEMBLY	10-7-08	RTZ
640	FUNCTION TEST AND	10-9-08	TL
650	TARGET	10-9-08	TL
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION	10-9-08	RTZ
	A) HEADSPACE	10-22-08	RTZ
		10-22-08	RTZ
	A) 5 LBS MIN 2.50 LBS B) TRIGGER PULL MAX 40 LBS	2.91 2.93 2.90 2.78 2.77	10-13-08 TL
	C) 5 LBS MIN 10 LBS MAX	3.5 3.5 3.5	10-22-08 RTZ
	F) SAFETY ON FORCE	4.0 5.0 5.0	10-22-08 RTZ
	G) SAFETY OFF FORCE	0.21 0.22 0.22	10-22-08 RTZ
690	H) FIRING PIN INDENT PACK		10-13-08 RTZ

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6348993.___0

FILE DATE AND TIME: 10/09/2008 15:55


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.005
The Average Y Centroid of the Five Target Set:	-0.036
The Average Point of Impact of the Five Target Set:	0.036
The Average Mean Radius of the Five Target Set:	0.588
The Distance from POA to Centroid Target #1:	0.234
The Distance from Centroid Target #2 to Centroid Target #1:	0.351
The Distance from Centroid Target #3 to Centroid Target #1:	0.226
The Distance from Centroid Target #4 to Centroid Target #1:	0.205
The Distance from Centroid Target #5 to Centroid Target #1:	0.220

SERIAL NUMBER: C6348993. __0
TARGET NUMBER: 1
FILE DATE: 10/09/2008
FILE TIME: 15:55

POINT#	X	Y
1:	-0.241	1.161
2:	-0.811	0.175
3:	-0.565	-0.219
4:	0.393	0.061
5:	-0.308	-0.670
6:	-0.182	-0.545
7:	-0.013	-0.500
8:	0.817	-0.736
9:	0.604	-0.548
10:	0.382	-0.515

X CENTROID: 0.008
Y CENTROID: -0.234
POA TO CENTROID: 0.234
HORZ SPREAD: 1.628
VERT SPREAD: 1.897
GROUP SPREAD: 2.172
MIN RADIUS: 0.267
MAX RADIUS: 1.417
MEAN RADIUS: 0.665
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

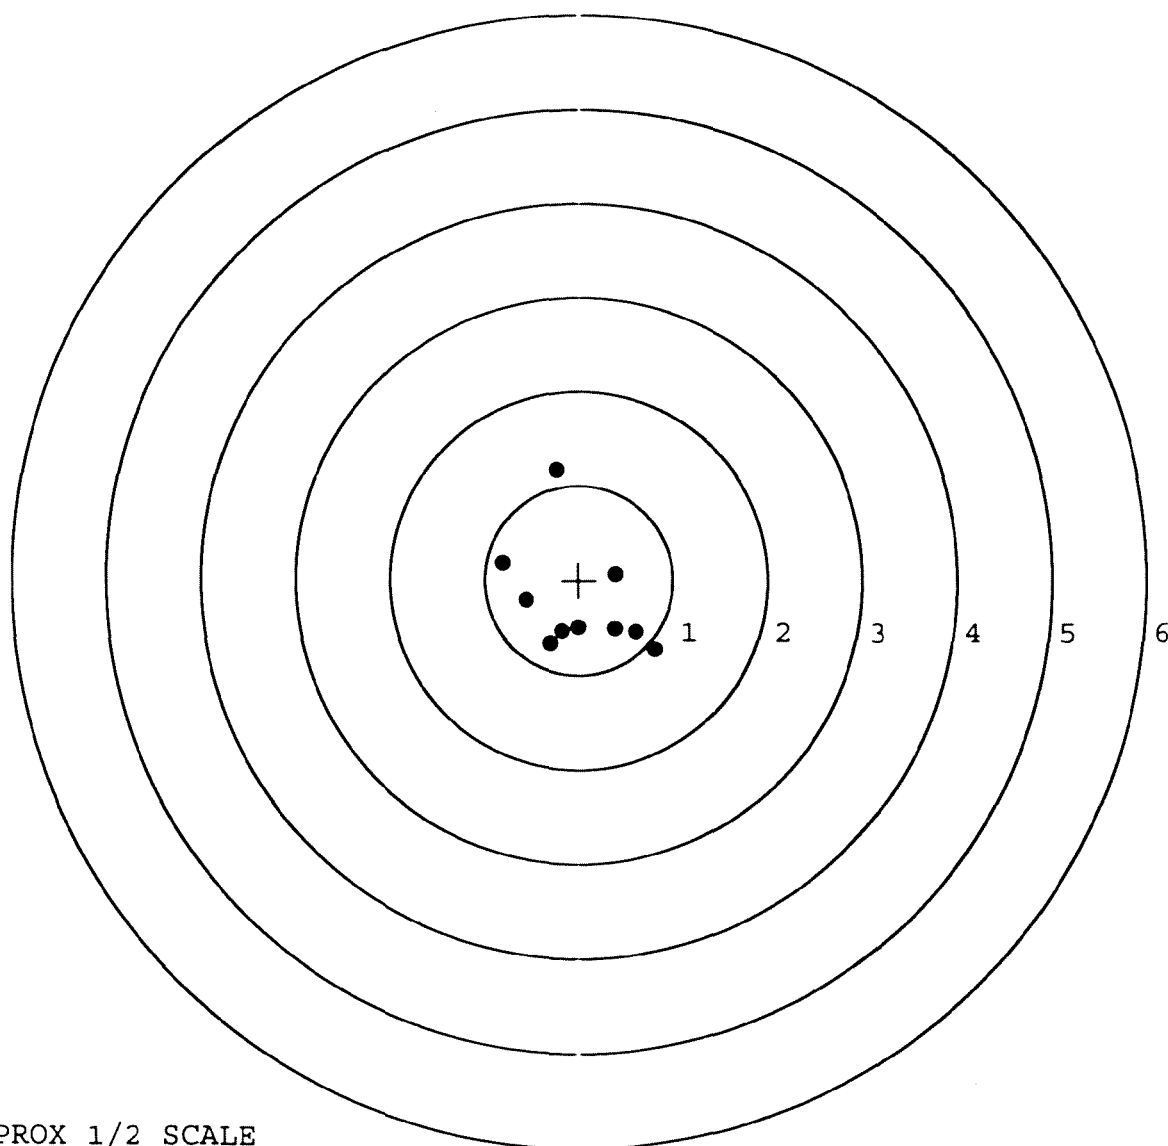


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348993. __0
TARGET NUMBER: 2
FILE DATE: 10/09/2008
FILE TIME: 15:55

POINT#	X	Y
1:	-0.578	-0.901
2:	-0.344	1.115
3:	0.070	1.110
4:	0.115	0.274
5:	0.105	0.571
6:	-0.267	0.156
7:	-0.414	-0.019
8:	0.621	-0.431
9:	0.459	-0.293
10:	0.297	-0.405

X CENTROID: 0.006
Y CENTROID: 0.118
POA TO CENTROID: 0.118
HORZ SPREAD: 1.199
VERT SPREAD: 2.016
GROUP SPREAD: 2.113
MIN RADIUS: 0.190
MAX RADIUS: 1.174
MEAN RADIUS: 0.663
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

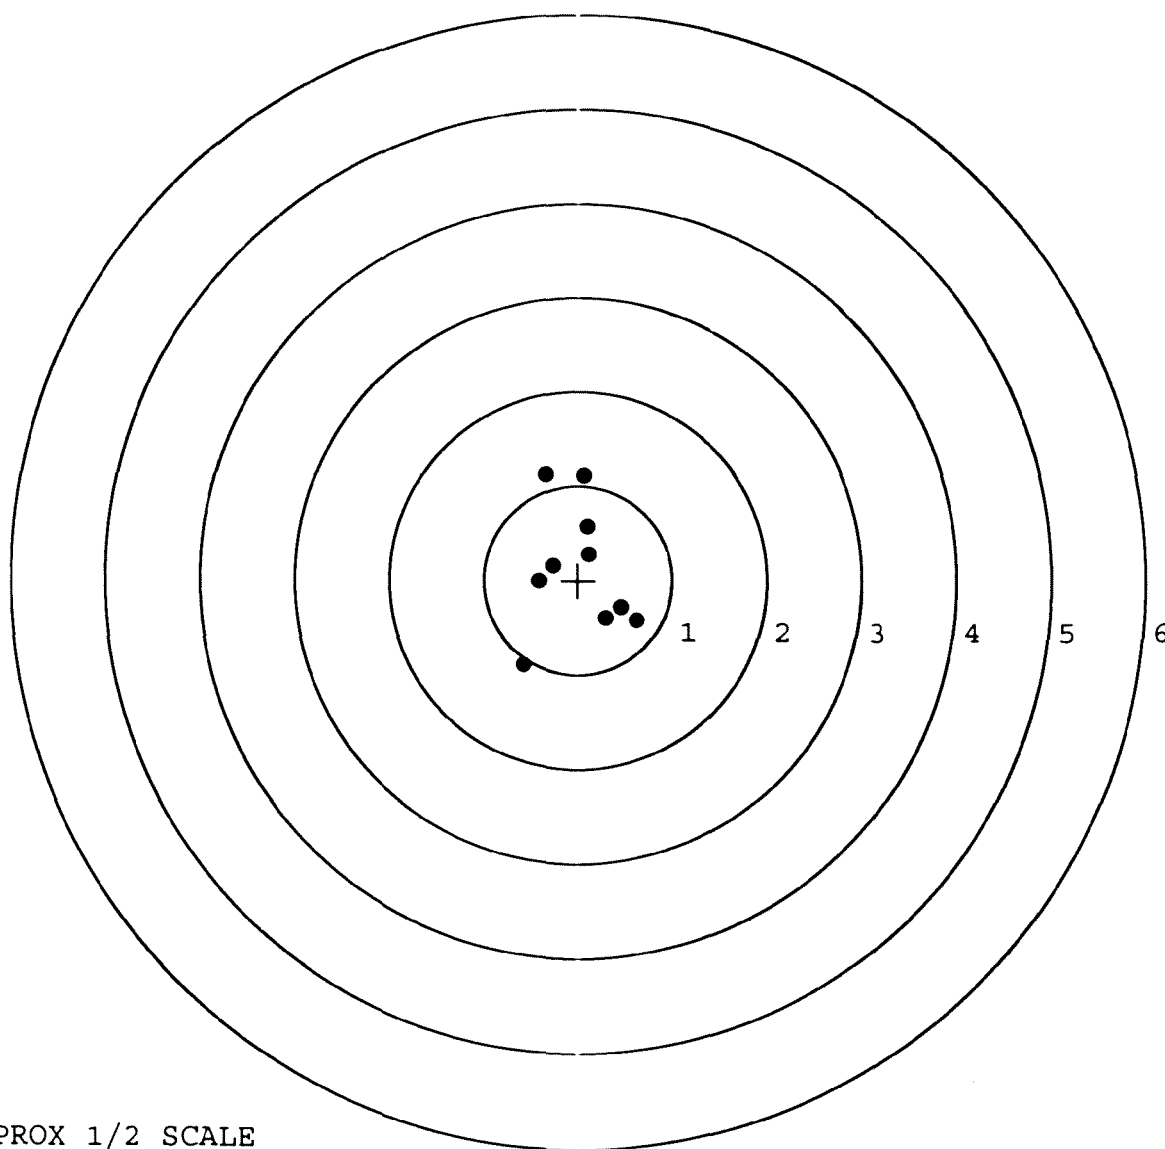


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348993. __0
TARGET NUMBER: 3
FILE DATE: 10/09/2008
FILE TIME: 15:55


POINT#	X	Y
1:	-0.710	0.951
2:	0.285	0.681
3:	0.745	-0.709
4:	-0.081	-0.789
5:	0.013	-0.505
6:	-0.003	-0.306
7:	-0.380	-0.014
8:	-0.298	0.058
9:	0.009	0.257
10:	0.109	0.270

X CENTROID: -0.031
Y CENTROID: -0.011
POA TO CENTROID: 0.033
HORZ SPREAD: 1.455
VERT SPREAD: 1.740
GROUP SPREAD: 2.207
MIN RADIUS: 0.271
MAX RADIUS: 1.177
MEAN RADIUS: 0.576
IN 1 IN DIAMETER: 6
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

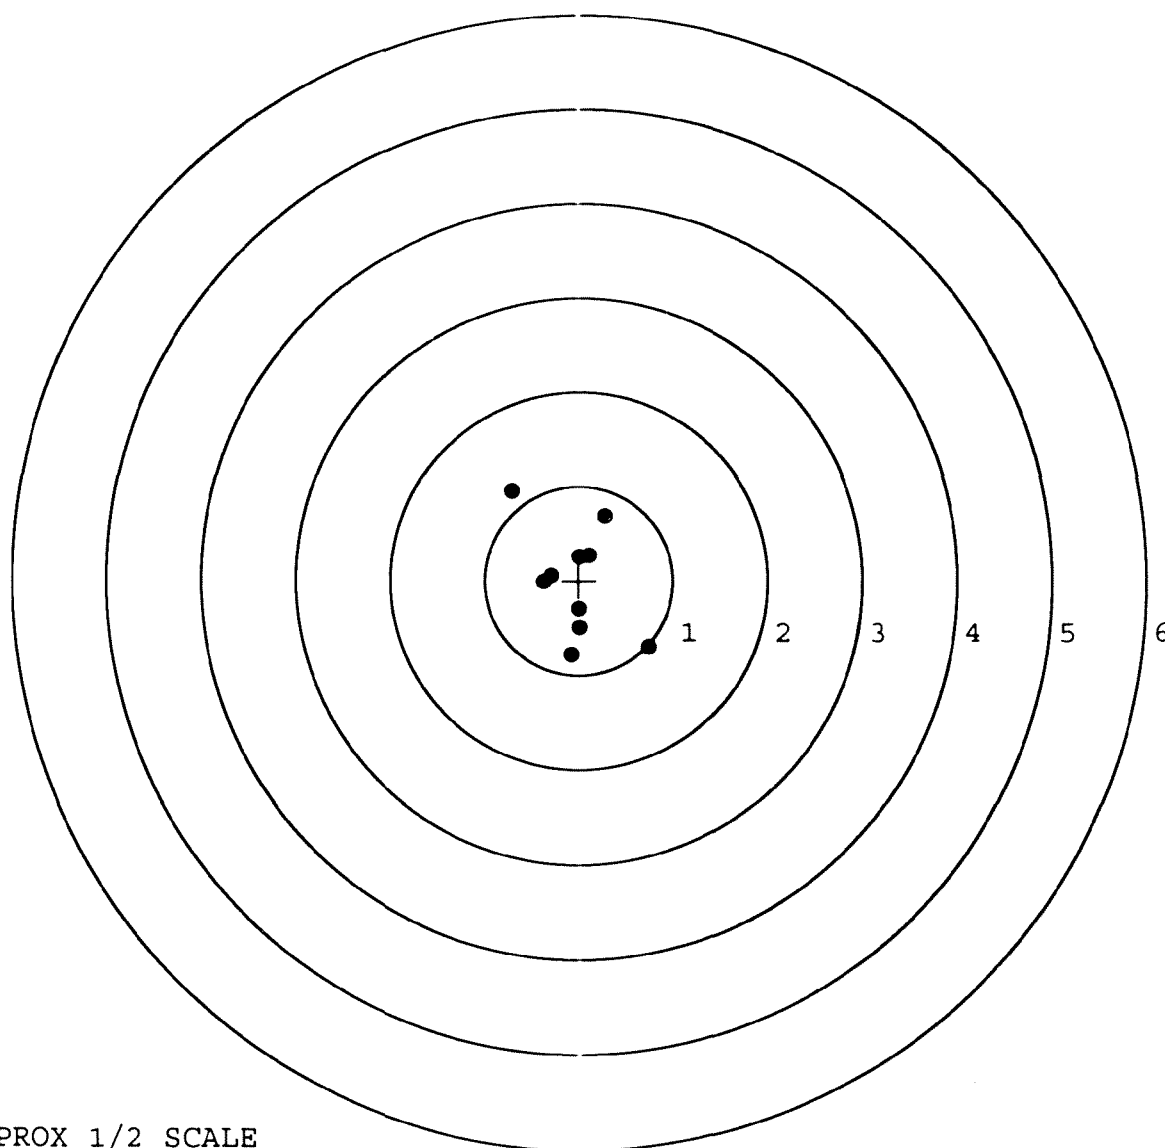

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348993. __0	POINT#	X	Y
TARGET NUMBER: 4	1:	-0.520	0.827
FILE DATE: 10/09/2008	2:	-0.413	0.242
FILE TIME: 15:55	3:	-0.301	-0.074
	4:	0.567	-0.457
X CENTROID: 0.067	5:	0.285	-0.590
Y CENTROID: -0.038	6:	0.143	-0.311
POA TO CENTROID: 0.077	7:	0.199	-0.152
HORZ SPREAD: 1.087	8:	0.277	-0.033
VERT SPREAD: 1.417	9:	0.258	0.024
GROUP SPREAD: 1.682	10:	0.175	0.147
MIN RADIUS: 0.175			
MAX RADIUS: 1.045			
MEAN RADIUS: 0.430			
# IN 1 IN DIAMETER: 6			
# IN 2 IN DIAMETER: 9			
# in 3 IN DIAMETER: 10			

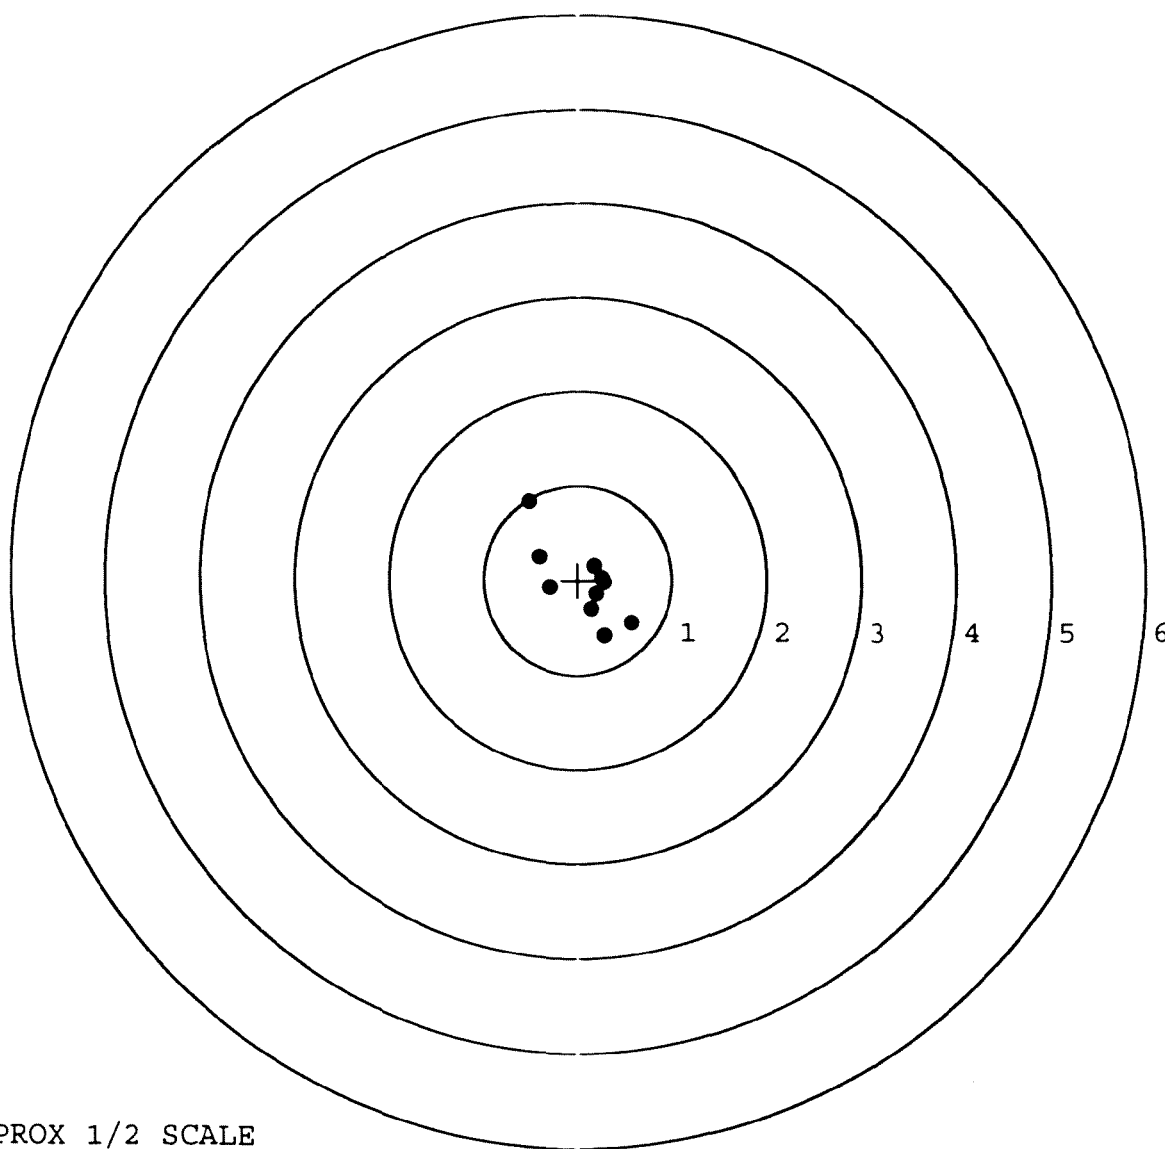


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348993. __0
TARGET NUMBER: 5
FILE DATE: 10/09/2008
FILE TIME: 15:55

POINT#	X	Y
1:	-0.203	1.376
2:	0.392	-1.295
3:	-0.157	-0.599
4:	-0.312	-0.473
5:	-0.558	0.627
6:	0.335	0.139
7:	-0.085	0.341
8:	0.082	0.083
9:	0.081	-0.122
10:	0.178	-0.236

X CENTROID: -0.025
Y CENTROID: -0.016
POA TO CENTROID: 0.029
HORZ SPREAD: 0.950
VERT SPREAD: 2.671
GROUP SPREAD: 2.736
MIN RADIUS: 0.145
MAX RADIUS: 1.403
MEAN RADIUS: 0.607
IN 1 IN DIAMETER: 5
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

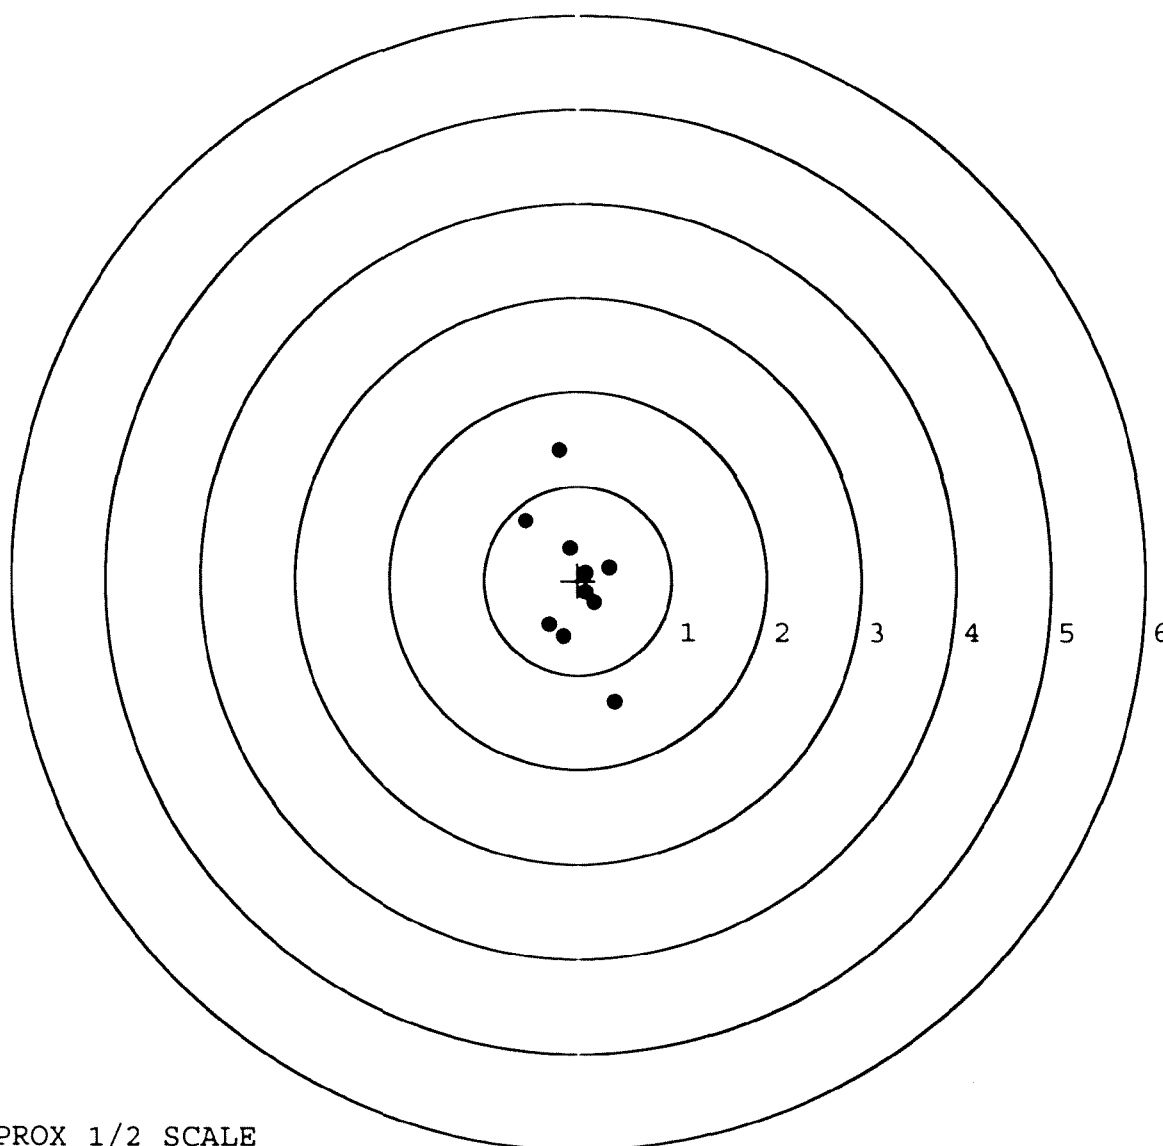

TARGET APPROX 1/2 SCALE

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 99-09156

INITIAL CUSTOMER ORDER NO.

RLP 381

DATE RECEIVED

04/07/99

DATE OPENED

04/08/99

DATE CODE

BK 1-90

SERIAL NUMBER

C6348993

NEW SERIAL NUMBER

MODEL AND GRADE

700

7.62

M24

ACCESSORIES

W/STUDS

SCOPE BASE

FROM:

US ARMY
ATTN: JAMES C STARNES JR
GSC 5TH SFG (A)
FORT CAMPBELL

KY 42223

SHIP TO:

US ARMY
ATTN: JAMES C STARNES JR
GSC 5TH SFG (A)
FORT CAMPBELL

KY

42223

CUST NO: 208414 C.D.D.L.

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

DOOR

GUN CONDITION

☐ NEW☐ LIGHTLY WORN☐ WORN☐ VERY WORN☐ UNREPAIRABLE☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

PARTS

COMMENTS

Barrel
Bolt Assy
Extractor96003
96005
96816

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD5925 REV. 7/97

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400043501

Receipt Of Firearm(s) Delivered to the Plant for Repair
Firearm Checked For Live Ammunition []

File # 00381

Delivery Date 4/17/99

Customer Name (Print) US Army, James C. Starns Jr.
Address GSC 5th Special Forces Group State Ft Campbell, KY Zip 42223
Phone Number (502) - 798-2882/7932

Firearm Description Model 700 (m24) Cal./ Ga. 7.62

Serial Number C6348993

Stock/ Fore-end Condition circle the description

(Excellent; Good; Fair; Poor; Fancy; Plain; Synthetic; Wood)

Comments on Stock/ Fore-end condition _____

Metal Condition circle the description

(Excellent; Good; Fair; Poor; Fancy; Plain Stainless Steel)

Comments on Metal condition _____

Barrel Type (VT. Rib; Plain; Deer; Stainless Steel) Barrel length _____

List additional accessories IE Scope, Sling, Gun case and description; _____

Customer request: Reconditioning

Return Process Return to Clark St. Ent. [] Return via UPS ☒

By signing this receipt the person delivering the firearm understands to be the only person to receive the firearm upon completion of repairs.

Signature [Signature] Date 4/17/99
person delivering firearm.

Signature [Signature] Date 4/17/99
security officer

Signature [Signature] Date 4/17/99
arms service / CSR

Customer Pick Up Verification

I certify, I am the same person whom delivered the above described firearm to the Remington Ilion plant for repair and may lawfully possess a firearm in New York State

Signature _____ Date ____/____/____
person receiving firearm must be the same whom delivered

Signature _____ Date ____/____/____
security officer or other witness returning the firearm

Receipt Of Firearm. Doc
Rev. 12/16/98

ARM SERVICE COPY

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400043502

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6348993
4 Jun 1999

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0808
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .1252
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .149009

THE AMR FOR THIS RIFLE IS: 1.245

CENTROIDAL DISTANCES

0 TO 1	.423821
1 TO 2	.640054
1 TO 3	.324299
1 TO 4	1.15574
1 TO 5	.116181

4


2 +3 15-----POA

PATTERN #: ☐ 1 ☐
 POA TO CENTROID: .533
 MIN RADIUS : .449
 MEAN RADIUS : 1.343
 MAX RADIUS : 3.016
 CENTROID X : .531
 CENTROID Y : -.043

4 Jun 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348993

CENTERFIRE PATTERN # 1

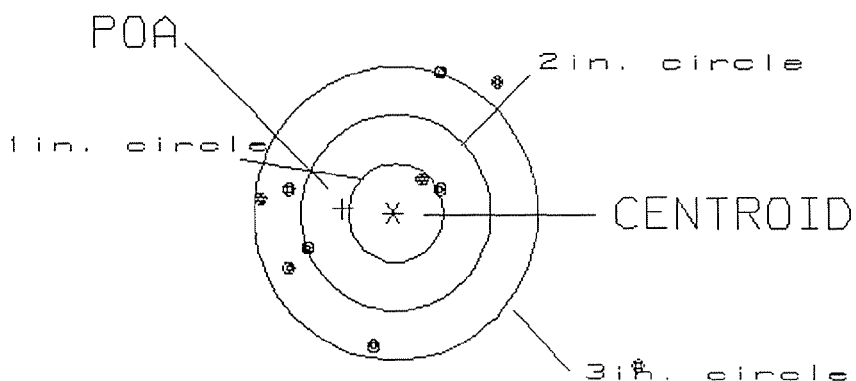

OF SHOTS= 10

IN CIRCLE

HS= 4.06

2

VS= 2.90

3

GS= 4.38

8


PATTERN #: ☐ 2 ☐

POA TO CENTROID: .833
 MIN RADIUS : .366
 MEAN RADIUS : 1.129
 MAX RADIUS : 1.787
 CENTROID X : -.433
 CENTROID Y : .712

4 Jun 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348993

CENTERFIRE PATTERN # 2

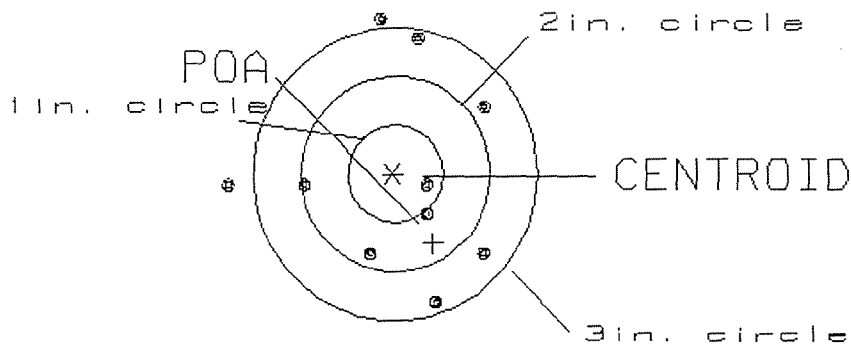

OF SHOTS= 10

IN CIRCLE

HS= 2.75

1

VS= 2.89

4

GS= 2.95

8


PATTERN #: ☐ 3 ☐

POA TO CENTROID: .104
 MIN RADIUS : .306
 MEAN RADIUS : 1.205
 MAX RADIUS : 2.361
 CENTROID X : .095
 CENTROID Y : -.041

4 Jun 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348993

CENTERFIRE PATTERN # 3

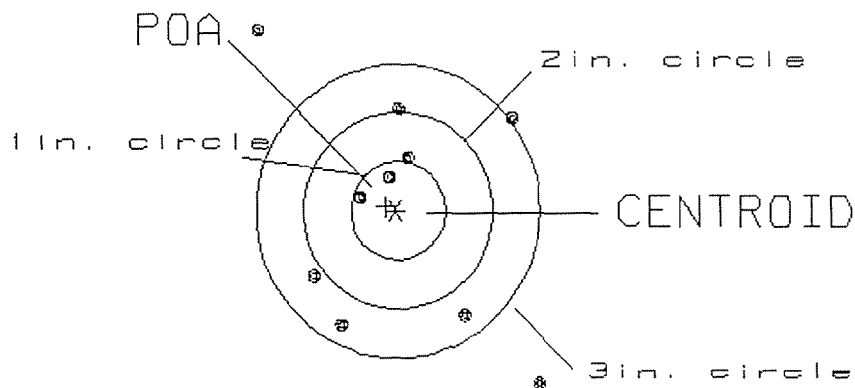

OF SHOTS= 10

IN CIRCLE

HS= 2.96

2

VS= 3.58

4

GS= 4.65

7


PATTERN #: ☐ 4 ☐

POA TO CENTROID: .218
 MIN RADIUS : .222
 MEAN RADIUS : 1.325
 MAX RADIUS : 2.099
 CENTROID X : -.207
 CENTROID Y : .068

4 Jun 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348993

CENTERFIRE PATTERN # 4

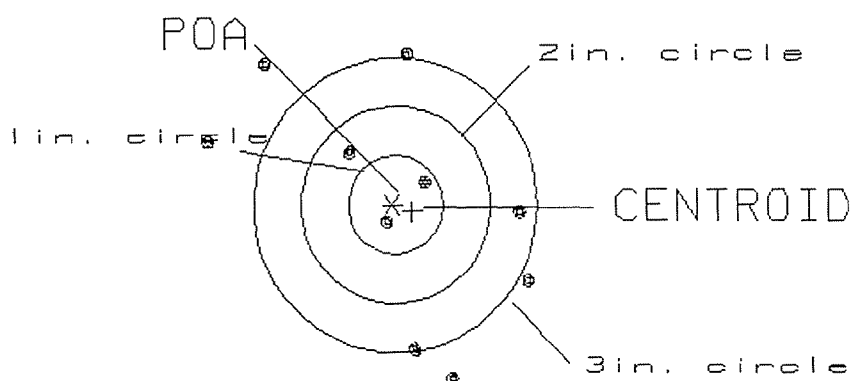

OF SHOTS= 10

IN CIRCLE

HS= 3.45

2

VS= 3.28

3

GS= 3.76

5

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: ☐ 5 ☐

POA TO CENTROID: .424
 MIN RADIUS : .461
 MEAN RADIUS : 1.221
 MAX RADIUS : 1.792
 CENTROID X : .418
 CENTROID Y : -.070

4 Jun 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348993

CENTERFIRE PATTERN # 5

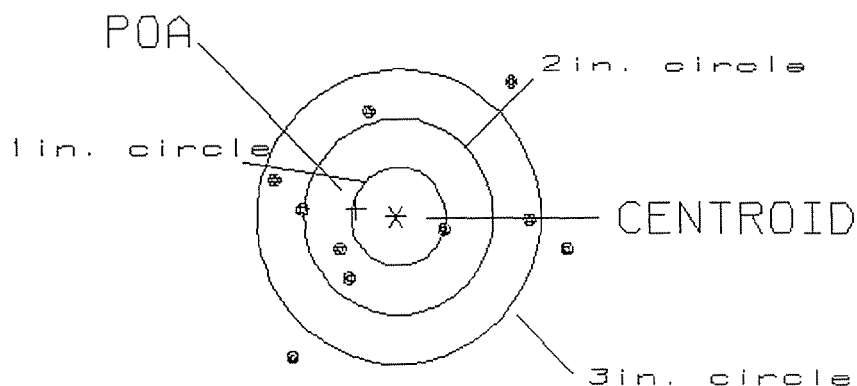

OF SHOTS= 10

IN CIRCLE

HS= 3.06

1

VS= 2.74

3

GS= 3.58

7