

C6225090

MODEL 700™ M24

Model **SWS**™

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington

Serial Number: C6225090

Model: M24 SWS



RE00105765

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6225090.___0

FILE DATE AND TIME: 01/18/2006 14:42


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.082
The Average Y Centroid of the Five Target Set:	0.078
The Average Point of Impact of the Five Target Set:	0.113
The Average Mean Radius of the Five Target Set:	0.743
The Distance from POA to Centroid Target #1:	0.452
The Distance from Centroid Target #2 to Centroid Target #1:	0.508
The Distance from Centroid Target #3 to Centroid Target #1:	0.469
The Distance from Centroid Target #4 to Centroid Target #1:	0.365
The Distance from Centroid Target #5 to Centroid Target #1:	0.422

SERIAL NUMBER: C6225090. __0
TARGET NUMBER: 1
FILE DATE: 01/18/2006
FILE TIME: 14:42

POINT#	X	Y
1:	0.433	-0.683
2:	-0.376	-0.641
3:	0.557	-0.159
4:	0.642	0.324
5:	-0.191	0.430
6:	-0.558	0.244
7:	0.682	1.155
8:	-1.143	0.872
9:	-0.989	1.143
10:	-1.401	1.176

X CENTROID: -0.234
Y CENTROID: 0.386
POA TO CENTROID: 0.452
HORZ SPREAD: 2.083
VERT SPREAD: 1.859
GROUP SPREAD: 2.611
MIN RADIUS: 0.062
MAX RADIUS: 1.409
MEAN RADIUS: 0.926
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 4
in 3 IN DIAMETER: 10

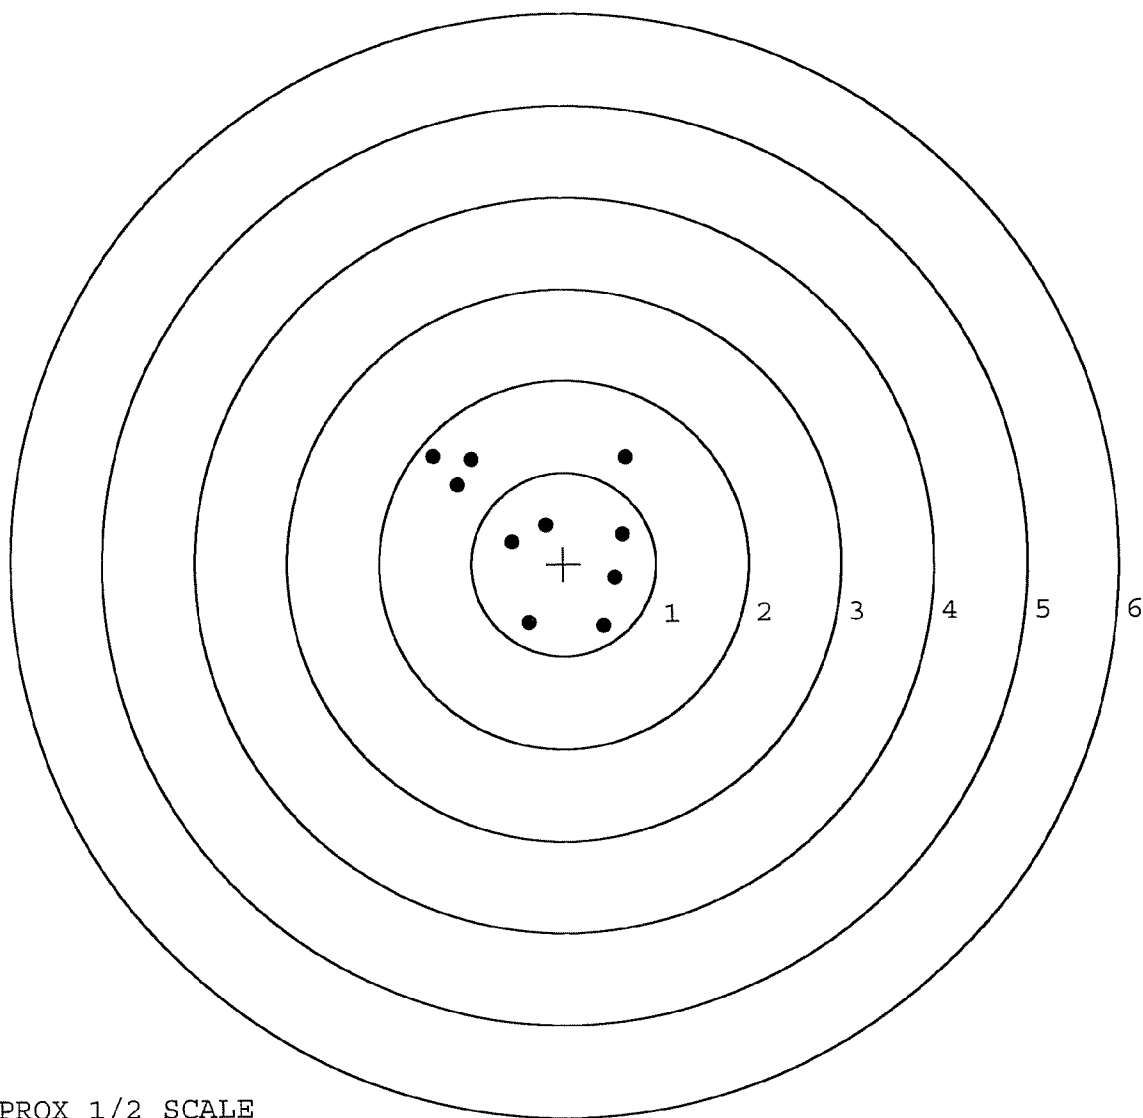


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225090. __0
TARGET NUMBER: 2
FILE DATE: 01/18/2006
FILE TIME: 14:42

POINT#	X	Y
1:	0.495	-0.553
2:	0.455	-0.072
3:	-0.093	-0.331
4:	-0.611	-0.405
5:	-0.459	-0.152
6:	-0.228	0.314
7:	0.094	0.532
8:	0.227	0.264
9:	0.399	0.277
10:	0.466	-0.052

X CENTROID: 0.075
Y CENTROID: -0.018
POA TO CENTROID: 0.077
HORZ SPREAD: 1.106
VERT SPREAD: 1.085
GROUP SPREAD: 1.219
MIN RADIUS: 0.320
MAX RADIUS: 0.787
MEAN RADIUS: 0.491
IN 1 IN DIAMETER: 6
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

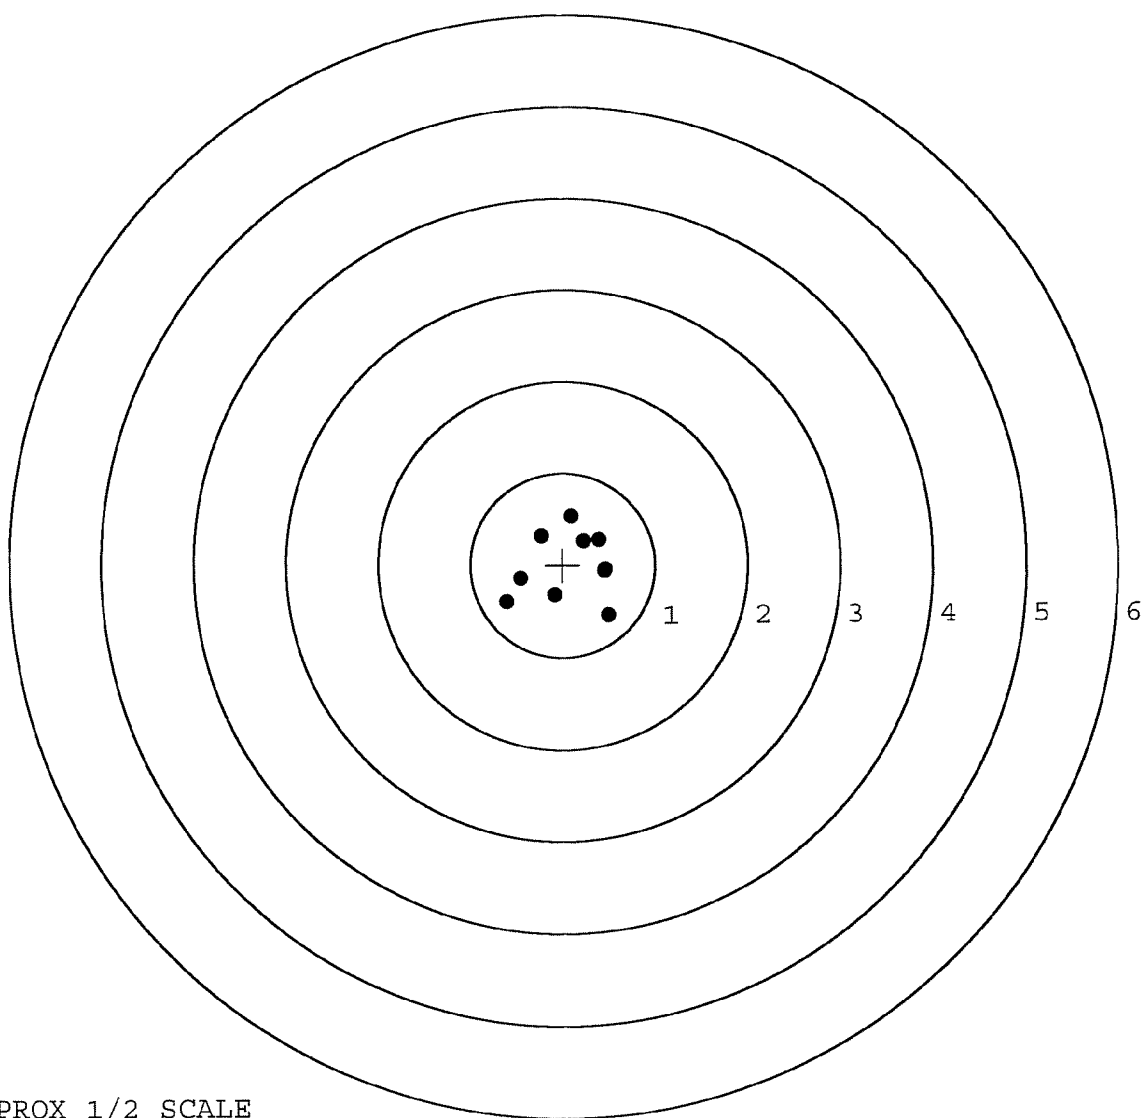


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225090.___0
 TARGET NUMBER: 3
 FILE DATE: 01/18/2006
 FILE TIME: 14:42

X CENTROID: -0.130
 Y CENTROID: -0.072
 POA TO CENTROID: 0.148
 HORZ SPREAD: 2.794
 VERT SPREAD: 1.426
 GROUP SPREAD: 2.910
 MIN RADIUS: 0.183
 MAX RADIUS: 1.511
 MEAN RADIUS: 0.786
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 7
 # in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.455	-0.725
2:	1.372	-0.240
3:	0.374	0.584
4:	-0.373	0.701
5:	-1.422	0.573
6:	-1.088	-0.362
7:	-0.412	-0.517
8:	-0.304	-0.224
9:	0.047	-0.026
10:	0.051	-0.480

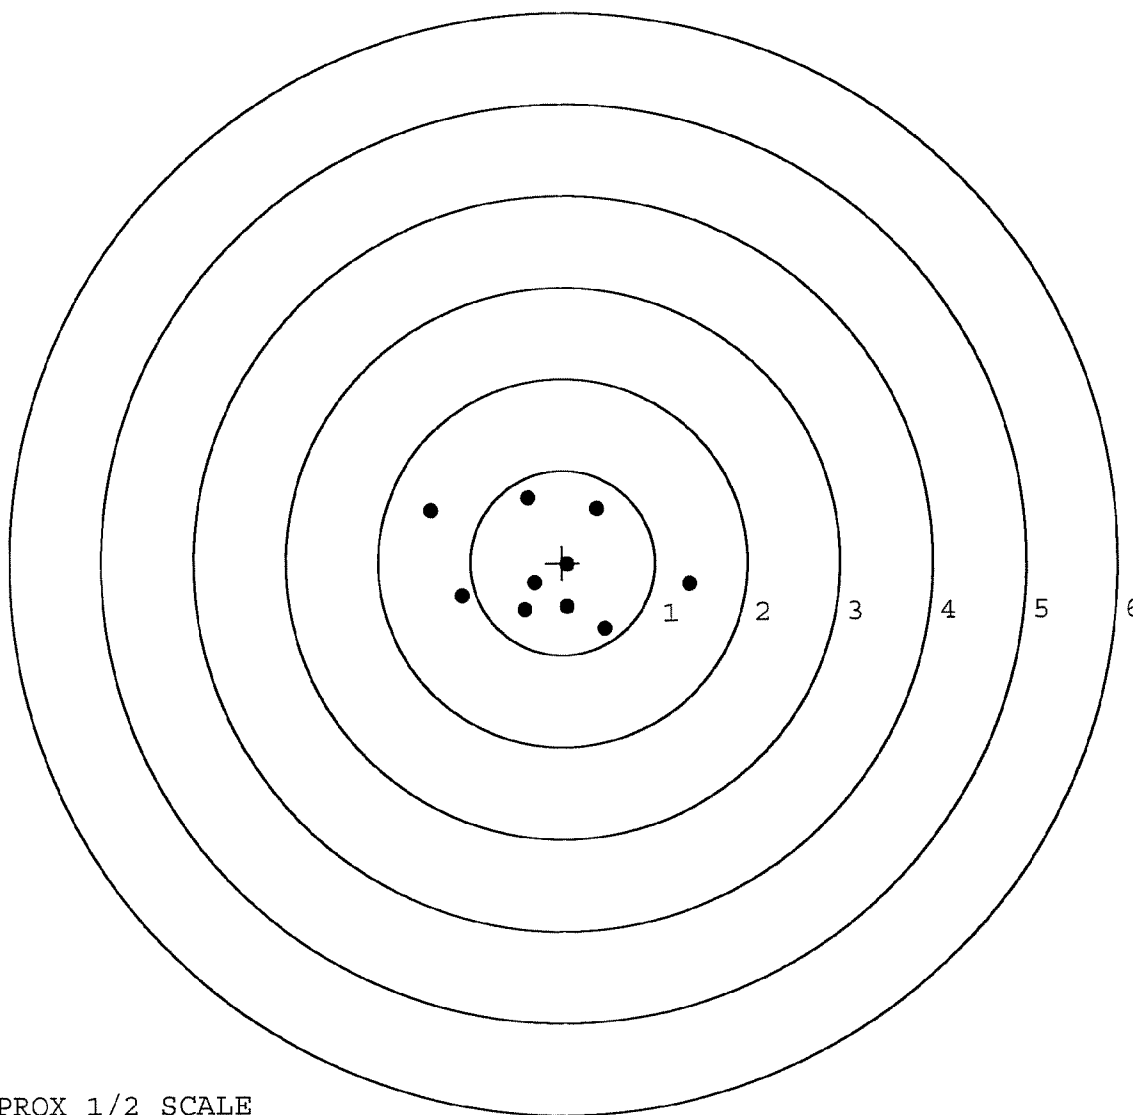


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225090. __0
 TARGET NUMBER: 4
 FILE DATE: 01/18/2006
 FILE TIME: 14:42

POINT#	X	Y
1:	0.453	0.593
2:	0.288	0.204
3:	-0.529	0.087
4:	-1.225	0.288
5:	-1.013	0.797
6:	-0.108	-0.006
7:	-0.053	-0.182
8:	0.414	-0.441
9:	0.153	-0.474
10:	0.009	-0.585

X CENTROID: -0.161
 Y CENTROID: 0.028
 POA TO CENTROID: 0.164
 HORZ SPREAD: 1.678
 VERT SPREAD: 1.382
 GROUP SPREAD: 1.889
 MIN RADIUS: 0.063
 MAX RADIUS: 1.148
 MEAN RADIUS: 0.620
 # IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 8
 # in 3 IN DIAMETER: 10

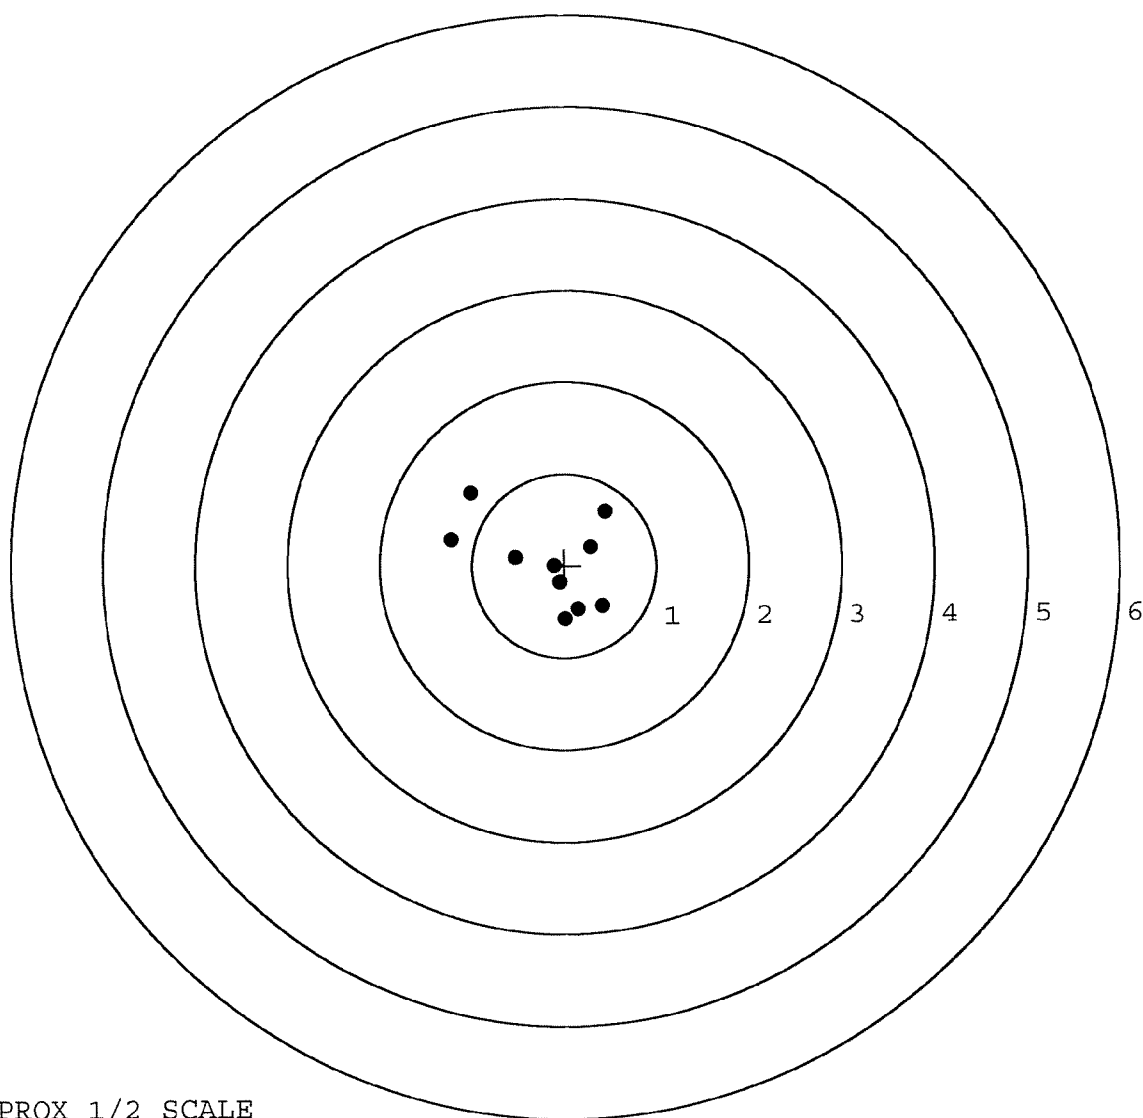


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225090. __0
TARGET NUMBER: 5
FILE DATE: 01/18/2006
FILE TIME: 14:42

POINT#	X	Y
1:	1.041	0.297
2:	0.775	-0.253
3:	1.251	1.134
4:	0.352	0.284
5:	-0.134	0.486
6:	-0.419	0.864
7:	-0.117	-0.628
8:	-0.581	-0.158
9:	-0.812	-0.466
10:	-0.945	-0.891

X CENTROID: 0.041
Y CENTROID: 0.067
POA TO CENTROID: 0.079
HORZ SPREAD: 2.196
VERT SPREAD: 2.025
GROUP SPREAD: 2.987
MIN RADIUS: 0.379
MAX RADIUS: 1.613
MEAN RADIUS: 0.895
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 6
in 3 IN DIAMETER: 9

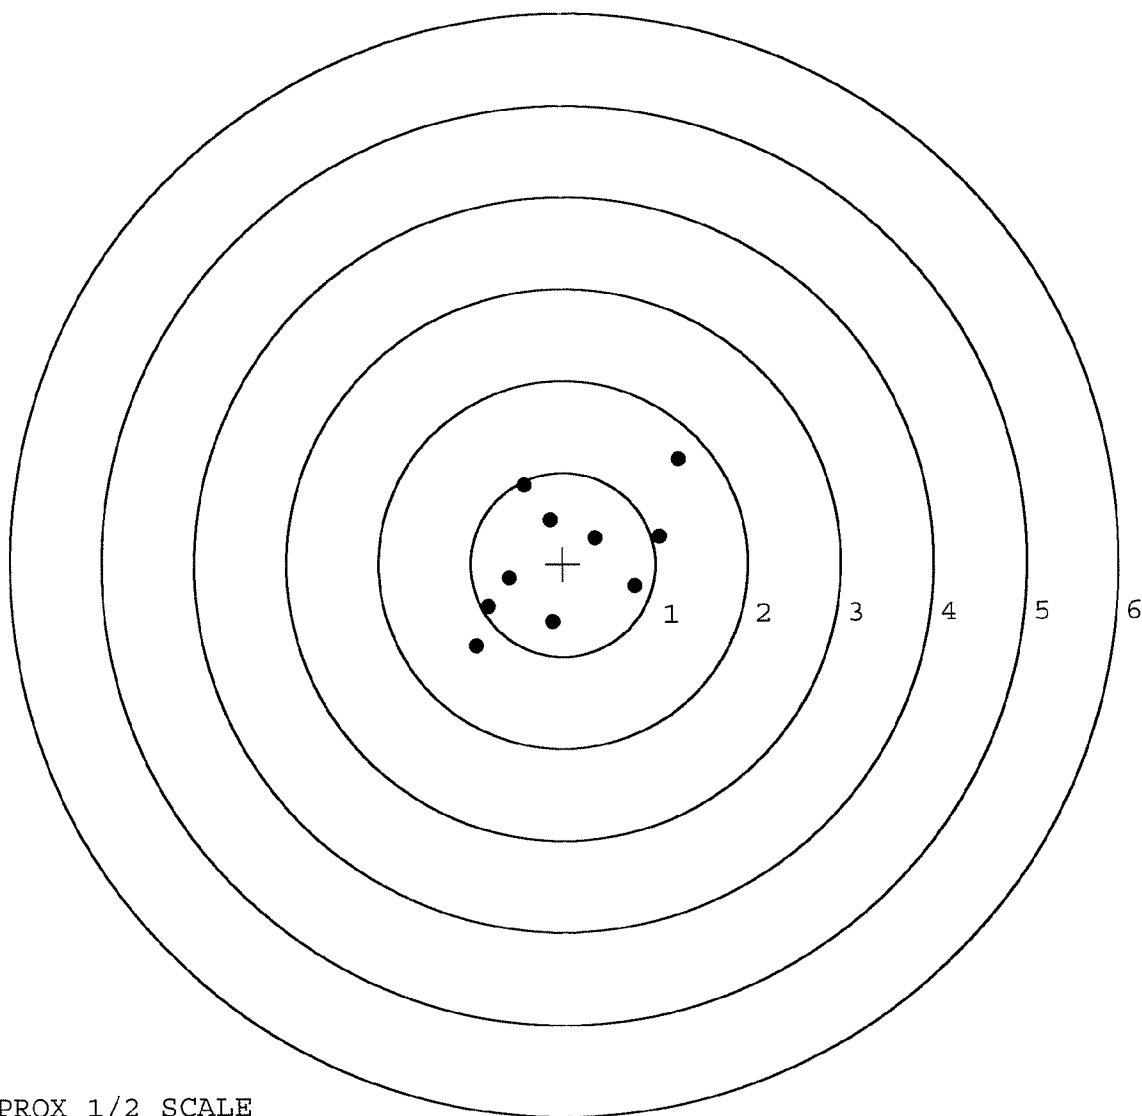

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAB-20-02-C-0149

R & E NUMBER	105765			
SERIAL NUMBER	C6223090			
LOG-IN DATE	12-27-05			
OPERATION #	OPERATION NAME	DATE	INITIAL	
500	DIS-ASSEMBLE GUN	1-3-06	RTZ	
505	RE-BARREL	1-4-06	RTZ	
560	ASSEMBLE	1-4-06	RTZ	
600	PROOF	1-4-06	K	
605	CHECK HEADSPACE	1-4-06	K	
610	DIS-ASSEMBLE GUN	1-4-06	K	
612	MAGNAFLUX	1-6-06	unsub	
510	DRILL AND TAP	1-5-06	TRW	
615	ROLLMARK CALIBER	1-6-06	CW	
618	ROTO-BLAST	1-6-06	LB	
620	APPLY COATINGS	1-10-06	HP	
625	FINAL ASSEMBLY	1-11-06	RTZ	
640	FUNCTION TEST AND	1-18-06	TRW	
650	TARGET	1-18-06	TRW	
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION	N/A	
	MALFUNCTION	CORRECTION	1-18-06 TRW	
670	FINAL INSPECTION	2-7-06	AC	
	A) HEADSPACE	2-7-06	K	
	B) TRIGGER PULL	2-7-06	OA	
		2.85 2.87 2.87 2.85 2.85		
680	F) SAFETY ON FORCE	2-7-06	OA	
		4.0 3.5 4.0		
	G) SAFETY OFF FORCE	2-7-06	OA	
		2.0 2.0 2.0		
	I) FIRING PIN INDENT	.020		
690	PACK	3-13-06	OA	




VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

REG. U.S. PAT. & TM. OFF.

MODEL 700™ H24


SERIAL NO.
C6225090

ORDER NO.
5716

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

Ø1

UPC



5716 C6225090

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225090

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	3 17	89	RW
600	Proof	3 17	89	RW
607	Check Headspace	3 17	89	RW
610	Dis-assemble Gun	3 17	89	RW
612	Magnaflux Barrel Action		3/21	KCR
	Magnaflux Bolt		3/21	KCR
615	Rollmark Caliber		3/21	G.S.
617	Drill and Tap Sight Holes	3 22	89	FB
618	Polish Barrel	3 22	89	BT.
620	Apply Coatings (Barrel Action)		3/31/89	TJA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		4/7/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		4/7/89	RW
	C) Inspect Ejector Hole for Chamfer		4/7/89	RW
	D) Oil Firing Pin Ass'y		4/7/89	RW
	E) Adjust Trigger Pull to Min Setting and Stake		4/10/89	G.S.

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	5	5	5			4/10/89	gyl
	G) Safety Off Force	3	3	3			4/10/89	gyl
	H) Trigger Pull Test & Retainability						4/10/89	g.s.
	I) Firing Pin Indent	.021	.021	.022			4/10/89	gyl
	J) Assemble Stock						4/11/89	RW
	K) Assemble Swivel Studs						14 April 89	JS
	L) Attach Front and Rear Sight Assemblies						4/11/89	RW
	M) Iron Sight Alignment						4/11/89	RW
	N) Detach Front & Rear Sights & place in numbered container						4/11/89	RW
	O) Attach Scope to Rifle						4/11/89	gyl
	P) Detach & Attach Scope 20 Times						4/11/89	gyl
640	Gallery Target & Test	60 R	97L				4/11/89	gyl
	A) Time						4/11/89	DH
	B) Malfunctions						4/11/89	DA
	C) Pierced Primers						4/11/89	DH
	D) Optical Clarity of Scope						4/11/89	DH
645	Inspect for Live Ammo						4/11/89	DH
655	Final Inspection							
	A) Headspace						14 April 89	JS
	B) Trigger Pull	2.34	2.22	2.29	2.26	2.36	14 April 89	JS
	C) Function						14 April 89	JS
660	Pack						21 June 89	JS

SWS TRIGGER PULL TEST

5090

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. 66348927

DATE 26 Sept 87

TESTER JD

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.12	2.51	2.52	2.65	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.11	2.39	2.58	2.65	
PULL #3	2.34	2.36	2.58	2.51	
PULL #4	2.46	2.37	2.71	2.63	
PULL #5	2.36	2.50	2.59	2.54	
TOTAL	11.39	12.13	12.98	12.98	
AVG.	2.278	2.426	2.596	2.596	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	2.99	3.08		
PULL #2	3.02	3.02		
PULL #3	3.10	3.10		
PULL #4	2.88	2.97		
PULL #5	3.14	3.04		
TOTAL	15.13	15.21		
AVG.	3.026	3.042		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	3.99	3.98		4.11
PULL #2	4.01	4.05		4.08
PULL #3	3.91	4.04		4.07
PULL #4	4.01	3.98		4.07
PULL #5	4.08	4.07		4.06
TOTAL	20.00	20.12		20.39
AVG.	4.00	4.024		4.078

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225090
12 Apr 1989

CENTROIDAL DISTANCES

0 TO 1	.596471
1 TO 2	.390744
1 TO 3	.164347
1 TO 4	.730658
1 TO 5	.137201

$\frac{2}{3}$ $\frac{3}{4}$ <----POA
4


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .413
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0914
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .422993

THE AMR FOR THIS RIFLE IS: .9584

12 Apr 1989

FILE:/PATTERNING/CENTERFIRE_PATT/06225090

CENTERFIRE PATTERNS # 1

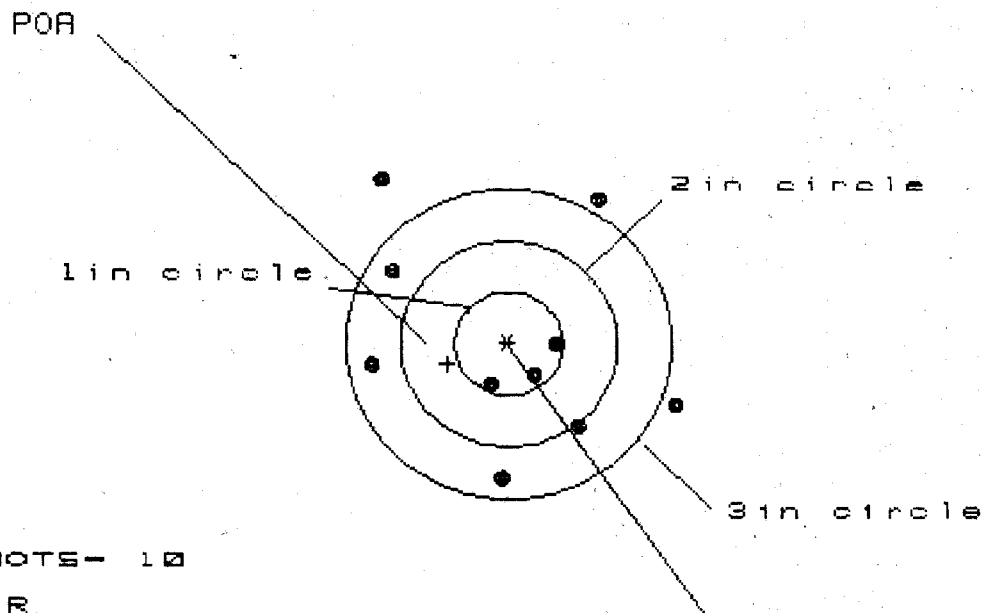

OF SHOTS- 10

IN CIR

1in = 3

2in = 3

3in = 7

HS= 2.842

VS= 2.837


GS= 3.529

PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.571	1.438	.899
MINIMUM X	:	-1.271	-1.404	-1.224
MAXIMUM Y	:	1.553	1.578	1.520
MINIMUM Y	:	-1.284	-1.111	-1.169
CENTROID X	:	.563	.696	.516
CENTROID Y	:	.197	.024	.083
POA TO CENTROID in.	:	.596	.696	.522
MIN RADIUS	:	.374	.157	.300
MEAN RADIUS	:	1.140	.992	.944
MAX RADIUS	:	1.958	1.734	1.766
HORIZONTAL SPREAD	:	2.842	2.842	2.123
VERTICAL SPREAD	:	2.837	2.689	2.689
EXTREME SPREAD	:	3.529	2.947	2.835
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		3	
NUMBER IN THREE INCH CIRCLE	=		7	

12 Apr 1989

FILE:/PATTERNING/CENTERFIRE_PATT/CG225090

CENTERFIRE PATTERNS # 2

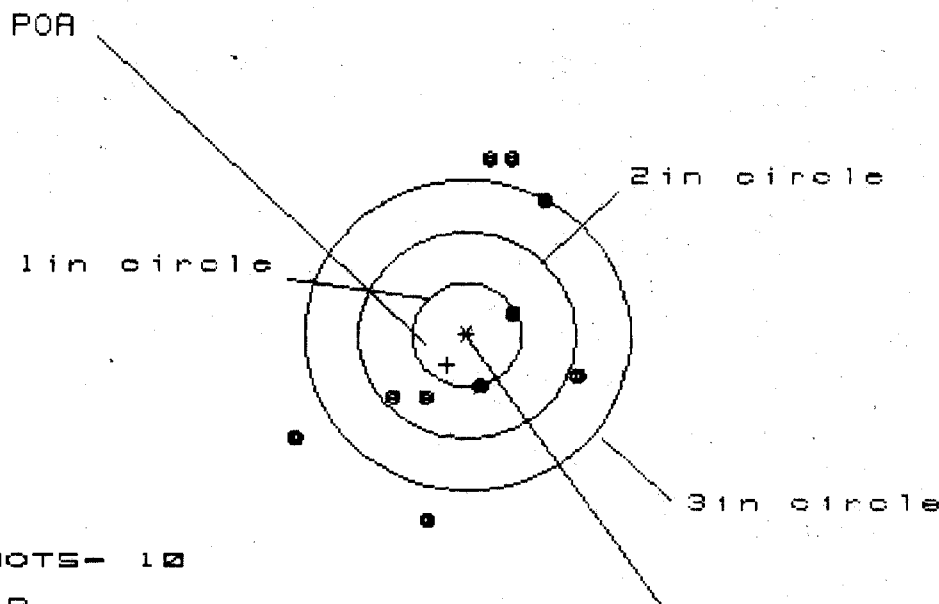

OF SHOTS- 10

IN CIR

1in = 1

2in = 4

3in = 6

HS= 2.640

VS= 3.585


GS= 3.695

PATTERN #	:	10	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.061	1.013	.810
MINIMUM X	:	-1.579	-1.627	-.935
MAXIMUM Y	:	1.756	1.553	1.403
MINIMUM Y	:	-1.829	-1.196	-.942
CENTROID X	:	.183	.231	.434
CENTROID Y	:	.288	.491	.641
POA TO CENTROID in.	:	.341	.543	.774
MIN RADIUS	:	.449	.362	.230
MEAN RADIUS	:	1.241	1.177	1.052
MAX RADIUS	:	1.879	2.019	1.419
HORIZONTAL SPREAD	:	2.640	2.640	1.745
VERTICAL SPREAD	:	3.585	2.749	2.345
EXTREME SPREAD	:	3.695	3.424	2.602
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		6	

12 Apr 1989

FILE:/PATTERNING/CENTERFIRE_PATT/CG225090

CENTERFIRE PATTERNS # 3

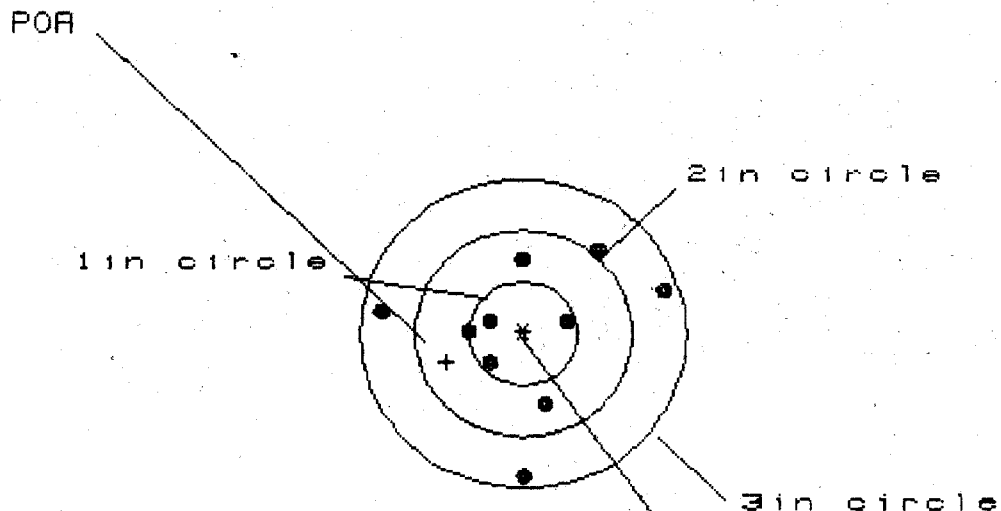

OF SHOTS- 10

IN CIR

1in - 3

2in - 6

3in - 10

HS- 2.654

VS- 2.112

GS- 2.659

PATTERN #	1	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.298	1.148	.683
MINIMUM X	-1.355	-.690	-.547
MAXIMUM Y	.784	.809	.862
MINIMUM Y	-1.328	-1.303	-1.251
CENTROID X	.706	.857	.714
CENTROID Y	.278	.253	.201
POA TO CENTROID in.	.759	.894	.741
MIN RADIUS	.340	.255	.359
MEAN RADIUS	.813	.755	.675
MAX RADIUS	1.374	1.317	1.251
HORIZONTAL SPREAD	2.654	1.838	1.230
VERTICAL SPREAD	2.112	2.112	2.112
EXTREME SPREAD	2.659	2.236	2.236
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		6	
NUMBER IN THREE INCH CIRCLE =		10	

12 Apr 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C8225050

CENTERFIRE PATTERNS

4

POA

1 in circle

2 in circle

3 in circle

OF SHOTS = 10

IN CIR

1 in = 1

2 in = 4

3 in = 10

HS = 2.507

VS = 2.638

ES = 2.932


CENTROID #

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.172	1.014	1.060
MINIMUM X	:	-1.415	-.916	-.870
MAXIMUM Y	:	1.384	1.329	1.332
MINIMUM Y	:	-1.254	-1.309	-1.142
CENTROID X	:	.132	.290	.244
CENTROID Y	:	-.393	-.338	-.505
POA TO CENTROID in.	:	.415	.445	.561
MIN RADIUS	:	.278	.436	.411
MEAN RADIUS	:	1.053	1.001	.927
MAX RADIUS	:	1.498	1.597	1.436
HORIZONTAL SPREAD	:	2.587	1.930	1.930
VERTICAL SPREAD	:	2.638	2.638	2.474
EXTREME SPREAD	:	2.932	2.932	2.674
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		10	

12 Apr 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6225090

CENTERFIRE PATTERNS # 5

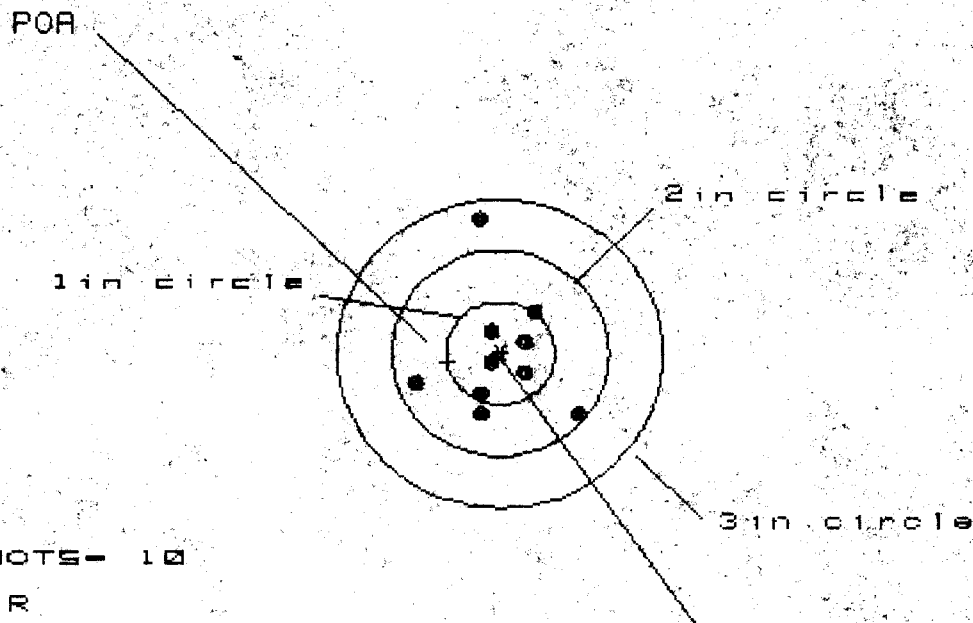

OF SHOTS- 10

IN CIR

1in = 5

2in = 9

3in = 10

HS= 1.475

VS= 1.959

GS= 2.056

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.686	.668	.363
MINIMUM X	:	-.789	-.807	-.724
MAXIMUM Y	:	1.331	.593	.544
MINIMUM Y	:	-.628	-.480	-.529
CENTROID X	:	.481	.499	.416
CENTROID Y	:	.087	-.061	-.012
POA TO CENTROID in.	:	.489	.503	.416
MIN RADIUS	:	.095	.123	.037
MEAN RADIUS	:	.545	.447	.397
MAX RADIUS	:	1.341	.815	.741
HORIZONTAL SPREAD	:	1.475	1.475	1.087
VERTICAL SPREAD	:	1.959	1.073	1.073
EXTREME SPREAD	:	2.056	1.502	1.295
NUMBER IN ONE INCH CIRCLE	=		5	
NUMBER IN TWO INCH CIRCLE	=		9	
NUMBER IN THREE INCH CIRCLE	=		10	

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6225090
27 Oct 1998

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0986
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .1132
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .150121

THE AMR FOR THIS RIFLE IS: 1.086

CENTROIDAL DISTANCES

Ø TO	1	.371128
1 TO	2	.733843
1 TO	3	.391655
1 TO	4	.338
1 TO	5	.483231

2
3 5
4+ <----POA
1


PATTERN #: 1

POA TO CENTROID: .371
 MIN RADIUS : .120
 MEAN RADIUS : 1.119
 MAX RADIUS : 1.850
 CENTROID X : -.306
 CENTROID Y : -.210

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225090

CENTERFIRE PATTERN # 1

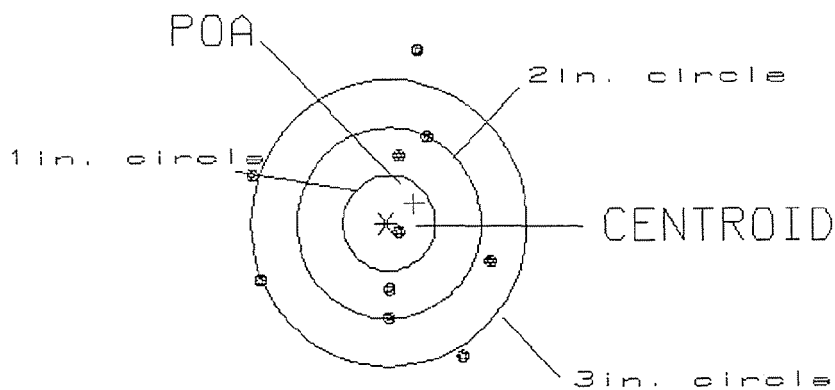

OF SHOTS= 10

IN CIRCLE

HS= 2.62

1

VS= 3.19

4

GS= 3.23

6


PATTERN #: 2

POA TO CENTROID: .425
 MIN RADIUS : .207
 MEAN RADIUS : .894
 MAX RADIUS : 1.954
 CENTROID X : .072
 CENTROID Y : .419

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225090

CENTERFIRE PATTERN # 2

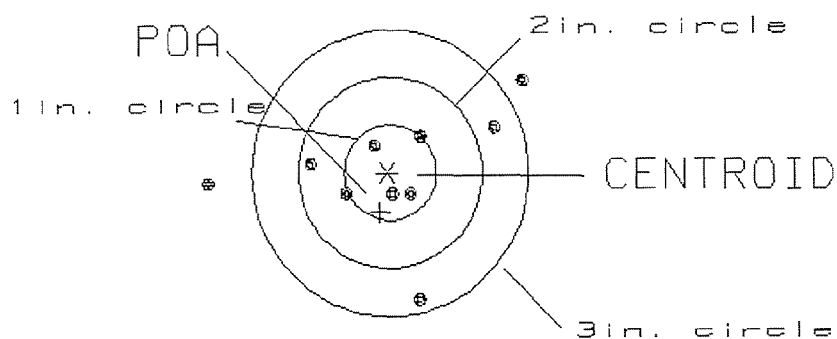

OF SHOTS= 10

IN CIRCLE

HS= 3.38

4

VS= 2.26

6

GS= 3.54


8

PATTERN #: 3
 POA TO CENTROID: .254
 MIN RADIUS : .525
 MEAN RADIUS : .855
 MAX RADIUS : 1.454
 CENTROID X : -.193
 CENTROID Y : .165

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225090

CENTERFIRE PATTERN # 3

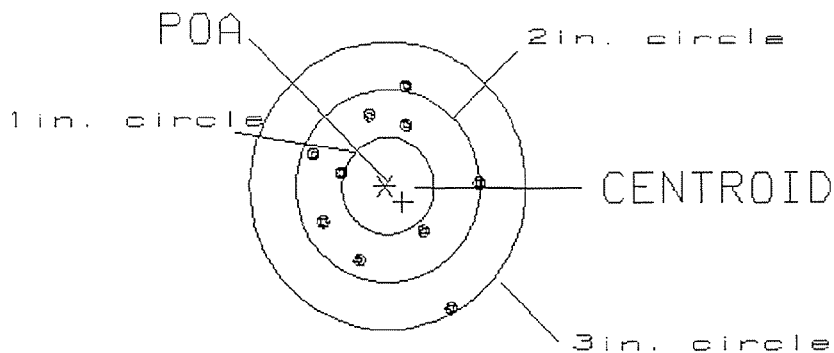

OF SHOTS= 10

IN CIRCLE

HS= 1.79

0

VS= 2.33

7

GS= 2.37


10

PATTERN #: 4
 POA TO CENTROID: .071
 MIN RADIUS : .325
 MEAN RADIUS : .988
 MAX RADIUS : 2.573
 CENTROID X : -.066
 CENTROID Y : .028

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225090

CENTERFIRE PATTERN # 4

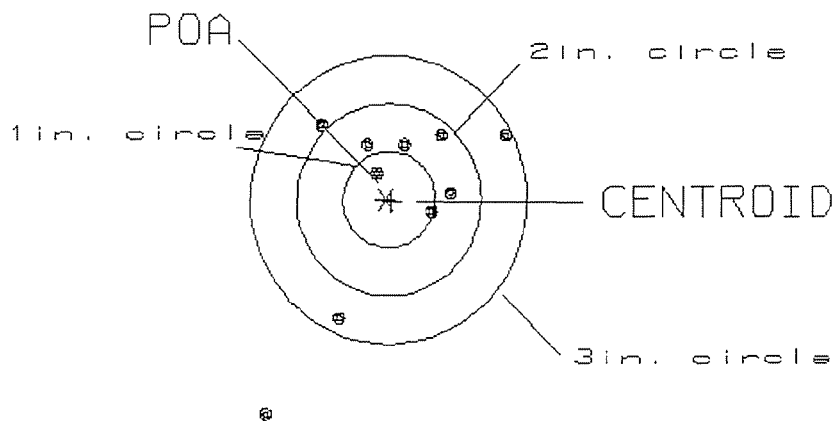

OF SHOTS= 10

IN CIRCLE

HS= 2.61
 VS= 2.95
 GS= 3.88

2
 6
 9

PATTERN #: 5

POA TO CENTROID: .164

MIN RADIUS : 1.009

MEAN RADIUS : ~~1.575~~

MAX RADIUS : 2.557


CENTROID X : 0.000

CENTROID Y : .164

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225098

CENTERFIRE PATTERN # 5

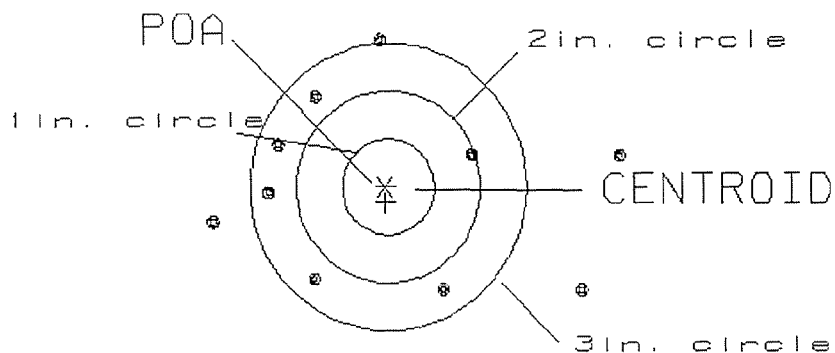

OF SHOTS= 10

IN CIRCLE

HS= 4.49

0

VS= 2.67

0

GS= 4.54

6

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER

R 98-17002

INITIAL

CUSTOMER ORDER NO.

W/LEUPOLD 10X SCOPE

SWS

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

08/25/98

08/25/98

DJ 7-89

C6225090

700

7.62

NATO

ACCESSORIES

HARD CASE

SCOPE MNTS

SCOPE BASE

W/STUDS

W/SWIVELS

FROM:

SHIP TO:

TRANSPORTATION OFFICER MI

BLDG 49015

FORT HOOD

TX 76544

TRANSPORTATION OFFICER MI

BLDG 49015

FORT HOOD

TX

76544

CUST NO: 191677 C.O.D.

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

FROM DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

B1

TRIGGER GROUP

B2

BOLT ASSY.

B3

BARREL ASSY.

B4

REG. ASSY.

B5

WOOD

C1

D3

E3

F3

METAL

C2

MAIN FAULT

PARTS

COMMENTS

Richard Wright 8-25-98

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD8925 REV. 7/97

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400048741

EMERY WORLDWIDE



1 FROM - SHIPPER		Shipper's Emery Account Number	
From (Your Name)		Phone Number (Very Important)	
		(254)287-1216	
Company Name		Dept. or Floor	
Address			
City		State/Prov.	Zip/Postal Code (Required)
Shipper's Reference		First Thirty Characters Will Appear On Invoice	
2 TO - CONSIGNEE		Consignee's Emery Account Number	
Contact Name		Phone Number (Very Important)	
ATTN: FABRICATED PRODUCTS		(315)895-3200	
Company Name		Dept. or Floor	
REMINGTON ARMS CO., INC.			
Address		Emery Cannot Deliver to PO Box or PO Zip Codes	
14 HOFELER AVE.			
City		State/Prov.	Zip/Postal Code (Required)
LION		NY	13357-1816
Consignee's Reference		First Twenty Characters Will Appear On Invoice	
		Country	

3 SERVICES		For Definition of Services "X" One Box See Back of Air Waybill		*EXTRA CHARGES	
U.S., Puerto Rico, & Canada		International		Int'l Airport-To-Airport	
☐ *EXPEDITE (First Out)	☐ SECOND DAY	☐ EXPRESS	☐ PREFERRED		
☐ *09:30	☐ DEFERRED	☐ STANDARD PLUS	☐ STANDARD		
☐ AM	☐ *SATURDAY DELIVERY	Preferred and Standard Add'l Services		☐ *CUSTOMS CLEARANCE REQUESTED	
☐ OVERNIGHT		☐ *DELIVERY REQUESTED			
4 SHIPMENT DETAILS					
☐ DANGEROUS GOODS		EMERY PACKAGING		SKID(S), SAID TO CONTAIN:	
☐ UNUSABLE		☐ ENVELOPE		TOTAL PIECES	
☐ URGENT PACK					
5 DIMENSIONS		DESCRIPTION			
Pieces	Length	Width	Height		
1	54	18	13	SNIPER RIFLE	
TOTAL PIECES		SPECIAL INSTRUCTIONS			
TOTAL WEIGHT					
☐ lbs. (x" one)					
6 EMERY WORLDWIDE					
☐ P		PIECES		/ WEIGHT	
☐ P					
☐ AU					
☐ CO					
7 SERVICE					

SHIPMENT NUMBER	
163 825	
5 METHOD OF PAYMENT	
☐ BILL SHIPPER	☐
☐ BILL CONSIGNEE	☐
☐ BILL THIRD PARTY EMERY ACCOUNT	Third Party Account Number
☐ G.P. (Character G.D.L. Required)	
Tariff	
Vest.	
Gal	
CHECK TO SHIPPER	
ONLY IN U.S./P.R./CANADA	
\$	
Emery amount related non-pi	
Emery Driver: Place Label Here. If Pall Thermal Labels to	
FOR INFO CALL (1-800-441-1111) http://www.emery.com	
SHIPPER'S AUTHORIZATION AND SIGNATURE	
Pamela Oliver	
9-20-98	

LABEL COPY - 4

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON
M2400048742

SIGNATURE AND TALLY RECORD

FORM APPROVED
OMB No. 0702-0027
Expires Oct 31, 1988

DISTRIBUTION INSTRUCTIONS

- * The SHIPPER will prepare copies 1 through 4, retain copy 4 and deliver copies 1 through 3 to the Origin Carrier.
- * The CARRIER will deliver copies 1 through 3 to the Destination Carrier.
- * The DESTINATION CARRIER will attach copy 1 (reflecting all signatures) and Standard Form 1113 (Public Voucher for Transportation Charges) to the original Government Bill of Lading, and forward for payment. Copy 2 will be delivered to the Consignee. Copy 3 will be retained.
- * The CONSIGNEE will ensure Destination Carrier surrenders copy 2.

SECTION A - To be completed by the SHIPPER

1. SHIPPER		2. PROTECTIVE SERVICE REQUESTED	
a. NAME III COPRS AND FORT HOOD W45QRE		CS DOD CONSTANT SURVEILLANCE SERVICE	
b. ORIGIN TRANSPORTATION OFFICER, W45QRE III CORPS AND FORT HOOD ATTN: AFZF-DL-TNS FORT HOOD, TX 76544-5062		3. GBL OR CBL NUMBER M-1469526	
4. CONSIGNEE		5. PERMIT NUMBER (if any)	
a. NAME REMINGTON ARMS, ILION, NY REMING			
b. DESTINATION REMINGTON ARMS CO., INC. ATTN: FABRICATED PRODUCTS DEPT. 14 HOEFER AVE. ILION, NY 13357-1816		6. TRANSPORTATION CONTROL NUMBER (HBAT-07-8223013 -01) W810GG81959801XXX	
7. ROUTING EMERY WORLDWIDE		8. WEIGHT 80 POUNDS	9. CUBE 7.3
10. SPECIAL INSTRUCTIONS		11. DATE SHIPMENT TENDERED TO CARRIER 98.08.20	12. NAME OF CARRIER EWCF
13. NUMBER OF PIECES 1	14. TYPE OF PACKAGE(S) (For unsealed loads only) OR CONVEYANCE IDENTIFICATION & SEAL NUMBERS (for sealed loads only) CS	15. FREIGHT CLASSIFICATION DESCRIPTION 069300 FIREARMS OR PARTS, NOI, IN BOXES, SEE NOTE, ITEM 69302	

SECTION B - To be completed by each person accepting custody of classified or protected material requiring the use of transportation protective service during transit.

16. CUSTODY RECORD				
a. PRINT NAME OF PERSON AND COMPANY REPRESENTED	b. STATION INTERCHANGE POINT DESTINATION	c. SIGNATURE OF PERSON ACCEPTING CUSTODY	d. TIME ACCEPTED	e. DATE ACCEPTED
BRUCE DUMLER EMERY WORLDWIDE	FT. HOOD, TX 76544-5062	<i>[Signature]</i>	13:30	20 AUG 98
SUE POSTELLE EMERY WORLDWIDE	FT. HOOD, TX 76544-5062	<i>[Signature]</i>	13:30	20 AUG 98
<i>[Signature]</i> EDWARDS EDWARDS	EDWARDS	<i>[Signature]</i>	1600	20 AUG 98
<i>[Signature]</i> DEAN DEAN	TBS-HAY	<i>[Signature]</i>	0200	8-21
J. FRASER	SGR-EWW	<i>[Signature]</i>	950A	8/21/98
J. Younkers	Remains delin	<i>[Signature]</i>	1310	8/21/98

DD FORM 1907, FEB 86

Previous editions are obsolete

PAGE 1

Consignee - Copy 2

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400048743

2		3		4		5		6		7		8		9		10		11		12		13		14		15		16		17		18		19		20		21		22		23		24		25		26		27		28		29		30		31		32		33		34		35		36		37		38		39		40		41		42		43		44		45		46		47		48		49		50		51		52		53		54		55		56		57		58		59		60		61		62		63		64		65		66		67		68		69		70		71		72		73		74		75		76		77		78		79		80	
DOC. IDENT.		IN. FROM		STOCK NUMBER		QUANTITY		DOCUMENT NUMBER		SUPPLEMENTARY ADDRESS		DIST. BUTON		PROD. COT.		RECD. DATE		UNIT PRICE		DOLLARS		CENTS																																																																																																																																							
1005 012402136		ETA		COD		1816		8195		ORD																																																																																																																																																			
SHIPPED FROM		SHIP TO		MARK FOR		PROJECT		TOTAL PRICE		DOLLARS		CENTS																																																																																																																																																	
BCO 1/9 CAV		Remington Arms Co Inc																																																																																																																																																											
FT HOOD, TX 76544		ATTN: Fabricated Products																																																																																																																																																											
		Dept 14 Hocker Ave.																																																																																																																																																											
		Ticon, NY 13357-1816																																																																																																																																																											
WAREHOUSE LOCATION		TYPE OF CARGO		UNIT WT.		UNIT PRICE		UNIT CUBE		UNIT CUBE		FREIGHT RATE		DOCUMENT DATE		LAST GOOD		QUANTITY		TOTAL PRICE		DOLLARS		CENTS																																																																																																																																					
SUBSTITUTE DATA (ITEM ORIGINALLY REQUESTED)		FREIGHT CLASSIFICATION NOMENCLATURE		ITEM NOMENCLATURE																																																																																																																																																									
		50 in x 17 in x 11 in		M24 sniper rifle																																																																																																																																																									
SELECTED BY AND DATE		TYPE OF CONTAINER(S)		TOTAL WEIGHT		RECEIVED BY AND DATE		INSPECTED BY AND DATE																																																																																																																																																					
						17 JUL 98																																																																																																																																																							
PACKED BY AND DATE		NO. OF CONTAINER(S)		TOTAL CUBE		WAREHOUSED BY AND DATE		WAREHOUSE LOCATION																																																																																																																																																					
REMARKS																																																																																																																																																													
FIRST DESTINATION ADDRESS		DATE SHIPPED		RECEIVER'S SIGNATURE (AND DATE)		RECEIVER'S DOCUMENT NUMBER																																																																																																																																																							

DD FORM 1348-1A, SEP 87 (BLUE)

Jun 86 edition may be used

FORM APPROVED OMB NO 0704-0188

DOD SINGLE LINE ITEM RELEASE/RECEIPT DOCUMENT

X Joaquin Alvarez
X Alvarez Joaquin

X 1754/1998
X B co 19CAV

X 257-5321

X 600-44-5973

SENSITIVE ITEMS TRANSACTION LIST
(FT HOOD REG 700-3)

1-3 DIC	4-6 DIC	7 DIC	8-22 STOCK NUMBER	DOCUMENT NUMBER 30-43 AAC	DATE / SERIAL	45-50 AAC TO
			1005-01-240 2136	W81G66	81959801	Lat. Trans.
51-56 ACCISD FORT HOOD			68-73 OWNER AAC	76-80 TRANS DATE		
M24 Sniper rifle			Remington Arms Co Inc ATTN: Fabricated Products	Definity Hoefler Ave Heron, NY		

SENSITIVE ITEMS SERIAL NUMBERS

1	C6225090	21		41	
2		22		42	
3		23		43	
4		24		44	
5		25		45	
6		26		46	
7		27		47	
8		28		48	
9		29		49	
10		30		50	
11		31		51	
12		32		52	
13		33		53	
14		34		54	
15		35		55	
16		36		56	
17		37		57	
18		38		58	
19		39		59	
20		40		60	

FT HOOD FORM 700-X-2

EQUIPMENT INSPECTION AND MAINTENANCE WORKSHEET																																																											
For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG																																																											
1. ORGANIZATION 137-9 CAC 100					2. NOMENCLATURE AND MODEL M24 Remington 700																																																						
3. REGISTRATION/SERIAL/NSN CC62250790			4a. MILES	b. HOURS	c. ROUNDS FIRED	d. HOT STARTS	5. DATE 15 June 98		6. TYPE INSPECTION TT																																																		
7. APPLICABLE REFERENCE																																																											
TM NUMBER TM 9-1005-306-10			TM DATE		TM NUMBER			TM DATE																																																			
COLUMN a — Enter TM item number. COLUMN b — Enter the applicable condition status symbol. COLUMN c — Enter deficiencies and shortcomings.					COLUMN d — Show corrective action for deficiency or shortcoming listed in Column c. COLUMN e — Individual ascertaining completed corrective action initial in this column.																																																						
STATUS SYMBOLS																																																											
"X"—Indicates a deficiency in the equipment that places it in an inoperable status. CIRCLED "X"—Indicates a deficiency, however, the equipment may be operated under specific limitations as directed by higher authority or as prescribed locally, until corrective action can be accomplished. HORIZONTAL DASH "—" Indicates that a required inspection, component replacement, maintenance operation check, or test flight is due but has not been accomplished, or an overdue MWO has not been accomplished.					DIAGONAL "(/)"—Indicates a materiel defect other than a deficiency which must be corrected to increase efficiency or to make the item completely serviceable. LAST NAME INITIAL IN BLACK, BLUE-BLACK INK, OR PENCIL—Indicates that a completely satisfactory condition exists. FOR AIRCRAFT—Status symbols will be recorded in red.																																																						
ALL INSPECTIONS AND EQUIPMENT CONDITIONS RECORDED ON THIS FORM HAVE BEEN DETERMINED IN ACCORDANCE WITH DIAGNOSTIC PROCEDURES AND STANDARDS IN THE TM CITED HEREON.																																																											
8a. SIGNATURE (Person(s) performing inspection) <i>Miller James R</i> <i>col JAMES R Miller</i>				8b. TIME 0745	9a. SIGNATURE (Maintenance Supervisor) <i>[Signature]</i> <i>MAISENBACHER Kim</i>			9b. TIME	10. MANHOURS REQUIRED																																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 5%;">TM ITEM NO. a</th> <th style="width: 5%;">STATUS b</th> <th style="width: 40%;">DEFICIENCIES AND SHORTCOMINGS c</th> <th style="width: 40%;">CORRECTIVE ACTION d</th> <th style="width: 10%;">INITIAL WHEN CORRECTED e</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>X</td> <td>crack in pistol grip</td> <td>HIGHER MAINTENANCE REQUIRED <i>Kim</i></td> <td></td> </tr> <tr> <td>2</td> <td>X</td> <td>Barrel touching stock</td> <td>HIGHER MAINTENANCE REQUIRED <i>Kim</i></td> <td></td> </tr> <tr> <td>3</td> <td>X</td> <td>knicks in barrel</td> <td>HIGHER MAINTENANCE REQUIRED <i>Kim</i></td> <td></td> </tr> <tr> <td>4</td> <td>X</td> <td>crowd worn out</td> <td>HIGHER MAINTENANCE REQUIRED <i>Kim</i></td> <td></td> </tr> <tr> <td>5</td> <td>X</td> <td>pits in barrel</td> <td>HIGHER MAINTENANCE REQUIRED <i>Kim</i></td> <td></td> </tr> <tr> <td>6</td> <td>X</td> <td>pits in bolt face</td> <td>HIGHER MAINTENANCE REQUIRED <i>Kim</i></td> <td></td> </tr> <tr> <td>6</td> <td>X</td> <td>Firing pin worn down</td> <td>HIGHER MAINTENANCE REQUIRED <i>Kim</i></td> <td></td> </tr> <tr> <td>7</td> <td>X</td> <td>left side of chamber gauge gauged</td> <td>HIGHER MAINTENANCE REQUIRED <i>Kim</i></td> <td></td> </tr> <tr> <td>8</td> <td>X</td> <td>m3A gauge windage knob</td> <td>HIGHER MAINTENANCE REQUIRED <i>Kim</i></td> <td></td> </tr> </tbody> </table>										TM ITEM NO. a	STATUS b	DEFICIENCIES AND SHORTCOMINGS c	CORRECTIVE ACTION d	INITIAL WHEN CORRECTED e	1	X	crack in pistol grip	HIGHER MAINTENANCE REQUIRED <i>Kim</i>		2	X	Barrel touching stock	HIGHER MAINTENANCE REQUIRED <i>Kim</i>		3	X	knicks in barrel	HIGHER MAINTENANCE REQUIRED <i>Kim</i>		4	X	crowd worn out	HIGHER MAINTENANCE REQUIRED <i>Kim</i>		5	X	pits in barrel	HIGHER MAINTENANCE REQUIRED <i>Kim</i>		6	X	pits in bolt face	HIGHER MAINTENANCE REQUIRED <i>Kim</i>		6	X	Firing pin worn down	HIGHER MAINTENANCE REQUIRED <i>Kim</i>		7	X	left side of chamber gauge gauged	HIGHER MAINTENANCE REQUIRED <i>Kim</i>		8	X	m3A gauge windage knob	HIGHER MAINTENANCE REQUIRED <i>Kim</i>	
TM ITEM NO. a	STATUS b	DEFICIENCIES AND SHORTCOMINGS c	CORRECTIVE ACTION d	INITIAL WHEN CORRECTED e																																																							
1	X	crack in pistol grip	HIGHER MAINTENANCE REQUIRED <i>Kim</i>																																																								
2	X	Barrel touching stock	HIGHER MAINTENANCE REQUIRED <i>Kim</i>																																																								
3	X	knicks in barrel	HIGHER MAINTENANCE REQUIRED <i>Kim</i>																																																								
4	X	crowd worn out	HIGHER MAINTENANCE REQUIRED <i>Kim</i>																																																								
5	X	pits in barrel	HIGHER MAINTENANCE REQUIRED <i>Kim</i>																																																								
6	X	pits in bolt face	HIGHER MAINTENANCE REQUIRED <i>Kim</i>																																																								
6	X	Firing pin worn down	HIGHER MAINTENANCE REQUIRED <i>Kim</i>																																																								
7	X	left side of chamber gauge gauged	HIGHER MAINTENANCE REQUIRED <i>Kim</i>																																																								
8	X	m3A gauge windage knob	HIGHER MAINTENANCE REQUIRED <i>Kim</i>																																																								

DA FORM 2404
1 APR 79

Replaces edition of 1 Jan 64, which will be used

