

C6225098

MODEL 700™ M24

Model 700 M24™

Action

Barrel Length

Capacity

Order No. 5715

*Includes 1 in chamber.

Remington

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: RE00147677

Serial: C6225098 Model M24 SWS Center Fire
Caliber: 7.62 NATO

Repairman:

Verify Repair

Status:

Closed 7/17/2008 8:22:49 AM

Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: PBO 1/75 RANGER REGIMENT

PBO 1/75 RANGER REGIMENT

Address 1: ATTN: WO1 CURTIS B MATHIS

ATTN: WO1 CURTIS B MATHIS

Address 2: 1036 LIBERATOR RD

PO Box:

1036 LIBERATOR RD

PO Box:

City: HUNTER AAF

HUNTER AAF

State: GA

Zip Code: 31409

Country: US

State: GA

Zip Code: 31409

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NN

Fax:

Email:

Comments:

Received Condition

Fair

Condition:

Notes:

CSR:

Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A057	Fit and Rear Sgt Base	1

Repair Search

Refresh

Close

nagletj

7/17/2008

8:09 AM

CAPS

NUM

INS

SCRL



8:09 AM

Reset

Number: C6225098

Model: M24 SWS



RE00147677

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-C-0149

R & E NUMBER 147677
SERIAL NUMBER C6220098
LOG-IN DATE 7-17-08

OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	7-29-08	RTZ
505	RE-BARREL	9-30-08	RTZ
560	ASSEMBLE	9-30-08	RTZ
600	PROOF	10-2-08	SPD
605	CHECK HEADSPACE	10-2-08	SPD
610	DIS-ASSEMBLE GUN	10-2-08	SPD
612	MAGNAFLUX	10/8/08	(H)
510	DRILL AND TAP	10-7-08	JS
615	ROLLMARK CALIBER	10/8/08	RT
618	ROTO-BLAST		
620	APPLY COATINGS	10-11	
625	FINAL ASSEMBLY	10-14-08	RTZ
640	FUNCTION TEST AND	PASS FAIL	10-15-08 TC
650	TARGET	PASS FAIL	10-15-08 TC
	MALFUNCTION BAC	CORRECTION	10-15-08 TC
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION N/A	
	MALFUNCTION	CORRECTION	10-15-08 X PD
670	FINAL INSPECTION		
	A) HEADSPACE	PASS FAIL	10-22-08 X PD
	B) TRIGGER PULL	2.67 2.64 2.63 2.61 2.70	10-22-08 X PD
680	F) SAFETY ON FORCE	3.0 3.0 3.0	10-22-08 X PD
	G) SAFETY OFF FORCE	5.0 5.0 4.5	10-22-08 X PD
	I) FIRING PIN INDENT	.020 .021 .021	10-22-08 X PD
690	PACK		10/22/08 FM

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6225098.___0

FILE DATE AND TIME: 10/16/2008 06:11

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.109
The Average Y Centroid of the Five Target Set:	0.144
The Average Point of Impact of the Five Target Set:	0.180
The Average Mean Radius of the Five Target Set:	1.108
The Distance from POA to Centroid Target #1:	0.406
The Distance from Centroid Target #2 to Centroid Target #1:	0.265
The Distance from Centroid Target #3 to Centroid Target #1:	0.453
The Distance from Centroid Target #4 to Centroid Target #1:	0.597
The Distance from Centroid Target #5 to Centroid Target #1:	0.313

SERIAL NUMBER: C6225098. __0

TARGET NUMBER: 1

FILE DATE: 10/16/2008

FILE TIME: 06:11

X CENTROID: 0.297

Y CENTROID: 0.277

POA TO CENTROID: 0.406

HORZ SPREAD: 2.028

VERT SPREAD: 2.993

GROUP SPREAD: 3.094

MIN RADIUS: 0.421

MAX RADIUS: 1.749


MEAN RADIUS: 1.172

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 3

in 3 IN DIAMETER: 8

POINT#	X	Y
1:	1.162	-1.243
2:	1.038	-1.032
3:	1.046	-0.779
4:	0.192	-0.470
5:	-0.866	0.092
6:	-0.068	0.488
7:	-0.011	1.027
8:	-0.277	1.389
9:	0.377	1.553
10:	0.377	1.750

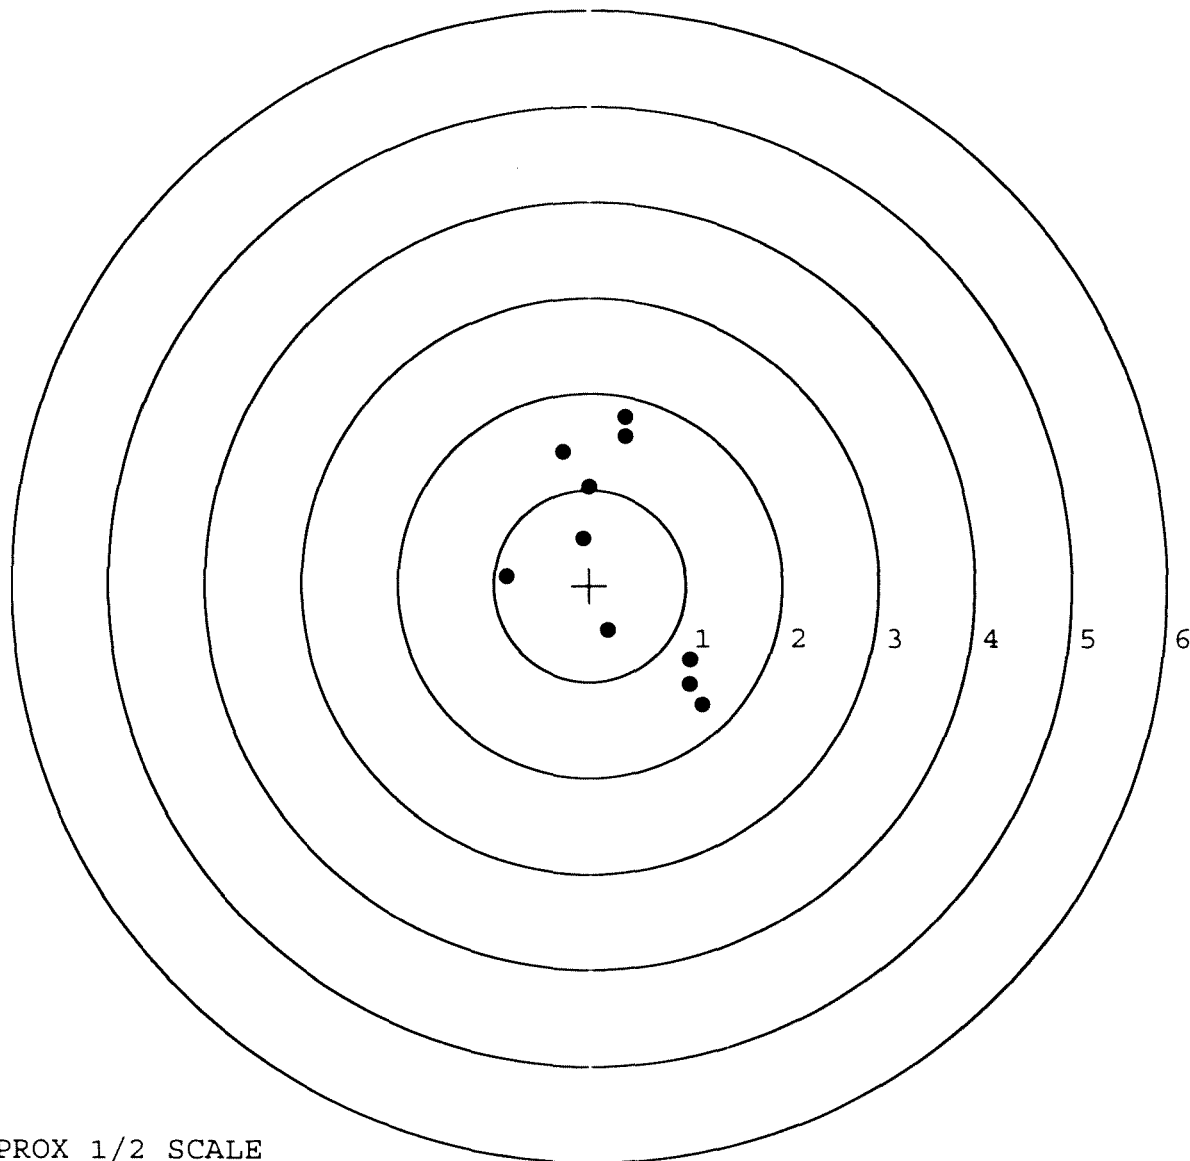

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225098. __0

TARGET NUMBER: 2

FILE DATE: 10/16/2008

FILE TIME: 06:11

X CENTROID: 0.516

Y CENTROID: 0.128

POA TO CENTROID: 0.531

HORZ SPREAD: 2.494

VERT SPREAD: 1.436

GROUP SPREAD: 2.535

MIN RADIUS: 0.557

MAX RADIUS: 1.673


MEAN RADIUS: 0.872

IN 1 IN DIAMETER: 0

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 9

POINT#	X	Y
1:	2.170	0.380
2:	1.501	0.351
3:	1.261	-0.523
4:	0.359	-0.616
5:	0.125	-0.372
6:	0.336	0.655
7:	-0.324	-0.074
8:	-0.170	0.241
9:	-0.094	0.414
10:	-0.006	0.820

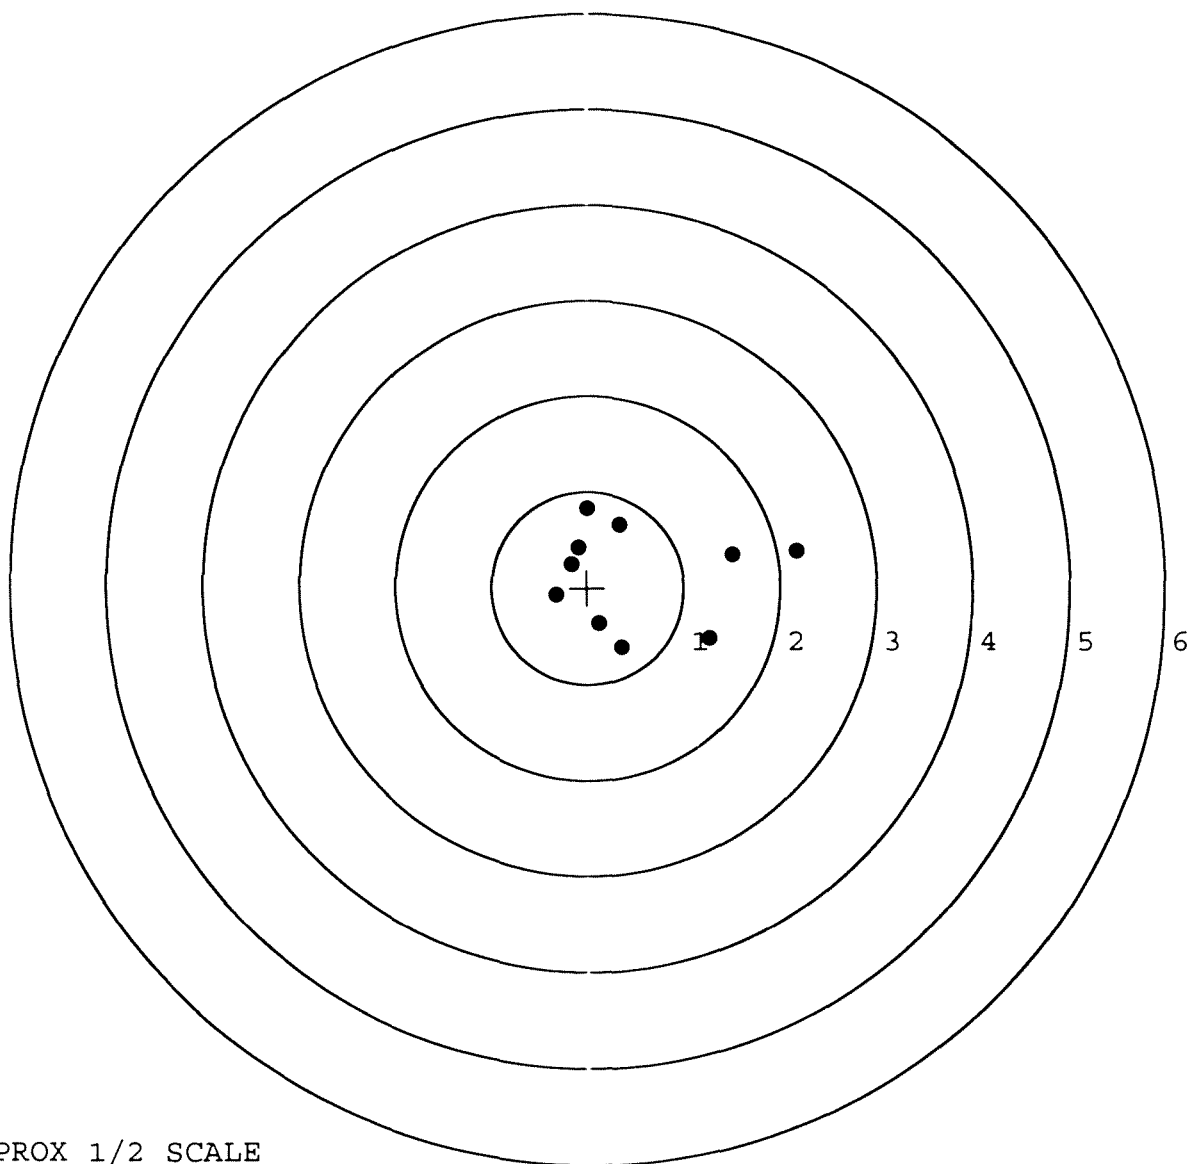

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225098. __0

TARGET NUMBER: 3

FILE DATE: 10/16/2008

FILE TIME: 06:11

X CENTROID: -0.073

Y CENTROID: 0.015

POA TO CENTROID: 0.074

HORZ SPREAD: 1.200

VERT SPREAD: 3.636

GROUP SPREAD: 3.638

MIN RADIUS: 0.196

MAX RADIUS: 1.914


MEAN RADIUS: 0.956

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 7

POINT#	X	Y
1:	0.156	1.915
2:	0.003	1.262
3:	0.147	0.814
4:	-0.343	0.346
5:	0.050	-1.721
6:	-0.785	-1.473
7:	-0.475	-0.434
8:	0.023	-0.435
9:	0.082	-0.106
10:	0.415	-0.017

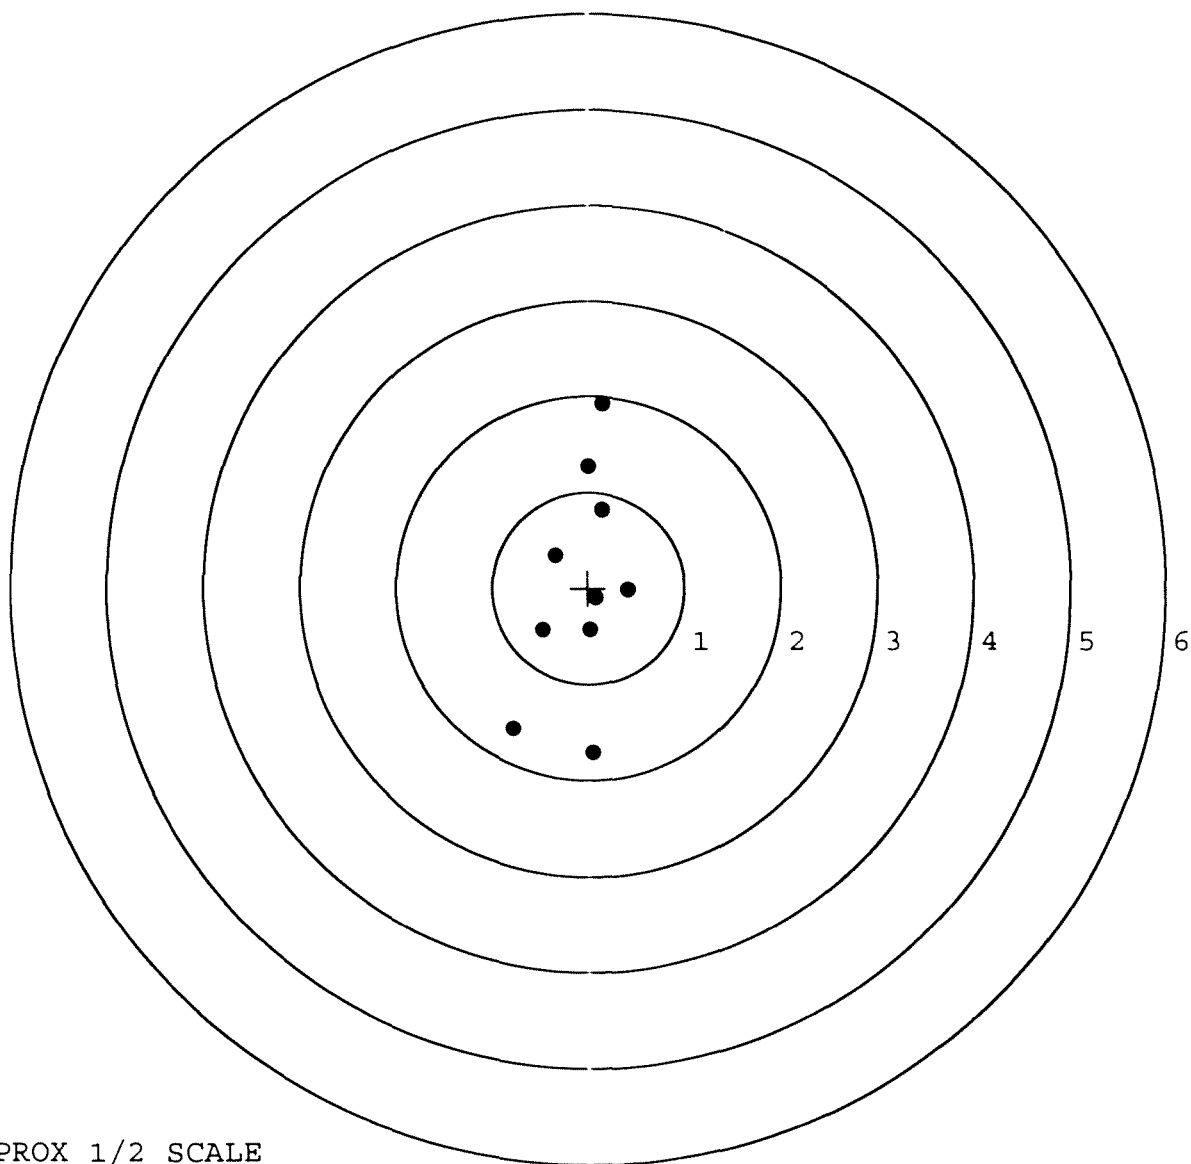

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225098. 0

TARGET NUMBER: 4

FILE DATE: 10/16/2008

FILE TIME: 06:11

X CENTROID: -0.193

Y CENTROID: -0.064

POA TO CENTROID: 0.203

HORZ SPREAD: 2.146

VERT SPREAD: 5.634

GROUP SPREAD: 5.644

MIN RADIUS: 0.440

MAX RADIUS: 3.060


MEAN RADIUS: 1.399

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 3

in 3 IN DIAMETER: 7

POINT#	X	Y
1:	-1.325	2.779
2:	0.276	1.288
3:	0.060	0.988
4:	-0.133	0.598
5:	0.210	0.114
6:	0.821	-0.038
7:	0.012	-0.800
8:	-0.452	-1.064
9:	-0.410	-1.647
10:	-0.986	-2.855

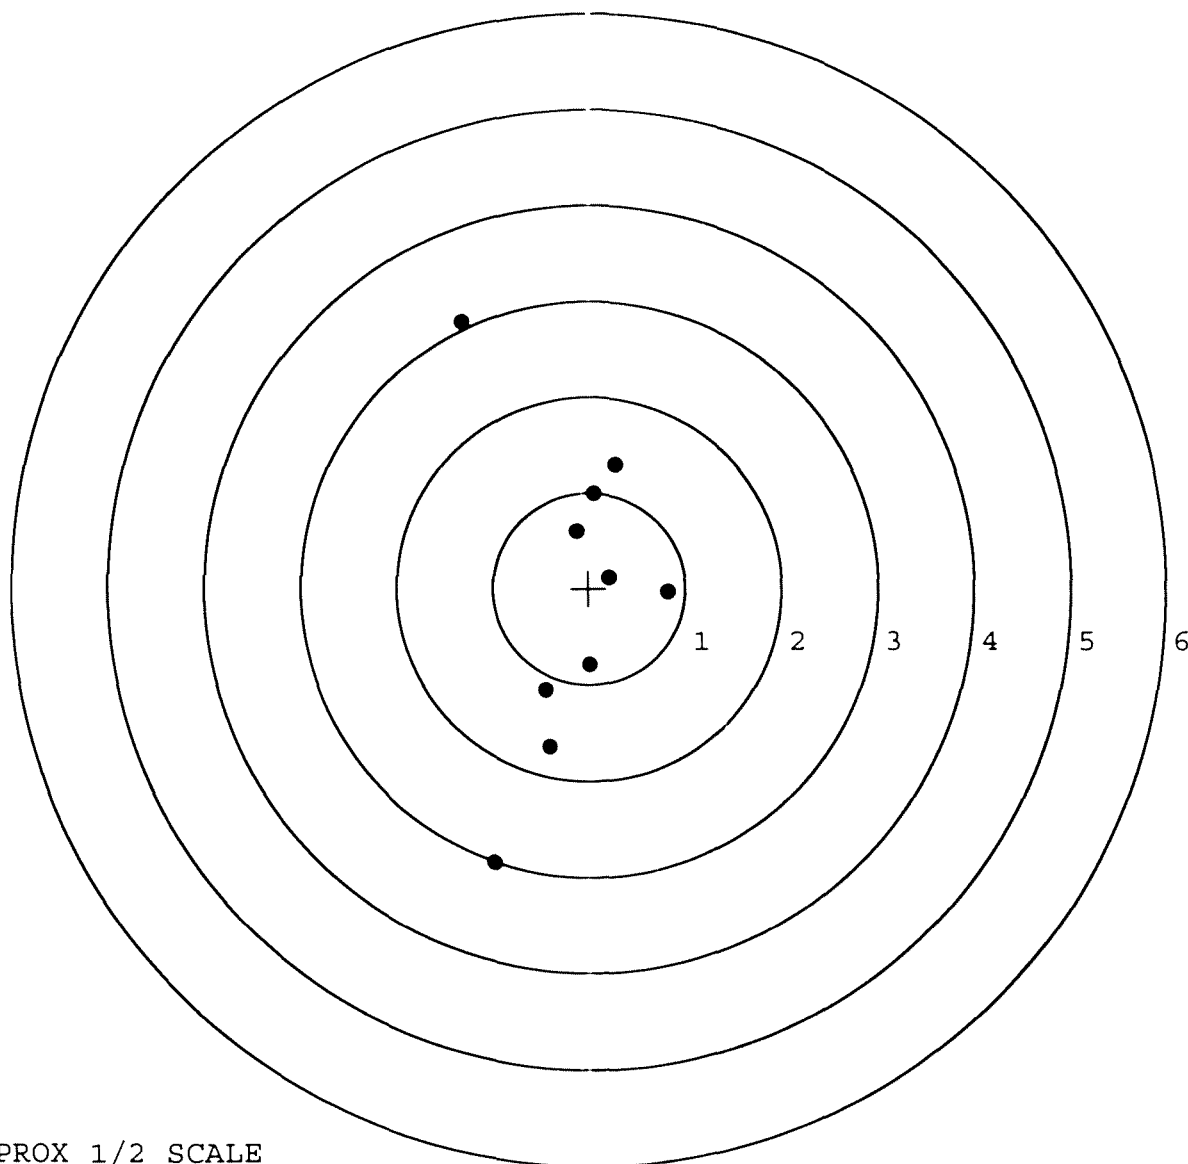

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225098. 0

TARGET NUMBER: 5

FILE DATE: 10/16/2008

FILE TIME: 06:11

X CENTROID: -0.004

Y CENTROID: 0.361

POA TO CENTROID: 0.361

HORZ SPREAD: 1.658

VERT SPREAD: 3.161

GROUP SPREAD: 3.161

MIN RADIUS: 0.506

MAX RADIUS: 1.838


MEAN RADIUS: 1.140

IN 1 IN DIAMETER: 0

IN 2 IN DIAMETER: 4

in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.080	-0.963
2:	0.597	-0.706
3:	-0.783	-0.689
4:	-0.079	-0.422
5:	-0.347	-0.265
6:	0.875	0.423
7:	-0.451	0.599
8:	-0.366	1.630
9:	0.366	1.808
10:	0.066	2.198

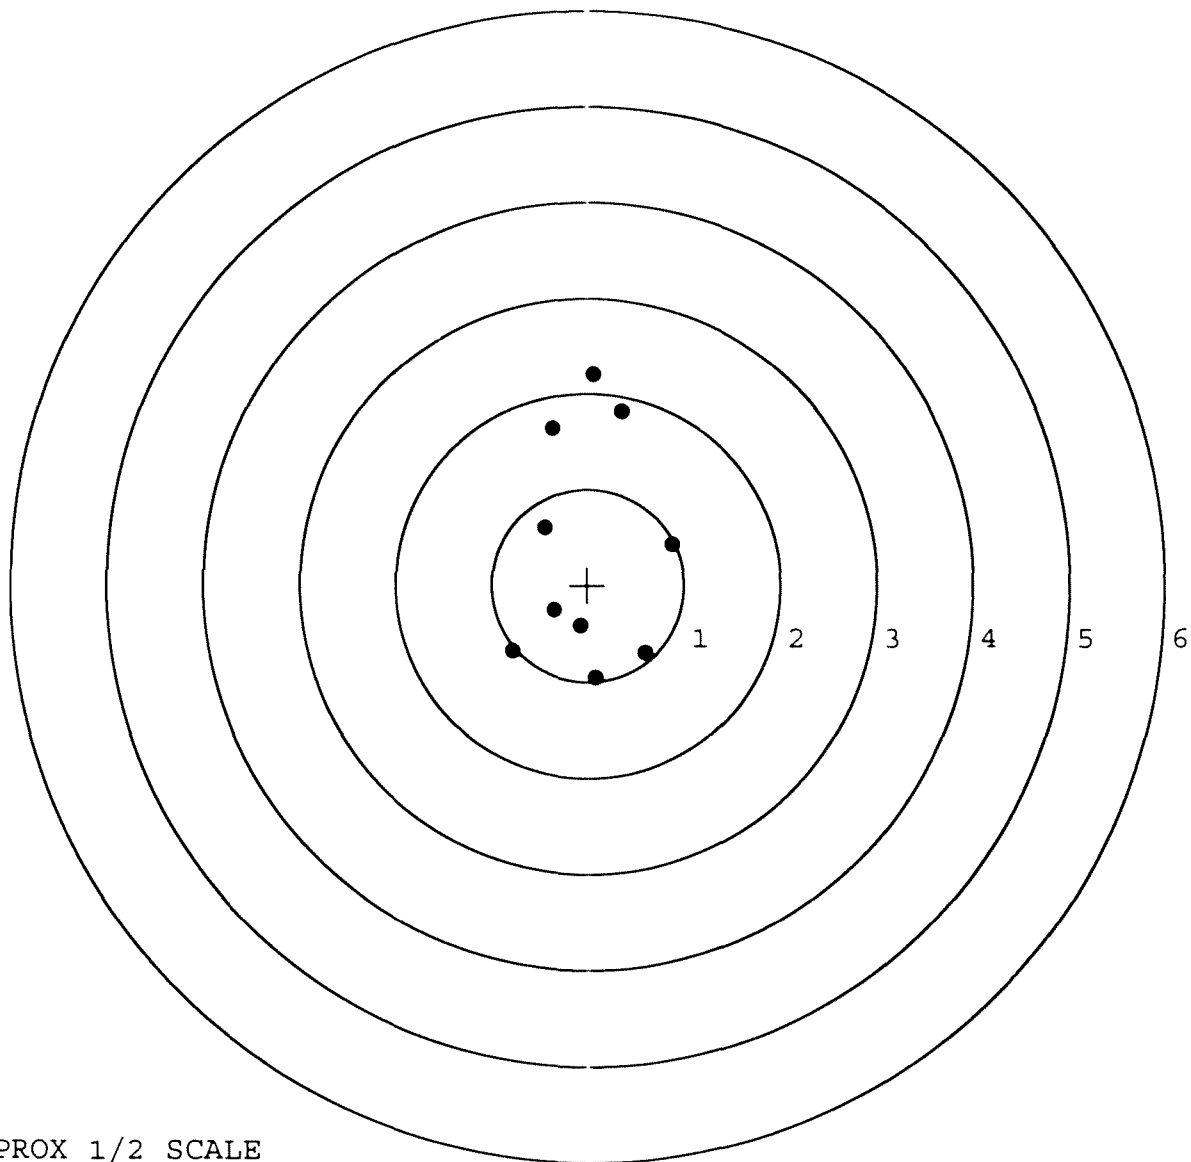

TARGET APPROX 1/2 SCALE

Serial
Number:

C6225098

Model: 700SWS



RE00007104

DS/GS Electronics -
-Maintenance
1/75th Ranger Regiment
(BLDG 1360)
108 Emmett Rifles -
-Drive STE#206
Hunter Army Airfield,
GA. 31409-5602

~~C6225098~~

C6225098

W/ Scope, Scope Base,
Scope Rings, Sling
Studs, Bipod & Soft
Carrying Case &
Hard Case
(~~Box~~)

Score S/N 88-1268

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00007104** Serial: C6225098 Model 700 Center Fire Caliber: 7.62 M-24 (SWS) Repairman: Status: Closed 3/27/00 3:04:14 PM

Address Information

Customer: ☒ Received From Return To: ☒ Received From

Name: **DS/GS ELECTRONICS -MAINTENANCE-** **DS/GS ELECTRONICS -MAINTENANCE-**

Address 1: **1775TH RANGER REGIMENT (BLDG. 1360)** **1775TH RANGER REGIMENT (BLDG. 1360)**

Address 2: **108 EMMETT RIFLES** PO Box: **108 EMMETT RIFLES** PO Box:

City: **HUNTER ARMY AIRFIELD** **HUNTER ARMY AIRFIELD**

State: **GA** Zip Code: **314095602** Country: **US** State: **GA** Zip Code: **314095602** Country: **US**

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information

Phone:

Fax:

Email:

Comments:

Received Condition

Poor

Condition Notes:

CSR Notes:

Accessories Received

Code	Desc	Qty
A008	With Swivel studs	2
A009	Soft Case, & hard case	2
A016	Scope Mounts, & BAS	2
A026	Scope	1
XXX	BI-POD	1

Repair Search **Refresh** **Close**

neglet 3/27/00 3:50 PM CAPS NUM INS SCRL

Start SAP ... Inbox ... Explo ... Micro ... Micro ... Nagle ... Arm ... Part ... Prints ... 3:50 PM

BBL - 96003
Extractor - 91816

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6225098

9 Jun 2000

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.2052

THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.1958

THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .283628

THE AMR FOR THIS RIFLE IS: 1.127

CENTROIDAL DISTANCES

0	TO	1	.194756
1	TO	2	.57632
1	TO	3	.0490408
1	TO	4	.102552
1	TO	5	.197995

2 5⁴ <----POA


PATTERN #: ☐ 1 ☐

POA TO CENTROID: .195
MIN RADIUS : .432
MEAN RADIUS : 1.190
MAX RADIUS : 2.178
CENTROID X : -.047
CENTROID Y : -.189

9 Jun 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225098

CENTERFIRE PATTERN # 1

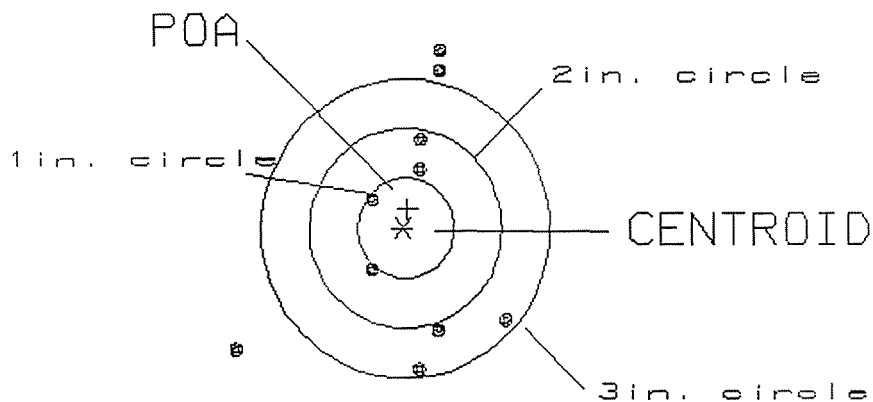

OF SHOTS= 10

IN CIRCLE

HS= 2.81

1

VS= 3.24

4

GS= 3.72

7


PATTERN #: ☐ 2 ☐

POA TO CENTROID: .610
 MIN RADIUS : .286
 MEAN RADIUS : 1.236
 MAX RADIUS : 2.498
 CENTROID X : -.608
 CENTROID Y : -.057

9 Jun 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225098

CENTERFIRE PATTERN # 2

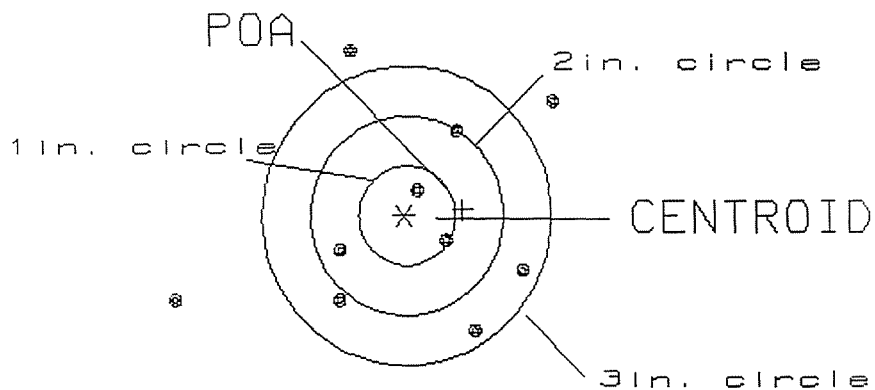

OF SHOTS= 10

IN CIRCLE

HS= 3.85

2

VS= 2.73

4

GS= 4.33

7

PATTERN #: ☐ 3 ☐

POA TO CENTROID: .156

MIN RADIUS : .285

MEAN RADIUS : 1.158

MAX RADIUS : 1.911


CENTROID X : -.064

CENTROID Y : -.143

9 Jun 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225098

CENTERFIRE PATTERN # 3

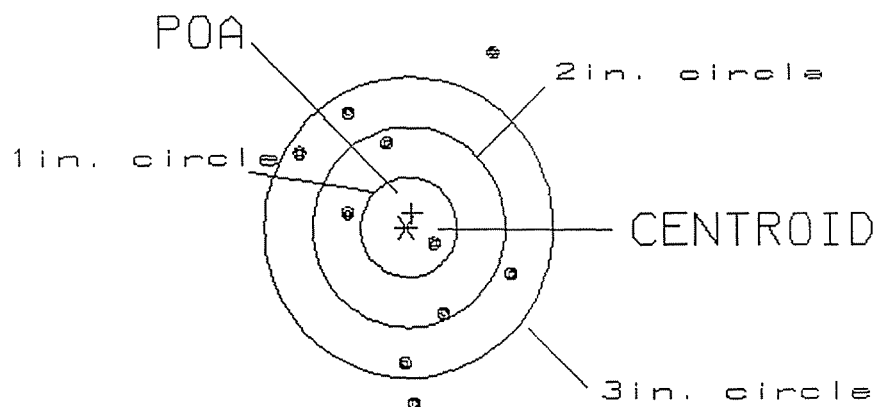

OF SHOTS= 10

IN CIRCLE

HS= 2.18

1

VS= 3.47

4

GS= 3.56

8


PATTERN #: ☐ 4 ☐

POA TO CENTROID: .286
MIN RADIUS : .480
MEAN RADIUS : .833
MAX RADIUS : 1.534
CENTROID X : -.121
CENTROID Y : -.260

9 Jun 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225098

CENTERFIRE PATTERN # 4

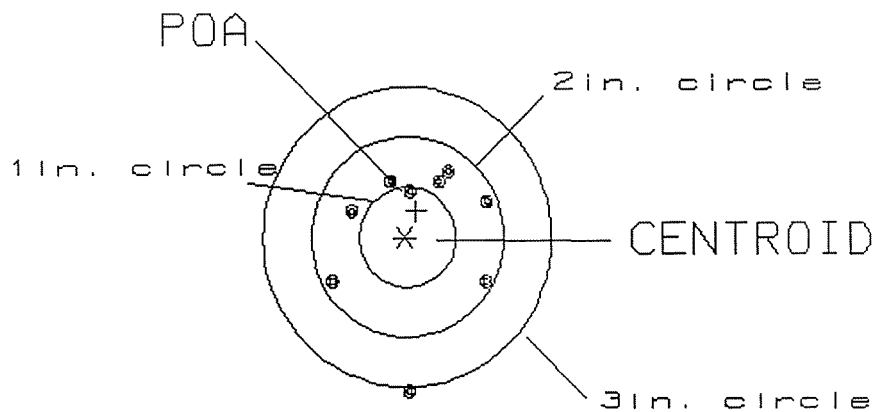

OF SHOTS= 10

IN CIRCLE

HS= 1.67

1

VS= 2.17

9

GS= 2.22

9


PATTERN #: ☐ 5 ☐

POA TO CENTROID: .379
 MIN RADIUS : .255
 MEAN RADIUS : 1.216
 MAX RADIUS : 2.060
 CENTROID X : -.186
 CENTROID Y : -.330

9 Jun 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225098

CENTERFIRE PATTERN # 5

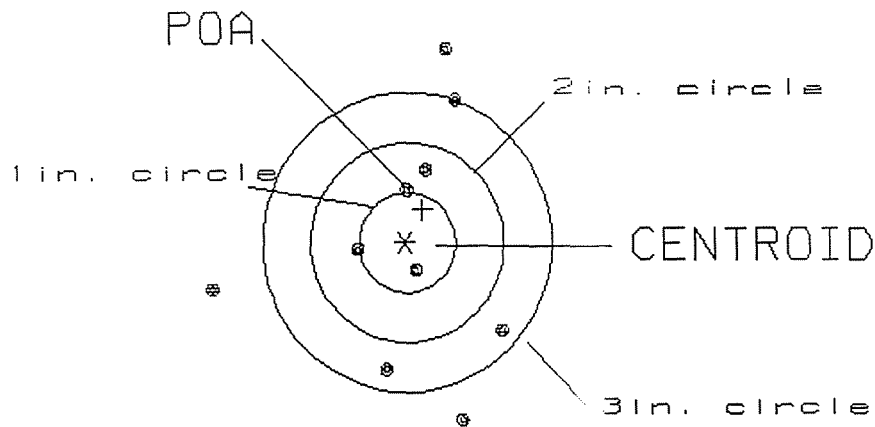

OF SHOTS= 10

IN CIRCLE

HS= 3.01
 VS= 3.74
 GS= 3.74

1
 4
 6

FINAL Inspection

Sn: C6225098

DATE REC'D: 3-25-00

DATE RET'D:

AUDITOR: RW

Item:

BARREL ASSY.

☒ BARREL

☒ RECEIVER

☒ FRONT SIGHT BLOCK

☒ REAR SIGHT BLOCK

☒ SCREWS

☒ FINISH

SCOPE ASSY.

☒ SCOPE

☒ SCOPE RINGS

☒ MOUNTING SCREWS

☒ MOUNTING BASE

☒ SCREWS

☒ FINISH

☒ LOOSENESS

☒ CLARITY

Item:

STOCK ASSY.

☒ STOCK

☒ SLING SWIVEL STUDS

☒ ADJUSTABLE BUTT PLATE

☒ LOCK NUTS

☒ BARREL CLEARANCE

☒ COLOR/FINISH

SYSTEMS CASE

☐ SCOPE CASE

☐ INON SIGHTS

☐ DEPLOYMENT KIT

TRIGGER

☒ SAFETY OPERATION

☒ SET

☐

MISC.

☐ DD-250

☐ BAR CODE

☐ PACKAGING

Comments:

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-97-C-242

R & E NUMBER <u>0000 7104</u>			
SERIAL NUMBER <u>C6225098</u>			
LOG-IN DATE <u>3-25-00</u>			

INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	4-6-00	RW
560 A	RE-BARREL AT CUSTOM SHOP		
B	DRILL AND TAP		
C	POLISH		
575	ASSEMBLE		
600	PROOF	4-24-00	RW
605	CHECK HEADSPACE	4-24-00	RW
610	DIS-ASSEMBLE GUN		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	6-8-00	RW
655	FINAL INSPECT	6-12-00	RW
660	PACK		
		SHIP DATE	
QAR INSPECTION DATE			

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225098

OPERATION		DATE	INT
#	NAME		
575- 580	ASSEMBLY	2/1	FB
600	PROOF	2/2/88	RW
615	MAGNAFLUX BARREL	2/18/88	P/C
	MAGNAFLUX BOLT	2/25/88	P/C
620	COATING	3/21/88	TJA
625- 630	FINAL ASSEMBLY		
635	TEST		
640	TARGET		
	FIRING PIN INDENT		
660	PACK		

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6225098

New Stock

OP.#	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill & Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coatings (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		9/12/88	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		9/12/88	RW
	C) Inspect Ejector Hole for Chamfer		9/12/88	RW

OVER

OP.#		READINGS	DATE	INITIAL
625 cont.	D) Oil Firing Pin Ass'y		9/12/88	RW
	E) Adjust Trigger Pull to Min. Setting and Stake		12 Sept 88	JS
	F) Safety on Force	7# 7# 7#	12 Sept 88	JS
	G) Safety off Force	3# 3 3#	12 Sept 88	JS
	H) Trigger Pull Test & Retainabilty		12 Sept 88	JS
	I) Firing Pin Indent	.021 .021 .021	12 Sept 88	JS
	J) Assemble Stock		9/14/88	RW
	K) Assemble Swivel Studs		10-13-88	JS
	L) Attach Front & Rear Sight Assemblies		9/14/88	RW
	M) Iron Sight Alignment		9/14/88	RW
	N) Detach Front & Rear Sights & place in numbered container		9/14/88	RW
	O) Attach Scope to Rifle		10/5/88	RW
	P) Detach & Attach Scope 20 times	60 R 95L	10-5-88	JS
640	Gallery Target & Test	RESHOT PC 10/12/88	10/11/88	W.B.
	A) Optical Clarity of Scope		10/11/88	W.B.
645	Inspect for Live Ammo		10/11/88	W.B. & JC
655	Final Inspection		10-13-88	JS
	A) Headspace		10-14-88	JS
	B) Trigger Pull		10-13-88	JS
	C) Function		10-13-88	JS
660	Pack		15 Dec 88	JS

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. C6225098DATE 12 Sept 88TESTER J.O. & W.B.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.65	2.45	2.60	2.63	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.35	2.48	2.59	2.57	
PULL #3	2.38	2.49	2.61	2.58	
PULL #4	2.55	2.49	2.58	2.62	
PULL #5	2.49	2.49	2.57	2.74	
TOTAL	12.42	12.40	12.95	13.14	
AVG.	2.484	2.48	2.59	2.628	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.33	3.25		
PULL #2	3.25	3.30		
PULL #3	3.34	3.35		
PULL #4	3.31	3.35		
PULL #5	3.31	3.33		
TOTAL	16.54	16.58		
AVG.	3.308	3.316		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.20	4.29		4.02
PULL #2	4.40	4.34		4.03
PULL #3	4.27	4.37		4.08
PULL #4	4.39	4.42		4.10
PULL #5	4.40	4.42		4.13
TOTAL	21.66	21.84		20.35
AVG.	4.332	4.368		4.072

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225098

CENTROIDAL DISTANCES

0 TO	1	.21523
1 TO	2	.262086
1 TO	3	.377712
1 TO	4	.404675
1 TO	5	.3568


$\frac{51}{42}$ <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0138
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0036
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0363235
THE AMR FOR THIS RIFLE IS: .9686

12 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C8225098

CENTERFIRE PATTERNS # 1

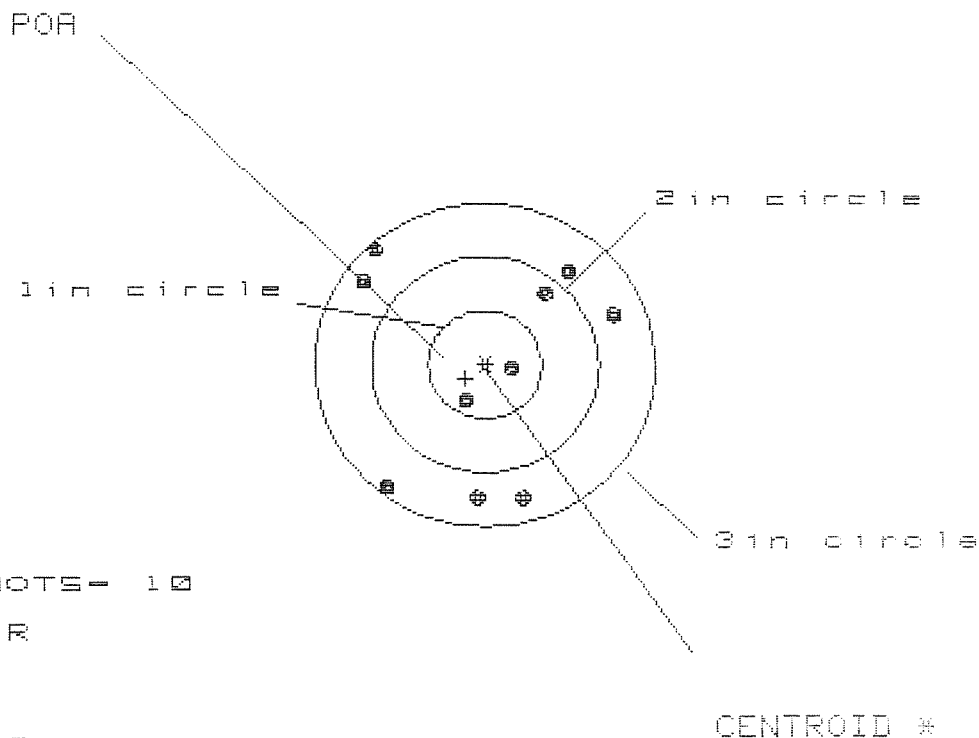

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 3

3 in = 10

HS= 2.190

VS= 2.330


GS= 2.688

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.138	1.028	.911
MINIMUM X	-1.052	-1.162	-1.279
MAXIMUM Y	1.086	.996	.870
MINIMUM Y	-1.244	-1.123	-1.249
CENTROID X	.170	.280	.397
CENTROID Y	.132	.011	.137
POA TO CENTROID in.	.215	.280	.420
MIN RADIUS	.275	.205	.048
MEAN RADIUS	1.059	.993	.919
MAX RADIUS	1.467	1.484	1.508
HORIZONTAL SPREAD	2.190	2.190	2.190
VERTICAL SPREAD	2.330	2.119	2.119
EXTREME SPREAD	2.688	2.557	2.483
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	10		

12 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6225098

CENTERFIRE PATTERNS # 2

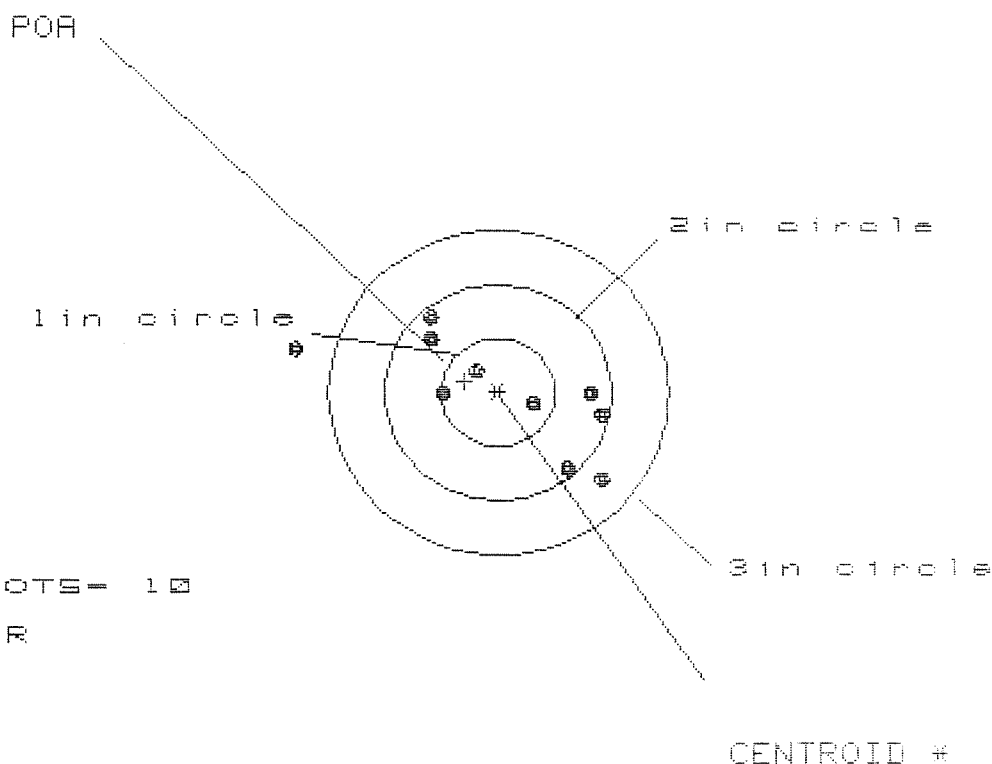

OF SHOTS= 10

IN CIR

1in = 3

2in = 8

3in = 9

HS= 2.691

VS= 1.481


GS= 2.903

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.935	.740	.828
MINIMUM X	:	-1.756	-.834	-.746
MAXIMUM Y	:	.706	.749	.657
MINIMUM Y	:	-.775	-.732	-.720
CENTROID X	:	.290	.485	.397
CENTROID Y	:	-.101	-.144	-.052
POA TO CENTROID in.	:	.307	.506	.400
MIN RADIUS	:	.236	.125	.240
MEAN RADIUS	:	.841	.713	.672
MAX RADIUS	:	1.798	1.090	.963
HORIZONTAL SPREAD	:	2.691	1.574	1.574
VERTICAL SPREAD	:	1.481	1.481	1.377
EXTREME SPREAD	:	2.903	2.109	1.861
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		9	

12 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6225098

CENTERFIRE PATTERNS # 3

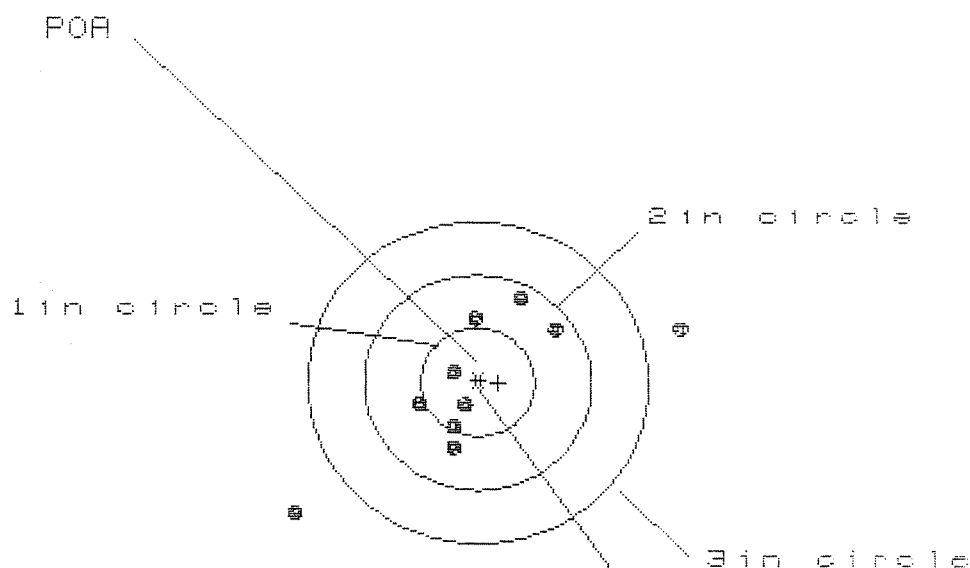

OF SHOTS- 10

IN CIR

1in = 3

2in = 8

3in = 8

HS= 3.386

VS= 2.015

GS= 3.778

CENTROID #

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.767	1.587	.741
MINIMUM X	:	-1.619	-.688	-.490
MAXIMUM Y	:	.809	.675	.717
MINIMUM Y	:	-1.206	-.712	-.670
CENTROID X	:	-.185	-.005	-.203
CENTROID Y	:	.003	.137	.095
POA TO CENTROID in.	:	.185	.137	.224
MIN RADIUS	:	.177	.387	.197
MEAN RADIUS	:	.830	.727	.558
MAX RADIUS	:	2.019	1.622	.857
HORIZONTAL SPREAD	:	3.386	2.275	1.231
VERTICAL SPREAD	:	2.015	1.387	1.387
EXTREME SPREAD	:	3.778	2.382	1.487
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		8	


12 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C8225098

CENTERFIRE PATTERNS

4

POA

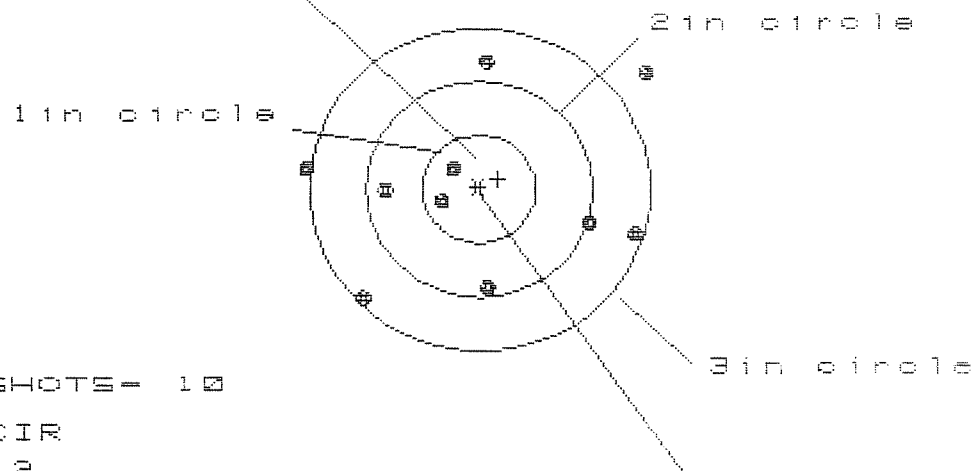

OF SHOTS= 10

IN CIR

1in = 2

2in = 5

3in = 8

HS= 3.022

VS= 2.181

GS= 3.216

PATTERN #	4	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.476	1.573	1.400
MINIMUM X	-1.546	-1.382	-1.013
MAXIMUM Y	1.214	1.335	1.372
MINIMUM Y	-.967	-.846	-.809
CENTROID X	-.169	-.333	-.160
CENTROID Y	-.089	-.210	-.247
POA TO CENTROID in.	.191	.393	.295
MIN RADIUS	.329	.155	.330
MEAN RADIUS	1.085	.963	.927
MAX RADIUS	1.829	1.594	1.417
HORIZONTAL SPREAD	3.022	2.955	2.413
VERTICAL SPREAD	2.181	2.181	2.181
EXTREME SPREAD	3.216	3.008	2.484
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	8		

12 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06225098

CENTERFIRE PATTERNS # 5

POA

1 in circle

2 in circle

3 in circle

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 5

3 in = 8

HS= 2.749

VS= 2.337

GS= 2.808

CENTROID #

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.401	1.251	1.130
MINIMUM X	:	-1.348	-.967	-.843
MAXIMUM Y	:	.997	1.094	.938
MINIMUM Y	:	-1.340	-1.243	-1.076
CENTROID X	:	-.175	-.025	.096
CENTROID Y	:	.223	.126	.282
POA TO CENTROID in.	:	.283	.129	.298
MIN RADIUS	:	.411	.536	.484
MEAN RADIUS	:	1.028	.950	.843
MAX RADIUS	:	1.604	1.575	1.367
HORIZONTAL SPREAD	:	2.749	2.218	1.973
VERTICAL SPREAD	:	2.337	2.337	2.014
EXTREME SPREAD	:	2.808	2.757	2.371
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		8	

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06225098
28 Oct 1993

CENTROIDAL DISTANCES

0 TO	1	.512247
1 TO	2	.690797
1 TO	3	.551572
1 TO	4	.668381
1 TO	5	.550568

⊙¹ <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .071
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0704
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0999858


THE AMR FOR THIS RIFLE IS: .9572

28 Oct 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C6225098

CENTERFIRE PATTERNS

1

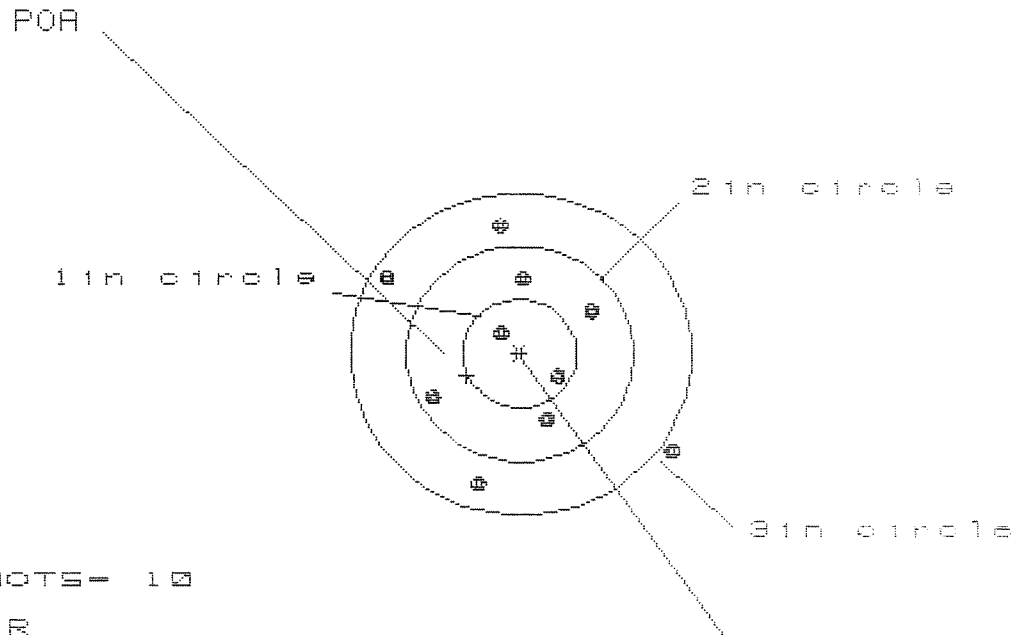

OF SHOTS- 10

IN CIR

1in = 2

2in = 6

3in = 8

HS= 2.506

VS= 2.406

GS= 2.960


CENTROID *

PATTERN #	:	1	2	3
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.332	.815	.687
MINIMUM X	:	-1.174	-1.027	-.729
MAXIMUM Y	:	1.193	1.097	1.175
MINIMUM Y	:	-1.213	-1.309	-1.231
CENTROID X	:	.469	.322	.450
CENTROID Y	:	.206	.302	.224
POA TO CENTROID in.	:	.513	.441	.503
MIN RADIUS	:	.251	.099	.225
MEAN RADIUS	:	.909	.822	.766
MAX RADIUS	:	1.585	1.324	1.274
HORIZONTAL SPREAD	:	2.506	1.842	1.416
VERTICAL SPREAD	:	2.406	2.406	2.406
EXTREME SPREAD	:	2.960	2.415	2.415
NUMBER IN ONE INCH CIRCLE	=	2		
NUMBER IN TWO INCH CIRCLE	=	6		
NUMBER IN THREE INCH CIRCLE	=	9		

28 Oct 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C6225098

CENTERFIRE PATTERNS # 2

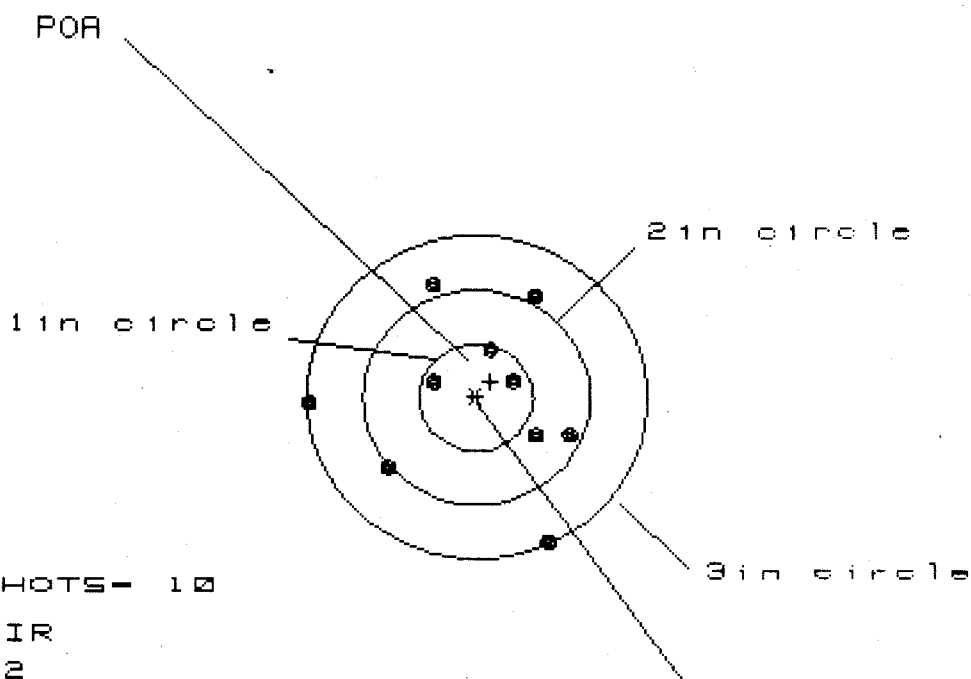

OF SHOTS- 10

IN CIR

1in = 2

2in = 5

3in = 8

HS= 2.353

VS= 2.404

GS= 2.593


CENTROID #

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.839	.909	.729
MINIMUM X	:	-1.514	-1.444	-.852
MAXIMUM Y	:	1.016	.862	.841
MINIMUM Y	:	-1.388	-.834	-.855
CENTROID X	:	-.123	-.193	-.013
CENTROID Y	:	-.150	.004	.025
POA TO CENTROID in.	:	.194	.193	.028
MIN RADIUS	:	.340	.276	.189
MEAN RADIUS	:	.904	.814	.704
MAX RADIUS	:	1.524	1.454	1.208
HORIZONTAL SPREAD	:	2.353	2.353	1.581
VERTICAL SPREAD	:	2.404	1.696	1.696
EXTREME SPREAD	:	2.593	2.381	2.058
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		8	

28 Oct 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C6225098

CENTERFIRE PATTERNS # 3

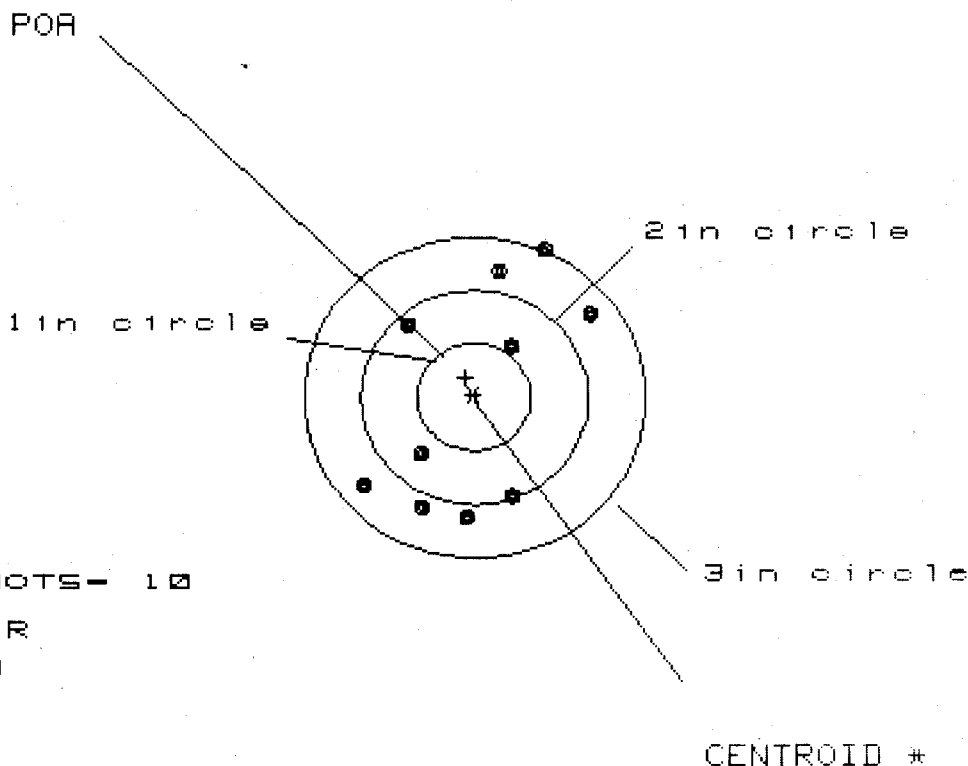

OF SHOTS- 10

IN CIR

1in = 0

2in = 3

3in = 9

HS= 1.984

VS= 2.456

GS= 2.710

CENTROID #


PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.052	1.123	.580
MINIMUM X	:	-.932	-.861	-.721
MAXIMUM Y	:	1.375	1.287	1.405
MINIMUM Y	:	-1.081	-.928	-.810
CENTROID X	:	.075	.004	-.136
CENTROID Y	:	-.180	-.333	-.451
POA TO CENTROID in.	:	.195	.333	.471
MIN RADIUS	:	.517	.565	.382
MEAN RADIUS	:	1.053	.981	.884
MAX RADIUS	:	1.514	1.467	1.471
HORIZONTAL SPREAD	:	1.984	1.984	1.301
VERTICAL SPREAD	:	2.456	2.215	2.215
EXTREME SPREAD	:	2.710	2.567	2.285
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		3	
NUMBER IN THREE INCH CIRCLE	=		9	

28 Oct 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C8225098

CENTERFIRE PATTERNS # 4

POA

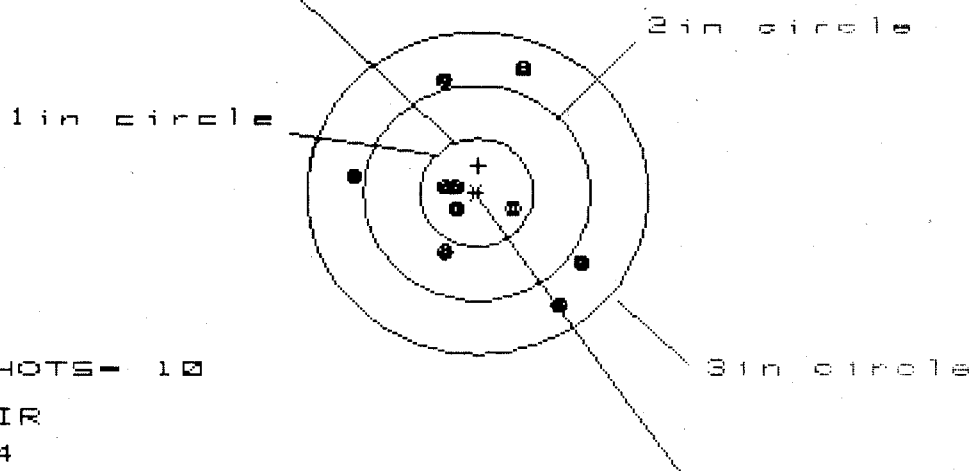

OF SHOTS- 10

IN CIR

1 in - 4

2 in - 5

3 in = 10

HS- 1.991

VS= 2.225

GS= 2.322


CENTROID *

PATTERN #	:	4	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.871	.947	1.012
MINIMUM X	:	-1.119	-1.044	-.979
MAXIMUM Y	:	1.165	1.047	1.056
MINIMUM Y	:	-1.060	-.761	-.630
CENTROID X	:	-.014	-.090	-.155
CENTROID Y	:	-.256	-.138	-.269
POA TO CENTROID in.	:	.256	.165	.311
MIN RADIUS	:	.170	.100	.077
MEAN RADIUS	:	.751	.688	.586
MAX RADIUS	:	1.259	1.215	1.192
HORIZONTAL SPREAD	:	1.991	1.991	1.991
VERTICAL SPREAD	:	2.225	1.808	1.686
EXTREME SPREAD	:	2.322	2.159	2.159
NUMBER IN ONE INCH CIRCLE	=		4	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		10	

28 Oct 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C6225098

CENTERFIRE PATTERNS # 5

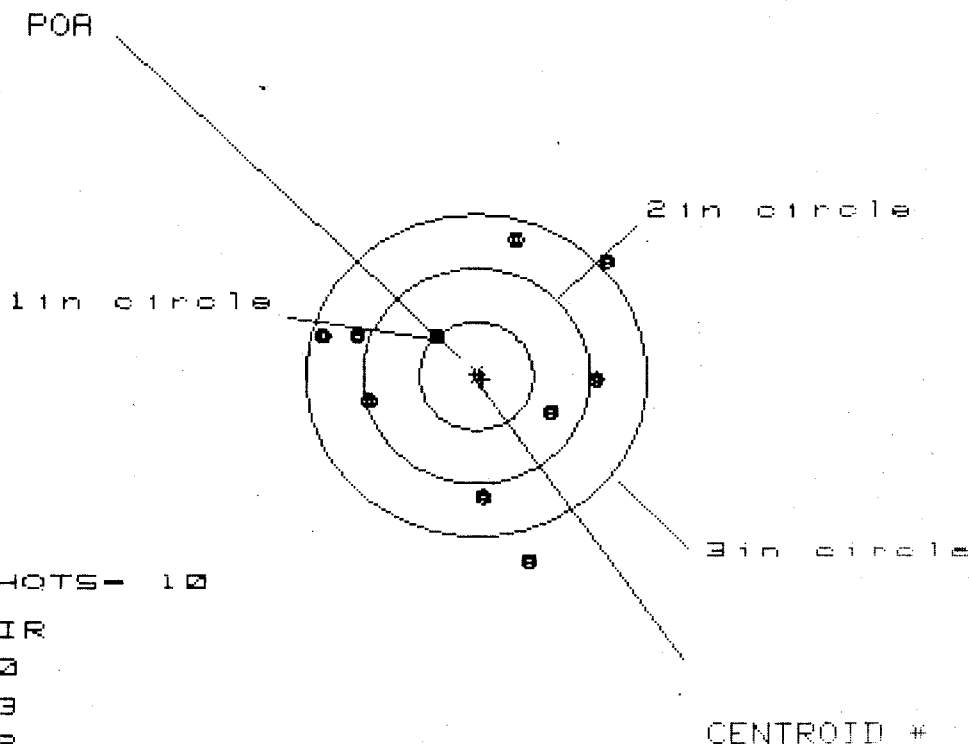

OF SHOTS- 10

IN CIR

1in = 0

2in = 3

3in = 8

HS= 2.519

VS= 2.929

GS= 2.930

CENTROID #

PATTERN #	5	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.135	1.184	1.294
MINIMUM X	-1.384	-1.335	-1.187
MAXIMUM Y	1.230	1.041	1.157
MINIMUM Y	-1.699	-1.355	-1.239
CENTROID X	-.052	-.101	-.249
CENTROID Y	.028	.217	.101
POR TO CENTROID in.	.059	.239	.268
MIN RADIUS	.530	.370	.356
MEAN RADIUS	1.169	1.086	1.014
MAX RADIUS	1.754	1.505	1.302
HORIZONTAL SPREAD	2.519	2.519	2.481
VERTICAL SPREAD	2.929	2.396	2.396
EXTREME SPREAD	2.930	2.620	2.525
NUMBER IN ONE INCH CIRCLE =	0		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	8		

CONTRACT # DAAA21-87-C-0086

New Barrel

GUN SERIAL # C6225098

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock		10/4/93	RW
600	Proof		10/4/93	RW
607	Check Headspace		10/4/93	RW
610	Dis-assemble Gun		10/4/93	RW
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		10/27/93	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		10/27/93	RW
	C) Inspect Ejector Hole for Chamfer		10/27/93	RW
	D) Oil Firing Pin Ass'y		10/27/93	RW
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS					DATE	INIT
5 cont.	F) Safety On Force							
	G) Safety Off Force							
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent							
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test						10/27/93	RW
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo						10/27/93	RW
655	Final Inspection							
	A) Headspace						10/27/93	RW
	B) Trigger Pull	2.17	2.17	2.18	2.17	2.23	10/27/93	RW
	C) Function						10/27/93	RW
660	Pack							

RECEIVING AND ESTIMATING REPORT

R 93-20756

INITIAL	CUSTOMER ORDER NO.			M-24 W/ULTRA 10X-M3A SCOPE/ATTN:FRED MARTIN		
PS	DATE RECEIVED	DATE OPENED	DATE CODE	SERIAL NUMBER	NEW SERIAL NUMBER	MODEL AND GRADE
	9/30/93	09/30/93	LI 2-88	C6225098		700 7.62 NATO
ACCESSORIES	W/STUDS	SCOPE MNTS	SCOPE BASE	HARD CASE		

FROM:

SHIP TO:

DEPT OF THE ARMY
B CO. 1/75TH RGR REGT.
ATTN: ARMORER BLDG. 1279A
HAAF GA 31409

DEPT OF THE ARMY
B CO. 1/75TH RGR REGT.
ATTN: ARMORER BLDG. 1279A
HAAF GA 31409

CUST NO:084578 C.O.D

ACCOUNT NUMBER	ACCOUNT NUMBER N/C	PROM. DATE	ESTIMATED	VIA
				UPS
UN CONDITION				REPAIR CHARGE
☐ NEW				EXCISE
☐ LIGHTLY WORN				TAX
☐ WORN				INSURANCE
☐ VERY WORN				UPS
☐ UNREPAIRABLE				PARCEL POST
☐ MARRED				TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
RIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

Barrel

PARTS

COMMENTS

Barrel Assy - 96002

Re-powder Coat - Floor plate,
Latch, Trigger Guard, Front &
Rear Sight Bases.

REPAIRMAN	PROOF	CLEAN	TEST	TARGET	PATTERN
RW	✓	✓	✓	✓	
GALLERY TESTER	DATE	DATE	DATE	DATE	DATE
RW	10/4/93	10/27/93	10/27/93	10/27/93	

OFFICE COPY

RD6925 REV. 1/92

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

M2400048900

MAINTENANCE REQUEST				PAGE NO.		NO. OF PAGES		REQUIREMENTS CONTROL SYMBOL CSGLD - 1047(R1)			
For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG											
SECTION I - EQUIPMENT DATA											
CONTROL NUMBER		WORK ORDER NO.		WESDC		ORG. PD		PD AUTHENTICATION			
☒ Work Request ☐ MWO ☐ Warranty Claim		1A. ORGANIZATION B Co 475 Rgr Regt		B. LOCATION Blk 1279 A HAAE GA 3149				C. UNIT IDENT CODE WAL380			
2. SERIAL NO. 6225098		3. NOUN NOMENCLATURE 7.62 mm RFL		4. LINE NO. B95387		5. MODEL m 24		6. NATIONAL STOCK NUMBER 1005-01-240-2136			
7A. MAINTENANCE ACTIVITY		B. LEVEL		8. UTILIZATION CODE		9A. MCSR ITEM		9B. ERC		9C. PACING ITEM	
14. FAILURE DETECTED DURING (Select one - use ☒ or X)				15. FIRST INDICATION OF TROUBLE (Select one - use ☒ or X)							
☐ A Sch. Main. ☐ C Test ☐ E Storage ☐ G Flight ☐ B Handling ☒ D Normal Op ☐ F Inspection ☐ H Other				☐ 068 Inoperative ☐ 258 Overheating ☐ 790 Out of Adjustment ☐ 008 Noisy ☒ 387 Low Performance ☐ Other							
16A. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs). Fired over 10000 Rounds											
B. REMARKS Scope # 871149											
SECTION II - WORK ACCOMPLISHED											
17A. REPAIR ORGANIZATION/ACTIVITY				C. UNIT IDENT. CODE		18. TYPE ORGANIZATION/ACTIVITY ACCOMPLISHING WORK (Select one - use ☒ or X)				19. AMS ACCT. CODE	
B. LOCATION						☐ 1 TOE ☐ 2 TD ☐ 3 Contractor					
20A. ACT. CODE	B. FAILURE	C. COMPONENT/PART NOUN, SVC, OR MWO NO.		D. MANHOURS (Hrs. & tenths)		E. NATIONAL STOCK NUMBER		F. PART SOURCE CODE	G. QTY.	H. PARTS COST	
		DEPARTMENT OF THE ARMY B Co 475 RGR Regt ATTN: Armorer Bldg: 1279A HAAE GA 3149-5122 OFFICIAL BUSINESS PENALTY FOR PRIVATE USE \$300 512-0		(3) MFR. CODE 1082						\$	
Contract No.: DAAA09-92-C-0834 Remington Arms Company, Inc. ATTN: Fabricated Products Dept. 14 Horflier Avenue Union, New York 13357-1816											
REGISTERED MAIL R 418 454 844											
IS COST								K. TOTAL PARTS COST			
								\$			
21. DELAY (Select One)											
☐ 1 Parts ☐ 2 Manpower ☐ 3 Facilities ☐ 4 Funds ☐ 5 Tools											
22. Data Transcribed											
23. SUBMITTED BY		24. RECEIVED BY		25. WORK STARTED BY		26. INSPECTED BY		27. ACCEPTED BY		28. DISPOSITION (Select One)	
										☐ A To User ☐ D Evacuated ☐ B To Stock ☐ E Cannibalization ☐ C Salvaged	
JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE			
93264											

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6225098
27 Oct 1998

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .04
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .004
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0401995

THE AMR FOR THIS RIFLE IS: 1.005

CENTROIDAL DISTANCES

0	TO	1	.230489
1	TO	2	.283064
1	TO	3	.762168
1	TO	4	.466744
1	TO	5	.343919

3
4
2 + <----POA
1
5

PATTERN #: ☐ 1 ☐

POA TO CENTROID: .230

MIN RADIUS : .441

MEAN RADIUS : 1.367

MAX RADIUS : 1.924


CENTROID X : .015

CENTROID Y : -.230

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/CG225098

CENTERFIRE PATTERN # 1

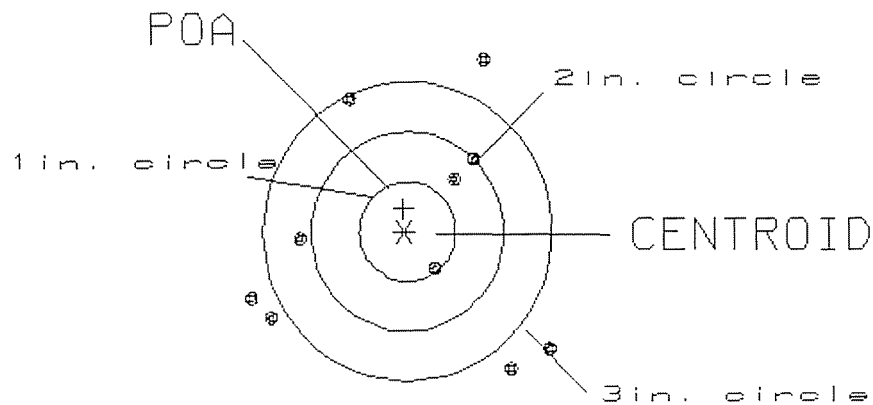

OF SHOTS= 10

IN CIRCLE

HS= 3.14

1

VS= 3.08

2

GS= 3.43

5

PATTERN #: 2

POA TO CENTROID: .225

MIN RADIUS : .285

MEAN RADIUS : .720

MAX RADIUS : 1.451


CENTROID X : -.215

CENTROID Y : -.065

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225098

CENTERFIRE PATTERN # 2

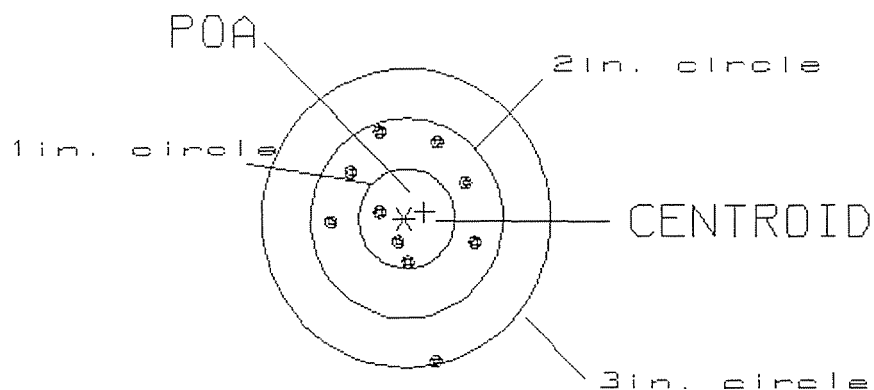

OF SHOTS= 10

IN CIRCLE

HS= 1.54

3

VS= 2.29

9

GS= 2.37

10


PATTERN #: ☐ 3 ☐

POA TO CENTROID: .533
 MIN RADIUS : .310
 MEAN RADIUS : 1.176
 MAX RADIUS : 2.097
 CENTROID X : .031
 CENTROID Y : .532

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225098

CENTERFIRE PATTERN # 3

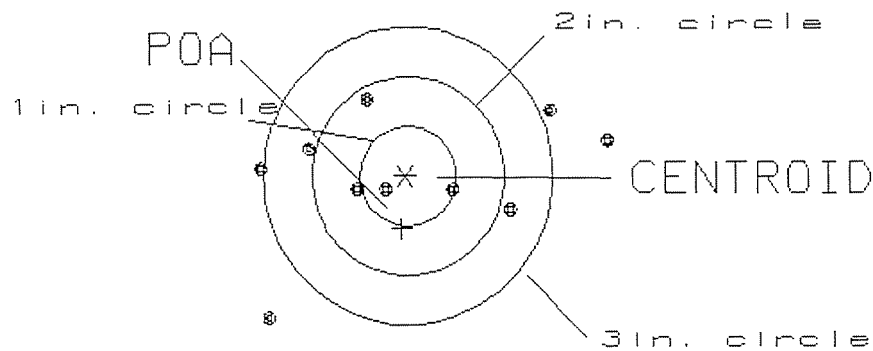

OF SHOTS= 10

IN CIRCLE

HS= 3.55

1

VS= 2.24

4

GS= 3.97

7

PATTERN #: ☐ 4 ☐

POA TO CENTROID: .247

MIN RADIUS : .447

MEAN RADIUS : 1.037

MAX RADIUS : 1.728


CENTROID X : .088

CENTROID Y : .231

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225098

CENTERFIRE PATTERN # 4

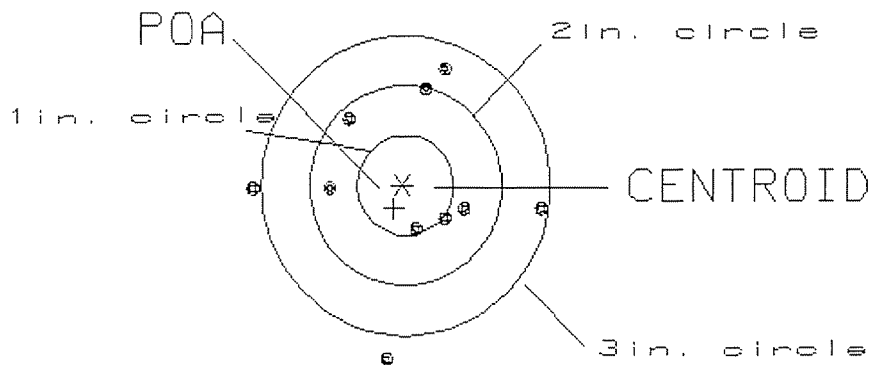

OF SHOTS= 10

IN CIRCLE

HS= 2.98

1

VS= 2.94

6

GS= 2.99


8

PATTERN #: ☐ 5 ☐
 POA TO CENTROID: .529
 MIN RADIUS : .104
 MEAN RADIUS : .727
 MAX RADIUS : 1.881
 CENTROID X : .281
 CENTROID Y : -.448

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225098

CENTERFIRE PATTERN # 5

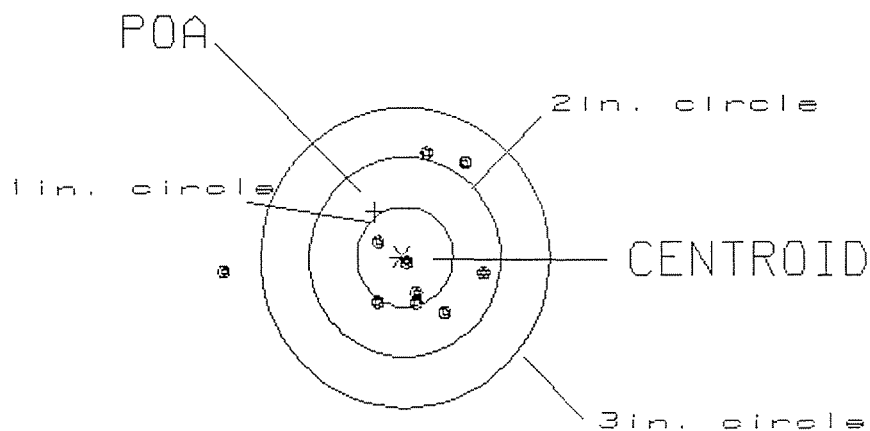

OF SHOTS= 10

IN CIRCLE

HS= 2.67

4

VS= 1.56

7

GS= 2.69

9

W/BI-POD

MODEL AND GRADE

NATO

SCOPE BASE

SHIP TO:

CDR 1/75TH RGR REGT BLDG 1036
ATTN PBO CW3 HUMES
43 LIBERATOR RD SUITE 102
HUNTER AAF GA
31409

CUST NO:119494 C.O.D

ACCOUNT NUMBER INC

Write

FROM. DATE

ESTIMATED

VIA

UP 3

☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCLSF

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

ASPECT

U

34

AIN FAULT

ARTS

COMMENTS

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE _____

DATE _____

DATE _____

DATE _____

DATE _____

OFFICE COPY

RD6925 REV. 7/97

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

M2400048908

[illegible]

HAND RECEIPT/ANNEX NUMBER <i>For use of this form, see DA PAM 710-2-1. The proponent agency is ODCSLOG.</i>			FROM: HHC 1/75TH RANGER REGT.			TO: PBO 1/75TH RANGER REGT.			HAND RECEIPT NUMBER							
FOR ANNEX/CR ONLY		END ITEM STOCK NUMBER 1005-01-240-2136	END ITEM DESCRIPTION 7.62mm M24 SNIPER WEAPON SYSTEM		PUBLICATION NUMBER TM 9-1005-306-10		PUBLICATION DATE JUNE 1989		QUANTITY 6							
STOCK NUMBER a.		ITEM DESCRIPTION b.				* c.	SEC d.	UI e.	QTY AUTH f.	g. QUANTITY						
										A	B	C	D	E	F	
1005012602662		SYSTEM CASE					U	EA	1	6	1					
1005012602663		FOAM, TOP					U	EA	1	6	1					
1005012602664		FOAM, BOTTOM					U	EA	1	6	1					
1005012622818		SOFT RIFLE CARRYING CASE					U	EA	1	0	0					
1005007141245		SLING, SMALL ARMS					U	EA	1	0	0					
1005012602665		BIPOD(OPTIONAL)					U	EA	1	6	1					
1005012602647		DEPLOYMENT CASE					U	EA	1	0	0					
1005012602666		DAY OPTIC SIGHT CASE					U	EA	1	0	0					
NSN		DEPLYMENT KIT					U	KT	1	0	0					
NSN		FRONT SIGHT					U	EA	1	0	0					
NSN		REAR SIGHT					U	EA	1	0	0					
NSN		DAY OPTIC SIGHT SN #881268, 881280, 881284, 881290, 881202, 881294					U	EA	1	6	1					
1001012402136		RIFLE SN #C6225098, C6225114, C6225164, C6225283, C6225368, C6225260					U	EA	1	6	1					

* WHEN USED AS A:

HAND RECEIPT, enter Hand Receipt Annex Number

HAND RECEIPT FOR QUARTERS FURNITURE, enter Condition Codes

HAND RECEIPT ANNEX/COMPONENTS RECEIPT, enter Accounting Requirements Code (ARC).