

C6225101

MODEL 700™ M24

Model **700 M24™**

Action

Barrel Length

Capacity

Order No. **5715**

*Includes 1 in chamber.

Remington

Repair Inquiry

Repair Number: RE00061155

Serial: C6225101 Model 700 Center Fire Caliber:
7.62 NATO M-24 (SWS)

Repairman:

Verify Repair

Status:

Closed 2/5/2003 12:37:33 PM

Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: CO C SUPPORT BATTALION

CO C SUPPORT BATTALION

Address 1: 1 ST SWTG (A)

1 ST SWTG (A)

Address 2: ATTN ARMAMENT FAC

PO Box:

ATTN ARMAMENT FAC

PO Box:

City: FORT BRAGG

FORT BRAGG

State: NC

Zip Code: 28310

Country: US

State: NC

Zip Code: 28310

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone:

Fax:

Email:

Comments:

Received Condition

Poor

Condition
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	1
A017	Scope Base	1
A026	Scope	1
X	FRT & REAR SGT BA	1

Repair Search

Refresh

Close

neglelj

2/6/2003

8:16 AM

CAPS

NUM

INS

SCPL



8:16 AM

Serial Number: C6225101

Model: 700



RE00061155

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6225101.___0
FILE DATE AND TIME: 03/08/2003 11:46


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.066
The Average Y Centroid of the Five Target Set:	-0.030
The Average Point of Impact of the Five Target Set:	0.073
The Average Mean Radius of the Five Target Set:	0.584
The Distance from POA to Centroid Target #1:	0.172
The Distance from Centroid Target #2 to Centroid Target #1:	0.191
The Distance from Centroid Target #3 to Centroid Target #1:	0.385
The Distance from Centroid Target #4 to Centroid Target #1:	0.090
The Distance from Centroid Target #5 to Centroid Target #1:	0.134

SERIAL NUMBER: C6225101. __0
TARGET NUMBER: 1
FILE DATE: 03/08/2003
FILE TIME: 11:46

X CENTROID: -0.132
Y CENTROID: 0.111
POA TO CENTROID: 0.172
HORZ SPREAD: 1.658
VERT SPREAD: 2.284
GROUP SPREAD: 2.471
MIN RADIUS: 0.193
MAX RADIUS: 1.547
MEAN RADIUS: 0.886
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 5
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.189	-1.194
2:	-0.402	-1.412
3:	-1.117	-0.413
4:	-0.531	0.556
5:	-0.899	0.786
6:	0.047	0.037
7:	0.338	0.414
8:	0.178	0.617
9:	0.541	0.872
10:	0.338	0.845

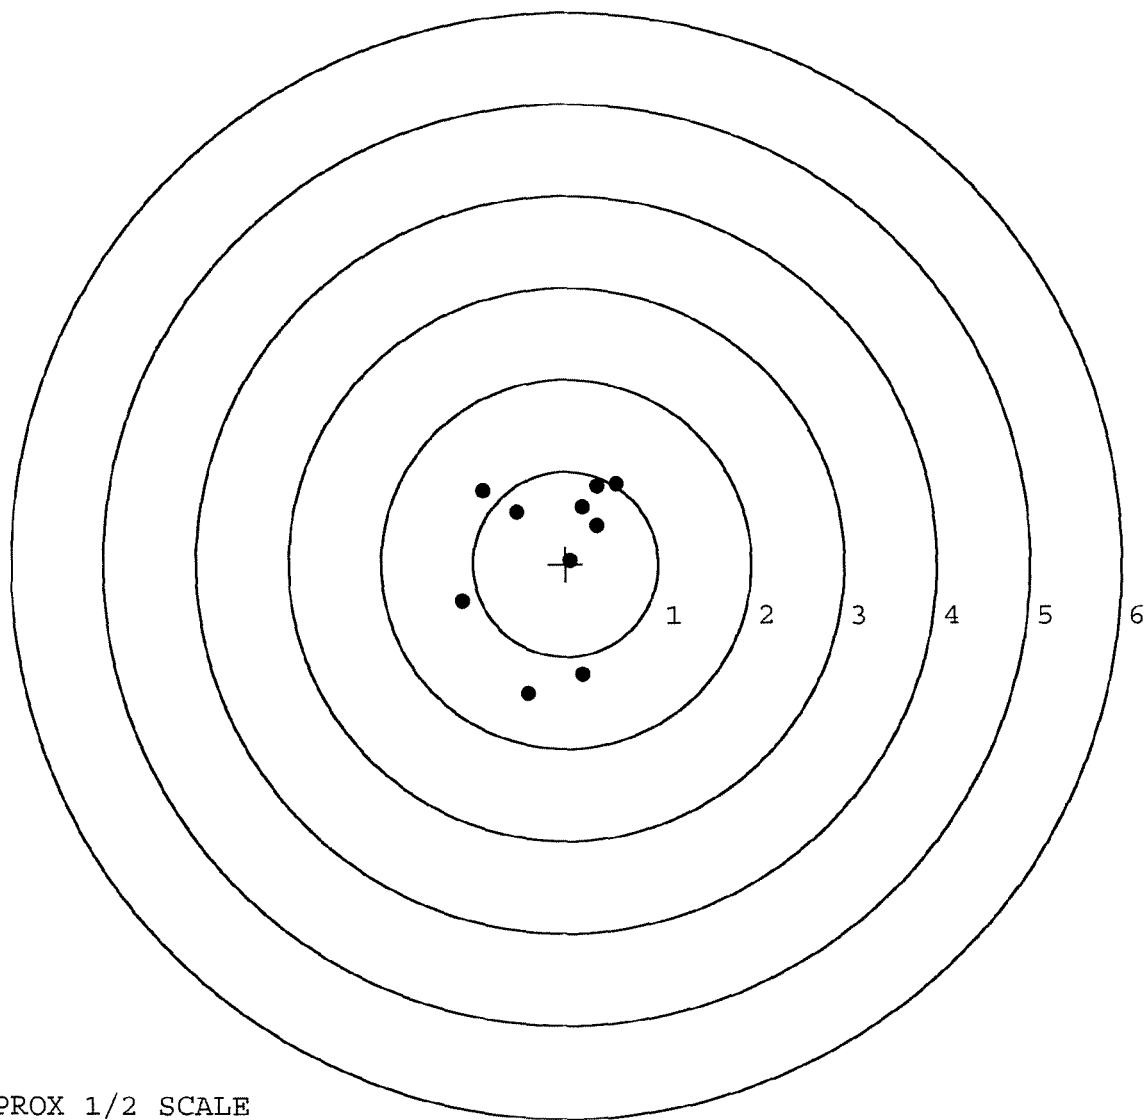


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225101.___0
TARGET NUMBER: 2
FILE DATE: 03/08/2003
FILE TIME: 11:46

X CENTROID: -0.032
Y CENTROID: -0.052
POA TO CENTROID: 0.061
HORZ SPREAD: 1.126
VERT SPREAD: 1.363
GROUP SPREAD: 1.768
MIN RADIUS: 0.091
MAX RADIUS: 1.015
MEAN RADIUS: 0.476
IN 1 IN DIAMETER: 7
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.653	-0.854
2:	-0.268	-0.732
3:	0.403	-0.140
4:	0.392	0.072
5:	0.473	0.509
6:	-0.062	0.318
7:	0.114	0.094
8:	-0.214	0.221
9:	-0.083	0.023
10:	-0.418	-0.028

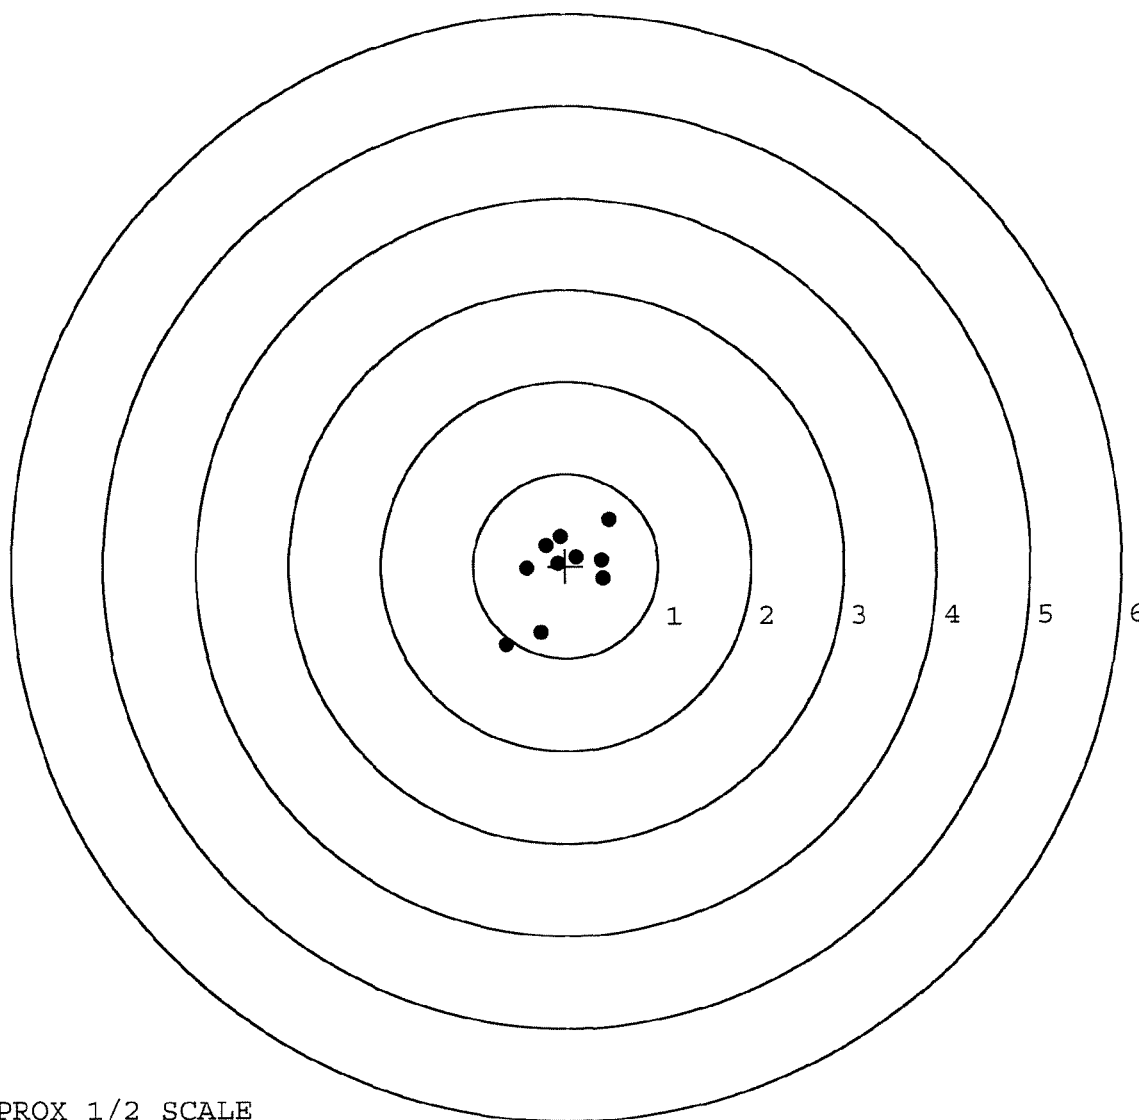


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225101.___0
TARGET NUMBER: 3
FILE DATE: 03/08/2003
FILE TIME: 11:46

X CENTROID: 0.050
Y CENTROID: -0.228
POA TO CENTROID: 0.234
HORZ SPREAD: 1.323
VERT SPREAD: 1.740
GROUP SPREAD: 1.990
MIN RADIUS: 0.201
MAX RADIUS: 1.013
MEAN RADIUS: 0.604
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.761	-0.520
2:	0.402	-0.815
3:	0.585	-1.088
4:	0.052	-0.429
5:	-0.258	-0.422
6:	-0.562	-0.298
7:	0.169	0.039
8:	-0.088	0.283
9:	-0.380	0.652
10:	-0.184	0.316

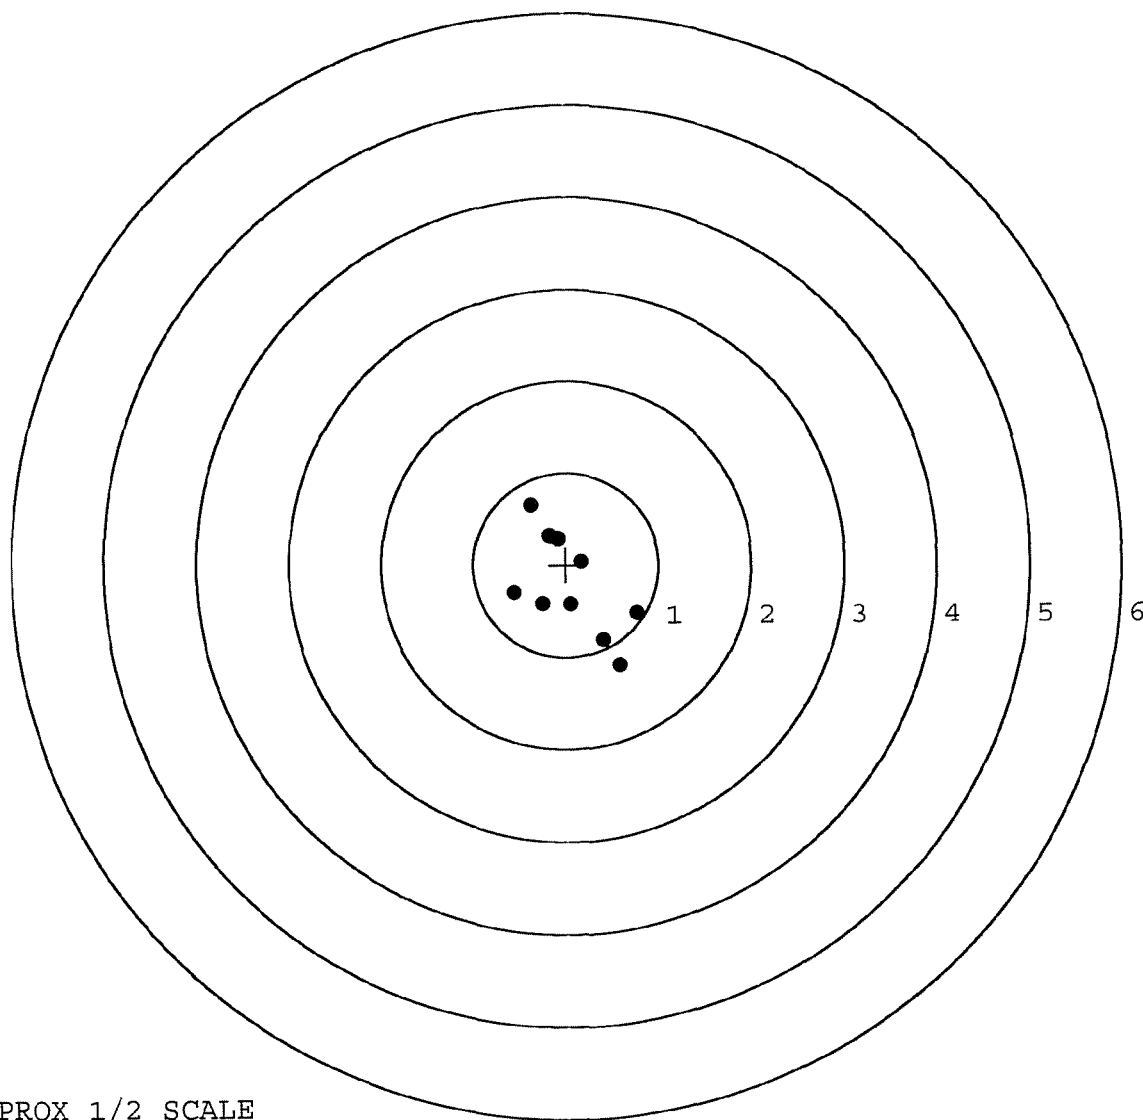

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225101. 0

TARGET NUMBER: 4

FILE DATE: 03/08/2003

FILE TIME: 11:46

X CENTROID: -0.072

Y CENTROID: 0.043

POA TO CENTROID: 0.084

HORZ SPREAD: 1.508

VERT SPREAD: 1.085

GROUP SPREAD: 1.854

MIN RADIUS: 0.155

MAX RADIUS: 1.064


MEAN RADIUS: 0.524

IN 1 IN DIAMETER: 5

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.808	-0.555
2:	0.395	0.455
3:	0.178	-0.536
4:	-0.135	-0.438
5:	-0.194	-0.154
6:	-0.313	-0.022
7:	-0.119	0.190
8:	-0.256	0.433
9:	-0.388	0.530
10:	-0.700	0.523

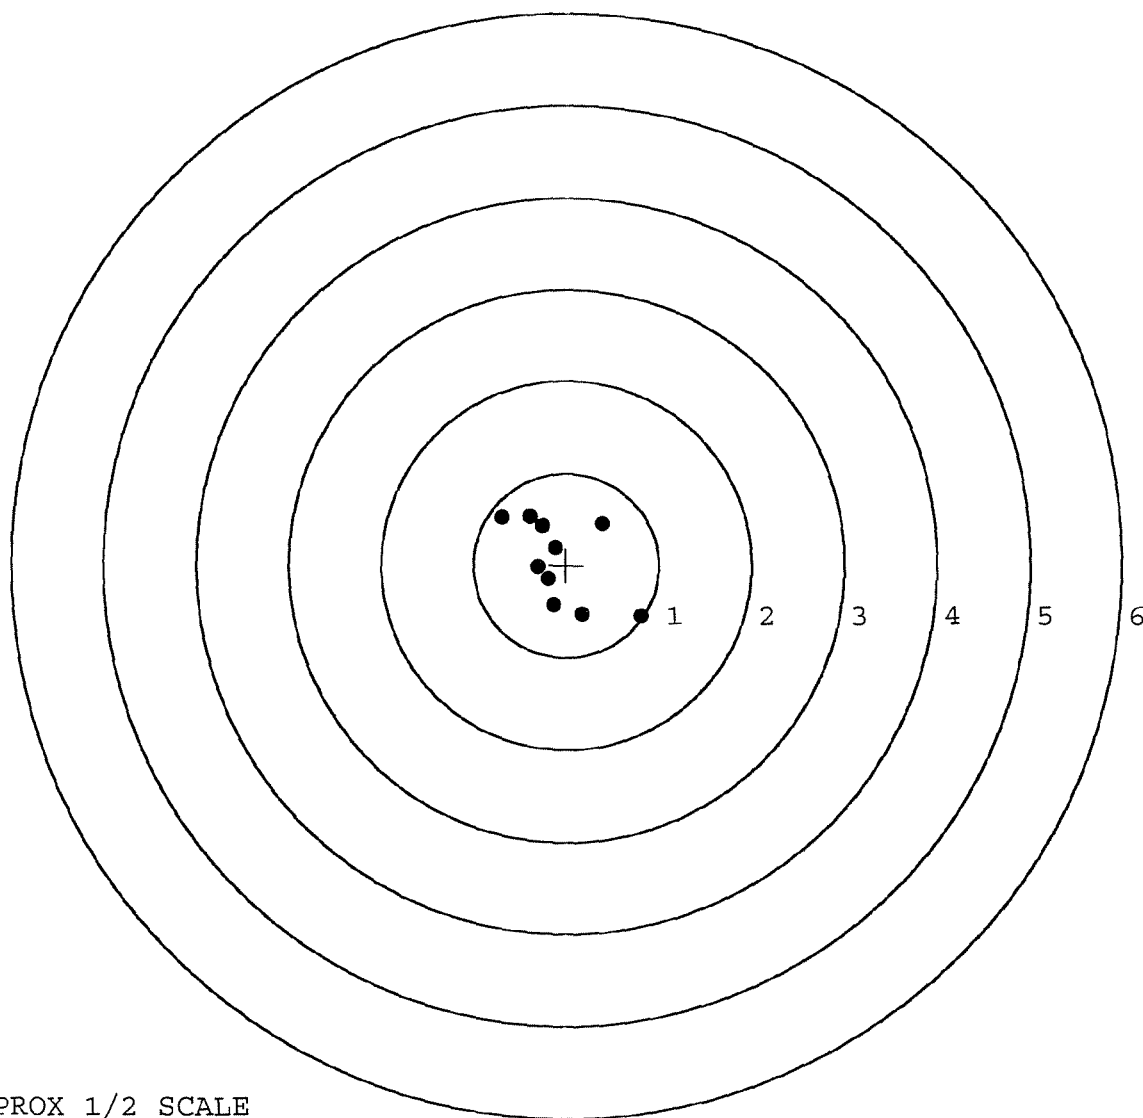

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225101. 0

TARGET NUMBER: 5

FILE DATE: 03/08/2003

FILE TIME: 11:46

POINT#	X	Y
1:	-0.141	-0.103
2:	0.333	-0.812
3:	0.101	-0.197
4:	0.074	0.289
5:	-0.052	0.689
6:	-0.265	0.648
7:	-0.668	-0.170
8:	-0.200	-0.071
9:	-0.343	-0.129
10:	-0.290	-0.366

X CENTROID: -0.145

Y CENTROID: -0.022

POA TO CENTROID: 0.147

HORZ SPREAD: 1.001

VERT SPREAD: 1.501

GROUP SPREAD: 1.578

MIN RADIUS: 0.073


MAX RADIUS: 0.923

MEAN RADIUS: 0.430

IN 1 IN DIAMETER: 6

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

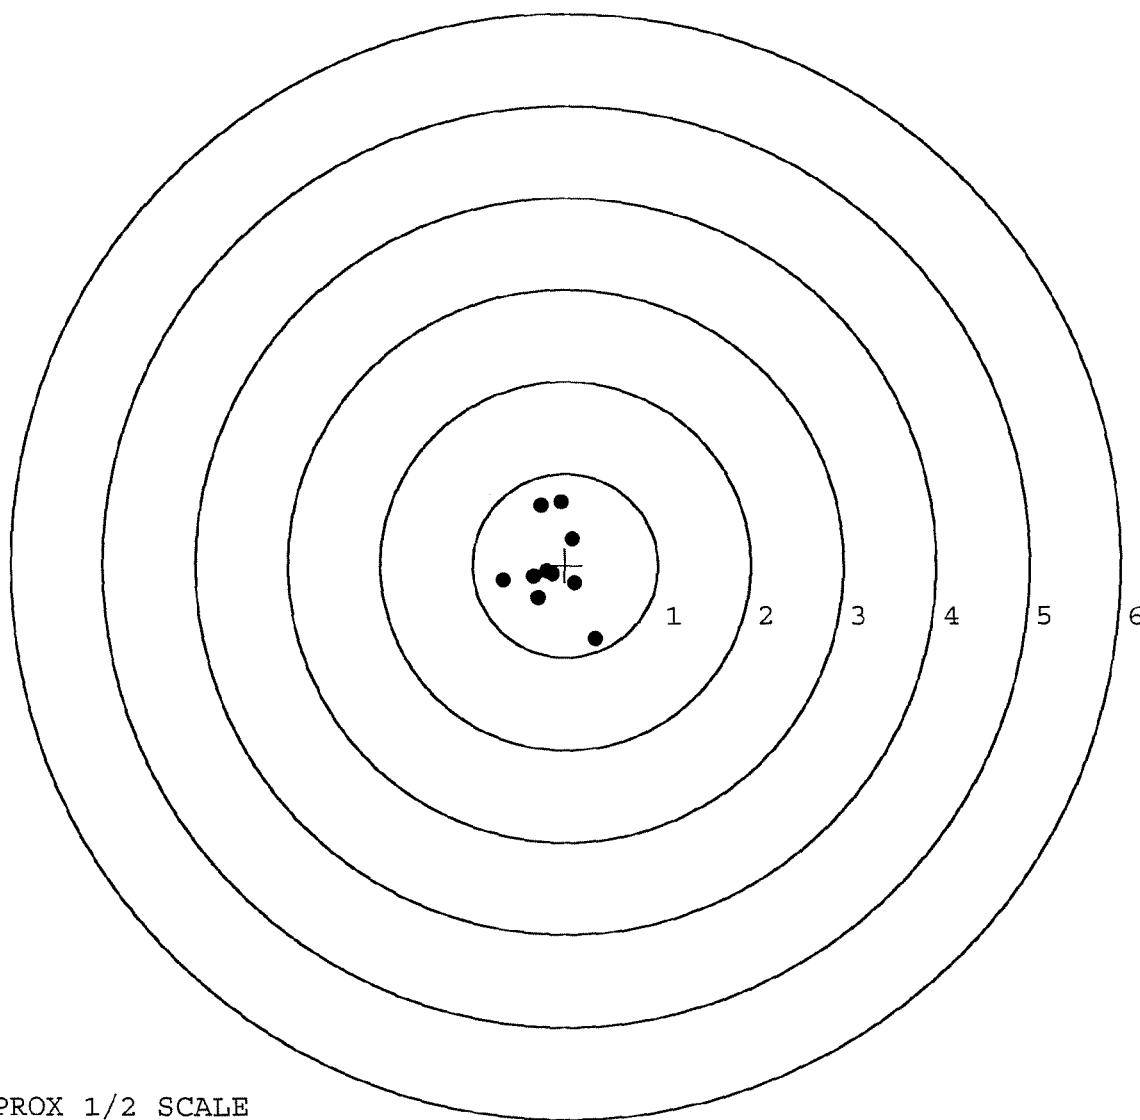

TARGET APPROX 1/2 SCALE

FINAL INSPECTION CHECKLIST M-24 REPAIRS
CONTRACT #: DAAE-20-02-D-0127

SERIAL # C6225101 INSPECTED BY: RTL

DATE REC'D: 2-5-03 DATE RET'D: 3-10-03

ITEM

BARREL ASSEMBLY

☒ BARREL
☒ RECEIVER
☒ FRONT SIGHT BASE
☒ REAR SIGHT BASE
☒ SCREWS
☒ FINISH

SCOPE ASSEMBLY

☒ SCOPE
☒ SCOPE RINGS
☒ MOUNTING SCREWS
☒ MOUNTING BASE
☒ SCREWS
☒ FINISH
☒ CLARITY

ITEM

STOCK ASSEMBLY

☒ STOCK
☒ SLING AWIVEL STUDS
☒ ADJUSTABLE
☒ BUTT PLATE
☒ LOCK NUTS
☒ BARREL CLEARANCE
☒ COLOR / FINISH

SYSTEMS CASE

☒ SCOPE CASE
☒ IRON SIGHTS
☒ DEPLOYMENT KIT

TRIGGER ASSEMBLY

☒ SAFETY OPERATION
☒ RE-SET TO FACTORY SPECS

COMMENTS:

MISSION INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R & E NUMBER	61153		
SERIAL NUMBER	C6225101		
LOG-IN DATE	2/5/03		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	2-10-03	RTL
560 A	RE-BARREL	2-11-03	RTL
B	DRILL AND TAP	2-20-03	TRW
575	ASSEMBLE	2-13-03	RTL
600	PROOF	2-13-03	AK
605	CHECK HEADSPACE	2-13-03	AK
610	DIS-ASSEMBLE GUN	2-14-03	RTL
612	MAGNAFLUX OPERATOR		
615	ROLLMARK CALIBER	2/19/03	AK
618	ROTO-BLAST	2-16-03	AK
620	APPLY COATINGS	3-3	AK
625 A	FINAL ASSEMBLY	3-5-03	AK
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	3-7-03	TRW
655	FINAL INSPECT	3-10-03	RTL
660	PACK	3-10-03	AK
		SHIP DATE	
QAR INSPECTION DATE			

00299

5081

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225101

OPERATION		DATE	INT
#	NAME		
575-580	ASSEMBLY	1/22	FB
600	PROOF	1/28/88	RW
615	MAGNAFLUX BARREL	2/18/88	R/C
	MAGNAFLUX BOLT	2/25/88	R/C
620	COATING	3/24/88	TJA
625-630	FINAL ASSEMBLY		
635	TEST		
640	TARGET		
	FIRING PIN INDENT		
660	PACK		

M-24

Score #
1114

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225101

OP.#	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill & Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coatings (Bolt)			
	Final Assembly A) Clean inside of Bolt Assembly		9/9/88	AW
	B) Inspect & finish Pin Hole for Chamfer in Bolt Head		9/9/88	AW
	C) Inspect Ejector Hole for Chamfer		9/9/88	AW

OVER

OP.#		READINGS	DATE	INITIAL
625 cont.	D) Oil Firing Pin Ass'y		9/9/88	RW
	E) Adjust Trigger Pull to Min. Setting and Stake		9 Sept 88	JU + B.S.
	F) Safety on Force	4.25 5.75 5.75	9 Sept 88	JU + B.S.
	G) Safety off Force	4 4 4	9 Sept 88	JU + B.S.
	H) Trigger Pull Test & Retainability		9 Sept 88	JU + B.S.
	I) Firing Pin Indent	0.215 0.22 0.215	9 Sept 88	JU + B.S.
	J) Assemble Stock		9/20/88	RW
	K) Assemble Swivel Studs		10-12-88	J.S.
	L) Attach Front & Rear Sight Assemblies		9/20/88	RW
	M) Iron Sight Alignment		9/20/88	RW
	N) Detach Front & Rear Sights & place in numbered container		9/20/88	RW
	O) Attach Scope to Rifle		10/4/88	RW
	P) Detach & Attach Scope 20 times		10-5-88	B.S.
640	Gallery Target & Test	83 R 77 L	10/10/88	W.B.
	A) Optical Clarity of Scope		10/10/88	W.B.
645	Inspect for Live Ammo		10/10/88	W. B.A.
655	Final Inspection			
	A) Headspace		10-12-88	J.S.
	B) Trigger Pull		10-14-88	J.S.
	C) Function		10-12-88	J.S.
660	Pack		10-21-88	J.S.

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. C6225101
DATE 9 Sept. 88
TESTER J. U. + 208

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.61	2.33	2.27	2.28	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.55	2.27	2.14	2.23	
PULL #3	2.56	2.18	2.22	2.22	
PULL #4	2.45	2.28	2.22	2.19	
PULL #5	2.49	2.18	2.16	2.18	
TOTAL	12.66	11.24	11.01	11.10	
AVG.	2.532	2.248	2.202	2.222	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.23	3.19		
PULL #2	3.23	3.14		
PULL #3	3.21	3.22		
PULL #4	3.23	3.14		
PULL #5	3.23	3.15		
TOTAL	16.13	15.84		
AVG.	3.226	3.168		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.34	4.05		4.08
PULL #2	4.16	4.10		4.07
PULL #3	4.20	4.08		4.14
PULL #4	4.16	4.12		4.11
PULL #5	3.98	4.13		4.10
TOTAL	20.84	20.48		20.50
AVG.	4.168	4.096		4.10

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 6225101

CENTROIDAL DISTANCES

0 TO	1	2.08134
1 TO	2	.53834
1 TO	3	1.48208
1 TO	4	1.49014
1 TO	5	1.11741

+ (-3--POB

1
2
5
4

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: 1.6888
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -1.7186
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: 2.40949
THE AMR FOR THIS RIFLE IS: .9686

11 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06225181

CENTERFIRE PATTERNS # 1

POA

1 in circle

2 in circle

3 in circle

OF SHOTS = 10

IN CIR

1 in = 6

2 in = 7

3 in = 8

HS = 2.035

VS = 3.270

GS = 3.790

CENTROID #

PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.856	.725	.801
MINIMUM X	:	-1.179	-.484	-.408
MAXIMUM Y	:	1.859	.946	.795
MINIMUM Y	:	-1.411	-1.204	-1.045
CENTROID X	:	1.566	1.697	1.621
CENTROID Y	:	-1.371	-1.578	-1.427
POA TO CENTROID in.	:	2.082	2.317	2.160
MIN RADIUS	:	.053	.252	.086
MEAN RADIUS	:	.766	.657	.505
MAX RADIUS	:	2.202	1.348	1.317
HORIZONTAL SPREAD	:	2.035	1.209	1.209
VERTICAL SPREAD	:	3.270	2.150	1.841
EXTREME SPREAD	:	3.790	2.204	1.937
NUMBER IN ONE INCH CIRCLE	=		6	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		8	


11 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06225101

CENTERFIRE PATTERNS # 2

POA


OF SHOTS = 10
IN CIR
1 in = 0
2 in = 4
3 in = 8
HS = 3.828
VS = 2.555
GS = 4.416

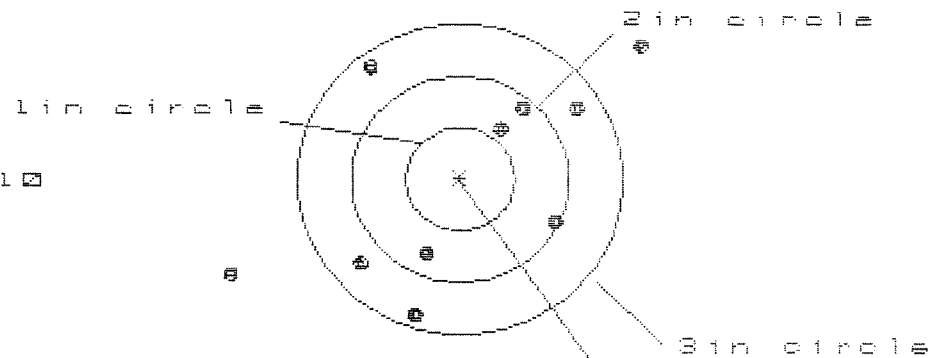

PATTERN #	:	2	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.788	1.473	1.043
MINIMUM X	:	-2.128	-1.190	-1.006
MAXIMUM Y	:	1.267	1.163	1.089
MINIMUM Y	:	-1.288	-1.392	-1.247
CENTROID X	:	1.423	1.658	1.474
CENTROID Y	:	-1.890	-1.786	-1.931
POA TO CENTROID in.	:	2.365	2.437	2.430
MIN RADIUS	:	.599	.378	.599
MEAN RADIUS	:	1.284	1.129	1.045
MAX RADIUS	:	2.317	1.876	1.374
HORIZONTAL SPREAD	:	3.828	2.663	2.049
VERTICAL SPREAD	:	2.555	2.555	2.336
EXTREME SPREAD	:	4.416	3.396	2.564
NUMBER IN ONE INCH CIRCLE =	:	0		
NUMBER IN TWO INCH CIRCLE =	:	4		
NUMBER IN THREE INCH CIRCLE =	:	8		

FILE:/PATTERNING/CENTERFIRE PATT/08225101

POH

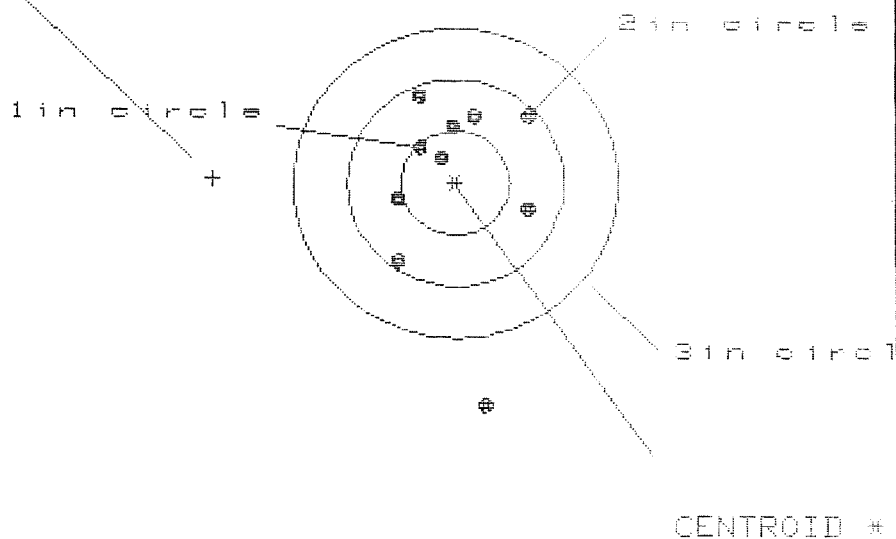

GS= 3.954

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.673	.706	.784
MINIMUM X	:	-.548	-.515	-.427
MAXIMUM Y	:	.883	.648	.701
MINIMUM Y	:	-2.114	-.988	-.935
CENTROID X	:	2.234	2.201	2.113
CENTROID Y	:	-.048	.187	.134
POA TO CENTROID in.	:	2.234	2.209	2.118
MIN RADIUS	:	.272	.065	.077
MEAN RADIUS	:	.810	.578	.549
MAX RADIUS	:	2.134	1.114	1.028
HORIZONTAL SPREAD	:	1.221	1.221	1.211
VERTICAL SPREAD	:	2.997	1.636	1.636
EXTREME SPREAD	:	3.054	1.863	1.655
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		9	
NUMBER IN THREE INCH CIRCLE	=		9	


11 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/08225101

CENTERFIRE PATTERNS

4

POA

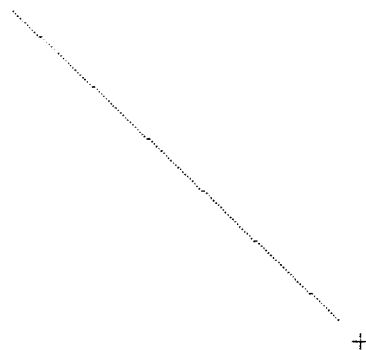

OF SHOTS = 10

IN CIR

1 in = 4

2 in = 6

3 in = 8

HS = .711


VS = 3.286

GS = 3.291

1 in circle

2 in circle

3 in circle

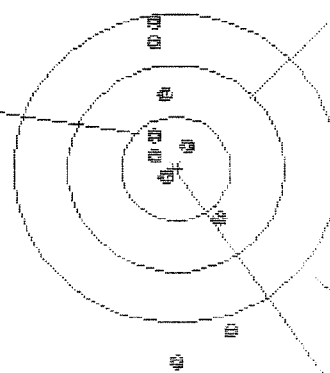

PATTERN # : 4

SHOTS (BEST OF)	10	9	8
MAXIMUM X	.499	.496	.463
MINIMUM X	-.212	-.215	-.153
MAXIMUM Y	1.405	1.196	.976
MINIMUM Y	-1.881	-1.756	-.859
CENTROID X	1.901	1.904	1.842
CENTROID Y	-2.823	-2.614	-2.394
POA TO CENTROID in.	3.403	3.234	3.021
MIN RADIUS	.160	.145	.152
MEAN RADIUS	.843	.687	.541
MAX RADIUS	1.881	1.825	.988
HORIZONTAL SPREAD	.711	.711	.616
VERTICAL SPREAD	3.286	2.952	1.835
EXTREME SPREAD	3.291	3.036	1.935
NUMBER IN ONE INCH CIRCLE =		4	
NUMBER IN TWO INCH CIRCLE =		6	
NUMBER IN THREE INCH CIRCLE =		8	

11 Oct 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06225181

CENTERFIRE PATTERNS # 5

POA

OF SHOTS = 10

IN CIR

1 in = 1


2 in = 4

3 in = 8

HS = 2.225

VS = 3.051

GS = 3.119

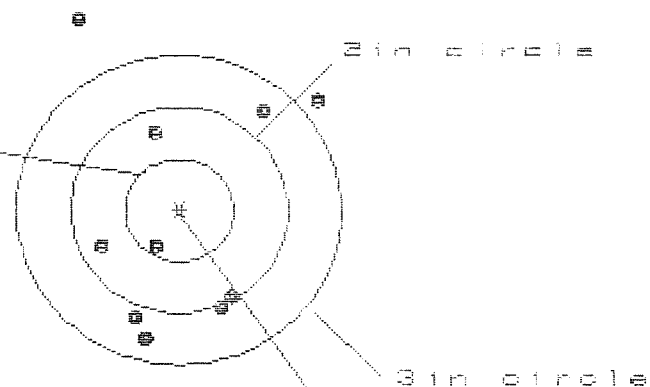

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.263	1.156	.848
MINIMUM X	:	-.962	-.792	-.647
MAXIMUM Y	:	1.845	1.238	1.356
MINIMUM Y	:	-1.286	-1.001	-.846
CENTROID X	:	1.320	1.427	1.282
CENTROID Y	:	-2.461	-2.666	-2.821
POA TO CENTROID in.	:	2.793	3.024	3.099
MIN RADIUS	:	.455	.409	.231
MEAN RADIUS	:	1.140	.997	.846
MAX RADIUS	:	2.081	1.694	1.599
HORIZONTAL SPREAD	:	2.225	1.948	1.495
VERTICAL SPREAD	:	3.051	2.239	2.202
EXTREME SPREAD	:	3.119	2.751	2.482
NUMBER IN ONE INCH CIRCLE =			1	
NUMBER IN TWO INCH CIRCLE =			4	
NUMBER IN THREE INCH CIRCLE =			8	

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 98-24055

INITIAL CUSTOMER ORDER NO.

JJM

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

11/12/98

11/13/98

C6225101

700 7.62

NATO

ACCESSORIES

FROM:

SHIP TO:

COMMANDER
1ST BN 1ST SFG A UNIT 35123
ATTN PROPERTY BOOK OFFICER
PSC 560 TORII STA. CA 96376

COMMANDER
1ST BN 1ST SFG A UNIT 35123
ATTN PROPERTY BOOK OFFICER
PSC 560 TORII STA. CA 96376

CUST NO:198287 C.O.D

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

PARTS

COMMENTS

Barrel

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD9925 REV. 7/97

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400048989

JOHN ?

REGISTERED MAIL

R 660 491 021

DEPARTMENT OF THE ARMY
Commander

Attn: Property Book Officer
1st Bn 1st SFG(A) Unit 35123

PSC 560 TORII STATION
APO AP 96376-5123

DA Label 18-1, Sep 83
Edition of Oct 74 will be used until exhausted.

Remington Arms Co., Inc.
ATTN: Fabricated Products Dept.
14 Hoefler Avenue
Ilion NY 13357-1816

PSC 560 TORII STATION

WEIGHT

58.13

VIA

12 GUNS
M-24

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6225101
19 Feb 1999

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0152
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0404
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0431648

THE AMR FOR THIS RIFLE IS: 1.224

CENTROIDAL DISTANCES

0	TO	1	.105551
1	TO	2	.0578014
1	TO	3	.511321
1	TO	4	.179234
1	TO	5	.200325


5 ⁴/₂ 3<----POA

PATTERN #: 5
 POA TO CENTROID: .288
 MIN RADIUS : .359
 MEAN RADIUS : 1.156
 MAX RADIUS : 2.235
 CENTROID X : -.269
 CENTROID Y : -.102

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225101

CENTERFIRE PATTERN # 5

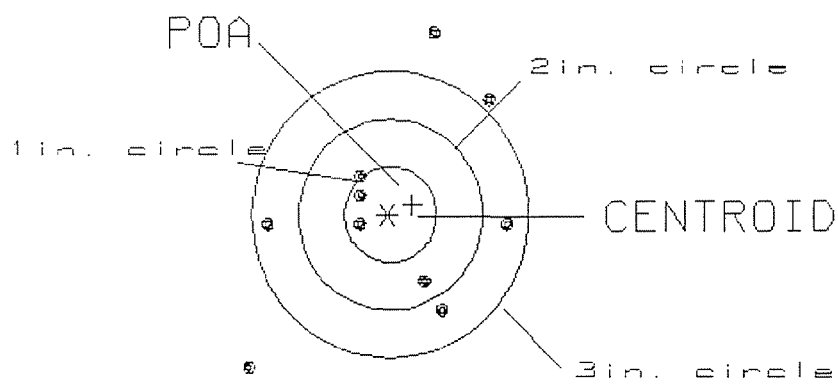

OF SHOTS= 10

IN CIRCLE

HS= 2.76

2

US= 3.51

4

GS= 4.03


7

PATTERN #: 4
 POA TO CENTROID: .078
 MIN RADIUS : .425
 MEAN RADIUS : 1.216
 MAX RADIUS : 2.433
 CENTROID X : .020
 CENTROID Y : .076

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225101

CENTERFIRE PATTERN # 4

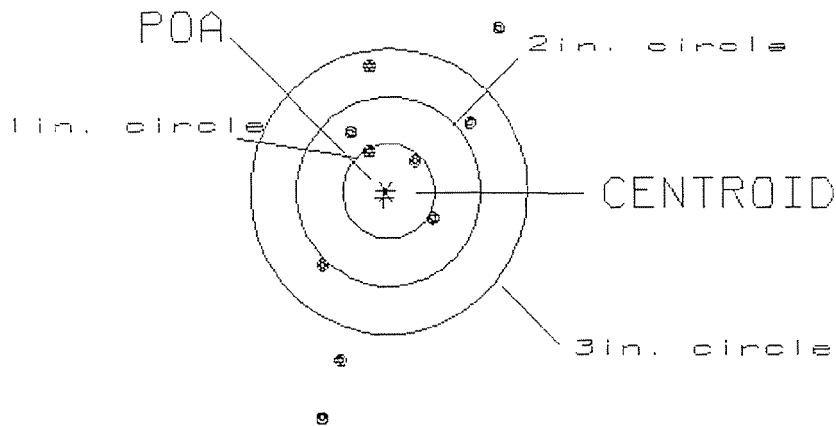

OF SHOTS= 10

IN CIRCLE

HS= 1.93
 VS= 4.10
 GS= 4.50


2
 4
 7

PATTERN #: 3
 POA TO CENTROID: .431
 MIN RADIUS : .043
 MEAN RADIUS : .739
 MAX RADIUS : 1.680
 CENTROID X : .430
 CENTROID Y : .028

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225181

CENTERFIRE PATTERN # 3

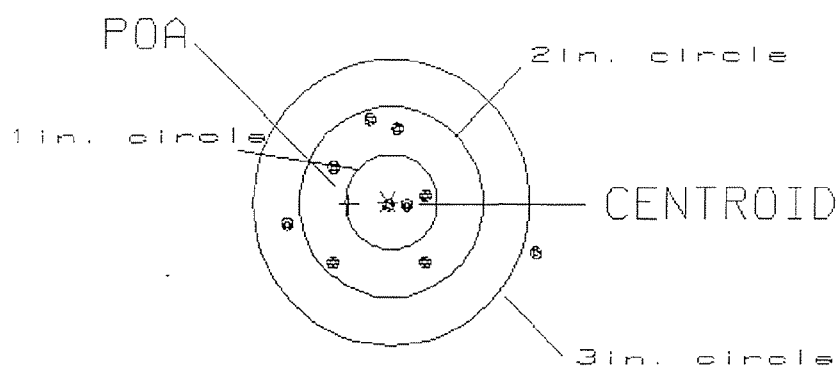

OF SHOTS= 10

IN CIRCLE

HS= 2.68

3

VS= 1.51

6

GS= 2.69


9

PATTERN #: 2
 POA TO CENTROID: .130
 MIN RADIUS : .174
 MEAN RADIUS : 1.608
 MAX RADIUS : 3.022
 CENTROID X : -.035
 CENTROID Y : -.125

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225101

CENTERFIRE PATTERN # 2

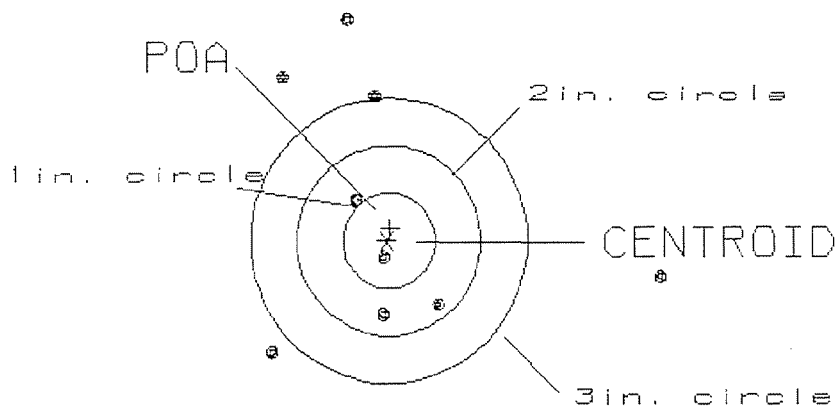

OF SHOTS= 10

IN CIRCLE

HS= 4.14

1

VS= 5.39

4

GS= 5.40

4


PATTERN #: ☐ 1 ☐

POA TO CENTROID: .105
 MIN RADIUS : .463
 MEAN RADIUS : 1.401
 MAX RADIUS : 2.016
 CENTROID X : -.070
 CENTROID Y : -.079

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225181

CENTERFIRE PATTERN # 1

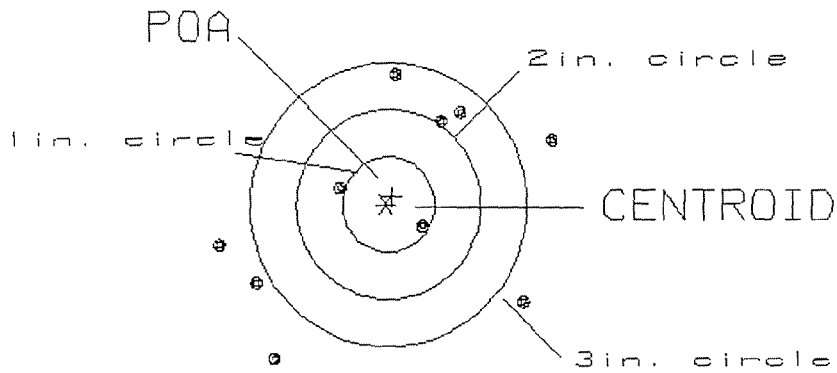

OF SHOTS= 10

IN CIRCLE

HS= 3.62
 VS= 3.00
 GS= 3.80

1
 2
 5