

CE225112

MODEL 700TM N24

Model **SMS** TM

Action

Barrel Length

Capacity

Order No. **5715**

*Includes 1 in chamber.

Remington

Call
800.441.0000

Repair Inquiry

Repair Number: RE00114298

Serial: C6225112 Model M24 SWS Center Fire
Caliber: 7.62 NATO

Repairman:

Status:

Closed 7/6/2006 10:56:30 AM

Verify Repair

Address Information

Customer:

Received From

Return To:

Received From

Name: OMDC

OMDC

Address 1: 4-2175 REILLY ROAD

4-2175 REILLY ROAD

Address 2: PO Box:

PO Box:

City: FORT BRAGG

FORT BRAGG

State: NC Zip Code: 28310

Country: US

State: NC Zip Code: 28310

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NA

Fax:

Email:

Comments:

Received Condition

Fair

Condition
Notes:

CSR
Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A017	Scope Base	1
A026	Scope	1
A045	Bi Pod	1
A057	Fit and Rear Sgt Base	1

Repair Search

Refresh

Close

nagletj

7/6/2006

11:37 AM

CAPS

NUM

INS

SCRL



Serial Number: C6225112

Model: M24 SWS



RE00114298

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6225112.__1
FILE DATE AND TIME: 07/17/2006 15:58


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.090
The Average Y Centroid of the Five Target Set:	-0.001
The Average Point of Impact of the Five Target Set:	0.090
The Average Mean Radius of the Five Target Set:	0.573
The Distance from POA to Centroid Target #1:	0.089
The Distance from Centroid Target #2 to Centroid Target #1:	0.188
The Distance from Centroid Target #3 to Centroid Target #1:	0.061
The Distance from Centroid Target #4 to Centroid Target #1:	0.517
The Distance from Centroid Target #5 to Centroid Target #1:	0.126

SERIAL NUMBER: C6225112.___1
TARGET NUMBER: 1
FILE DATE: 07/17/2006
FILE TIME: 15:58

X CENTROID: 0.046
Y CENTROID: -0.076
POA TO CENTROID: 0.089
HORZ SPREAD: 1.242
VERT SPREAD: 2.138
GROUP SPREAD: 2.390
MIN RADIUS: 0.106
MAX RADIUS: 1.479
MEAN RADIUS: 0.594
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.583	0.682
2:	0.064	0.028
3:	-0.486	-1.456
4:	-0.269	-0.382
5:	-0.515	-0.312
6:	-0.504	0.010
7:	0.062	0.047
8:	0.397	0.104
9:	0.398	0.405
10:	0.727	0.111

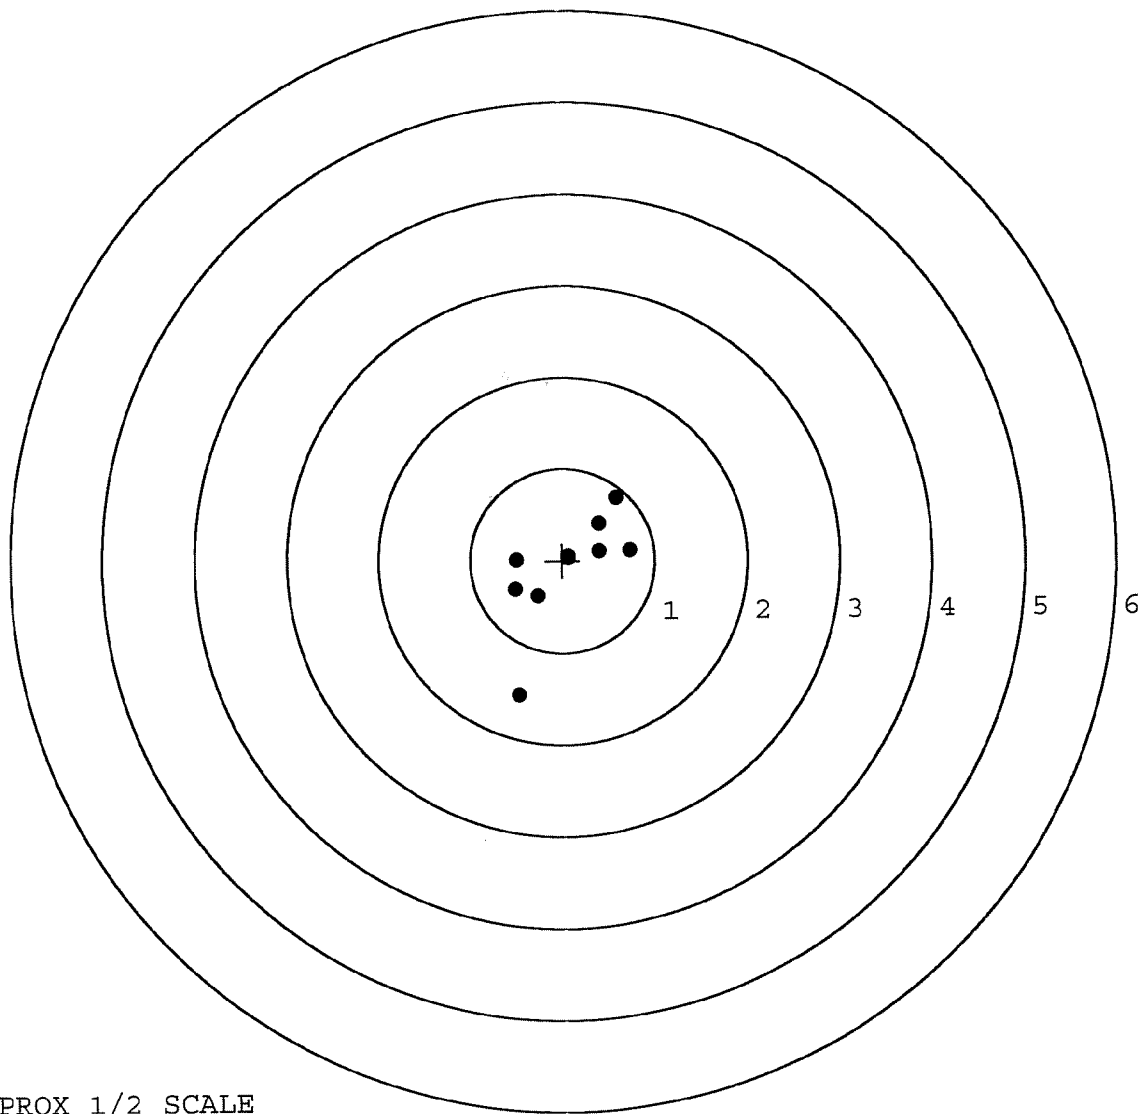


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225112.___1
TARGET NUMBER: 2
FILE DATE: 07/17/2006
FILE TIME: 15:58

X CENTROID: -0.142
Y CENTROID: -0.082
POA TO CENTROID: 0.164
HORZ SPREAD: 2.609
VERT SPREAD: 1.464
GROUP SPREAD: 2.628
MIN RADIUS: 0.212
MAX RADIUS: 1.381
MEAN RADIUS: 0.738
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-1.445	0.375
2:	-0.921	0.380
3:	-0.262	0.101
4:	-0.418	-0.400
5:	-0.626	-1.065
6:	-0.035	-0.265
7:	0.249	-0.222
8:	0.198	0.399
9:	0.677	-0.174
10:	1.164	0.056

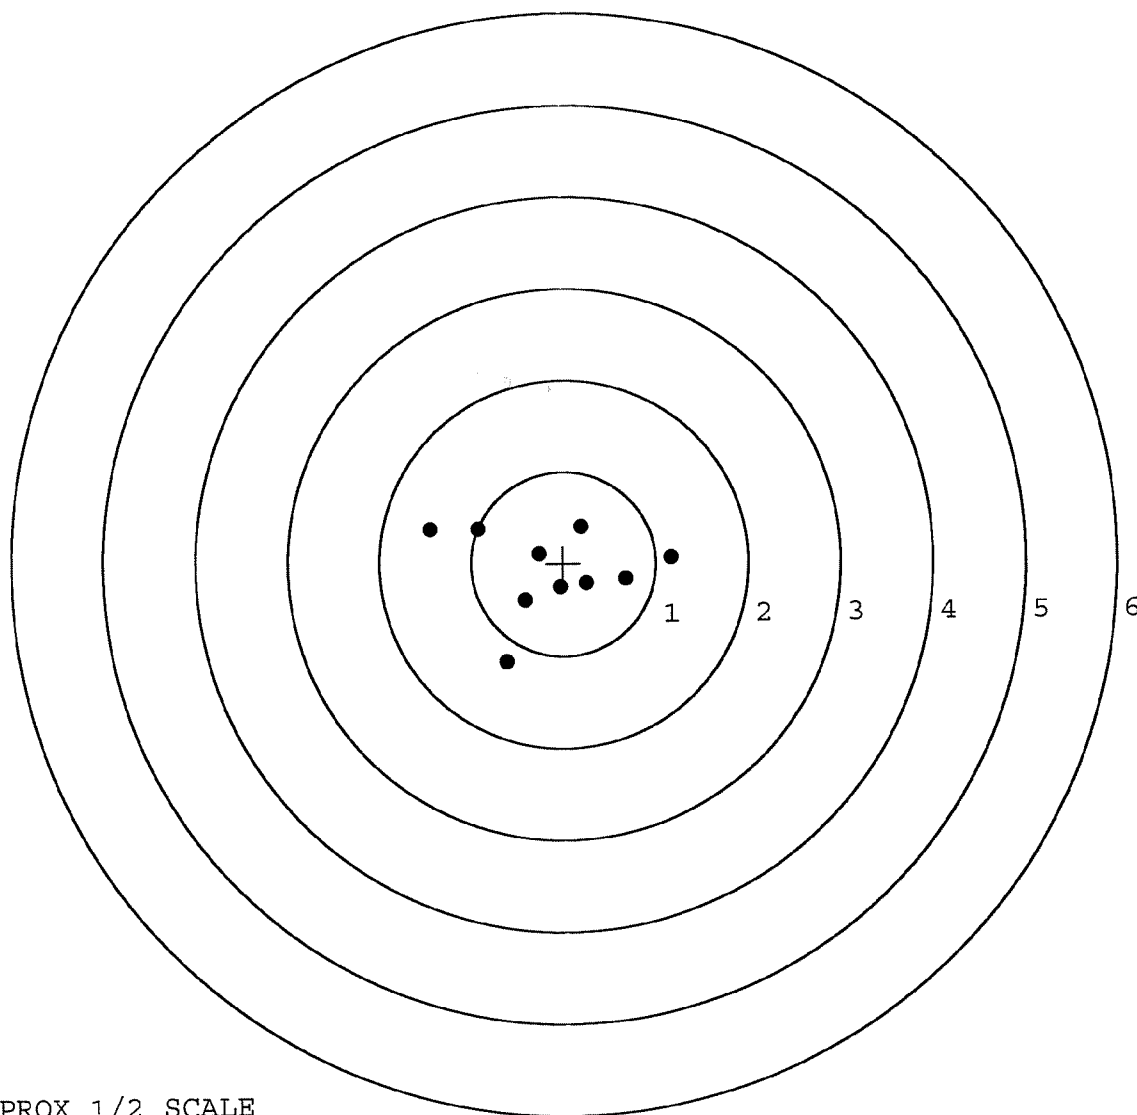


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225112.___1
TARGET NUMBER: 3
FILE DATE: 07/17/2006
FILE TIME: 15:58

X CENTROID: 0.045
Y CENTROID: -0.016
POA TO CENTROID: 0.048
HORZ SPREAD: 1.776
VERT SPREAD: 0.611
GROUP SPREAD: 1.878
MIN RADIUS: 0.139
MAX RADIUS: 1.163
MEAN RADIUS: 0.458
IN 1 IN DIAMETER: 8
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-1.069	-0.350
2:	-0.153	-0.313
3:	-0.348	-0.069
4:	-0.202	0.155
5:	0.091	0.116
6:	0.052	-0.209
7:	0.415	0.060
8:	0.454	0.219
9:	0.507	-0.027
10:	0.707	0.261

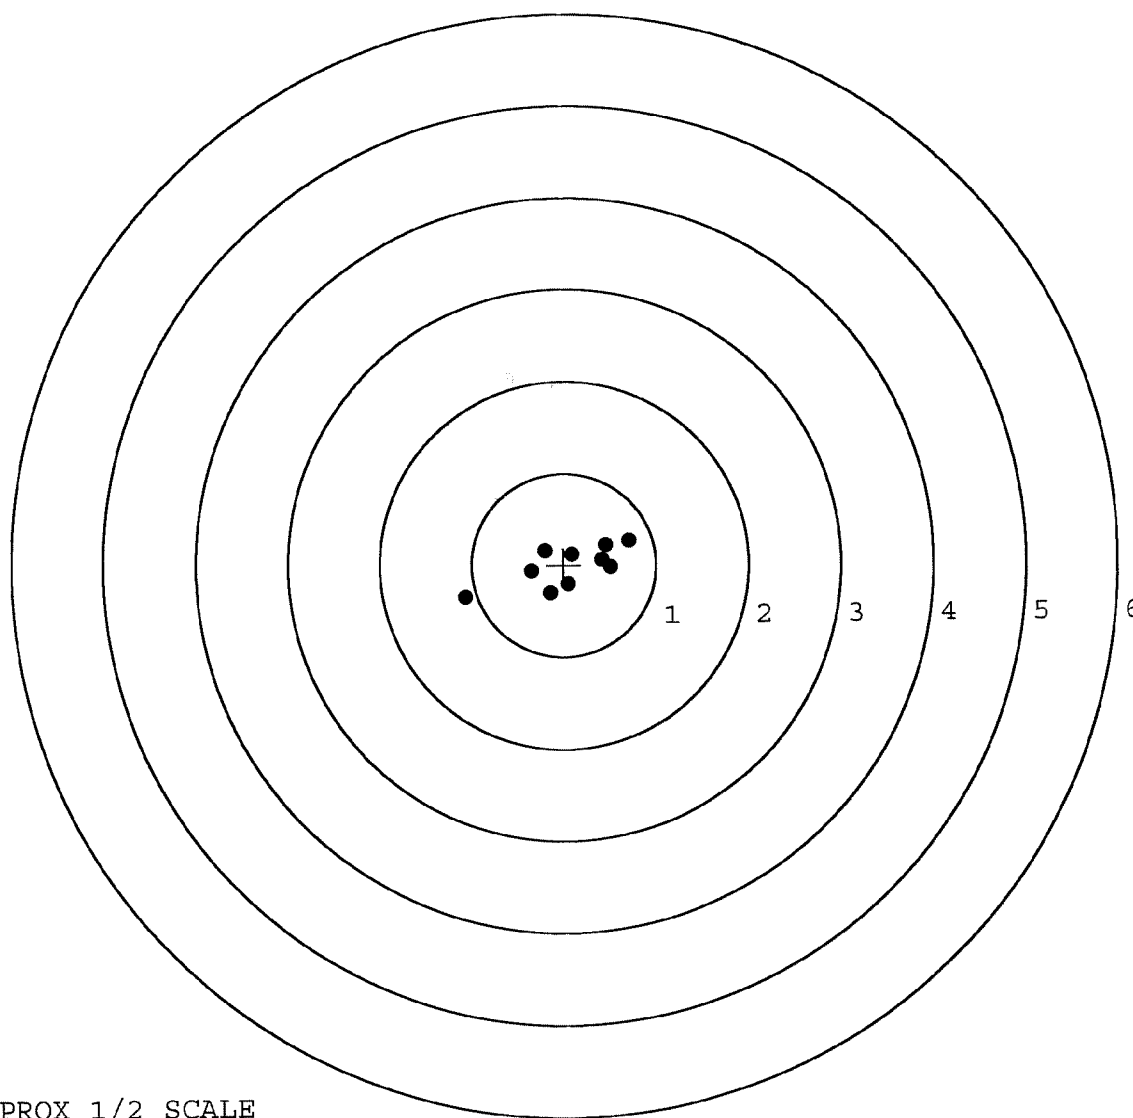


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225112.___1
TARGET NUMBER: 4
FILE DATE: 07/17/2006
FILE TIME: 15:58

X CENTROID: -0.433
Y CENTROID: 0.119
POA TO CENTROID: 0.449
HORZ SPREAD: 2.055
VERT SPREAD: 0.972
GROUP SPREAD: 2.055
MIN RADIUS: 0.147
MAX RADIUS: 1.378
MEAN RADIUS: 0.593
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.527	-0.017
2:	0.944	0.090
3:	-0.462	-0.525
4:	-0.232	0.287
5:	-0.617	0.110
6:	-0.785	0.306
7:	-1.021	0.447
8:	-1.111	0.072
9:	-0.998	0.298
10:	-0.580	0.118

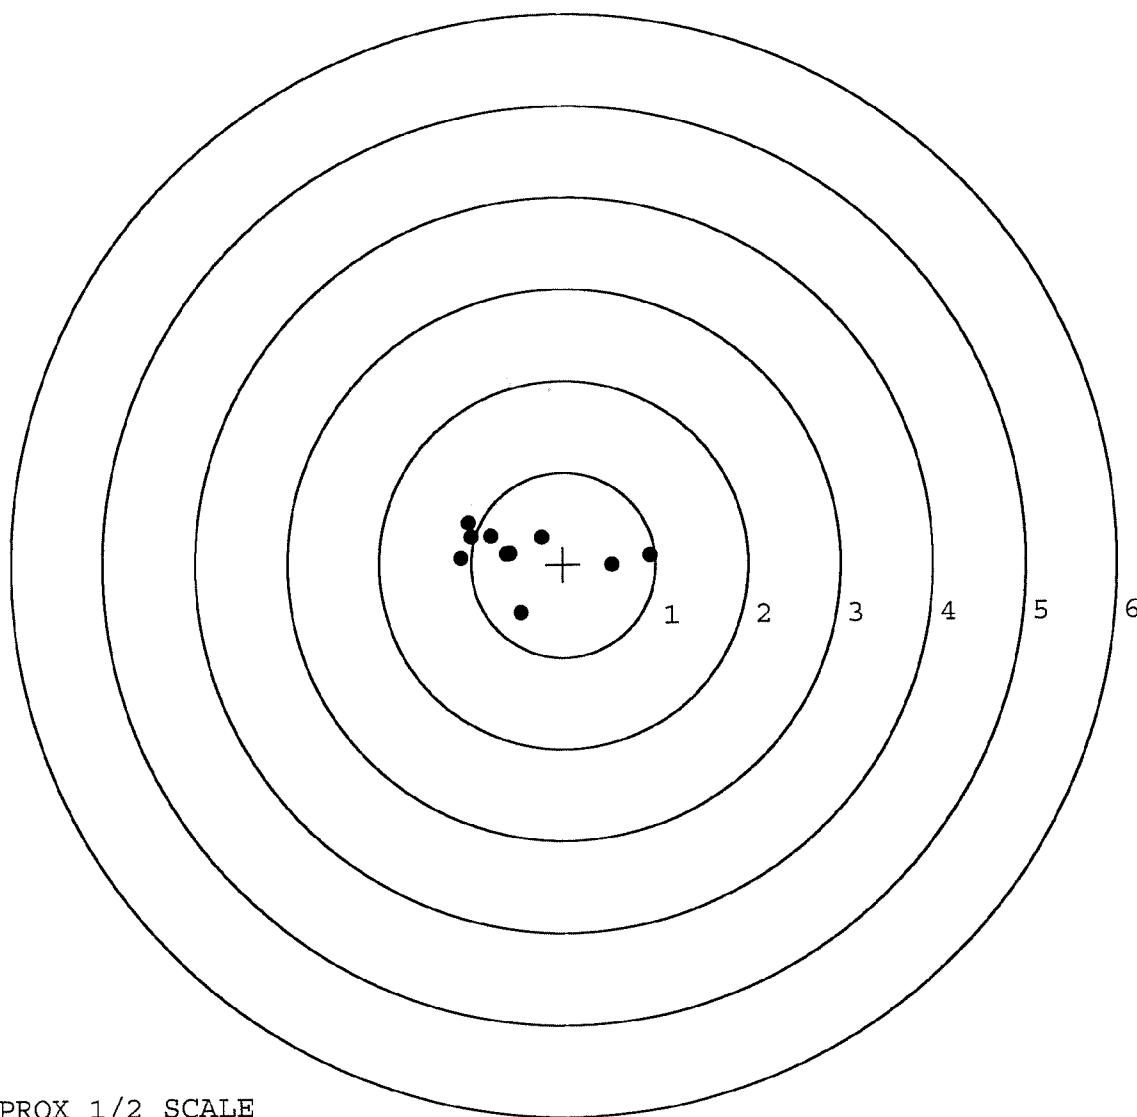


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225112. __1
TARGET NUMBER: 5
FILE DATE: 07/17/2006
FILE TIME: 15:58

X CENTROID: 0.033
Y CENTROID: 0.049
POA TO CENTROID: 0.059
HORZ SPREAD: 0.988
VERT SPREAD: 1.307
GROUP SPREAD: 1.534
MIN RADIUS: 0.132
MAX RADIUS: 0.882
MEAN RADIUS: 0.485
IN 1 IN DIAMETER: 5
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.398	0.354
2:	-0.371	0.181
3:	-0.360	-0.069
4:	-0.397	-0.721
5:	0.460	-0.382
6:	0.590	-0.099
7:	0.111	-0.058
8:	0.101	0.286
9:	0.187	0.408
10:	0.406	0.586

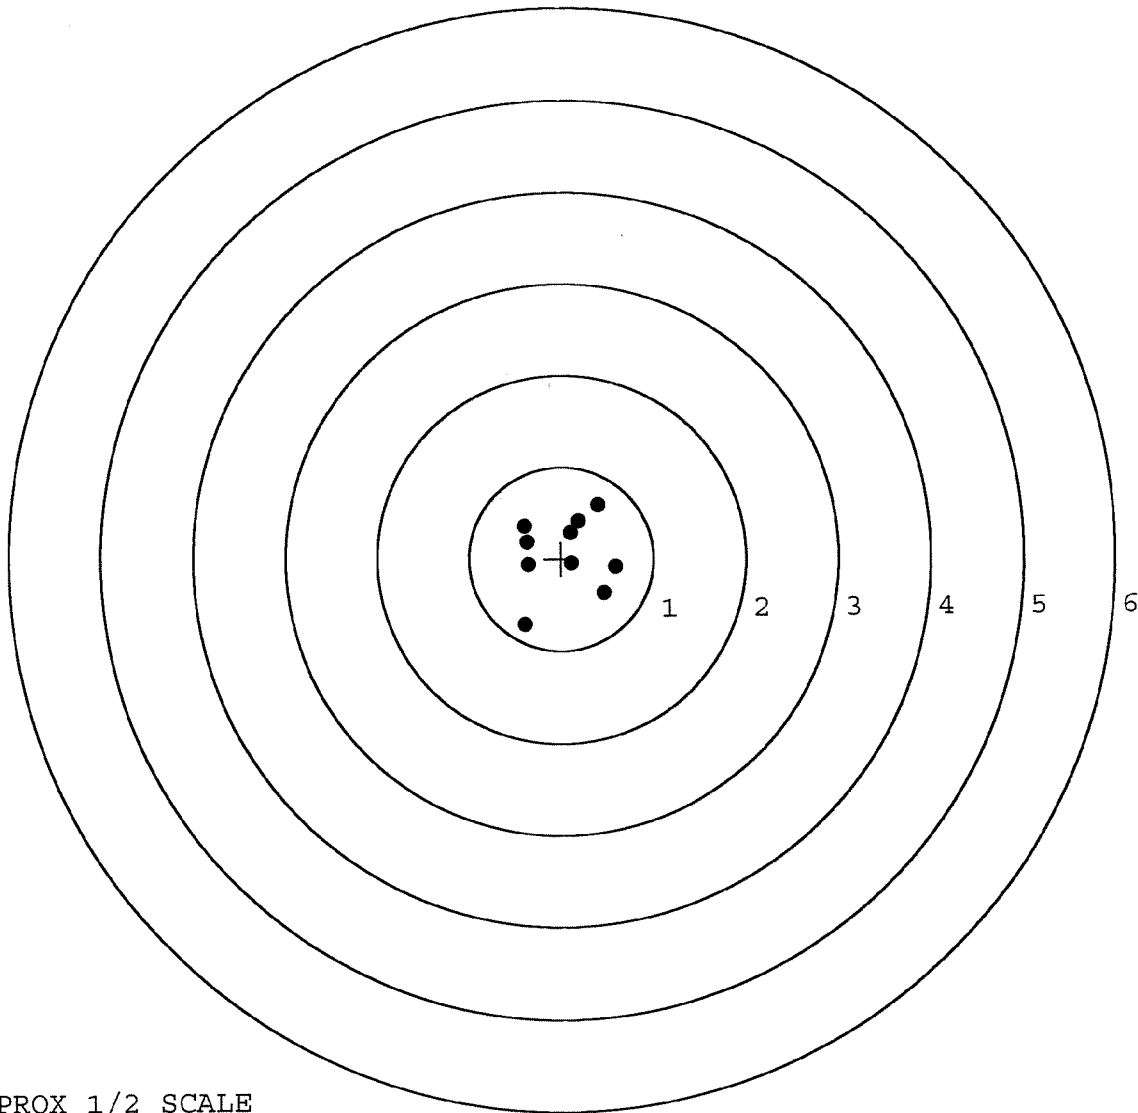

TARGET APPROX 1/2 SCALE

M-24
INSPECTION CHECKLIST - REPAIRS
CONTRACT #: DAAE-20-02-C-0149

R & E NUMBER	114298					
SERIAL NUMBER	C6225112					
LOG-IN DATE	07-06-06					
OPERATION #	OPERATION NAME		DATE	INITIAL		
500	DIS-ASSEMBLE GUN		7-10-06	RTZ		
505	RE-BARREL		7-10-06	RTZ		
420	ASSEMBLE		7-10-06	RTZ		
440	PROOF	MAGNA-FLUX INSPECTED JUL 13 2006 OPERATOR <u>APD</u>	7-11-06	TRW		
460	CHECK HEADSPACE		7-11-06	TRW		
470	DIS-ASSEMBLE GUN		7-11-06	RTZ		
480	MAGNAFLUX		7-13-06	APD		
510	DRILL AND TAP		7-12-06	TRW		
500	ROLLMARK CALIBER		7-12-06	CW		
520	GOFF BLAST BBL / REC		7-13-06	LB		
530 & 540	APPLY COATINGS		7-13			
560	FINAL ASSEMBLY		7-14-06	RTZ		
640	FUNCTION TEST AND	PASS FAIL	7-17-06	WJM		
650	TARGET	PASS FAIL	7-17-06	WJM		
	MALFUNCTION	CORRECTION				
	MALFUNCTION	CORRECTION				
	MALFUNCTION	CORRECTION				
	MALFUNCTION	CORRECTION				
670	FINAL INSPECTION		7-27-06	AC		
	A) HEADSPACE	PASS FAIL	7-27-06	AC		
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	2.79 2.86 2.84 2.85 2.83 7-18-06 DA			
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	4.9 4.9 4.9 7-18-06 DA			
	G) SAFETY OFF FORCE	2 LBS MIN	2.9 2.9 2.9 7-18-06 DA			
	I) FIRING PIN INDENT	.020	.022 .021 .022 7-18-06 DA			
690	PACK		8-7-06			

F006 REV 5/2006

FINAL INSPECTION CHECKLIST

BARREL ASSEMBLY _____ BARREL _____ RECEIVER _____ FRONT SIGHT BASE _____ REAR SIGHT BASE _____ SCREWS _____ FINISH		STOCK ASSEMBLY _____ STOCK _____ SLING SWIVEL STUDS _____ BUTT PATE _____ LOCK NUTS _____ BARREL CLEARANCE _____ COLOR / FINISH	
SCOPE ASSEMBLY _____ SCOPE _____ SCOPE RINGS _____ MOUNTING SCREWS _____ MOUNTING BASE _____ SCREWS _____ FINISH _____ CLARITY		SYSTEM CASE _____ SCOPE CASE _____ IRON SIGHTS _____ DEPLOYMENT KIT TRIGGER ASSEMBLY _____ SAFETY OPERATION _____ RE-SET TO FACTORY SPECS	
COMMENTS: _____			

F006 REV 5/2006

Repair Inquiry

Repair Number: RE00090883

Serial: C6225112 Model: M24 SWS Center Fire
Caliber: 7.62 NATO Produced: 03/21/1999

Repairman:

Status:

Closed 1/11/2005 7:02:57 AM

Address Information

Customer:

Received From

Return To:

Received From

Name: COMMANDER

COMMANDER

Address 1: HCC 1 325 AIRBORNE INF REG

HCC 1 325 AIRBORNE INF REG

Address 2: ATTN AFVC BA

PO Box:

ATTN AFVC BA

PO Box:

City: FORT BRAGG

FORT BRAGG

State: NC

Zip Code: 28310

Country: US

State: NC

Zip Code: 28310

Country: US

FFL

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NA

Fax:

Email:

Comments:

Received Condition

Fair

Condition

Notes:

CSR

Notes:

Accessories Received

Code	Desc	Qty
A007	With Studs	3
A008	With Swivels	2
A010	Hard Case	1
A017	Scope Base	1
A042	Adjustable Butt Pad	1
A057	Fit and Rear Sgt Base	2

Repair Search

Refresh

Close

Inqlet

1/17/2005

8:48 AM

CAPS

NUM

INC

SCPL

start

8

CS Firearms Services

Serial: C6225112

Model: M24 SWS



RE00090883

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6225112.__0
FILE DATE AND TIME: 02/02/2005 09:01


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.056
The Average Y Centroid of the Five Target Set:	0.033
The Average Point of Impact of the Five Target Set:	0.065
The Average Mean Radius of the Five Target Set:	0.511
The Distance from POA to Centroid Target #1:	0.162
The Distance from Centroid Target #2 to Centroid Target #1:	0.110
The Distance from Centroid Target #3 to Centroid Target #1:	0.210
The Distance from Centroid Target #4 to Centroid Target #1:	0.183
The Distance from Centroid Target #5 to Centroid Target #1:	0.096

SERIAL NUMBER: C6225112. __0
TARGET NUMBER: 1
FILE DATE: 02/02/2005
FILE TIME: 09:01

POINT#	X	Y
1:	1.016	-0.862
2:	0.423	-0.056
3:	0.870	0.361
4:	0.597	0.556
5:	0.241	0.816
6:	-0.026	0.098
7:	-0.114	-0.151
8:	-0.462	0.174
9:	-0.508	-0.145
10:	-0.859	0.319

X CENTROID: 0.118
Y CENTROID: 0.111
POA TO CENTROID: 0.162
HORZ SPREAD: 1.875
VERT SPREAD: 1.678
GROUP SPREAD: 2.216
MIN RADIUS: 0.144
MAX RADIUS: 1.324
MEAN RADIUS: 0.659
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

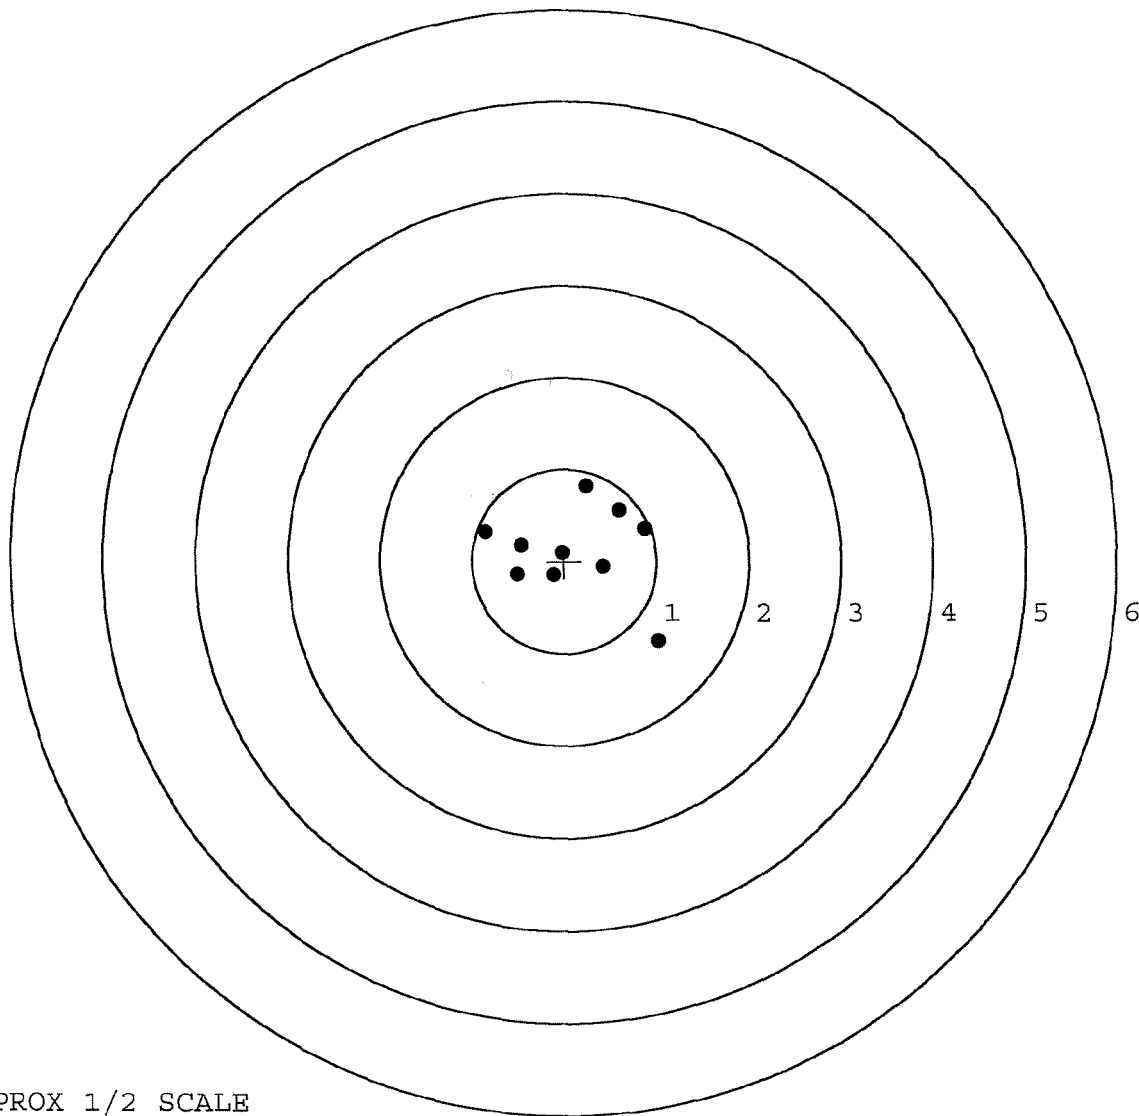


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225112. __0
TARGET NUMBER: 2
FILE DATE: 02/02/2005
FILE TIME: 09:01

X CENTROID: 0.009
Y CENTROID: 0.096
POA TO CENTROID: 0.096
HORZ SPREAD: 1.045
VERT SPREAD: 1.577
GROUP SPREAD: 1.577
MIN RADIUS: 0.138
MAX RADIUS: 0.922
MEAN RADIUS: 0.475
IN 1 IN DIAMETER: 5
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.004	1.018
2:	-0.060	0.664
3:	-0.573	0.451
4:	-0.287	0.004
5:	-0.083	-0.007
6:	0.167	-0.034
7:	0.472	-0.168
8:	0.024	-0.559
9:	0.329	-0.276
10:	0.096	-0.135

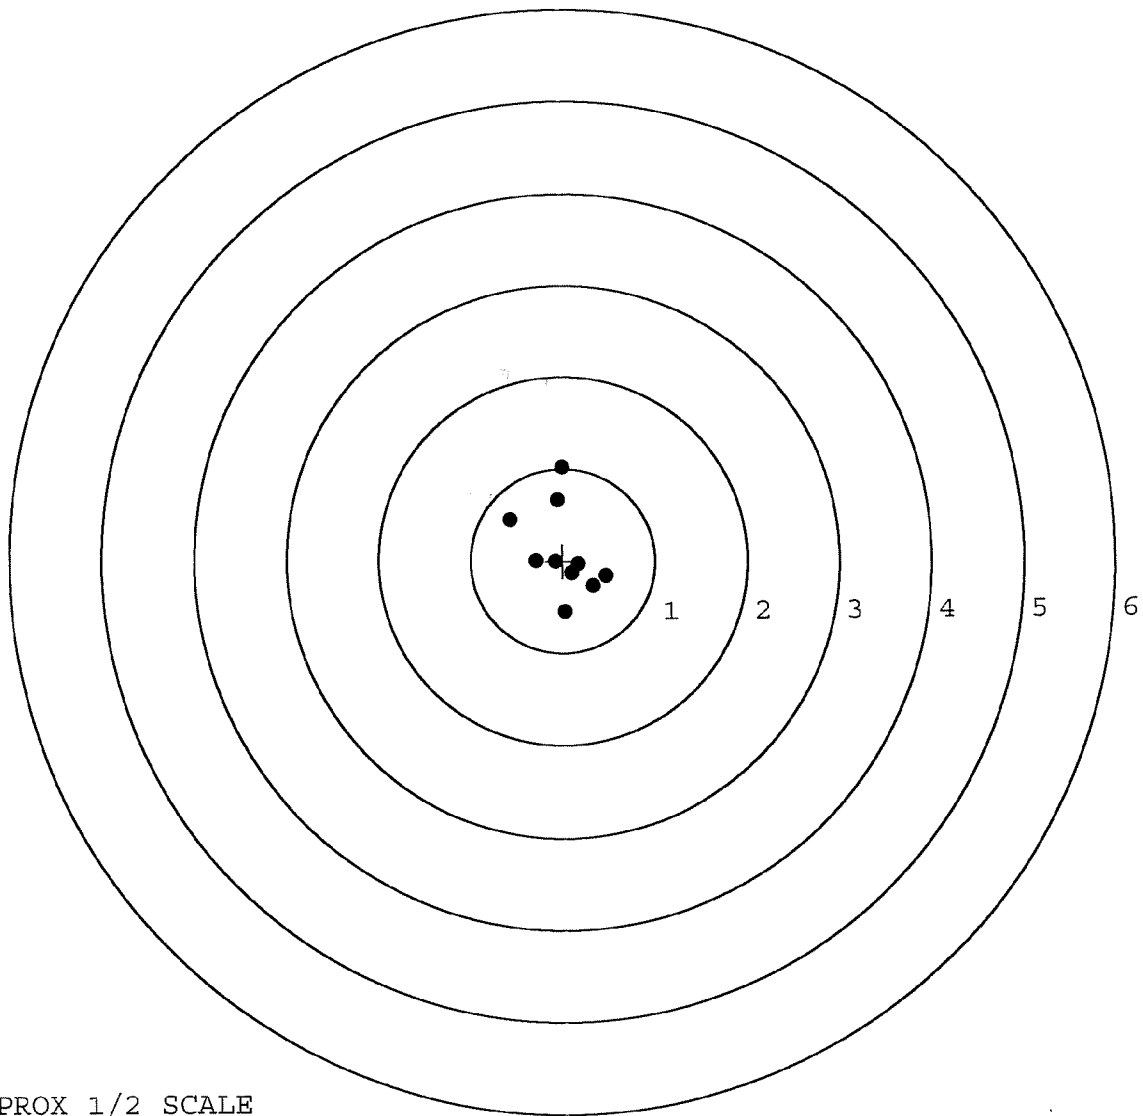


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225112.___0
TARGET NUMBER: 3
FILE DATE: 02/02/2005
FILE TIME: 09:01

X CENTROID: 0.135
Y CENTROID: -0.098
POA TO CENTROID: 0.167
HORZ SPREAD: 1.079
VERT SPREAD: 0.858
GROUP SPREAD: 1.172
MIN RADIUS: 0.174
MAX RADIUS: 0.687
MEAN RADIUS: 0.434
IN 1 IN DIAMETER: 7
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.247	-0.588
2:	-0.390	-0.125
3:	-0.488	0.191
4:	-0.013	-0.007
5:	0.234	0.165
6:	0.430	0.270
7:	0.415	0.052
8:	0.445	-0.185
9:	0.591	-0.266
10:	0.375	-0.486

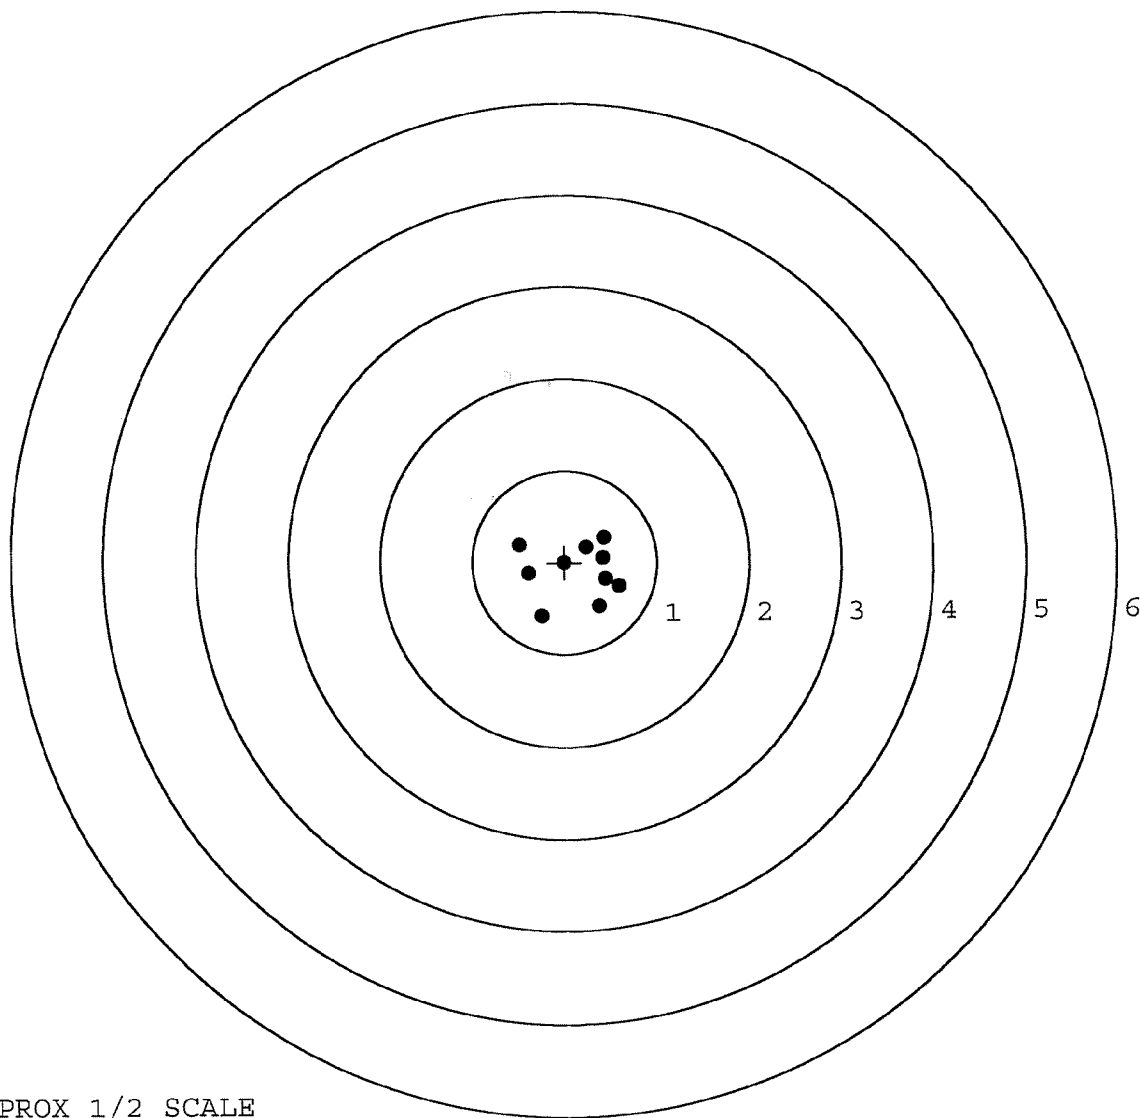


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225112. __0
TARGET NUMBER: 4
FILE DATE: 02/02/2005
FILE TIME: 09:01

X CENTROID: -0.043
Y CENTROID: 0.023
POA TO CENTROID: 0.048
HORZ SPREAD: 1.096
VERT SPREAD: 1.784
GROUP SPREAD: 1.842
MIN RADIUS: 0.121
MAX RADIUS: 1.014
MEAN RADIUS: 0.542
IN 1 IN DIAMETER: 6
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.481	-0.892
2:	-0.189	-0.580
3:	-0.496	-0.142
4:	-0.024	-0.248
5:	-0.366	0.355
6:	-0.021	0.892
7:	0.600	0.561
8:	0.222	0.340
9:	0.252	-0.107
10:	0.076	0.047

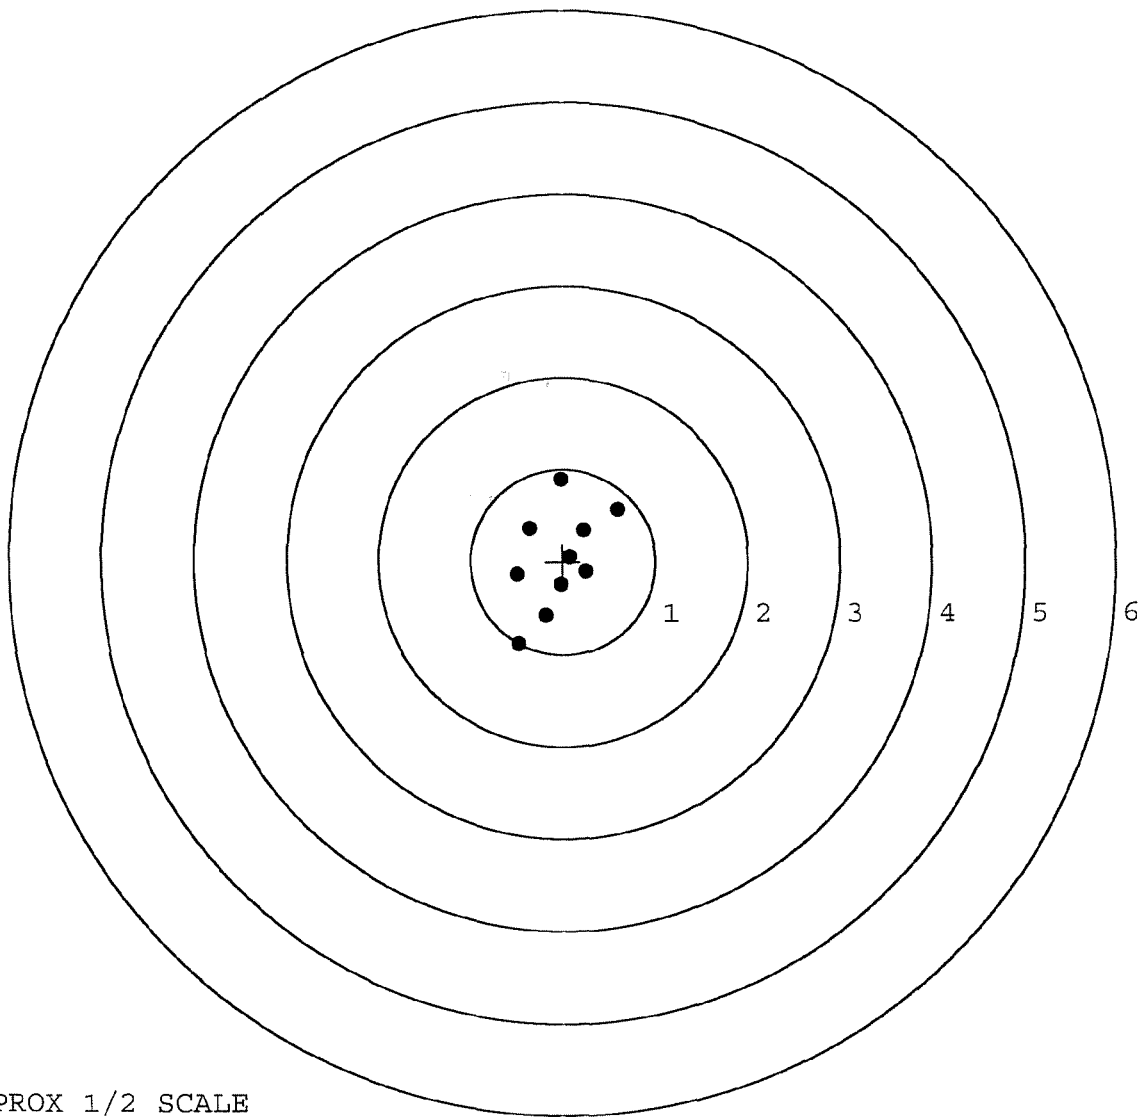


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225112. __0
TARGET NUMBER: 5
FILE DATE: 02/02/2005
FILE TIME: 09:01

POINT#	X	Y
1:	-0.136	0.936
2:	0.770	-0.010
3:	0.056	-0.804
4:	0.318	0.183
5:	0.310	-0.085
6:	0.020	-0.274
7:	-0.192	0.300
8:	-0.458	0.001
9:	-0.118	0.056
10:	0.037	0.033

X CENTROID: 0.061
Y CENTROID: 0.034
POA TO CENTROID: 0.069
HORZ SPREAD: 1.228
VERT SPREAD: 1.740
GROUP SPREAD: 1.751
MIN RADIUS: 0.024
MAX RADIUS: 0.924
MEAN RADIUS: 0.445
IN 1 IN DIAMETER: 6
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

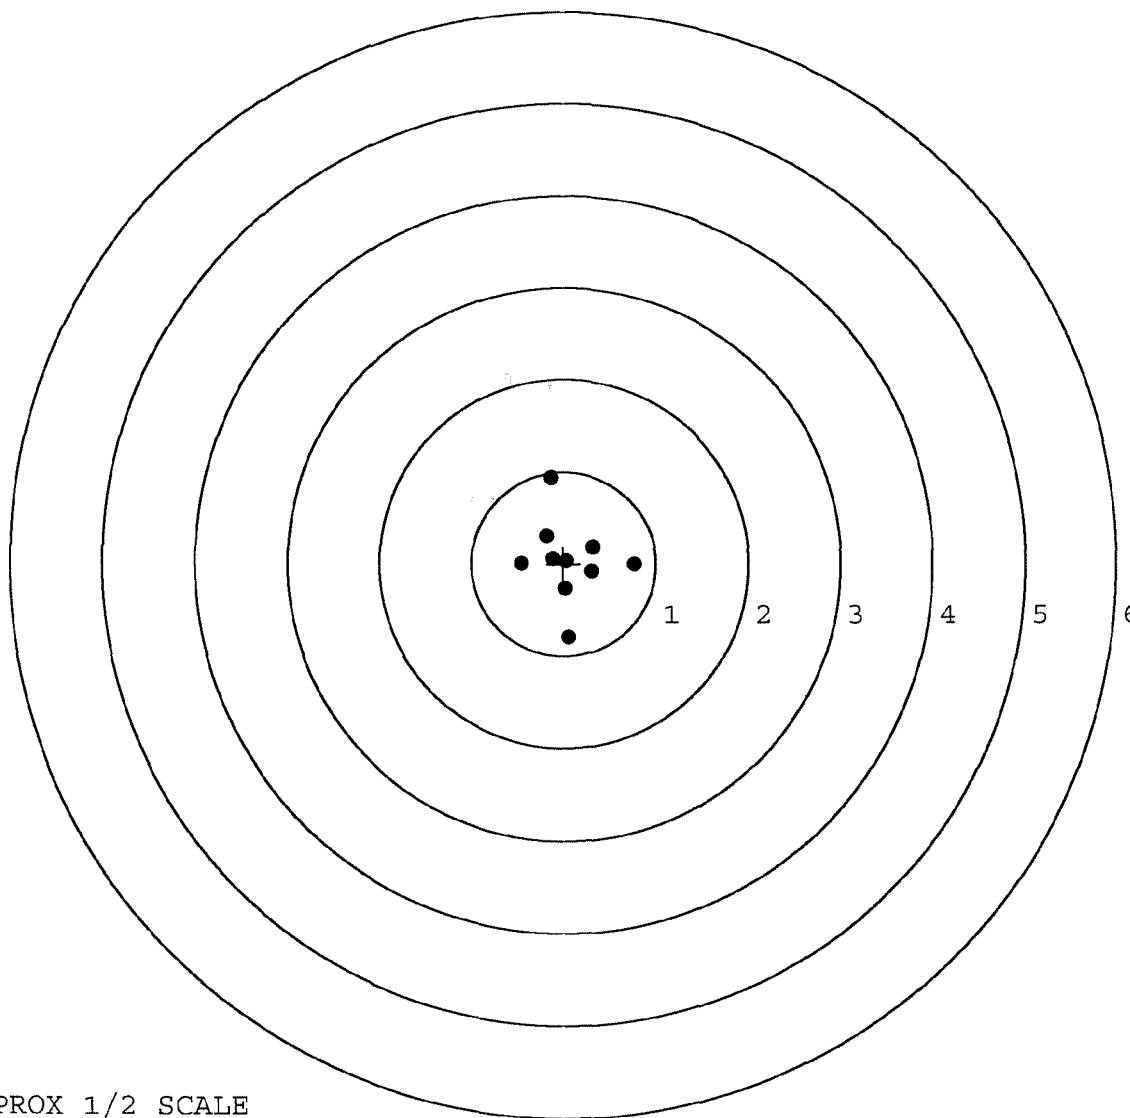

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R & E NUMBER	90883		
SERIAL NUMBER	C6225112		
LOG-IN DATE	1-11-05		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	1-18-05	RTL
560 A	RE-BARREL	1-18-05	RTL
B	DRILL AND TAP	1-26-05	TRW
575	ASSEMBLE	1-20-05	RTL
600	PROOF	1-24-05	AC
605	CHECK HEADSPACE	1-24-05	AC
610	DIS-ASSEMBLE GUN		
612	MAGNAFLUX	OPERATOR	
615	ROLLMARK CALIBER	1-27-05	CW
618	ROTO-BLAST	1-27-05	LB
620	APPLY COATINGS	1/29/05	HO
625 A	FINAL ASSEMBLY	1-31-05	RTL
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	2-2-05	AC
655	FINAL INSPECT	2-11-05	RL
660	PACK	2-11-05	DA
		SHIP DATE	
		QAR INSPECTION DATE	

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 99-22143INITIAL
DJU CUSTOMER ORDER NO.
AMBAA1906039

SWS

DATE RECEIVED 11/05/99 DATE OPENED 11/09/99 DATE CODE SERIAL NUMBER C6225112 NEW SERIAL NUMBER MODEL AND GRADE 700 7.62NAT M/24-CAMO
ACCESSORIES SLING STRAP W/STUDS W/SWIVELS HARD CASE SCOPE BASE
W/SCOPE, BI-POD

FROM:

COMMANDER
HHC I-325 A.I.R.
FORT BRAGG

NC 28307

SHIP TO:

COMMANDER
HHC I-325 A.I.R.
FORT BRAGGNC
28307

CUST NO: 215072 C.O.D.

ACCOUNT NUMBER ACCOUNT NUMBER N/C WRITE ☐ FROM DATE ESTIMATED VIA UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			
MAIN FAULT						

PARTS

COMMENTS

BBL 96003
EXTRACTOR 91816

REPAIRMAN PROOF CLEAN TEST TARGET PATTERN

GALLERY TESTER DATE DATE DATE DATE DATE DATE

OFFICE COPY

RD6925 REV. 7/97

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400049325

PACKING LIST	PACKED BY LT CHARLES HITER HHC 1-325 AIR	1. NO. BOXES 1	2. REQUISITION NO. AMBAR 1906039		
3. END ITEM M24 SNIPER WPN SYSTEM W/ DAY OPTIC NSN: 1005012462136			4. DATE 03 NOV 99		
			5. PAGE 1 OF 1 PAGES		
BOX NO.	CONTENTS - STOCK NUMBER AND NOMENCLATURE	UNIT OF ISSUE	QUANTITIES REQUIRED		
(a)	(b)	(c)	INITIAL OPERATIO	RUNNING SPARES	TOTAL
1	M24 SN C622511Z	1			1
1	DAY OPTIC ULTRA 10X, M3A SN 880416	1			1
6. THIS CERTIFIES THAT ITEMS LISTED HEREON ARE WITHIN THE SPECIFIED BOXES					
TYPED NAME AND TITLE CHARLES L HITER EXECUTIVE OFFICER		SIGNATURE <i>Charles L Hiter</i> LT			

M2400049327

NMP COPY 2

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6225112
7 Feb 2000

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .11
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .079
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .135429

THE AMR FOR THIS RIFLE IS: 1.114

CENTROIDAL DISTANCES

0	TO	1	.105683
1	TO	2	.120702
1	TO	3	.868664
1	TO	4	.381026
1	TO	5	.0643817

3

4⁺ 4 <----POA
52


PATTERN #: 1

POA TO CENTROID: .106
 MIN RADIUS : .726
 MEAN RADIUS : 1.240
 MAX RADIUS : 2.024
 CENTROID X : -.060
 CENTROID Y : -.087

4 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225112

CENTERFIRE PATTERN # 1

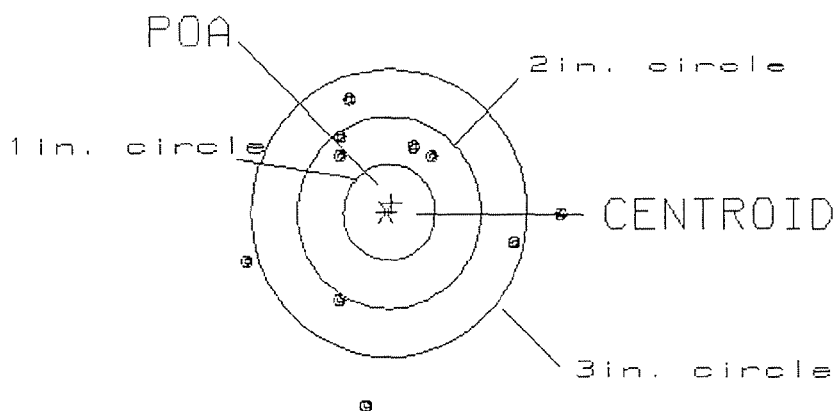

OF SHOTS= 10

IN CIRCLE

HS= 3.37

0

VS= 3.16

4

GS= 3.40


7

PATTERN #: 020
 POA TO CENTROID: .142
 MIN RADIUS : .671
 MEAN RADIUS : 1.293
 MAX RADIUS : 2.137
 CENTROID X : .052
 CENTROID Y : -.132

4 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225112

CENTERFIRE PATTERN # 2

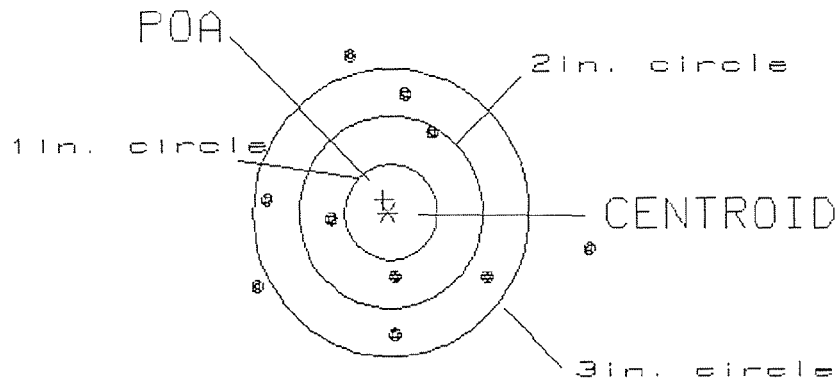

OF SHOTS= 10

IN CIRCLE

HS= 3.52
 VS= 2.97
 GS= 3.54

0
 3
 7


PATTERN #: ☐ 3 ☐

POA TO CENTROID: .764
 MIN RADIUS : .347
 MEAN RADIUS : 1.499
 MAX RADIUS : 3.093
 CENTROID X : .344
 CENTROID Y : .682

4 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225112

CENTERFIRE PATTERN # 3

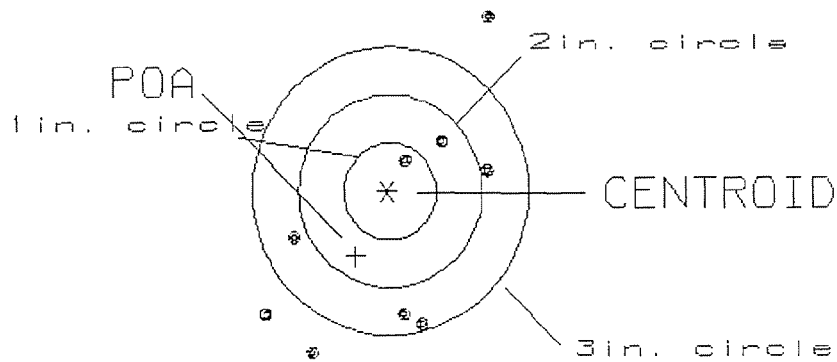

OF SHOTS= 10

IN CIRCLE

HS= 2.42
 VS= 4.76
 GS= 4.79

1
 2
 6


PATTERN #: ☐ 4 ☐

POA TO CENTROID: .293
 MIN RADIUS : .024
 MEAN RADIUS : .910
 MAX RADIUS : 1.408
 CENTROID X : .281
 CENTROID Y : .083

4 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225112

CENTERFIRE PATTERN # 4

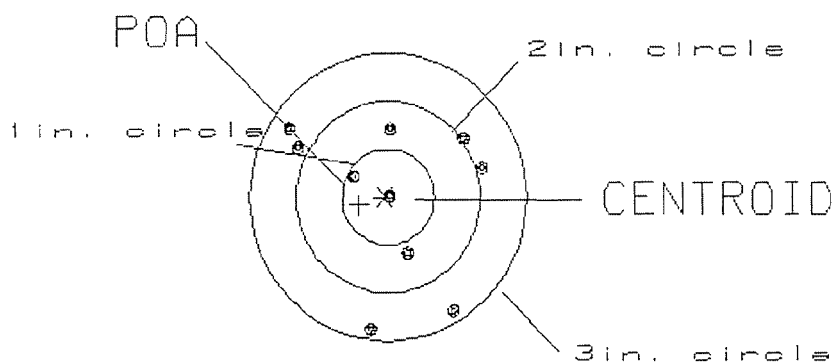

OF SHOTS= 10

IN CIRCLE

HS= 2.10

2

VS= 2.12

5

GS= 2.66

10


PATTERN #: 5

POA TO CENTROID: .165
 MIN RADIUS : .203
 MEAN RADIUS : .629
 MAX RADIUS : 1.177
 CENTROID X : -.067
 CENTROID Y : -.151

4 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225112

CENTERFIRE PATTERN # 5

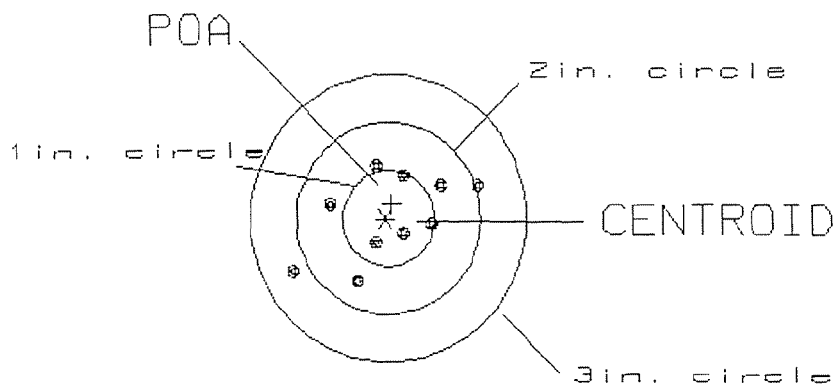

OF SHOTS= 10

IN CIRCLE

HS= 1.98

3

VS= 1.23

8

GS= 2.18

10

21 DAY TURN - AROUND

M-24

CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO.

C6225112

LOG IN DATE: / /		DATE	INIT.
INSPECT & VERIFY:			
OP. #	OP. NAME		
550	DIS-ASSEMBLE GUN		
560 A	RE-BARREL AT CUSTOM SHOP		
B	DRILL & TAP		
C	POLISH		
575	ASSEMBLE		
600	PROOF	<i>12-13-99</i>	<i>RW</i>
605	CHECK HEADSPACE	<i>12-13-99</i>	<i>RW</i>
610	DIS-ASSEMBLE		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST		
C	SAFETY ON FORCE		
D	SAFETY OFF FORCE		
E	FIRING PIN INDENT		
640	TARGET	<i>2-3-00</i>	<i>RW</i>
655	FINAL INSPECT	<i>2-8-00</i>	<i>RW</i>
660	PACK		

QAR INSPECTION

SHIP DATE

Final Inspection

Sn: C6225112

DATE REC'D: 11-5-99

DATE RET'D:

Auditor: RW

Item:

Barrel Assy.

- ☒ BARREL
- ☒ RECEIVER
- ☒ FRONT SIGHT BLOCK
- ☒ REAR SIGHT BLOCK
- ☒ SCREWS
- ☒ FINISH

Scope Assy.

- ☒ Scope
- ☒ Scope Rings
- ☒ Mounting Screws
- ☒ Mounting Base
- ☒ Screws
- ☒ FINISH
- ☒ Looseness
- ☒ CLARITY

Misc.

- ☐ DD-250
- ☐ BAR CODE
- ☐ PACKAGING

Item:

Stock Assy.

- ☒ Stock
- ☒ Sling Swivel Studs
- ☒ ADJUSTABLE BUTT PLATE
- ☒ LOCK NUTS
- ☒ BARREL CLEARANCE
- ☒ COLOR/FINISH

System's Case

- ☐ Scope Case
- ☐ Iron SIGHTS
- ☐ Deployment Kit

Trigger

- ☒ SAFETY OPERATION
- ☒ SET

Comments:

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225112
4 Jan 1900

CENTROIDAL DISTANCES

0 TO	1	.19757
1 TO	2	.591838
1 TO	3	.794048
1 TO	4	.604003
1 TO	5	.273095


$25r^4$ <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0792
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0404
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0889089
THE AMR FOR THIS RIFLE IS: 1.208

4 Jan 1900

FILE:/PATTERNING/CENTERFIRE_PATT/06225112

CENTERFIRE PATTERNS # 1

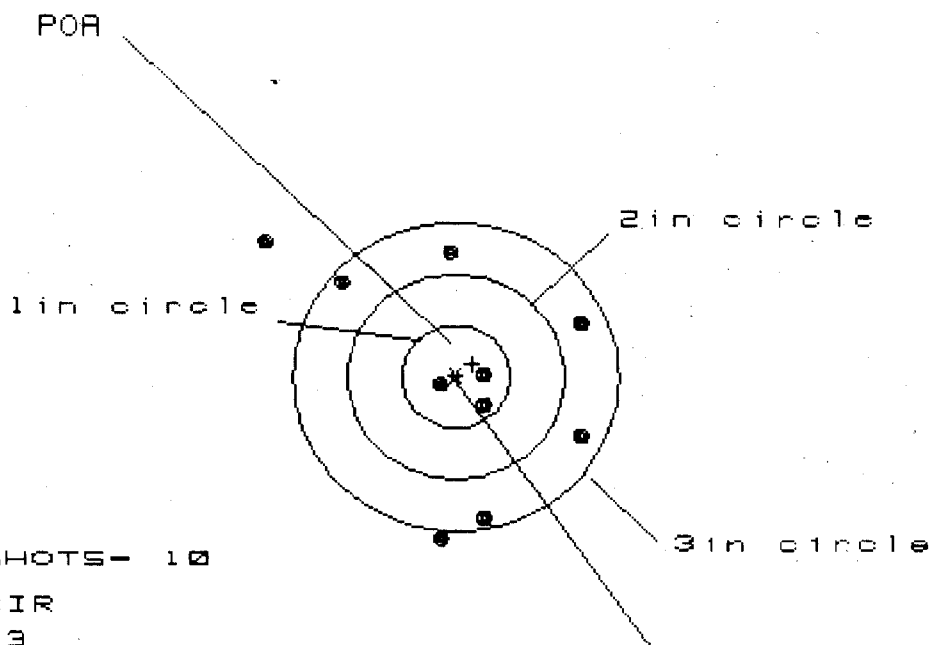

OF SHOTS- 10

IN CIR

1in = 3

2in = 3

3in = 8

HS= 2.926

VS= 2.840

GS= 3.451


CENTROID *

PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.171	.976	.939
MINIMUM X	:	-1.755	-1.290	-1.328
MAXIMUM Y	:	1.280	1.334	1.157
MINIMUM Y	:	-1.560	-1.418	-1.445
CENTROID X	:	-.153	.042	.080
CENTROID Y	:	-.125	-.267	-.090
POA TO CENTROID in.	:	.197	.271	.120
MIN RADIUS	:	.161	.161	.079
MEAN RADIUS	:	1.117	.958	.892
MAX RADIUS	:	2.173	1.661	1.587
HORIZONTAL SPREAD	:	2.926	2.266	2.266
VERTICAL SPREAD	:	2.840	2.752	2.602
EXTREME SPREAD	:	3.451	2.754	2.692
NUMBER IN ONE INCH CIRCLE =			3	
NUMBER IN TWO INCH CIRCLE =			3	
NUMBER IN THREE INCH CIRCLE =			8	

4 Jan 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6225112

CENTERFIRE PATTERNS # 2

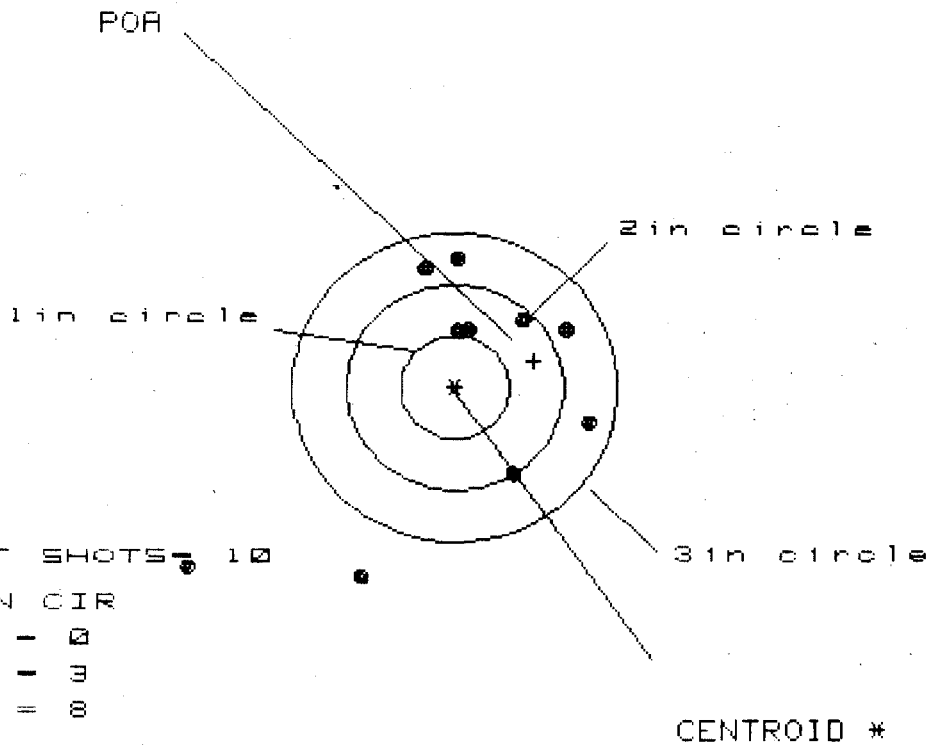

OF SHOTS = 10

IN CIR

1in = 0

2in = 3

3in = 8

HS = 3.695

VS = 3.043

GS = 4.162


CENTROID *

PATTERN #	:			
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.248	.977	.830
MINIMUM X	:	-2.446	-1.174	-.661
MAXIMUM Y	:	1.239	1.041	.790
MINIMUM Y	:	-1.804	-2.002	-1.333
CENTROID X	:	-.729	-.457	-.310
CENTROID Y	:	-.261	-.063	.188
POA TO CENTROID in.	:	.774	.461	.362
MIN RADIUS	:	.550	.409	.308
MEAN RADIUS	:	1.306	1.000	.749
MAX RADIUS	:	3.027	2.321	1.335
HORIZONTAL SPREAD	:	3.695	2.151	1.491
VERTICAL SPREAD	:	3.043	3.043	2.123
EXTREME SPREAD	:	4.162	3.172	2.189
NUMBER IN ONE INCH CIRCLE =	:		0	
NUMBER IN TWO INCH CIRCLE =	:		3	
NUMBER IN THREE INCH CIRCLE =	:		8	

4 Jan 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06225112

CENTERFIRE PATTERNS # 3

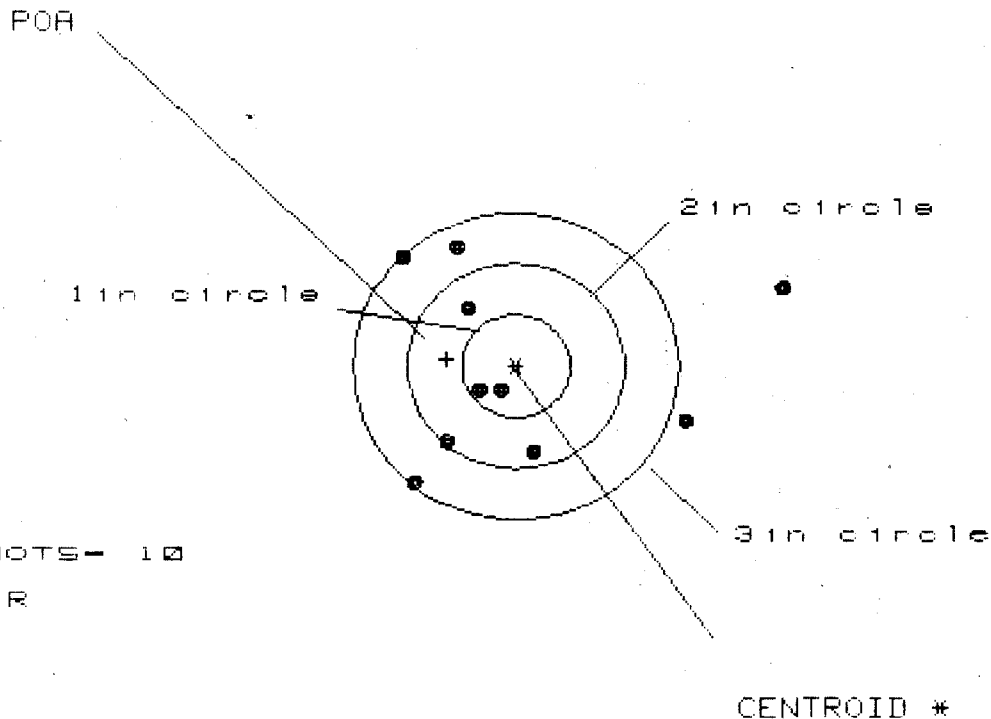

OF SHOTS- 10

IN CIR

1in - 2

2in - 5

3in - 6

HS= 3.518

VS= 2.321


GS= 3.938

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	2.435	1.808	.655
MINIMUM X	:	-1.083	-.813	-.587
MAXIMUM Y	:	1.148	1.238	1.187
MINIMUM Y	:	-1.173	-1.083	-1.134
CENTROID X	:	.639	.369	.142
CENTROID Y	:	-.068	-.158	-.107
POA TO CENTROID in.	:	.643	.401	.178
MIN RADIUS	:	.253	.144	.245
MEAN RADIUS	:	1.163	.933	.830
MAX RADIUS	:	2.564	1.853	1.293
HORIZONTAL SPREAD	:	3.518	2.621	1.241
VERTICAL SPREAD	:	2.321	2.321	2.321
EXTREME SPREAD	:	3.938	3.073	2.357
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		6	

4 Jan 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06225112

CENTERFIRE PATTERNS # 4

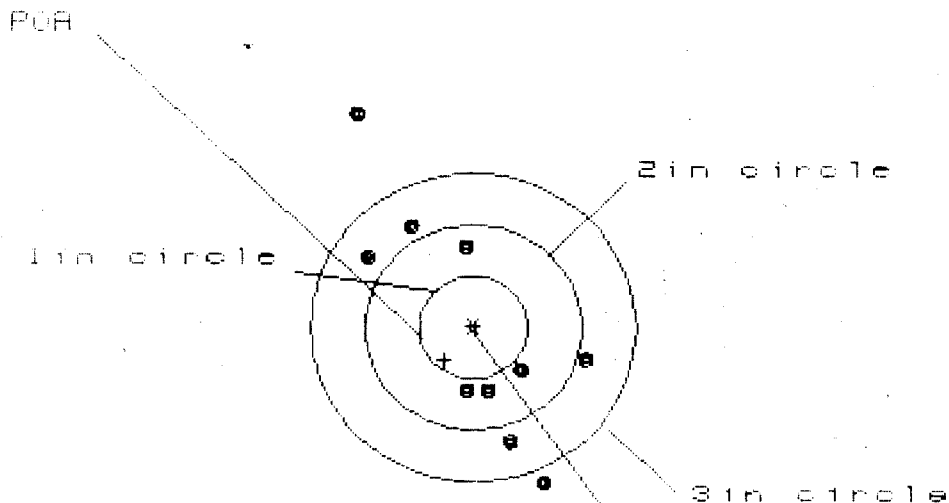

* OF SHOTS - 10

IN CIR.

1in = 0

2in = 4

3in = 8

MS = 2.137

VS = 3.604

ES = 4.888


CENTROID *

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.067	.948	1.017
MINIMUM X	:	-1.070	-1.067	-.998
MAXIMUM Y	:	2.064	1.236	1.072
MINIMUM Y	:	-1.540	-1.311	-1.033
CENTROID X	:	.265	.384	.315
CENTROID Y	:	.311	.082	.246
POA TO CENTROID IN.	:	.409	.392	.400
MIN RADIUS	:	.595	.348	.520
MEAN RADIUS	:	1.125	.924	.891
MAX RADIUS	:	2.325	1.420	1.253
HORIZONTAL SPREAD	:	2.137	2.015	2.015
VERTICAL SPREAD	:	3.604	2.547	2.105
EXTREME SPREAD	:	4.888	2.834	2.313
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		8	

4 Jan 1988

FILE:/PATTERNING-CENTERFIRE_PATT-06225112

CENTERFIRE PATTERNS # 5

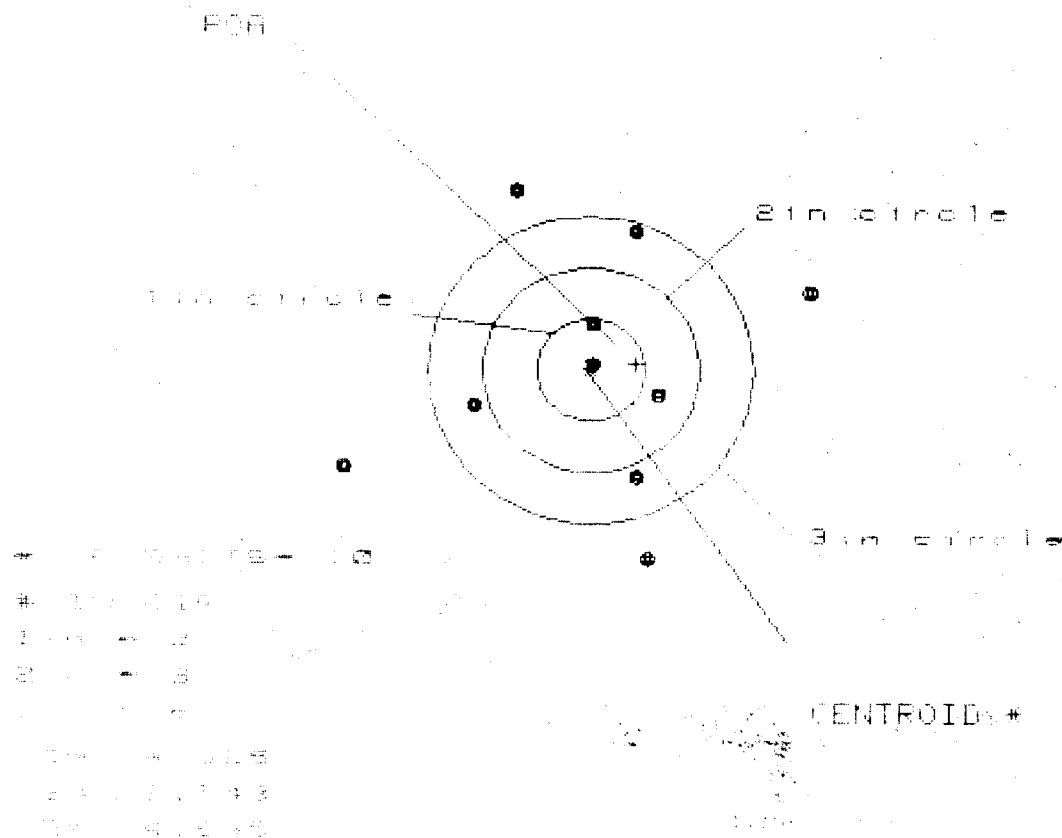

PATTERN #	5		
SHOTS (BOTH OF)	10	9	8
MAXIMUM X	2.035	1.790	.623
MINIMUM X	-2.290	-1.345	-1.122
MAXIMUM Y	1.718	1.617	1.702
MINIMUM Y	-1.825	-1.926	-1.841
CENTROID X	-.418	-.163	-.386
CENTROID Y	-.059	.042	-.043
POA TO CENTROID IN	.422	.169	.388
MIN RADIUS	.029	.265	.035
MEAN RADIUS	1.328	1.202	1.078
MAX RADIUS	2.464	1.940	1.895
HORIZONTAL SPREAD	4.325	3.125	1.745
VERTICAL SPREAD	3.543	3.543	3.543
EXTREME SPREAD	4.645	3.714	3.714
NUMBER IN ONE INCH CIRCLE	=	2	
NUMBER IN TWO INCH CIRCLE	=	3	
NUMBER IN THREE INCH CIRCLE	=	6	

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 96-16576INITIAL
FPS CUSTOMER ORDER NO.M-24 SNIPER W/DEPLOYMENT KIT
W/ULTRA 10X-M3A SCOPE

DATE RECEIVED 07/16/96	DATE OPENED 07/16/96	DATE CODE	SERIAL NUMBER C6225112	NEW SERIAL NUMBER	MODEL AND GRADE 700 7.62 NATO
ACCESSORIES W/STUDS	HARD CASE	SCOPE MNTS	SCOPE BASE		

FROM:

SHIP TO:

TRANSPORTATION OFFICER
ROCK ISLAND ARSENAL
BLDG 299 (SIORI-1ST
ROCK ISLAND

IL 61299

TRANSPORTATION OFFICER
ROCK ISLAND ARSENAL
BLDG 299 (SIORI-1ST
ROCK ISLAND

IL

61299

CUST NO:145587 C.O.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

W52 H096 180 H 253

PARTS

COMMENTS

Barrel 96003
Stock 96018
Scope Dust Cover Front
" " " Rear 96043
96044

Repowder Cart Trigger Guard
Assy, Front & Rear Sight Bases
Re-zinc Scope Base, Rings,
& Swivel Studs

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY


RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400049343

C 622 5112
622 5252
6 22 5167

C 6225112
6225252
6225167



U.S. GOVERNMENT FREIGHT WAYBILL

ORIGINAL

B/L NO. ► G-7944169

1. TRANSPORTATION COMPANY TENDERED TO BAGGETT TRANSPORTATION CO		2. SCAC BAGT	3. DATE B/L PREPARED 96.07.09	4. ROUTE ORDER/RELEASE NUMBER 7YBAADSCZA
5. DESTINATION (Name, address and ZIP code) XR REMINGTON ARMS COMPANY INC FABRICATED PRODUCTS DEPT 14 HOEFLE AVE ILION, NY 13357-1816		6. SPLC (Dest.) 172856000	8. ORIGIN STATION STATE TRANSPORTATION OFFICER ROCK ISLAND ARSENAL BLDG 299 (SIORI-IST) ROCK ISLAND, IL 61299-5000	
		7. SPLC (Orig.) 386250250		
9. CONSIGNEE (Name, address and ZIP code of installation) XR REMINGTON ARMS COMPANY INC FABRICATED PRODUCTS DEPT 14 HOEFLE AVE ILION, NY 13357-1816		10. GBLOC (Cons.) IOOI CMAH2W	11. SHIPPER (Name, address and ZIP code) TRANSPORTATION OFFICE ROCK ISLAND ARSENAL BLDG 102 (SIORI-IST) (309) 782-1363 ROCK ISLAND, IL 61299-5000 W52H1C	
12. APPROPRIATION CHARGEABLE 2162020 6D 6D02 P421010.12 (TMIL) 2217 S11116			13. BILL CHARGES TO (Dept./agency, bureau/office mailing address and ZIP code) DEFENSE FINANCE AND ACCOUNTING SVC INDIANAPOLIS CENTER TRANSPORTATION OPS. (DFAS-I-THA) INDIANAPOLIS, IN 46249-0611 AGENCY LOC CODE W53QRD	
14. VIA (Route shipment when advantageous to the Government)				

15. MARKS AND ANNOTATIONS TP:1 DDD:96.07.12 GLAM-02-6185006-01

EQUIPMENT 1
DN: DUAL DRIVER PROTECTIVE SERVICE WIT
DS: DROMEDARY SERVICE
... 1) INITIATING EXPL: N
SM: DTT SATELLITE MOTOR SURVEILLANCE
(108) DUAL DRIVER PROTECTIVE SERVICE
WITH NATIONAL AGENCY CHECK REQUESTED.

SIGNATURE AND TALLY RECORD (DD FORM 1907) FURNISHED TO CARRIER.

(111) SHIPPER TO LOAD AND CONSIGNEE TO UNLOAD.

SEE DESCRIPTION OF ARTICLES

16. PACKAGES		17. DESCRIPTION OF ARTICLES AND EXCEPTIONS	COMMODITY CODE NO.	19. WEIGHT* (Pounds only)	FOR USE OF BILLING CARRIER ONLY		
NO.	KIND				Services	Rate	Charges
		CLASSIFICATION ITEM NO. 069300	THIS BL CONSISTS OF 2 PAGES FIREARMS OR PARTS, NOI, IN BOXES, SEE NOTE, ITEM 69302 TCN: W52H096180H252XXX CU:34.7 1J DIM: 0050L0040W0030H RIFLE NSN: 1005-01-240-2136	255			
1	PT						
=====		MARKS & ANNOTATIONS: (112) FLAME OR HEAT PRODUCING TOOLS WILL NOT BE USED TO REMOVE SECURITY DEVICES. TOT QTY:255 P CU:34.7 SHIP AS-> SEE CONTINUATION SHEET FOR DETAILS		5000			
1	PT				TOTAL CHARGES		

20. TARIFF/SPECIAL RATE AUTHORITY BAGT 000537-00	21. PICKUP SERV. FURNISHED ☒ YES VEHICLE FULLY LOADED ☒ YES	SHIPPER'S INITIALS DD	22. CARRIER WAY/FREIGHT BILL NO. AND DATE
---	--	--------------------------	---

23. STOP THIS SHIPMENT AT FOR:	24. FURNISH INFORMATION ON CAR/TRUCKLOAD/CONTAINER SHIPMENTS						
	INITIALS & NO.	SEAL NUMBERS	LENGTH/CUBE		MARKED CAPACITY		DATE FURNISHED
	BAGT:599L-B	0908356	ORDERED	FURNISHED	ORDERED AD	FURNISHED AD	96.07.09
		APPLIED BY: SH					

25. CARRIER'S PICKUP DATE (Year, month, & day) 96.07.09	26a. SIGNATURE OF AGENT HAROLD/LOUISE <i>Russell Weaver</i>	26b. PER BAGT	B/L NUMBER G-7944169
---	--	------------------	-------------------------

27. MODE B	28. ESTIMATE 1933	29. NO. OF CLS/TLS 1	30. TYPE RATE 1	31. PSC DN:SM	32. REASON	WEIGHED AT GROSS TARE ALLOWANCE NET			
---------------	----------------------	-------------------------	--------------------	------------------	------------	--	--	--	--

FOR USE OF ISSUING OFFICE						OUTBOUND JUNCTION AGENT — Show junction stamps in space and order provided. Additional junction stamps and all yard stamps to be placed on back hereof.			
33a. ISSUING OFFICE (Name and complete address) TRANSPORTATION OFFICE ROCK ISLAND ARSENAL BLDG 102 (SIORI-IST) (309) 782-1363 ROCK ISLAND, IL 61299-5000						33b. GBLOC GLAM	FIRST JUNCTION	SECOND JUNCTION	THIRD JUNCTION
33c. ISSUING OFFICER WENDELIN MCCULLOUGH, TRANSPORTATION OFFICER									
33d. CONTRACT/PURCHASE ORDER NO. OR OTHER AUTHORITY						33e. DATED	FOURTH JUNCTION	FIFTH JUNCTION	DESTINATION AGENT (Stamp herein station name and date reported)
33f. FOB POINT NAMED IN CONTRACT									

*Show also cubic measurements for shipments via air, truck or water carrier in cases where required.

1105-121-01

WHITE

STANDARD FORM 1105 (REV. 4-85)
PRESCRIBED BY GSA, FPMR(41 CFR) 101-11.3CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400049349

U.S. GOVERNMENT FREIGHT WAYBILL CONTINUATION SHEET

ORIGINAL

B/L NO. **G-7944169**
SHEET NO. **2 OF 2**

(This form is to be used as a continuation sheet for SF 1105, U.S. Government Freight Waybill-Original, or SF 1205, U.S. Government Freight Waybill- Privately Owned Personal Property-Original.)

ISSUING OFFICE (Name and complete address)

TRANSPORTATION OFFICE
ROCK ISLAND ARSENAL
BLDG 102 (SIORI-1ST) (309) 782-1363
ROCK ISLAND, IL 61299-5000

TRANSPORTATION COMPANY TENDERED TO

BAGGETT TRANSPORTATION CO

FROM(Shipping Point)

W52H1C
386250250

WAYBILL DATE

WAYBILL NUMBER

PACKAGES		HM	DESCRIPTION OF ARTICLES (Use carrier's classification or tariff description if possible; otherwise use a clear nontechnical description.)	WEIGHT* (Pounds only)	FOR USE OF BILLING CARRIER ONLY		
NO.	KIND				SERVICES	RATE	CHARGES
			(114) CARRIER TO NOTIFY CONSIGNEE RECEIVING PERSON (DUTY PHONE (800) 243-9700 AV--, NON-DUTY PHONE (315) 895-3200) AND CONSIGNOR WENDELINE MCCULLOUGH (DUTY PHONE (309) 782-1363 AV-793-1363, NON-DUTY PHONE (309) 782-5621) IMMEDIATELY IF SHIPMENT IS DELAYED EN ROUTE BECAUSE OF AN ACCIDENT OR INCIDENT. IF NEITHER CAN BE REACHED, CONTACT MTMC EASTERN AREA HOTLINE AT HOTLINE (800) 524-0331. USE HOTLINE NUMBER TO OBTAIN SAFE HAVEN OR REFUGE INSTRUCTIONS IN THE EVENT OF A CIVIL DISORDER, NATURAL DISASTER, CARRIER STRIKE OR OTHER EMERGENCY. (337) SATELLITE MOTOR SURVEILLANCE SERVICE (SM) REQUESTED. IN EVENT OF SYSTEM FAILURE, DRIVER MUST IMMEDIATELY NOTIFY THE MOTOR CARRIER'S DISPATCHER WHO WILL IMMEDIATELY NOTIFY DTTS AT 1-(800)-826-0794. THE DRIVER MUST SUBSEQUENTLY PROVIDE DTTS A TELEPHONIC LOCATION/STATUS REPORT EVERY FOUR (4) HOURS, WITH A FINAL TELEPHONIC REPORT UPON DELIVERY AT DESTINATION. (339) DROMEDARY SERVICE REQUESTED. (367) THIS SHIPMENT MUST NOT BE TRANSPORTED IN TRIP-LEASED EQUIPMENT.				
=====			BLOCK 24 EQUIPMENT DESCRIPTION CONT.:				
			TRACTOR: 599L				

*Show also cubic measurements for shipments via air, truck or water carrier in cases where required.

1111-114

WHITE

STANDARD FORM 1111, (REV. 4-85)
PRESCRIBED BY GSA, FPMR(41 CFR) 101-41.3

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400049350

SIGNATURE AND TALLY RECORD

FORM APPROVED
OMB No. 0702-0027
Expires Oct 31, 1988

DISTRIBUTION INSTRUCTIONS

- * The SHIPPER will prepare copies 1 through 4, retain copy 4 and deliver copies 1 through 3 to the Origin Carrier.
- * The CARRIER will deliver copies 1 through 3 to the Destination Carrier.
- * The DESTINATION CARRIER will attach copy 1 (reflecting all signatures) and Standard Form 1113 (Public Voucher for Transportation Charges) to the original Government Bill of Lading, and forward for payment. Copy 2 will be delivered to the Consignee. Copy 3 will be retained.
- * The CONSIGNEE will ensure Destination Carrier surrenders copy 2.

SECTION A - To be completed by the SHIPPER

1. SHIPPER		2. PROTECTIVE SERVICE REQUESTED	
a. NAME ROCK ISLAND ARSENAL, IL W52H1C		DN DUAL DRIVER PROTECTIVE SERVICE WITH NAC SM DTTS SATELLITE MOTOR SURVEILLANCE SERVICE	
b. ORIGIN TRANSPORTATION OFFICER ROCK ISLAND ARSENAL BLDG 299 (SIORI-IST) ROCK ISLAND, IL 61299-5000		3. GBL OR CBL NUMBER G-7944169	
4. CONSIGNEE		5. PERMIT NUMBER (if any)	
a. NAME REMINGTON ARMS CMAH2W			
b. DESTINATION XR REMINGTON ARMS COMPANY INC FABRICATED PRODUCTS DEPT 14 HOEFLER AVE ILION, NY 13357-1816		6. TRANSPORTATION CONTROL NUMBER (GLAM-02-6185006 -01) W52H096180H252XXX	
7. ROUTING BAGGETT TRANSPORTATION CO		8. WEIGHT 255 POUNDS	9. CUBE 34.7
10. SPECIAL INSTRUCTIONS		11. DATE SHIPMENT TENDERED TO CARRIER 96.07.09	12. NAME OF CARRIER BAGT
13. NUMBER OF PIECES 1	14. TYPE OF PACKAGE(S) (For unsealed loads only) OR CONVEYANCE IDENTIFICATION & SEAL NUMBERS (for sealed loads only) BAGT-599L-B 0908356	15. FREIGHT CLASSIFICATION DESCRIPTION 069300 FIREARMS OR PARTS, NOI, IN BOXES, SEE NOTE, ITEM 69302	

SECTION B - To be completed by each person accepting custody of classified or protected material requiring the use of transportation protective service during transit.

16. CUSTODY RECORD				
a. PRINT NAME OF PERSON AND COMPANY REPRESENTED	b. STATION INTERCHANGE POINT DESTINATION	c. SIGNATURE OF PERSON ACCEPTING CUSTODY	d. TIME ACCEPTED	e. DATE ACCEPTED
Harold Weaver	RIA	Harold Weaver	0830	7-9-96
Louise Weaver	RIA	Louise Weaver	0830	7-9-96
Raymond Scott ^{BAGT.}		Raymond Scott	0800	7-10-96
W. Summers	Blount Field IN	Will Summers	0800	7-13-96
K. Summers	Blount Field IN	Kath Summers	0200	7-13-96
L. Sizemore ^(BAGT.)	Oxford AL	L. Sizemore	1215	7-13-96
THARRIS	OXFORD AL	T. Harris	1500	7-13-96
A. Land	OXford, AL	A. Land	2310	7/13/96
L. Sizemore	OXford AL	L. Sizemore	0700	7-14-96
R. Hall	OXford al.	R. Hall	1500	7/14/96
A. Land	OXford, AL	A. Land	2310	7/14/96

DD FORM 1907, FEB 86

Previous editions are obsolete

PAGE 1

Consignee - Copy 2

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400049351

Figure 1

SHIPPER:	CONSIGNEE:
DESCRIPTION:	GBL NUMBER: G-7944169
ROUTE:	
<u>NOTICE:</u> HAND TO HAND SIGNATURE SERVICE IS REQUIRED FROM THE TIME THE SHIPMENT LEAVES THE HANDS OF THE CONSIGNOR UNTIL ITS DELIVERY TO THE CONSIGNEE.	
I, the undersigned, have handled (physically or otherwise) the shipment described above:	

[illegible]

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400049352

[illegible]

FSN, PART NO. AND ITEM DESCRIPTION 1005-01-240-2136 H		UNSERVICEABLE/REPARABLE TAG - MATERIEL	
		INSPECTION ACTIVITY	CONDITION CODE H
SERIAL NO./LOT NO. C 6225112		UNIT OF ISSUE EA	REASON FOR REPARABLE CONDITION THROAT EROSION
CONTRACT OR PURCHASE ORDER NO.	QUANTITY 1	REMOVED FROM	INSPECTOR'S NAME OR STAMP AND DATE JEM/1 Feb 96
REMARKS Depot Maintenance Required			

U.S. GPO: 1993-715-045
 OCT 86

DATE: 01-FEB-96

MAINTENANCE REQUEST

DA FORM 5990-E

CUSTOMER DATA

UIC: WH9ZAA
UTIL CODE: 0

4/325TH A.I.R

PHONE: (910)432-4334

ACTIVITY DATA

SUP WON:
SUP UIC: WH3EB0

B CO 407TH FSB

PHONE: 396-7123
SHOP SEC:

EQUIPMENT DATA

TYPE MNT REQ: 1

ID: A NSN: 1005012402136

MODEL: M24

NDUN: SNIPER SYSTEM

SER NUM: C 6225112

QTY: 00001

ORG WON: H9ZAA1607613 PRIORITY: 02

FAILURE DETECTED: D

MI/KM: -----

HOURS: -----

ROUNDS:

IN WARRANTY:

LEVEL OF WORK: F

ADMIN NUM:

DEFICIENCY: THROAT EROSION

PD AUTHENTICATING SIGNATURE:

SIGNATURE DATA

SUBMITTED BY:

ORD DATE:

MIL TIME:

ACCEPTED BY:

STATUS: A

ORD DATE:

MIL TIME:

ACTION DATA

WORK STARTED BY:

STATUS:

ORD DATE:

MIL TIME:

INSPECTED BY:

STATUS: R

ORD DATE:

MIL TIME:

PICKED UP BY:

STATUS: U

ORD DATE:

MIL TIME:

COMPLETION DATA

QTY RPR:

QTY CONDEMNED:

NRTS:




EVAC WON:

EVAC UNIT NAME:

Depot Maintenance
Required

NRTS 7

M2400049356

MAINTENANCE REQUEST For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG				PAGE NO 1	NO OF PAGES 1	REQUIREMENT CONTROL SYMBOL CSGLD-1047(R1)
SECTION I - CUSTOMER DATA				SECTION II - MAINTENANCE ACTIVITY DATA		
1a. UIC CUSTOMER 4H9,3TD	1b. CUSTOMER UNIT NAME HMC 4/325	1c. PHONE NO 2-5059	3a. WORK ORDER NUMBER (WON)		3b. SHOP	3c. PHONE NO
2a. SAMS-2 UIC/SAMS-1/TDA	2b. UTILIZATION CODE	2c. MCSR	4a. UIC SUPPORT UNIT		4b. SUPPORT UNIT NAME	
SECTION III - EQUIPMENT DATA						
5. TYPE MNT REQ CODE	6. ID	7. NSN 1005012402136	15a. FAILURE DETECTED DURING/WHEN DISCOVERED CODE (Enter code) See DA Pamphlets 738-750 and 738-751			
8. MODEL m24			15b. FIRST INDICATION OF TROUBLE/HOW RECOGNIZED CODE (Enter Code) See DA Pamphlets 738-750 and 738-751		16. MILES/KILOMETERS/HOURS/ROUNDS M K	
9. NOUN Sniper System					H R	
10a. ORG WON/DOC NO	10b. EIC					
11. SERIAL NUMBER 6325112	12. QTY 01	13. PD 02	17. PROJECT CODE (if assigned)	18. ACCOUNT PROCESSING CODE	19. IN WARRANTY? (enter Y or N) Y	20. ADMIN NO
14. MALFUNCTION DESCRIPTION (for DSU, GSU/AVIM, DEPOT use)			21. REIMBURSABLE CUSTOMER (if Intransit customer enter Y or N)			
			22. LEVEL OF WORK		23. SIGNATURE 	
24. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURES IN EQUIPMENT TM (Do not prescribe repairs)						
25. REMARKS throat erosion UNDER WARRANTY SEND BACK TO MFC						
PREPARATION INSTRUCTIONS FOR THIS PAGE						
SECTION I			SECTION III (Cont'd)			
Block 1a. Enter UIC of submitting organization. Block 1b. Enter name of submitting organization. Block 1c. Enter number to be called when maint. is completed. Block 2a. Enter UIC of supporting SAMS-2/SAMS-1/TDA if work is requested while intransit and away from your support maintenance unit. Block 2b. Enter utilization code. See DA Pamphlets 738-750 and 738-751. Block 2c. Enter "Y" if reportable under AR 700-138. If not, leave blank.			Block 12. Enter the quantity of items being submitted. Block 13. Enter the maintenance priority designator determined from DA PAM 710-2-1. Block 14. For DSU, GSU/AVIM, DEPOT use. Block 15a. Enter the code that most accurately describes when the fault or deficiency was detected. See DA Pamphlets 738-750 and 738-751. Block 15b. Select one. Enter the code. See DA Pamphlets 738-750 and 738-751. Block 16. Enter the accumulated usage data in blocks, when equipment is subject to usage reporting. Block 17. Enter the project code if one has been assigned. If not, leave blank. Block 18. See DA Pamphlets 738-750 and 738-751. Block 19. Enter "Y" or "N" to indicate whether equipment is still under manufacturer's warranty. Block 20. Enter the admin number assigned for property control purposes for the equipment being submitted. Block 21. For DSU/GSU/AVIM/Depot use. Block 22. Enter level of work performed "O" for UNIT LEVEL/AVUM, "F" for DSU/AVIM, "H" for GSU, "D" for DEPOT, "K" for contractor or "L" for Spc Rpr Act. Block 23. Enter the signature of the CO or the CO's designated representative when the priority designator is 01-10. For priority designators 11-15, leave blank. Block 24. Enter a brief description of the deficiencies or symptoms that you feel require attention at this level of maint. Block 25. Self-explanatory.			
SECTION II						
Leave blank. To be completed by the support maintenance DSU/GSU/AVIM/DEPOT.						
SECTION III						
Block 5. Enter the Type Maintenance Request Code. See DA Pamphlets 738-750 and 738-751. Block 6. Enter ID associated with block 7. See DA Pamphlets 738-750 and 738-751. Block 7. Enter the NSN or stock number of the item being submitted. Block 8. Enter model of item being submitted. Block 9. Enter noun/nomenclature of item being submitted. Block 10a. Enter Work Order Number (WON)/DOC NO assigned when item is submitted. Otherwise, leave blank. Block 10b. Enter End Item Code. See AMDF. Block 11. Enter serial number of item being submitted.						
34a. SUBMITTED BY 	35a. ACCEPTED BY 	35c. DATE				
34b. DATE 96032	35b. STATUS	35d. TIME				
			Block 34a. Enter first initial and last name of submitter. Block 34b. Enter ordinal date submitted (YYDDD). Block 35a. Enter first initial and last name of person accepting maint. request. Block 35b. Enter the initial status. See DA Pamphlets 738-750 and 738-751. Block 35c. Enter ordinal date accepted (YYDDD). Block 35d. Enter military time.			

DA FORM 2407, JUL 94

PREVIOUS EDITIONS OF DA FORM 2407 AND DA FORM 5504 ARE OBSOLETE

RECEIPT COPY 1

 CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
 KINZER V. REMINGTON

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

21 DAY TURN - AROUND

Barrel
&
Stock

M-24

CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO.

C6225112

LOG IN DATE: / /		DATE	INIT.
INSPECT & VERIFY:			
OP. #	OP. NAME		
550	DIS-ASSEMBLE GUN		
560 A	RE-BARREL AT CUSTOM SHOP		
B	DRILL & TAP		
C	POLISH		
575	ASSEMBLE		
600	PROOF	9/9/96	Rw
605	CHECK HEADSPACE	9/9/96	Rw
610	DIS-ASSEMBLE		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY	9/24/96	Rw
B	TRIGGER PULL TEST		
C	SAFETY ON FORCE		
D	SAFETY OFF FORCE		
E	FIRING PIN INDENT		
640	TARGET	9/27/96	Rw
655	FINAL INSPECT	10/1/96	Rw
660	PACK		

QAR INSPECTION

SHIP DATE

Final Inspection

Sn: C6225712

DATE REC'D: 7/16/96

DATE RET'D:

AUDITOR: RW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☒ Scope☒ Scope Rings☒ Mounting Screws☒ Mounting Base☒ SCREWS☒ FINISH☒ LOOSENESS☒ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☒ Scope Case☐ IRON SIGHTS☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments:

Remington



VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.


MODEL 700TM M24

SERIAL NO.
C6225112

ORDER NO.
5716


20

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off, Marca Registrada. Marque Deposee.



5716 C6225112

UPC



0 47700 25716 7

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER

R 93-27263

INITIALS CUSTOMER ORDER NO.

FPS 8383

ATTN: FRED MARTIN/M24 W/ULTRA 10X-M3A SCOPE
W/ADJUSTABLE RECOIL PAD

DATE RECEIVED	DATE OPENED	DATE CODE	SERIAL NUMBER	NEW SERIAL NUMBER	MODEL AND GRADE
12/14/93	12/14/93	BJ 1-89	C6225112		700 7.62 NATO
ACCESSORIES	W/STUDS	W/SWIVELS	SCOPE MNTS	SCOPE BASE	SOFT CASE

FROM:

CDR
HHC 4/325 TH A I R
FT BRAGG

NC 28307

SHIP TO:

CDR
HHC 4/325 TH A I R
FT BRAGGNC
28307

CUST NO: 045888 C.O.D L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

DOOR

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
------------------	------	----------	--------	----------	-----	---------

CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

New Barrel

PARTS

COMMENTS

Barrel - 96003

Re Zinc - Scope Base Scope Rings,
Swivels & Swivel Studs.
Re Powder Coat - Floor plate, latch,
Trigger Guard, Front & Rear
Sight Bases.

W52 H093361 H237

REPAIRMAN	PROOF	CLEAN	TEST	TARGET	PATTERN
Rw	✓	✓	✓	✓	
GALLERY TESTER	DATE	DATE	DATE	DATE	DATE
Rw	12/14/93	12/21/93	12/21/93	12/21/93	

OFFICE COPY

RD6925 REV. 1/92

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400049363

PAYMENT:

Mastercard / Visa (circle one)

Card #:

Exp. Date:

Signature

RETURN:

☐ Clark Street Entrance☒ Via US Mail or UPS

(PLEASE PRINT CLEARLY)

FIREARMS DELIVERED TO PLANT

FILE Nº 008383DATE 12/14/93

CUSTOMER NAME:

ADDRESS:

ZIP:

PHONE:

FIREARM

MODEL:

GAUGE:

SERIAL #

REMINGTON EMPLOYEE:

YES ☐ NO ☒

EMPLOYEE #

DEPT. #

CHECK FOR AMMUNITION ☒

CONDITION:

WOOD

GOOD

FAIR

POOR

FANCY

PLAIN

METAL

GOOD

FAIR

POOR

FANCY

PLAIN

BARREL

VT. RIB

PLAIN

DEER RSS

ACCESSORIES:

SCOPE: YES ☒ NO ☐

(BRAND NAME/POWER)

SLING: YES ☐ NO ☒GUN CASE: YES ☒ NO ☐(HARD ☒ SOFT ☐

EXTRA BBL FOR GUN MENTIONED ABOVE:

OTHER (Note in this area items missing or added from orig. equipment)

CUSTOMER REQUEST:

SIGNATURE:

(Person delivering firearm to Plant)

DATE:

SIGNATURE:

(Security Officer)

DATE:

SIGNATURE:

(Firearm picked up by)

DATE:

Arm Service Copy

MAINTENANCE REQUEST				PAGE NO.	NO. OF PAGES	REQUIREMENTS CONTROL SYMBOL CSGLD - 1047(R1)		
For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG								
SECTION I - EQUIPMENT DATA								
CONTROL NUMBER		WORK ORDER NO.		WESDC		ORG. PD		
☐ Work Request ☐ MWO ☐ Warranty Claim		1A. ORGANIZATION		B. LOCATION			C. UNIT IDENT CODE	
2. SERIAL NO.		3. NOUN NOMENCLATURE		4. LINE NO.		5. MODEL		
7A. MAINTENANCE ACTIVITY		B. LEVEL	8. UTILIZATION CODE	9A. MCSR ITEM	9B. ERC	9C. PACING ITEM	10. HOURS	
							11. MILES	12. ROUNDS
							13. STARTS	
14. FAILURE DETECTED DURING (Select one - use ✓ or X) ☐ A Sch. Main. ☐ C Test ☐ E Storage ☐ G Flight ☐ B Handling ☐ D Normal Op ☐ F Inspection ☐ H Other				15. FIRST INDICATION OF TROUBLE (Select one - use ✓ or X) ☐ 068 Inoperative ☐ 258 Overheating ☐ 790 Out of Adjustment ☐ 008 Noisy ☐ 387 Low Performance ☐ Other				
16A. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs) 								
B. REMARKS 								
PREPARATION INSTRUCTIONS (Prior to using this form, read DA PAM 738-750 for detailed preparation instructions)								
1. Place a "✓" or an "X" in the box for the type of action required. 2. Enter the WESDC if the item is Materiel Condition Status Reportable. 3. Enter the priority designator as determined from the urgency of need and force activity designator. 4. The Unit Commander, Chief of TDA activity or their designated representative will authenticate, by signature, a priority of 01 through 08. 5. <i>Block 1A.</i> Enter the name of the organization submitting the request. 6. <i>Block 1B.</i> Enter the unit submitting the request; units overseas enter APO only. 7. <i>Block 1C.</i> Enter the unit identification code of the unit in block 1A. 8. <i>Block 2.</i> Enter the equipment serial number. For ammunition, enter the lot number. For administrative-use vehicles, enter the USA registration number. 9. <i>Block 3.</i> Enter the noun abbreviation of the item. 10. <i>Block 4.</i> Enter the item line number, if applicable. 11. <i>Block 5.</i> Enter the model number. 12. <i>Block 6.</i> Enter the National Stock Number of the item listed in Block 3.				13. <i>Block 7.</i> Enter the name of the support activity. 14. <i>Block 7A.</i> Enter the symbol of the maintenance category (O, F, H, D, or L). 15. <i>Block 8.</i> Enter the utilization code. 16. <i>Block 9A.</i> Enter the word "yes" if the item is Materiel Condition Status Reportable. 17. <i>Block 9B.</i> Enter the equipment readiness code, if applicable. 18. <i>Block 9C.</i> Enter the word "yes" if the item is a pacing item. 19. <i>Block 10.</i> Enter the hour reading, if applicable. 20. <i>Block 11.</i> Enter the mileage from the odometer, if applicable. 21. <i>Block 12.</i> Enter the total rounds fired, if applicable. 22. <i>Block 13.</i> For turbine engines, enter the number of hot starts. 23. <i>Block 14.</i> Enter a "✓" or "X" in the proper block. 24. <i>Block 15.</i> Enter a "✓" or "X" in the proper block. 25. <i>Block 16.</i> Describe briefly the fault or symptoms needing correction.				
23. SUBMITTED BY		24. RECEIVED BY						
JULIAN DATE		JULIAN DATE						

MAINTENANCE REQUEST					PAGE NO.		NO. OF PAGES		REQUIREMENTS CONTROL SYMBOL CSGLD - 1047(R1)				
For use of this form, see DA PAM 738-750, the proponent agency is DCSLOG													
SECTION I - EQUIPMENT DATA													
CONTROL NUMBER		WORK ORDER NO.			WESDC		ORG. PD		PD AUTHENTICATION				
☐ Work Request ☐ MWO ☐ Warranty Claim		1A. ORGANIZATION			B. LOCATION				C. UNIT IDENT CODE				
2. SERIAL NO.		3. NOUN NOMENCLATURE			4. LINE NO.		5. MODEL		6. NATIONAL STOCK NUMBER				
7A. MAINTENANCE ACTIVITY		B. LEVEL	8. UTILIZATION CODE	9A. MCSR ITEM	9B. ERC	9C. PACING ITEM		10. HOURS	11. MILES	12. ROUNDS	13. STARTS		
14. FAILURE DETECTED DURING (Select one - use ☒ or X)					15. FIRST INDICATION OF TROUBLE (Select one - use ☒ or X)								
☐ A Sch. Main.		☐ C Test		☐ E Storage		☐ G Flight		☐ 058 Inoperative		☐ 258 Overheating		☐ 790 Out of Adjustment	
☐ B Handling		☐ D Normal Op		☐ F Inspection		☐ H Other		☐ 008 Noisy		☐ 387 Low Performance		☐ Other	
16A. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs).													
B. REMARKS													
SECTION II - WORK ACCOMPLISHED													
17A. REPAIR ORGANIZATION/ACTIVITY				C. UNIT IDENT. CODE		18. TYPE ORGANIZATION/ACTIVITY ACCOMPLISHING WORK (Select one - use ☒ or X)				19. AMS ACCT. CODE			
B. LOCATION						☐ 1 TOE ☐ 2 TD ☐ 3 Contractor							
20A. ACT. CODE	B. FAILURE CODE	C. COMPONENT/PART NOUN, SVC, OR MWO NO.			D. MANHOURS (Hrs. & tenths)	E. NATIONAL STOCK NUMBER		F. PART SOURCE CODE		G. QTY.	H. PARTS COST		
		(1) CB CODE	(2) REF DESIGN.	(3) MFR. CODE									
											\$		
											\$		
											\$		
											\$		
											\$		
											\$		
											\$		
											\$		
											\$		
											\$		
											\$		
					I. TOTAL MANHOURS		J. TOTAL MANHOURS COST		K. TOTAL PARTS COST				
							\$		\$				
21. DELAY (Select One)													
23. SUBMITTED BY	JULIAN DATE	24. RECEIVED BY	JULIAN DATE	25. WORK STARTED BY	JULIAN DATE	26. INSPECTED BY	JULIAN DATE	27. ACCEPTED BY	JULIAN DATE	28. DISPOSITION (Select One)			
										☐ A To User ☐ D Evacuated ☐ B To Stock ☐ E Cannibalization ☐ C Salvaged			

DA FORM 2407, AUG 88

EDITION OF MAY 81 MAY BE USED

NMP COPY 2

Final Inspection

In: C6225112

DATE REC'D: 12/14/93

DATE RET'D:

EDITOR: RW

Item:

BARREL ASSY.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

SCOPE ASSY.

☒ SCOPE☒ SCOPE RINGS☒ MOUNTING SCREWS☒ MOUNTING BASE☒ SCREWS☒ FINISH☒ LOOSENESS☒ CLARITY

MISC.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

STOCK ASSY.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

SYSTEMS CASE

☐ SCOPE CASE☐ IRON SIGHTS☐ DEPLOYMENT KIT

TRIGGER

☒ SAFETY OPERATION☒ SET

Comments: _____

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225112
27 Dec 1993

CENTROIDAL DISTANCES

0 TO 1	.175548
1 TO 2	.451359
1 TO 3	.382884
1 TO 4	.33699
1 TO 5	.218403

32 <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .1198
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0906
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .150201
THE RMR FOR THIS RIFLE IS: .8506

27 Dec 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C6225112

CENTERFIRE PATTERNS

1

POA

1in circle

2in circle

3in circle

CENTROID #

OF SHOTS- 10

IN CIR

1in = 4

2in = 8

3in = 10

HS= 1.713

VS= 1.768


GS= 1.893

PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.056	.722	.268
MINIMUM X	:	-.657	-.539	-.449
MAXIMUM Y	:	.954	1.005	.910
MINIMUM Y	:	-.814	-.763	-.857
CENTROID X	:	.111	-.007	-.007
CENTROID Y	:	-.136	-.187	-.092
POA TO CENTROID in.	:	.176	.187	.134
MIN RADIUS	:	.025	.104	.158
MEAN RADIUS	:	.646	.580	.517
MAX RADIUS	:	1.151	1.046	.949
HORIZONTAL SPREAD	:	1.713	1.261	.717
VERTICAL SPREAD	:	1.768	1.768	1.768
EXTREME SPREAD	:	1.893	1.893	1.880
NUMBER IN ONE INCH CIRCLE	=		4	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		10	

27 Dec 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C6225112

CENTERFIRE PATTERNS # 2

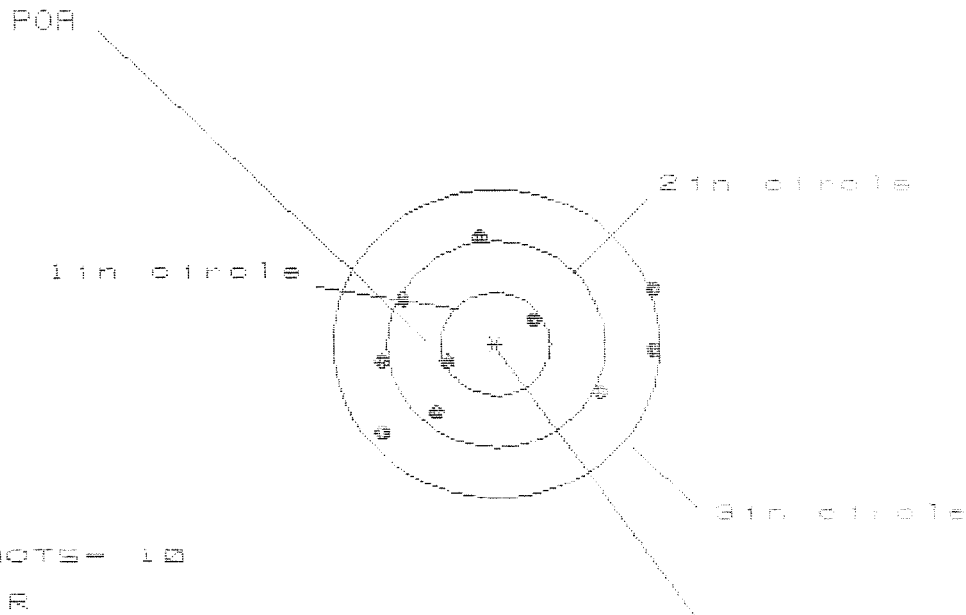

OF SHOTS- 10

IN CIR

1in = 1

2in = 4

3in = 9

HS= 2.501

VS= 1.905


ES= 2.835

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.450	1.592	1.363
MINIMUM X	:	-1.051	-0.890	-0.691
MAXIMUM Y	:	1.083	1.140	1.137
MINIMUM Y	:	-0.822	-0.765	-0.768
CENTROID X	:	.450	.289	.096
CENTROID Y	:	.162	.105	.108
POA TO CENTROID in.	:	.478	.307	.140
MIN RADIUS	:	.392	.346	.163
MEAN RADIUS	:	1.013	.927	.796
MAX RADIUS	:	1.538	1.592	1.322
HORIZONTAL SPREAD	:	2.501	2.482	1.954
VERTICAL SPREAD	:	1.905	1.905	1.905
EXTREME SPREAD	:	2.835	2.591	2.124
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		9	

27 Dec 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C8225112

CENTERFIRE PATTERNS # 3

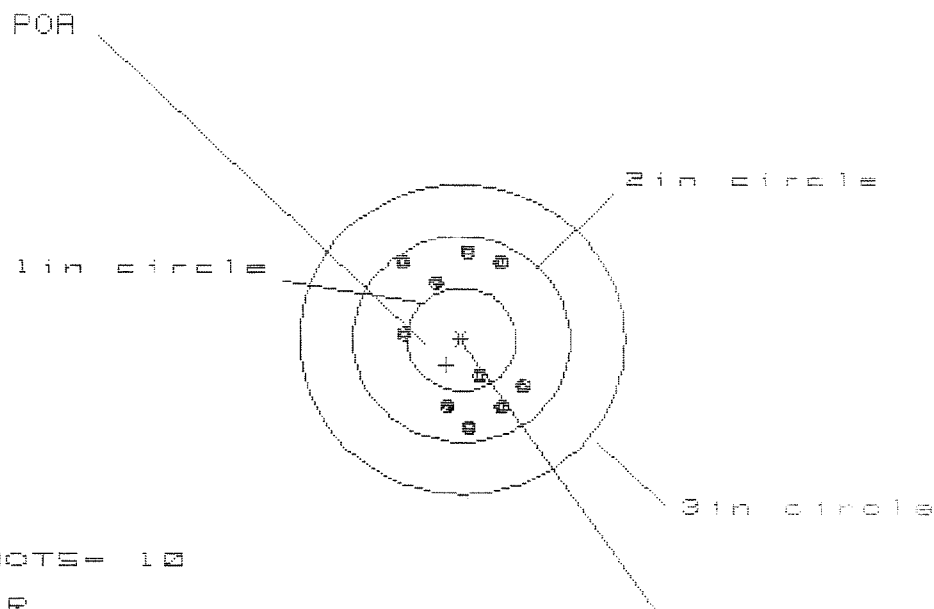

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 10

3 in = 10

HS= 1.183

VS= 1.734


ES= 1.735

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.600	.535	.531
MINIMUM X	:	-.583	-.589	-.593
MAXIMUM Y	:	.869	.949	.983
MINIMUM Y	:	-.865	-.785	-.666
CENTROID X	:	.137	.202	.206
CENTROID Y	:	.246	.166	.047
POA TO CENTROID in.	:	.282	.261	.211
MIN RADIUS	:	.346	.248	.137
MEAN RADIUS	:	.715	.677	.612
MAX RADIUS	:	.928	.950	1.023
HORIZONTAL SPREAD	:	1.183	1.124	1.124
VERTICAL SPREAD	:	1.734	1.734	1.649
EXTREME SPREAD	:	1.735	1.735	1.671
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		10	
NUMBER IN THREE INCH CIRCLE	=		10	

27 Dec 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C6225112

CENTERFIRE PATTERNS # 4

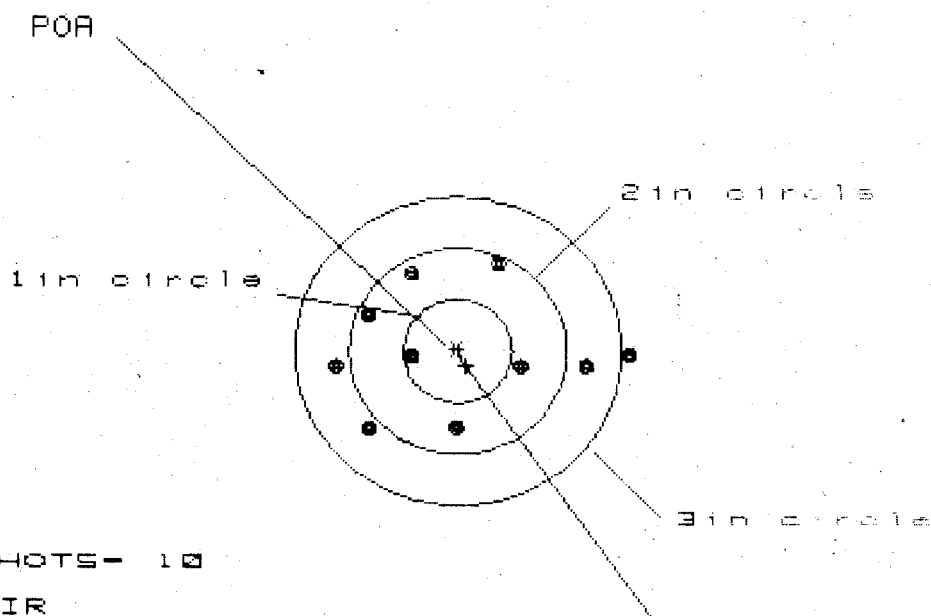

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 6

3 in = 9

HS= 2.699

VS= 1.635

GS= 2.705


PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.565	1.339	.922
MINIMUM X	:	-1.134	-.960	-.793
MAXIMUM Y	:	.889	.888	.869
MINIMUM Y	:	-.746	-.747	-.766
CENTROID X	:	-.078	-.252	-.419
CENTROID Y	:	.143	.144	.163
POA TO CENTROID in.	:	.163	.290	.450
MIN RADIUS	:	.403	.234	.111
MEAN RADIUS	:	.954	.858	.764
MAX RADIUS	:	1.565	1.348	1.133
HORIZONTAL SPREAD	:	2.699	2.299	1.715
VERTICAL SPREAD	:	1.635	1.635	1.635
EXTREME SPREAD	:	2.705	2.299	2.024
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

27 Dec 1993

FILE:/PATTERNING/CENTERFIRE_PATT/06225112

CENTERFIRE PATTERNS # 5

POA

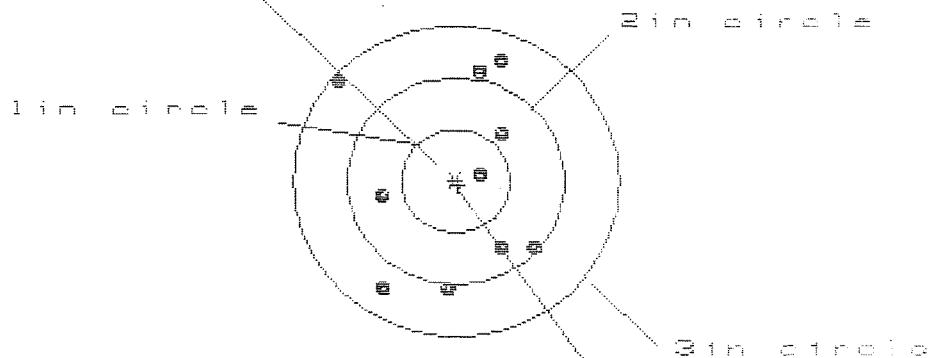

OF SHOTS= 10

IN CIR

1in = 1

2in = 5

3in = 10

HS= 1.750

VS= 2.187

GS= 2.418

CENTROID #

PATTERN #	5	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.727	.612	.589
MINIMUM X	-1.033	-.824	-.925
MAXIMUM Y	1.118	1.222	1.106
MINIMUM Y	-1.069	-.965	-1.081
CENTROID X	-.021	.094	.197
CENTROID Y	.038	-.066	.049
POA TO CENTROID in.	.043	.115	.203
MIN RADIUS	.199	.151	.023
MEAN RADIUS	.925	.852	.777
MAX RADIUS	1.391	1.257	1.123
HORIZONTAL SPREAD	1.760	1.436	1.434
VERTICAL SPREAD	2.187	2.187	2.187
EXTREME SPREAD	2.418	2.418	2.234
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	10		

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06225112
2 Feb 1989

CENTROIDAL DISTANCES

0 TO	1	.294437
1 TO	2	.440069
1 TO	3	.53956
1 TO	4	.952782
1 TO	5	.705505

+¹
+₁⁵ <----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0118
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.337
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .337297

THE AMR FOR THIS RIFLE IS: 1.014

31 Jan 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C8225112

CENTERFIRE PATTERNS # 1

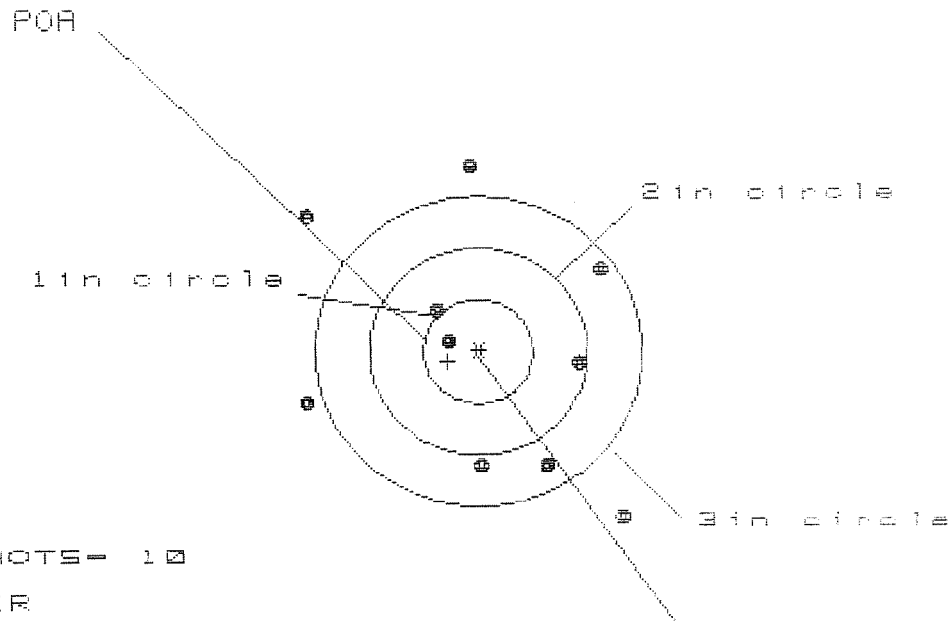

OF SHOTS- 10

IN CIR

1in = 1

2in = 3

3in = 6

HS= 2.879

VS= 3.372


GS= 4.094

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.274	1.099	1.077
MINIMUM X	-1.605	-1.780	-1.643
MAXIMUM Y	1.785	1.935	1.755
MINIMUM Y	-1.587	-1.437	-1.122
CENTROID X	.278	.453	.316
CENTROID Y	.097	-.053	.127
POA TO CENTROID in.	.294	.456	.340
MIN RADIUS	.337	.554	.368
MEAN RADIUS	1.312	1.221	1.128
MAX RADIUS	2.076	1.955	1.761
HORIZONTAL SPREAD	2.879	2.879	2.720
VERTICAL SPREAD	3.372	3.372	2.877
EXTREME SPREAD	4.094	3.643	3.015
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	6		

31 Jan 1989

FILE:/PATTERNING/CENTERFIRE_PATT/06225112

CENTERFIRE PATTERNS # 2

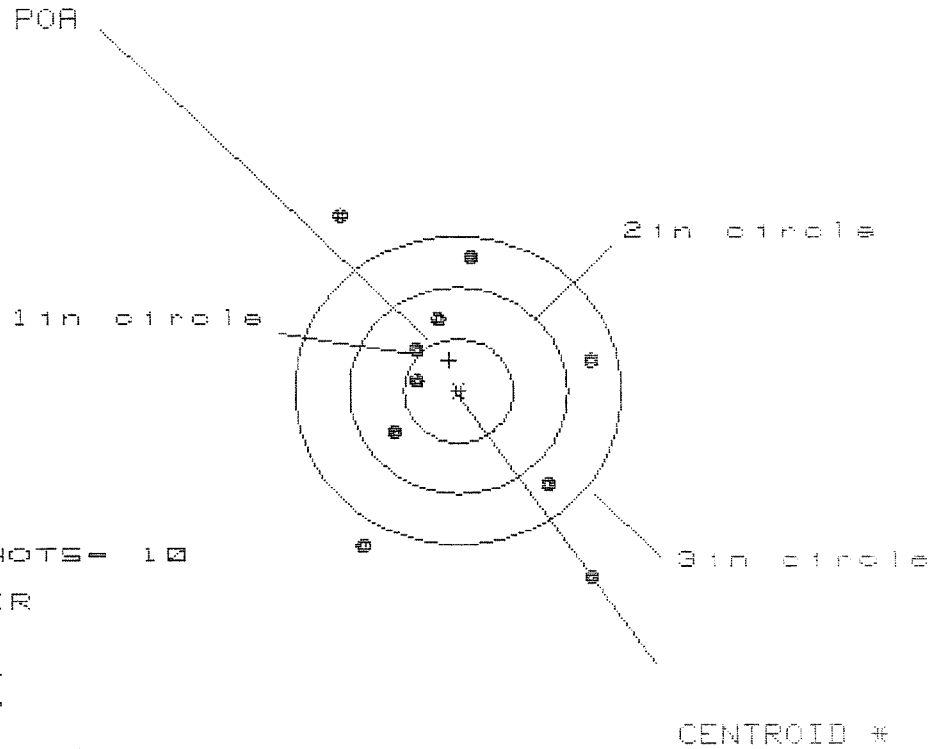

OF SHOTS- 10

IN CIR

1in = 1

2in = 4

3in = 7

HS= 2.313

VS= 3.581

GS= 4.263

PATTERN #	:	2	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.246	1.329	1.213
MINIMUM X	:	-1.067	-.928	-.986
MAXIMUM Y	:	1.741	1.536	1.319
MINIMUM Y	:	-1.840	-1.675	-1.483
CENTROID X	:	.084	-.055	.061
CENTROID Y	:	-.298	-.093	-.285
POA TO CENTROID in.	:	.309	.108	.292
MIN RADIUS	:	.354	.216	.328
MEAN RADIUS	:	1.204	1.033	.967
MAX RADIUS	:	2.223	1.843	1.727
HORIZONTAL SPREAD	:	2.313	2.257	2.099
VERTICAL SPREAD	:	3.581	3.211	2.802
EXTREME SPREAD	:	4.263	3.240	2.987
NUMBER IN ONE INCH CIRCLE =	:	1		
NUMBER IN TWO INCH CIRCLE =	:	4		
NUMBER IN THREE INCH CIRCLE =	:	7		

31 Jan 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6225112

CENTERFIRE PATTERNS # 3

POR

1in circle

2in circle

3in circle

CENTROID #

OF SHOTS= 10

IN CIR

1in = 6

2in = 9

3in = 10

HS= 1.549

VS= 1.389

GS= 1.582

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.800	.717	.222
MINIMUM X	:	-.749	-.518	-.428
MAXIMUM Y	:	.816	.588	.622
MINIMUM Y	:	-.573	-.482	-.409
CENTROID X	:	.088	.171	.081
CENTROID Y	:	-.408	-.499	-.572
POR TO CENTROID in.	:	.417	.527	.578
MIN RADIUS	:	.058	.079	.109
MEAN RADIUS	:	.505	.407	.335
MAX RADIUS	:	1.108	.927	.632
HORIZONTAL SPREAD	:	1.549	1.235	.650
VERTICAL SPREAD	:	1.389	1.070	1.031
EXTREME SPREAD	:	1.582	1.555	1.119
NUMBER IN ONE INCH CIRCLE	=		6	
NUMBER IN TWO INCH CIRCLE	=		9	
NUMBER IN THREE INCH CIRCLE	=		10	


31 Jan 1989

FILE:/PATTERNING/CENTERFIRE_PATT/08225112

CENTERFIRE PATTERNS

4

POA

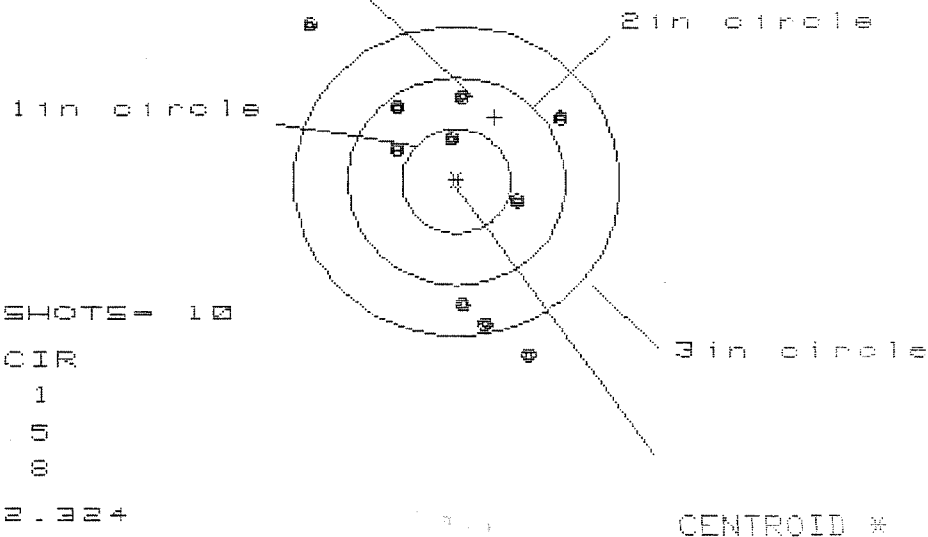

OF SHOTS= 10

IN CIR

1in = 1

2in = 5

3in = 8

HS= 2.324

VS= 3.259

GS= 3.843


CENTROID *

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.960	.909	.874
MINIMUM X	:	-1.364	-.737	-.672
MAXIMUM Y	:	1.527	.958	.762
MINIMUM Y	:	-1.732	-1.562	-1.406
CENTROID X	:	-.354	-.203	-.268
CENTROID Y	:	-.616	-.786	-.590
POA TO CENTROID in.	:	.710	.811	.648
MIN RADIUS	:	.407	.368	.397
MEAN RADIUS	:	1.099	1.000	.878
MAX RADIUS	:	2.047	1.647	1.414
HORIZONTAL SPREAD	:	2.324	1.546	1.546
VERTICAL SPREAD	:	3.259	2.520	2.168
EXTREME SPREAD	:	3.843	2.795	2.298
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		8	

31 Jan 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C8225112

CENTERFIRE PATTERNS # 5

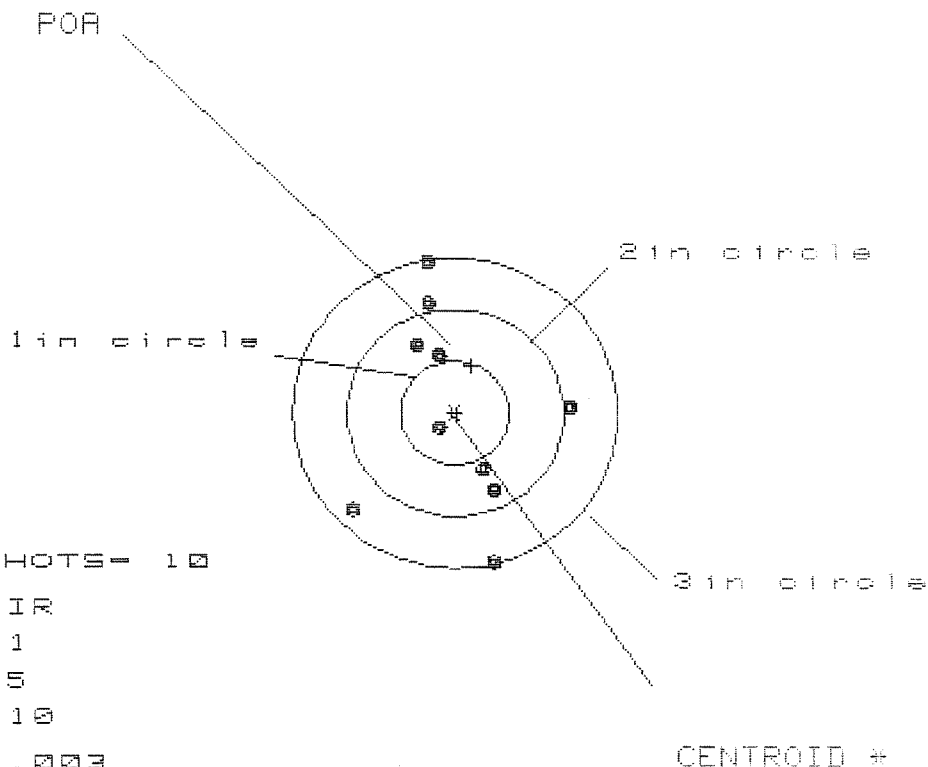

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 5

3 in = 10

HS= 2.003

VS= 2.871

GS= 2.938

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.091	1.061	1.101
MINIMUM X	:	-.912	-.942	-.902
MAXIMUM Y	:	1.459	1.266	1.110
MINIMUM Y	:	-1.412	-1.250	-.980
CENTROID X	:	-.155	-.125	-.165
CENTROID Y	:	-.460	-.622	-.466
POA TO CENTROID in.	:	.485	.634	.494
MIN RADIUS	:	.211	.182	.200
MEAN RADIUS	:	.949	.875	.818
MAX RADIUS	:	1.484	1.290	1.332
HORIZONTAL SPREAD	:	2.003	2.003	2.003
VERTICAL SPREAD	:	2.871	2.516	2.090
EXTREME SPREAD	:	2.938	2.579	2.249
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		10	

M-24

CONTRACT # DAAA21-87-C-0086

Scope # 0416

New Barrel

GUN SERIAL # C6225112

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock		12/14/93	RW
600	Proof		12/14/93	RW
607	Check Headspace		12/14/93	RW
610	Dis-assemble Gun		12/14/93	RW
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		12/20/93	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		12/20/93	RW
	C) Inspect Ejector Hole for Chamfer		12/20/93	RW
	D) Oil Firing Pin Ass'y		12/20/93	RW
	E) Adjust Trigger Pull to Min Setting and Stake		12/20/93	RW

op. #	OP. NAME	READINGS			DATE	INIT
5 cont.	F) Safety On Force					
	G) Safety Off Force					
	H) Trigger Pull Test & Retainability					
	I) Firing Pin Indent					
	J) Assemble Stock					
	K) Assemble Swivel Studs					
	L) Attach Front and Rear Sight Assemblies					
	M) Iron Sight Alignment					
	N) Detach Front & Rear Sights & place in numbered container					
	O) Attach Scope to Rifle					
	P) Detach & Attach Scope 20 Times					
640	Gallery Target & Test				12/21/93	RW
	A) Time					
	B) Malfunctions					
	C) Pierced Primers					
	D) Optical Clarity of Scope					
645	Inspect for Live Ammo				12/21/93	RW
655	Final Inspection					
	A) Headspace				12/21/93	RW
	B) Trigger Pull	2.62	2.72	2.73	2.78	2.78
	C) Function				12/21/93	RW
660	Pack					

SWS TRIGGER PULL TEST

5113

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. 66348910
DATE 27 Sept 89
TESTER 218

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.51	2.36	2.49	2.74	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.59	2.42	2.44	2.78	
PULL #3	2.41	2.38	2.41	2.75	
PULL #4	2.50	2.39	2.48	2.68	
PULL #5	2.59	2.43	2.29	2.72	
TOTAL	12.60	11.98	12.11	13.67	
AVG.	2.52	2.396	2.422	2.734	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.41	3.28		
PULL #2	3.44	3.39		
PULL #3	3.51	3.32		
PULL #4	3.57	3.50		
PULL #5	3.52	3.54		
TOTAL	17.45	17.03		
AVG.	3.49	3.406		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.14	4.13		3.85
PULL #2	4.18	4.22		3.91
PULL #3	4.18	4.21		3.88
PULL #4	4.27	4.17		3.96
PULL #5	4.24	4.12		3.98
TOTAL	21.01	20.85		19.58
AVG.	4.202	4.17		3.916

CONTRACT # DAAA21-87-C-0086

C 672 5112

GUN SERIAL # [REDACTED]

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS	DATE	INIT
625 cont.	F) Safety On Force			
	G) Safety Off Force			
	H) Trigger Pull Test & Retainability			
	I) Firing Pin Indent			
	J) Assemble Stock			
	K) Assemble Swivel Studs			
	L) Attach Front and Rear Sight Assemblies			
	M) Iron Sight Alignment			
	N) Detach Front & Rear Sights & place in numbered container			
	O) Attach Scope to Rifle			
	P) Detach & Attach Scope 20 Times			
640	Gallery Target & Test	15 RB Test	7-24-91	D/H
	A) Time			
	B) Malfunctions			
	C) Pierced Primers			
	D) Optical Clarity of Scope			
645	Inspect for Live Ammo			
655	Final Inspection			
	A) Headspace			
	B) Trigger Pull			
	C) Function			
660	Pack			

RECEIVING AND ESTIMATING REPORT

COMMENTS

W/ 10X-3MA SCOPE, TOOL BOX
MODEL 24 SNIPER RIFLE

CUSTOMER ORDER NO.

CEIVED	DATE OPENED	DATE CODE	SERIAL NUMBER	MODEL AND GRADE	ORDER
28/91	07/01/91	BJ 1-89	C6225112	700 7.62 NATO	R 91-13409
ORIES	W/STUDS	W/SWIVELS	SCOPE BASE		

SHIP TO:

CDR
HHC 4/325 TH A I R
FT BRAGG
USA

NC 28307

CDR
HHC 4/325 TH A I R
FT BRAGG
USA
NC 28307

NT NUMBER	ACCOUNT NUMBER N/C	WRITE ☐	CLEAN/TEST	PROM. DATE	ESTIMATED	VIA
						UPS

CHARGE	TAX	INSURANCE	UPS	PARCEL POST	TOTAL

CONDITION: ☐ NEW ☒ SLIGHTLY WORN ☐ VERY WORN ☐ MISUSED ☐ MARRED

WER'S REQUEST

1400 RDS

FAULT

(1) RE - POWER COAT BY HAND ACTION
(2) RE - POWER COAT TRIGGER GUARD

PARTS REPLACED

1 - 96044 - SCOPE JUST COVER REAR

REPAIRMAN	PROOF	CLEAN	TEST	TARGET	PATTERN
GALLERY TESTER	DATE	DATE	DATE	DATE	DATE

OFFICE COPY

RD6925 REV. 7/90

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400049385

EQUIPMENT INSPECTION AND MAINTENANCE WORKSHEET									
For use of this form, see DA PAM 738 750 and 738-751; the proponent agency is DCSLOG									
1. ORGANIZATION HHC / SCS 4/325					2. NOMENCLATURE AND MODEL M34 SWS				
3. REGISTRATION/SERIAL/NSN M34 SWS 6225112			4a. MILES	b. HOURS	c. ROUNDS FIRED 1,425	d. HOT STARTS	5. DATE 85 APR 91	6. TYPE INSPECTION PACS	
7. APPLICABLE REFERENCE									
TM NUMBER 7-625-36-10			TM DATE FEB 89		TM NUMBER			TM DATE	
COLUMN a - Enter TM item number.					COLUMN d - Show corrective action for deficiency or shortcoming listed in Column c.				
COLUMN b - Enter the applicable condition status symbol.					COLUMN e - Individual ascertaining completed corrective action initial in this column.				
COLUMN c - Enter deficiencies and shortcomings.									
STATUS SYMBOLS									
"X"-Indicates a deficiency in the equipment that places it in an inoperable status. CIRCLED "X"-Indicates a deficiency, however, the equipment may be operated under specific limitations as directed by higher authority or as prescribed locally, until corrective action can be accomplished. HORIZONTAL DASH "-"-Indicates that a required inspection, component replacement, maintenance operation check, or test flight is due but has not been accomplished, or an overdue MWO has not been accomplished.					DIAGONAL "/"-Indicates a materiel defect other than a deficiency which must be corrected to increase efficiency or to make the item completely serviceable. LAST NAME INITIAL IN BLACK, BLUE-BLACK INK, OR PENCIL-Indicates that a completely satisfactory condition exists. FOR AIRCRAFT-Status symbols will be recorded in red.				
ALL INSPECTIONS AND EQUIPMENT CONDITIONS RECORDED ON THIS FORM HAVE BEEN DETERMINED IN ACCORDANCE WITH DIAGNOSTIC PROCEDURES AND STANDARDS IN THE TM CITED HEREON.									
8a. SIGNATURE (Person(s) performing inspection) <i>[Signature]</i>				8b. TIME 1215		9a. SIGNATURE (Maintenance Supervisor)		9b. TIME	
								10. MANHOURS REQUIRED	
TM ITEM NO. a	STATUS b	DEFICIENCIES AND SHORTCOMINGS c			CORRECTIVE ACTION d			INITIAL WHEN CORRECTED e	
		C6225112							
1	/	BOLT RELEASE LATCH							
		STICKS IN OPEN POSITION							
2	X	OVER 1400 RDS							
		FIRED FIRE SYSTEM							
3	/	MISSING SCOP CASE							
		(LOST IN SOUNDING AREA)							
4	/	MISSING SCOP CASE							
		(LOST IN SOUNDING AREA)							
5	/	MISSING ITEMS FROM							
		CLEANING KIT							
6		SWIVEL SCREW							
17		SWIVEL, SLING							
28		FRONT SIGHT							
29		DAY OPTIC SIGHT DUST COVER							
		REAR							
31		BORE BRUSH							
41		CLEANING ROD KIT							

M2400049387

★ U.S.GPO: 1988-0-211-840

[illegible]

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225112

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	12 9 88		RW
600	Proof	12 9 88		RW
607	Check Headspace	12 9 88		RW
610	Dis-assemble Gun	12 9 88		RW
612	Magnaflux Barrel Action		12/22/88	RH.
	Magnaflux Bolt		1-3-89	A/C.
615	Rollmark Caliber		12/22/88	MBC
617	Drill and Tap Sight Holes	1 3 89		FB
618	Polish Barrel	12 2 88		WJT
620	Apply Coatings (Barrel Action)		1/16/89	JSX
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		1/26/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		1/26/89	RW
	C) Inspect Ejector Hole for Chamfer		1/26/89	RW
	D) Oil Firing Pin Ass'y		1/26/89	RW
	E) Adjust Trigger Pull to Min Setting and Stake		2/6/89	JS

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	5	4	4			30 Jan 89	JS
	G) Safety Off Force	3	3	3			30 Jan 89	JS
	H) Trigger Pull Test & Retainability						26 Jan 89	JS
	I) Firing Pin Indent	.0215	.0215	.0215			30 Jan 89	JS
	J) Assemble Stock						1/30/89	RW
	K) Assemble Swivel Studs						3 Feb 89	JS
	L) Attach Front and Rear Sight Assemblies						1/30/89	RW
	M) Iron Sight Alignment						1/30/89	RW
	N) Detach Front & Rear Sights & place in numbered container						1/30/89	RW
	O) Attach Scope to Rifle						1/30	RW
	P) Detach & Attach Scope 20 Times						31 Jan 89	JS
640	Gallery Target & Test	61	92L				1/31/89	PH
	A) Time						1/31/89	PH
	B) Malfunctions						1/31/89	PH
	C) Pierced Primers						1/31/89	PH
	D) Optical Clarity of Scope						1/31/89	PH
645	Inspect for Live Ammo						1/31/89	PH
655	Final Inspection							
	A) Headspace						3 Feb 89	JS
	B) Trigger Pull	2.60	2.54	2.63	2.60	2.57	3 Feb 89	JS
	C) Function						3 Feb 89	JS
660	Pack						23 Feb 89	JS