

66774412

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO
WITH BIPOD

proof of purchase



owner registration sticker



BM FORM


ORDER NO. **86470**

BARREL LENGTH 24"

CAPACITY 6

G6774412

UPC



M-24
INSPECTION CHECKLIST-NEW GUNS

GUN SERIAL # G 6774412

OP #	OPERATION NAME	READINGS	DATE	INITIAL
420	ASSEMBLE ACTION		7-29-08	SPD
430	ASSEMBLE TO STOCK		7-29-08	SP
440	PROOF		7-29-08	SPD
460	CHECK HEADSPACE		7-29-08	SPD
470	DIS-ASSEMBLE ACTION		7-29-08	SPD
472	SERIALIZE BOLT HANDLE		7-31-08	RJR
475	DRILL AND TAP SIGHT HOLES	MAGNA-FLUX AUG 19 2008	8-02-08	SP
480	MAGNAFLUX BBL ACTION	OPERATOR B/M	8/6	B/M
490	MAGNAFLUX BOLT			
500	ROLLMARK CALIBER		8/6/08	RJ
520	GOFF BLAST BBL / REC		7/8/08	Amf
542	APPLY COATINGS (BARREL ACTION)		8/18	
545	(BOLT)			
560	RE-ASSEMBLE ACTION			
	A) CLEAN INSIDE OF BOLT ASSEMBLY		8-19-08	SP
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		8-19-08	SP
	C) INSPECT EJECTOR HOLE FOR CHAMFER		8-19-08	SP
	D) OIL FIRING PIN ASSEMBLY		8-22-08	SPD
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE 2.50 LBS +/- .5 LBS			

F004 REV 5/2006


OP #	OPERATION NAME		READINGS	DATE	INITIAL
560	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	<u>3.5</u> <u>3.5</u> <u>3.5</u>	9-9-08	TL
CONT.					
	G) SAFETY OFF FORCE	2 LBS MIN	<u>7</u> <u>6.5</u> <u>6.5</u>	9-9-08	TL
	H) TRIGGER PULL TEST AND RETAINABILITY				
	I) FIRING PIN INDENT	.020 MIN	<u>.025</u> <u>.026</u> <u>.025</u>	9-9-08	TL
	J) ASSEMBLE STOCK			8-22-08	J.P.D.
	K) ASSEMBLE SWIVEL STUDS			9-9-08	TL
	L) ATTACH FRONT AND REAR SIGHT ASSY'S				
	M) IRON SIGHT ALIGNMENT				
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER				
640 &	FUNCTION TEST AND		(PASS) FAIL		
650	TARGET		(PASS) FAIL	8-23-08	TL
	MALFUNCTION BAC		CORRECTION OK	8-26-08	TRW
	MALFUNCTION		CORRECTION		
	MALFUNCTION		CORRECTION NA		
	MALFUNCTION		CORRECTION		
660	INSPECT FOR LIVE AMMO			8-23-08	TRW
670	FINAL INSPECTION A) HEADSPACE			9-9-08	TL
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	<u>2.28</u> <u>2.34</u> <u>2.30</u> <u>2.39</u> <u>2.28</u>	9-9-08	ESN
	C) FUNCTION			9-9-08	TL
690	PACK			10/11/08	Fm

F004 REV 5/2006

Trigger Profile [lbs,inch]

Profile: SWS
GunType: Rifle
Make: Remington
Note: C Schults 08/15/2008

Model: M/24
Serial No: Form #F005
Trigger: .25 lbs. ini. +/- .50 lbs

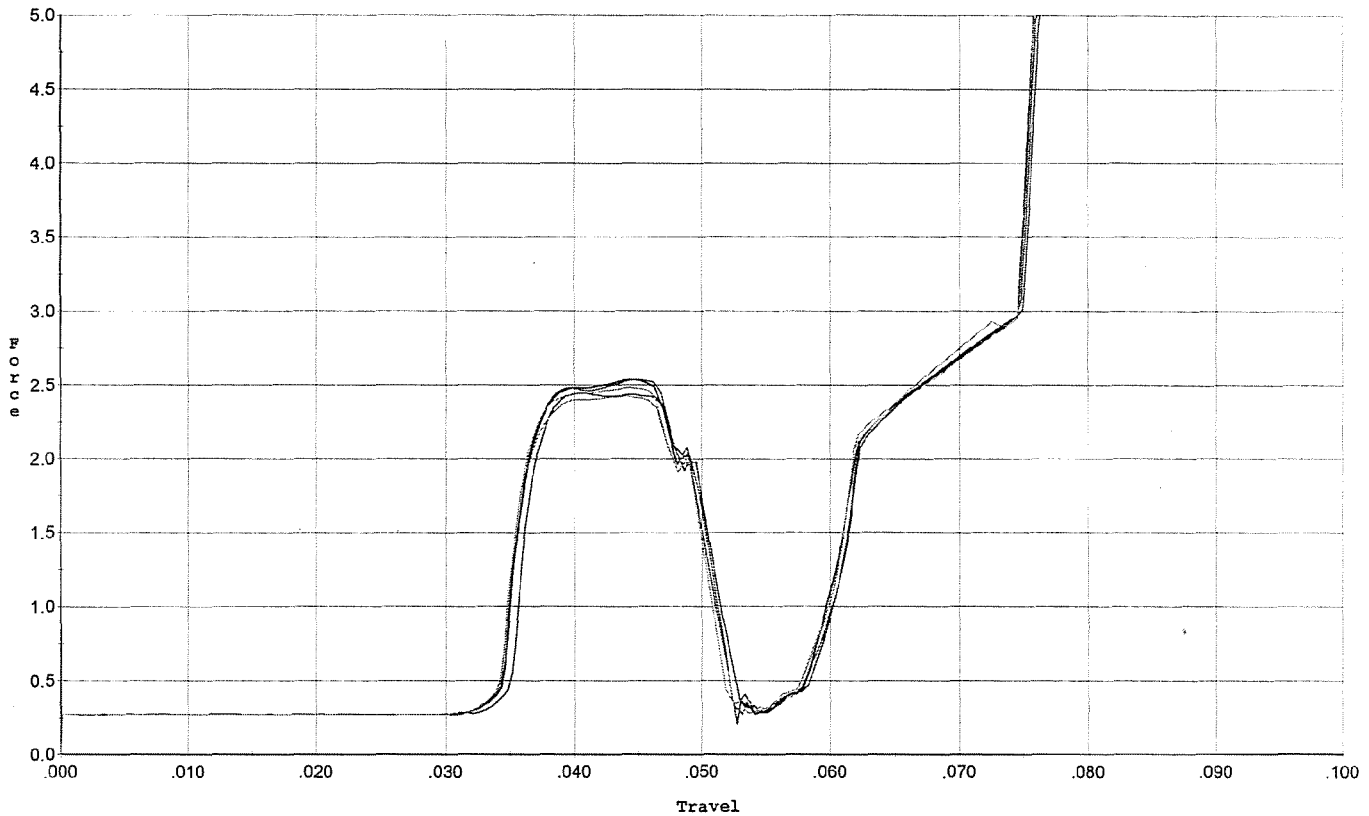


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.446	0.049	0.035	0.033	0.042		Set Trigger
2	2.538	0.049	0.034	0.033	0.043		Set Trigger
3	2.537	0.050	0.034	0.033	0.044		Set Trigger
4	2.485	0.049	0.034	0.033	0.043		Set Trigger
5	2.423	0.049	0.034	0.033	0.042		Set Trigger

Aug 2.48

Trigger Profile [lbs,inch]

Profile: SWS
GunType: Rifle
Make: Remington
Note: C Schults 08/15/2008

Model: M/24
Serial No: Form #F005
Trigger: .2.5 lbs.after 50 cycles+/- .50 lbs

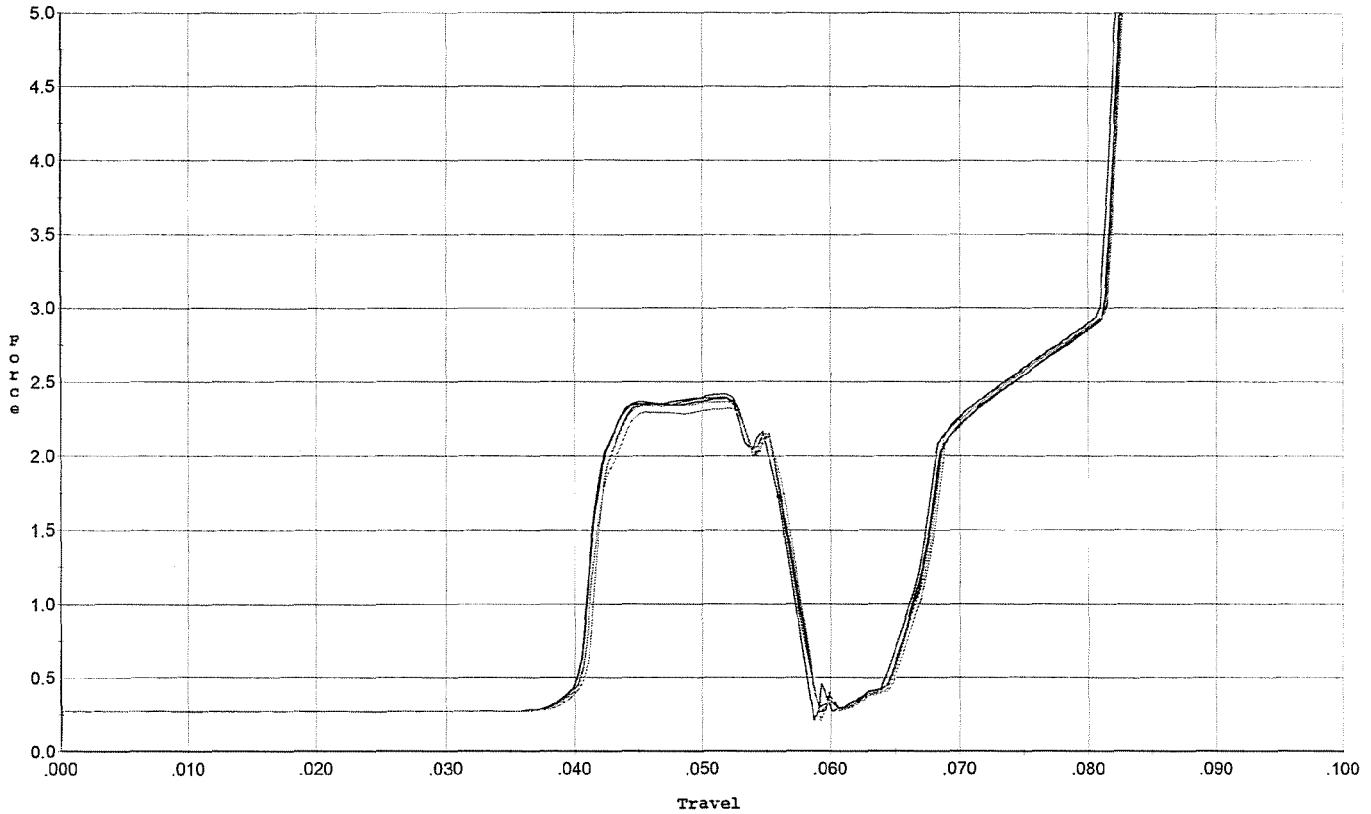


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.394	0.056	0.040	0.033	0.045		Set Trigger
2	2.391	0.055	0.040	0.034	0.045		Set Trigger
3	2.417	0.055	0.040	0.034	0.044		Set Trigger
4	2.367	0.057	0.040	0.033	0.046		Set Trigger
5	2.321	0.056	0.041	0.033	0.045		Set Trigger

Aug. 2.37

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: C Schults 08/15/2008

Model: M/24
Serial No: Form #F005
Trigger: 3.0 lbs. ini. +/- .75 lbs.

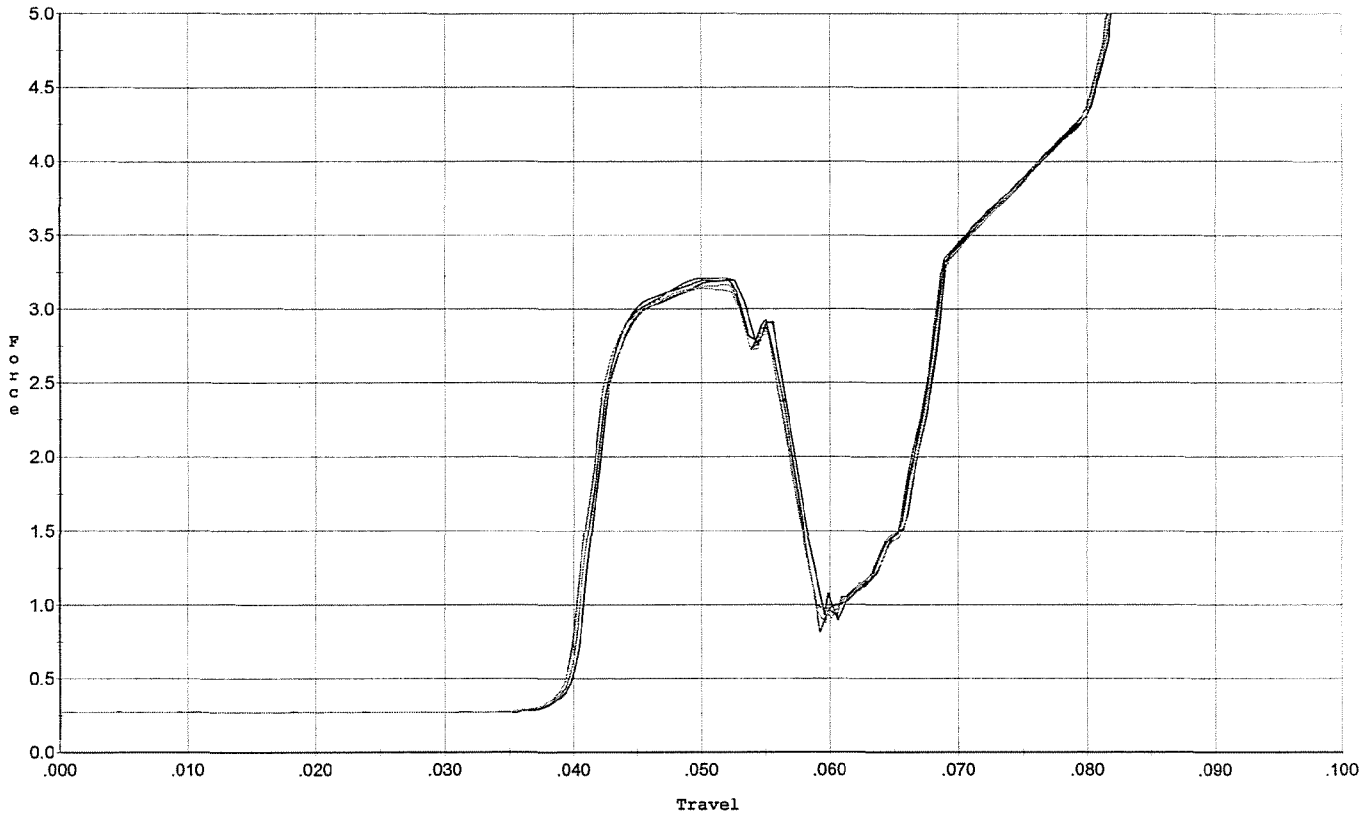


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.196	0.056	0.040	0.032	0.058		Set Trigger
2	3.201	0.056	0.040	0.032	0.056		Set Trigger
3	3.212	0.055	0.039	0.032	0.056		Set Trigger
4	3.166	0.055	0.039	0.032	0.056		Set Trigger
5	3.144	0.057	0.040	0.032	0.057		Set Trigger

Aug 3-18

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: C Schults 08/15/2008

Model: M/24
Serial No: Form #F005
Trigger: 3.0 lbs. after 20 cycles+/- .75 lbs.

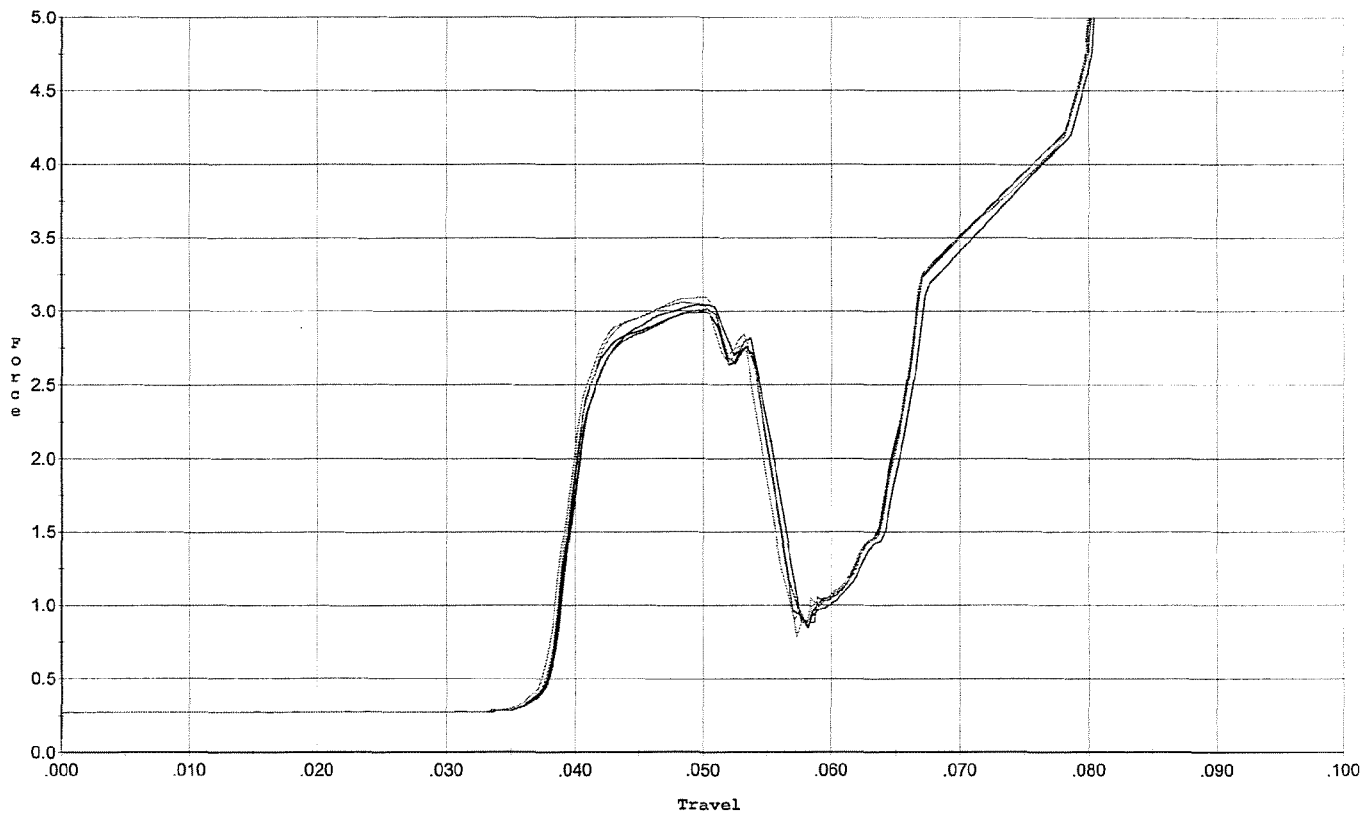


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.043	0.055	0.038	0.032	0.056		Set Trigger
2	2.993	0.054	0.038	0.032	0.054		Set Trigger
3	3.016	0.054	0.038	0.032	0.053		Set Trigger
4	3.099	0.054	0.038	0.032	0.055		Set Trigger
5	3.056	0.053	0.037	0.032	0.054		Set Trigger

Aug. 3.04

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: C Schults 08/15/2008

Model: M/24
Serial No: Form #F005
Trigger: 4.0 lbs. ini. +/- 1.0 lb.

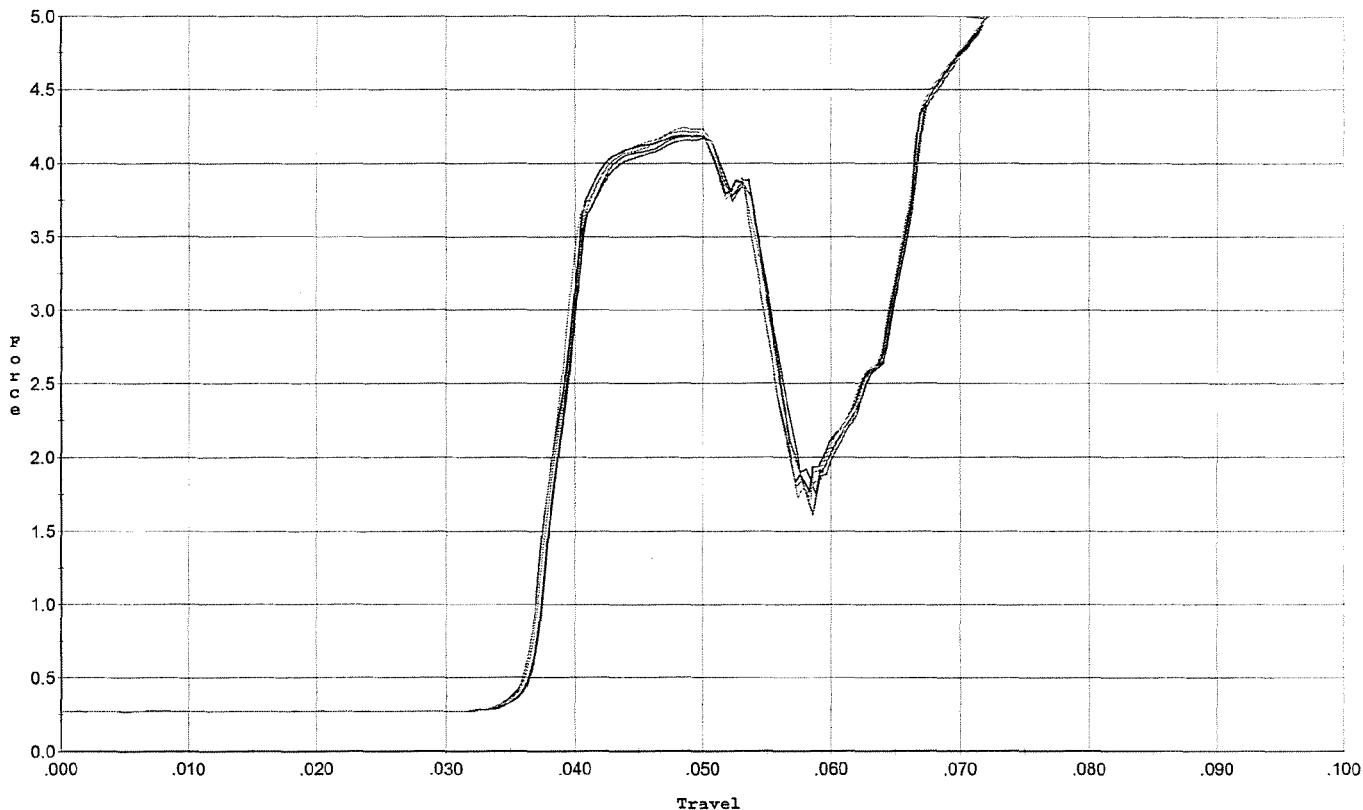


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.174	0.054	0.036	0.023	0.074		Set Trigger
2	4.193	0.053	0.036	0.023	0.074		Set Trigger
3	4.182	0.054	0.036	0.023	0.075		Set Trigger
4	4.215	0.053	0.036	0.023	0.074		Set Trigger
5	4.238	0.054	0.036	0.023	0.076		Set Trigger

Aug 4. 20

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: C Schults 08/15/2008

Model: M/24
Serial No: Form #F005
Trigger: 4.0 lbs. after 20 cycles+/- 1.0 lb.

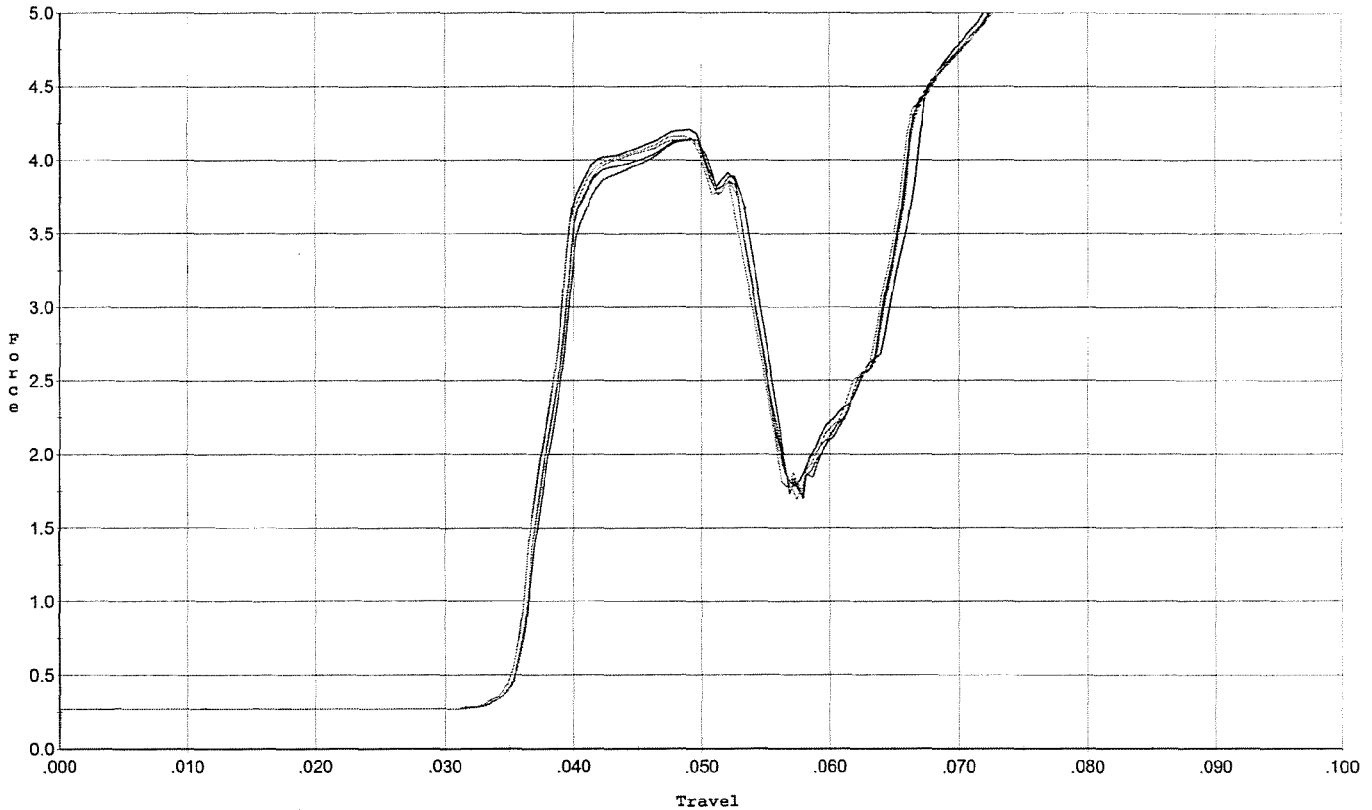


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.139	0.053	0.035	0.024	0.074		Set Trigger
2	4.213	0.053	0.035	0.024	0.075		Set Trigger
3	4.141	0.053	0.035	0.024	0.073		Set Trigger
4	4.164	0.054	0.035	0.024	0.076		Set Trigger
5	4.148	0.053	0.035	0.024	0.073		Set Trigger

Aug 4.16

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: C Schults 08/15/2008

Model: M/24
Serial No: Form #F005
Trigger: reset to 2.5lbs. +/- .50 lbs. for final test

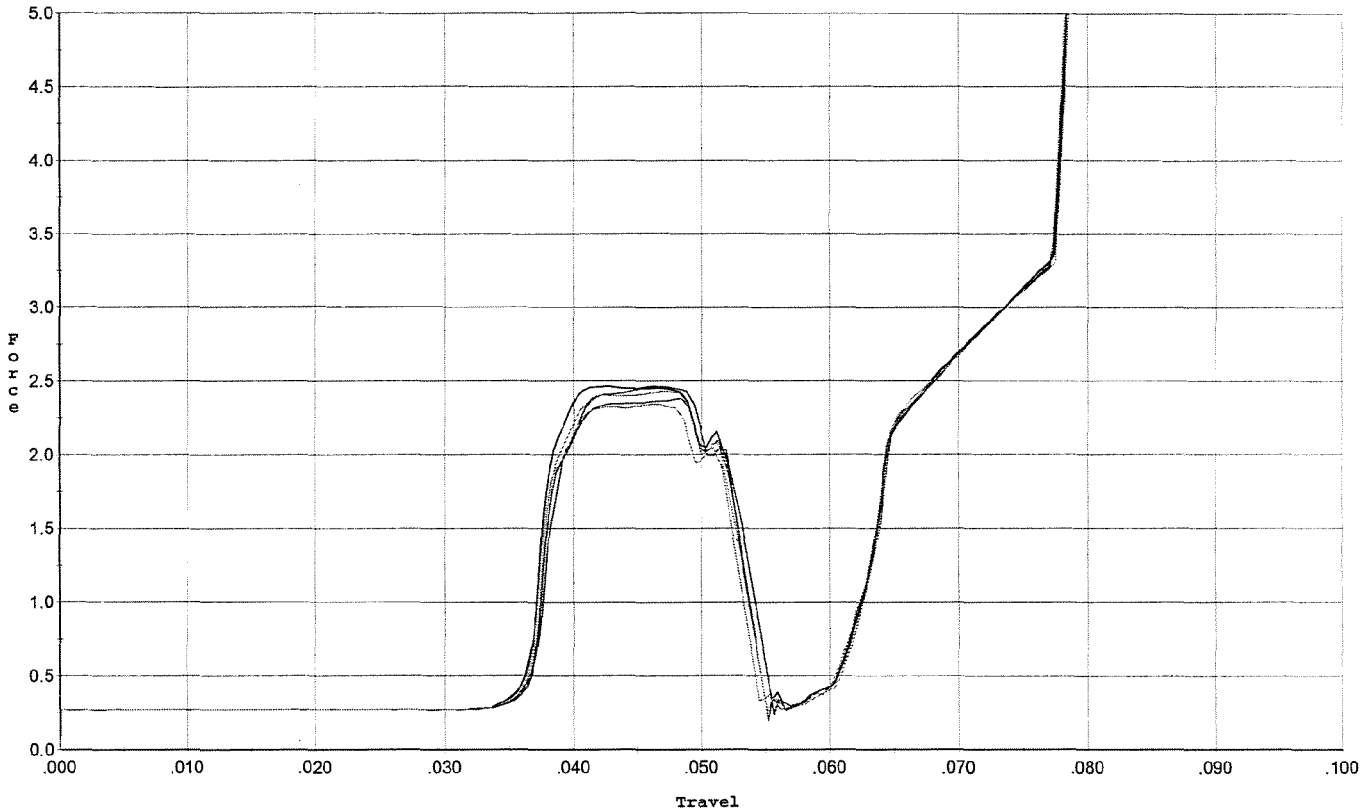


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.464	0.053	0.037	0.033	0.045		Set Trigger
2	2.464	0.052	0.036	0.033	0.045		Set Trigger
3	2.381	0.052	0.037	0.033	0.044		Set Trigger
4	2.432	0.053	0.036	0.033	0.045		Set Trigger
5	2.345	0.052	0.036	0.034	0.042		Set Trigger

Avg 2.41

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: C Schults 08/15/2008

Model: M/24
Serial No: Form #F005
Trigger: set to 4.0 lbs. +/- 1.0 lb. for target & accuracy

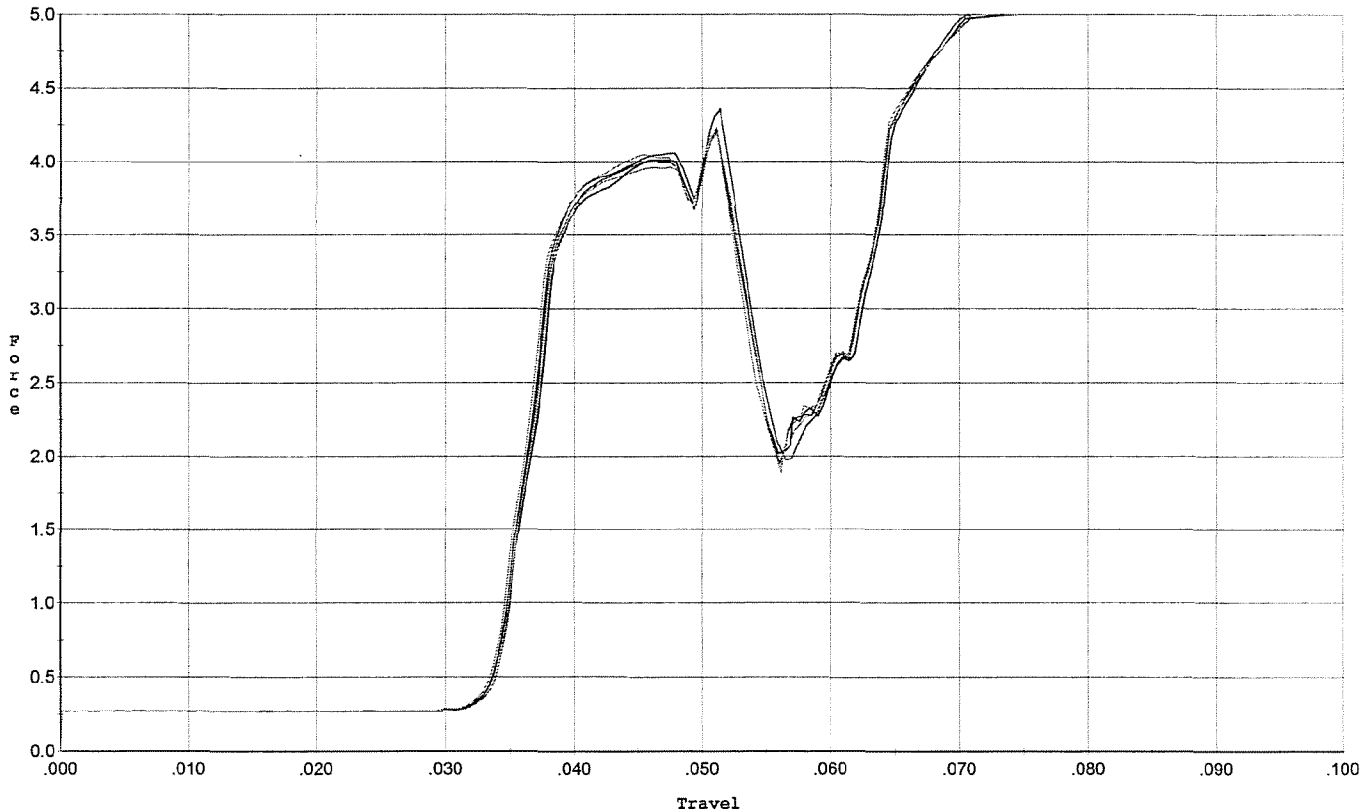

#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.354	0.051	0.033	0.029	0.075		Set Trigger
2	4.199	0.051	0.034	0.030	0.072		Set Trigger
3	4.207	0.051	0.034	0.029	0.073		Set Trigger
4	4.192	0.051	0.033	0.029	0.074		Set Trigger
5	4.236	0.053	0.034	0.029	0.075		Set Trigger

Aug 4.23