

C6225466

MODEL 700TM M24

Model **SWS** TM

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington[®]

M2400061524

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

Smart[®]

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00092750** Serial: C6225466 Model: M24 SWS Center Fire Caliber: 7.62 NATO Repairman: Status: Closed 2/8/2005 1:43:14 PM

Verify Repair

Address Information

Customer: ☒ Received From Return To: ☐ Received From

Name: **HHC 2/505 PIR, 82ND AIRBORNE DIVISION** **HHC 2/505 PIR, 82ND AIRBORNE DIVISION**

Address 1: **SSG SANDIVAL** **SSG SANDIVAL**

Address 2: PO Box: PO Box:

City: **FORT BRAGG** **FORT BRAGG**

State: **NC** Zip Code: **28310** Country: **US** State: **NC** Zip Code: **28310** Country: **US**

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition	Problems	Estimate	History / Status	Shipping / Billing																		
Contact Information Phone: 910 797 8996 Fax: Email: Comments:	Received Condition Good Condition Notes: CSR Notes:	Accessories Received <table border="1"> <thead> <tr> <th>Code</th> <th>Desc</th> <th>Qty</th> </tr> </thead> <tbody> <tr> <td>A007</td> <td>With Stud</td> <td>3</td> </tr> <tr> <td>A010</td> <td>Hard Case</td> <td>1</td> </tr> <tr> <td>A017</td> <td>Scope Base</td> <td>1</td> </tr> <tr> <td>A026</td> <td>Scope</td> <td>1</td> </tr> <tr> <td>A057</td> <td>Fit and Rear Sgt Base</td> <td>1</td> </tr> </tbody> </table>	Code	Desc	Qty	A007	With Stud	3	A010	Hard Case	1	A017	Scope Base	1	A026	Scope	1	A057	Fit and Rear Sgt Base	1		
Code	Desc	Qty																				
A007	With Stud	3																				
A010	Hard Case	1																				
A017	Scope Base	1																				
A026	Scope	1																				
A057	Fit and Rear Sgt Base	1																				

Repair Search Refresh Close

magle 2/8/2005 3:02 PM CAPS NUM INS SCRL

start 2 4

Serial Number: **C6225466**

Model: **M24 SWS**



RE00092750

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6225466.__1
FILE DATE AND TIME: 03/02/2005 07:57


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.036
The Average Y Centroid of the Five Target Set:	-0.034
The Average Point of Impact of the Five Target Set:	0.050
The Average Mean Radius of the Five Target Set:	0.899
The Distance from POA to Centroid Target #1:	0.191
The Distance from Centroid Target #2 to Centroid Target #1:	0.120
The Distance from Centroid Target #3 to Centroid Target #1:	0.617
The Distance from Centroid Target #4 to Centroid Target #1:	0.188
The Distance from Centroid Target #5 to Centroid Target #1:	0.400

SERIAL NUMBER: C6225466. __1
TARGET NUMBER: 1
FILE DATE: 03/02/2005
FILE TIME: 07:57

POINT#	X	Y
1:	0.790	0.282
2:	-0.140	1.018
3:	-1.131	0.561
4:	0.212	0.112
5:	-0.082	0.147
6:	-0.292	-0.131
7:	0.288	-0.367
8:	0.090	-0.120

X CENTROID: -0.033
Y CENTROID: 0.188
POA TO CENTROID: 0.191
HORZ SPREAD: 1.921
VERT SPREAD: 1.385
GROUP SPREAD: 1.941
MIN RADIUS: 0.064
MAX RADIUS: 1.160
MEAN RADIUS: 0.566
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 8

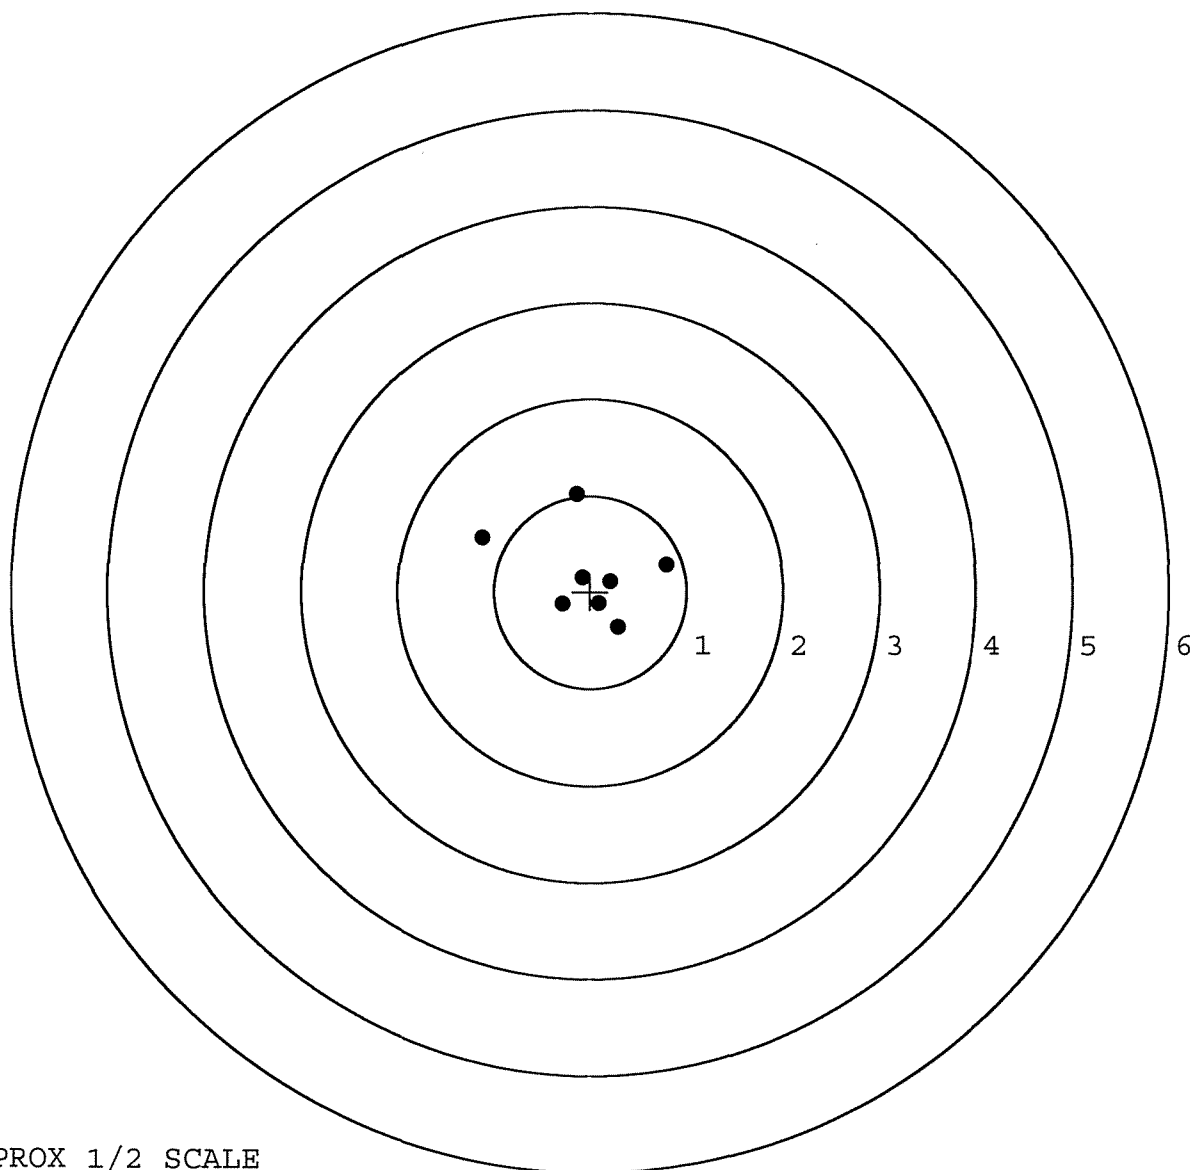


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225466. __1
 TARGET NUMBER: 2
 FILE DATE: 03/02/2005
 FILE TIME: 07:57

X CENTROID: -0.051
 Y CENTROID: 0.069
 POA TO CENTROID: 0.086
 HORZ SPREAD: 2.334
 VERT SPREAD: 5.058
 GROUP SPREAD: 5.571
 MIN RADIUS: 0.119
 MAX RADIUS: 2.923
 MEAN RADIUS: 1.133
 # IN 1 IN DIAMETER: 2
 # IN 2 IN DIAMETER: 7
 # in 3 IN DIAMETER: 8

POINT#	X	Y
1:	0.780	-0.003
2:	0.478	-0.388
3:	0.553	0.465
4:	-0.603	-1.060
5:	-0.142	-0.009
6:	-0.421	0.129
7:	-0.779	0.218
8:	-0.779	0.706
9:	1.366	-2.214
10:	-0.968	2.844

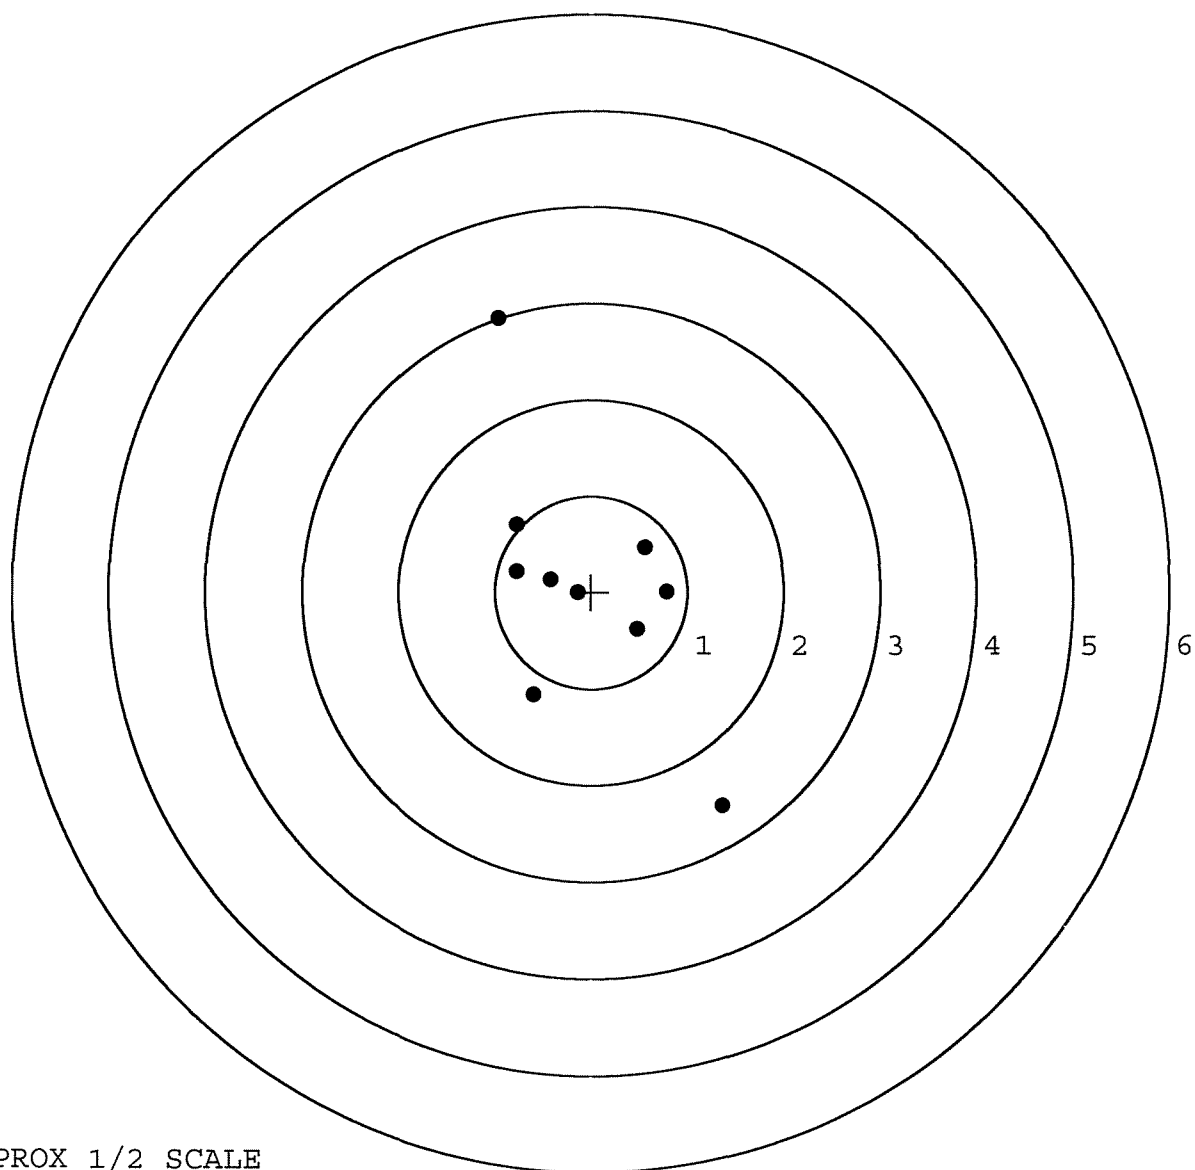


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225466. __1
 TARGET NUMBER: 3
 FILE DATE: 03/02/2005
 FILE TIME: 07:57

X CENTROID: 0.294
 Y CENTROID: -0.335
 POA TO CENTROID: 0.446
 HORZ SPREAD: 2.708
 VERT SPREAD: 2.844
 GROUP SPREAD: 2.746
 MIN RADIUS: 0.361
 MAX RADIUS: 1.874
 MEAN RADIUS: 1.075
 # IN 1 IN DIAMETER: 2
 # IN 2 IN DIAMETER: 4
 # in 3 IN DIAMETER: 8

POINT#	X	Y
1:	2.139	-0.664
2:	0.841	-1.636
3:	0.222	-1.679
4:	0.582	-0.553
5:	-0.569	-0.930
6:	0.302	0.096
7:	-0.479	-0.160
8:	-0.394	0.326
9:	0.210	0.683
10:	0.091	1.165

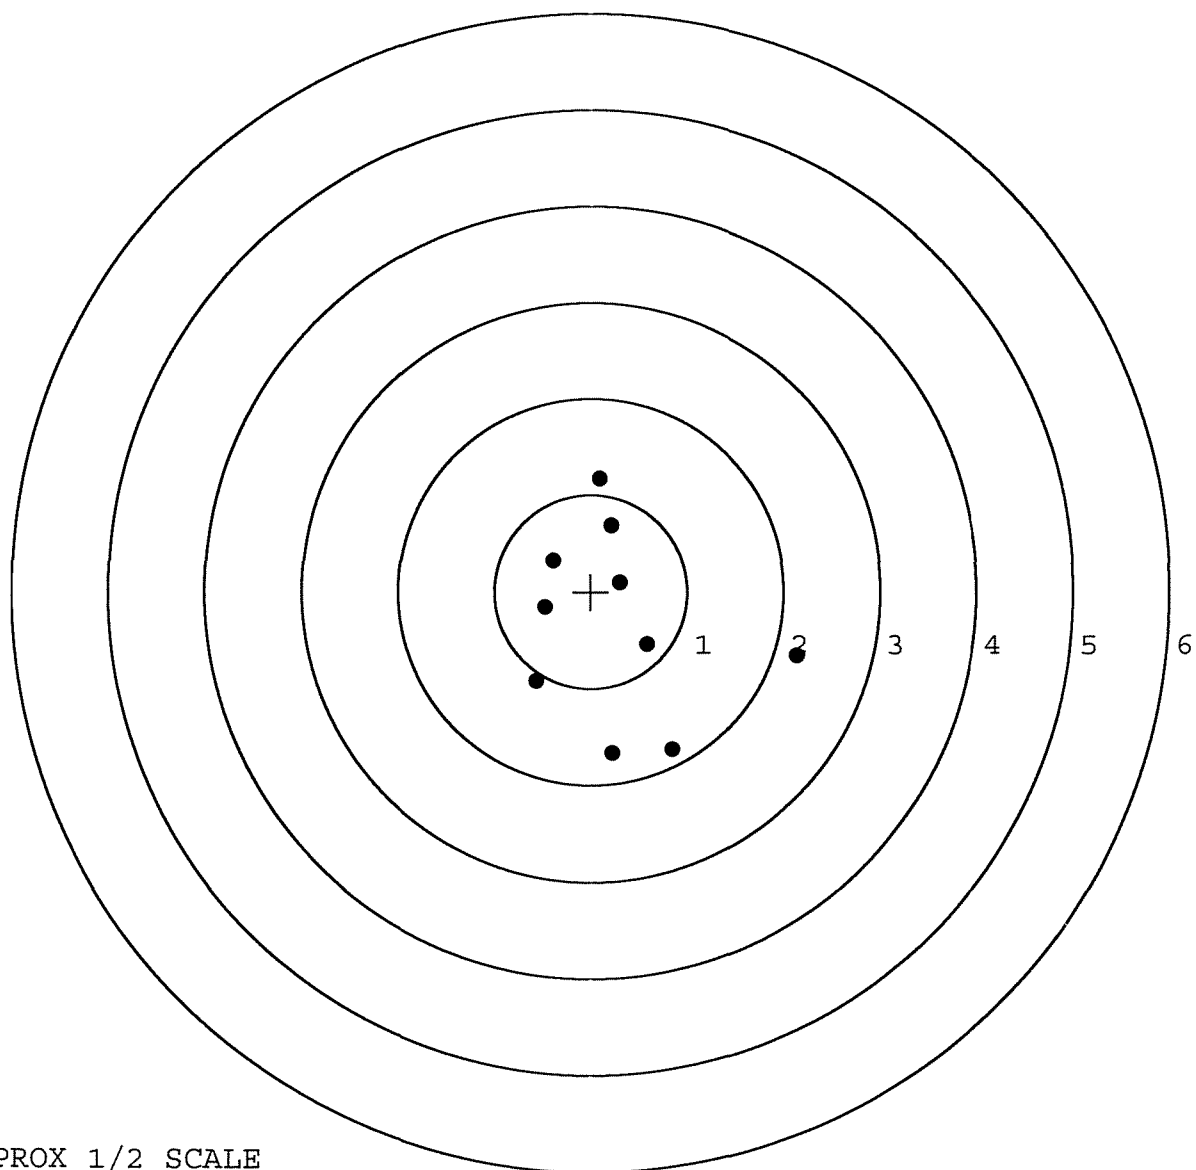


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225466. __1
TARGET NUMBER: 4
FILE DATE: 03/02/2005
FILE TIME: 07:57

POINT#	X	Y
1:	0.374	-0.662
2:	0.929	0.215
3:	0.609	0.586
4:	0.242	0.256
5:	0.207	0.006
6:	-0.258	-0.058
7:	-0.356	-0.547
8:	-1.685	-0.450
9:	-1.051	0.460
10:	-0.841	0.932

X CENTROID: -0.183
Y CENTROID: 0.074
POA TO CENTROID: 0.197
HORZ SPREAD: 2.614
VERT SPREAD: 1.594
GROUP SPREAD: 2.697
MIN RADIUS: 0.152
MAX RADIUS: 1.591
MEAN RADIUS: 0.826
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 9

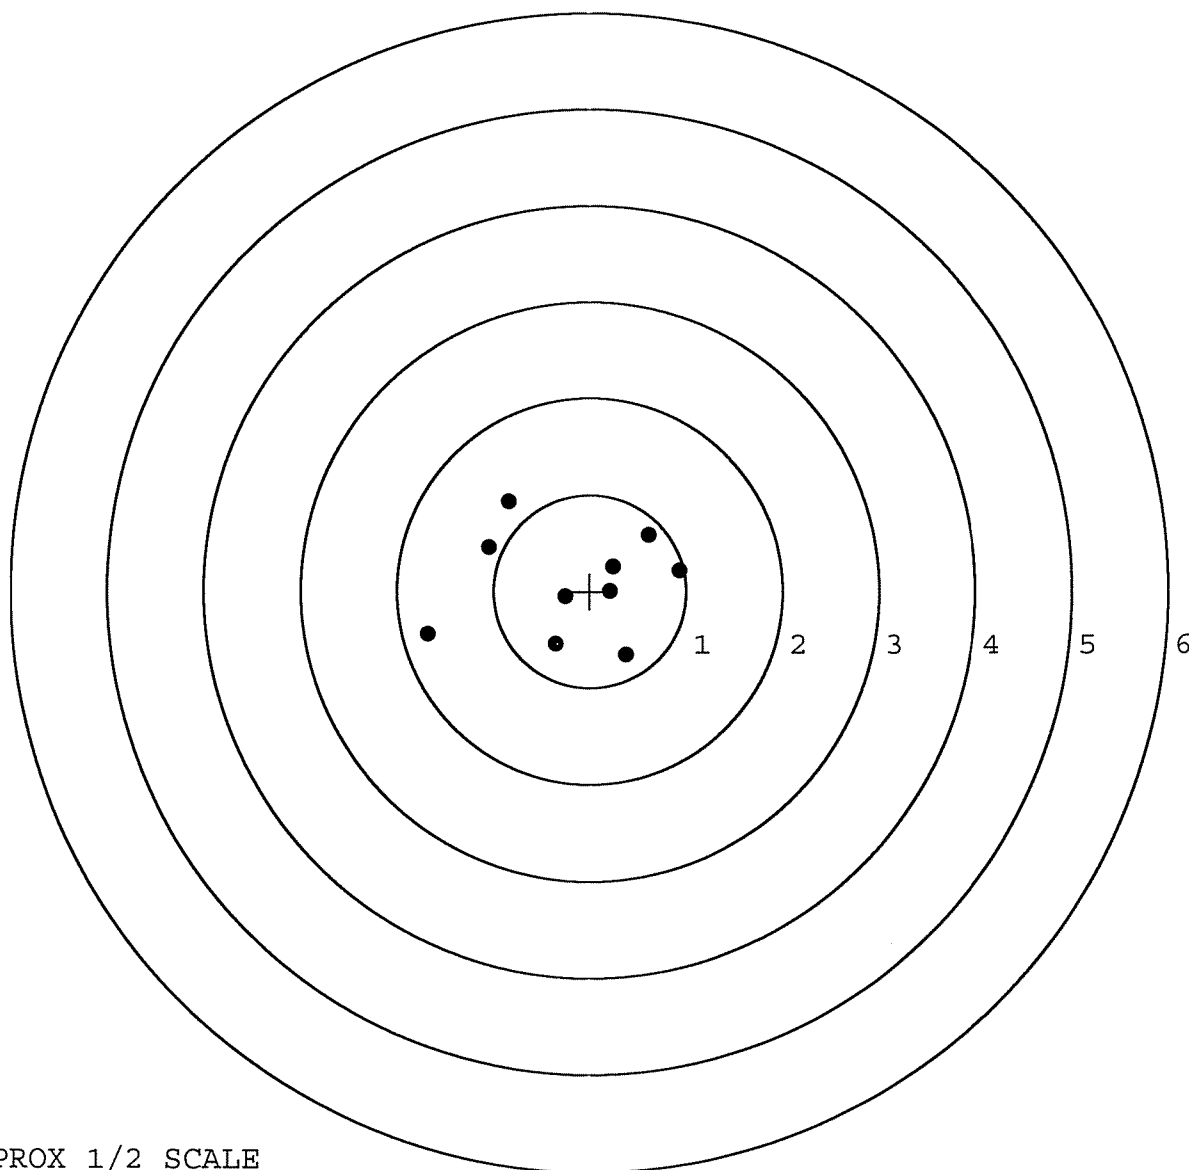


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225466. __1
 TARGET NUMBER: 5
 FILE DATE: 03/02/2005
 FILE TIME: 07:57

X CENTROID: 0.153
 Y CENTROID: -0.166
 POA TO CENTROID: 0.226
 HORZ SPREAD: 2.545
 VERT SPREAD: 1.998
 GROUP SPREAD: 2.587
 MIN RADIUS: 0.281
 MAX RADIUS: 1.739
 MEAN RADIUS: 0.892
 # IN 1 IN DIAMETER: 1
 # IN 2 IN DIAMETER: 8
 # in 3 IN DIAMETER: 8

POINT#	X	Y
1:	1.400	-1.378
2:	0.474	-0.712
3:	0.578	-0.597
4:	0.421	-0.080
5:	0.513	0.517
6:	-0.060	0.602
7:	-0.531	0.343
8:	-0.681	-0.036
9:	-1.145	-0.939
10:	0.562	0.620

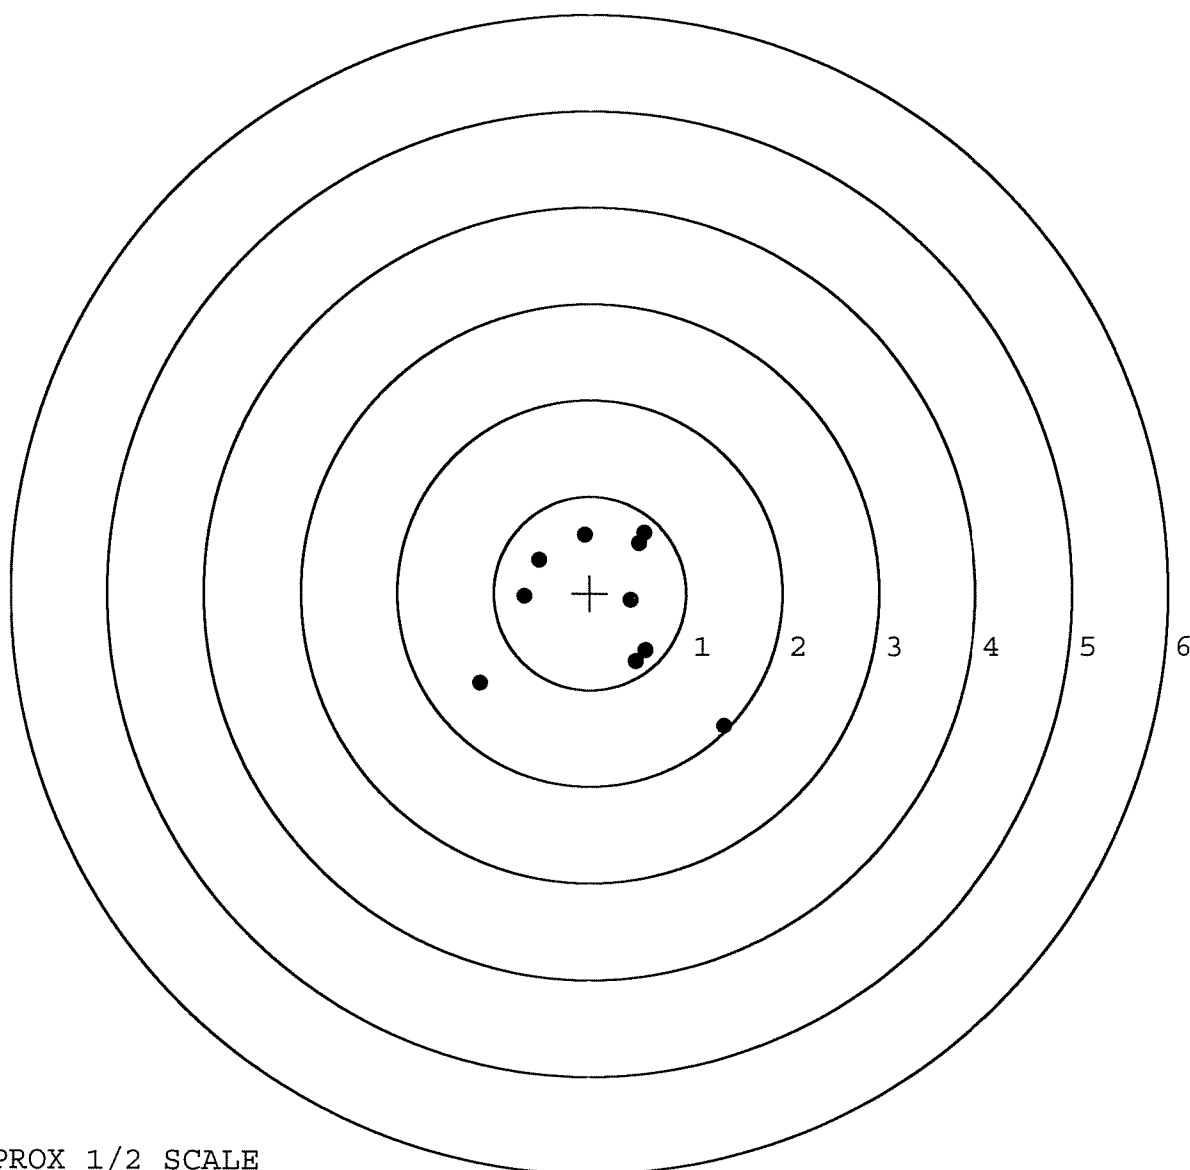

TARGET APPROX 1/2 SCALE

AVERAGE PULL FORCE BETWEEN
 INITIAL & CYCLE TESTS
 2.50 LBS (plus or minus 0.50 LBS)
 3.00 LBS (plus or minus 0.75 LBS)
 4.00 LBS (plus or minus 1.00 LBS)

SERIAL NO.

DATE

2-9-05

TESTER

TRW

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.35	2.07		2.18	
PULL #2	2.45	2.29		2.30	
PULL #3	2.60	2.27		2.30	
PULL #4	2.65	2.40		2.25	
PULL #5	2.40	2.32		2.24	
TOTAL	12.45	11.35		11.27	
AVERAGE	2.49	2.27		2.25	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.26	3.19		
PULL #2	3.30	3.06		
PULL #3	3.59	3.00		
PULL #4	3.35	3.18		
PULL #5	3.43	3.12		
TOTAL	16.93	15.55		
AVERAGE	3.38	3.11		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.05	4.44		4.63
PULL #2	4.38	4.28		4.01
PULL #3	4.45	4.27		4.17
PULL #4	4.48	4.20		4.13
PULL #5	4.43	4.18		4.06
TOTAL	21.79	21.37		21.00
AVERAGE	4.35	4.27		4.20

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R & E NUMBER	92750		
SERIAL NUMBER	C622 5466		
LOG-IN DATE	2-8-05		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	2-10-05	RTL
560 A	RE-BARREL	2-12-05	RTL
B	DRILL AND TAP	2-15-05	TRL
575	ASSEMBLE	2-12-05	RTL
600	PROOF	2-14-05	MAGNA-FLUX INSPECTED
605	CHECK HEADSPACE	2-14-05	AC
610	DIS-ASSEMBLE GUN	2-14-05	RTL
612	MAGNAFLUX		OPERATOR
615	ROLLMARK CALIBER	2-17-05	CW
618	ROTO-BLAST	2-17-05	LB
620	APPLY COATINGS	2/23/05	
625 A	FINAL ASSEMBLY	2-28-05	RTL
B	TRIGGER PULL TEST	N	A
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	3-2-05	TRU
655	FINAL INSPECT	3-7-05	
660	PACK	3-7-05	DA
		SHIP DATE	
		QAR INSPECTION DATE	

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Number: **RE00045663** Serial: C6225466 Model 700 Center Fire Caliber: 7.62 NATO M-24 (SWS) Repairman: Status: Closed 4/25/02 1:47:12 PM

Verify Repair

Address Information

Customer: ☒ Received From Return To: ☐ Received From

Name: 782ND MSB 782ND MSB

Address 1: ATTN CLASS II IV VII WAREHOUSE ATTN CLASS II IV VII WAREHOUSE

Address 2: BLDG A 2530 PO Box: BLDG A 2530 PO Box

City: FORT BRAGG FORT BRAGG

State: NC Zip Code: 28310 Country: US State: NC Zip Code: 28310 Country: US

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information: Phone: Fax: Email: Comments:

Received Condition: Poor Condition Notes: CSR Notes:

Accessories Received:

Code	Desc	Qty
A007	With Stud	3
A009	Soft Case	1
A010	Hard Case	1
A016	Scope Mounts	2
A017	Scope Base	1
A026	Scope & CAPS	1
X	NIGHT SCOPE W/ C	1

Repair Search Refresh Close

maglev 4/25/02 2:06 PM CAPS NUM INS SCFL

Start Sent It... Explorin... Google... Calend... Arms... Scorec... RAC19... 2:06 PM

Serial Number: **C6225466**

Model: **700**




RE00045663

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-97-C-242

R & E NUMBER 45603

SERIAL NUMBER C6225466

LOG-IN DATE 4/25/02

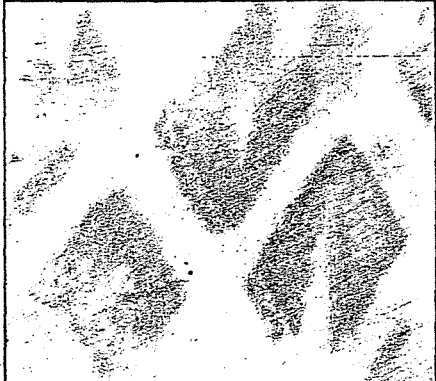INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	5/1/02	RL
560 A	RE-BARREL AT CUSTOM SHOP	5/2/02	BWT
B	DRILL AND TAP	5/2/02	BWT
C	POLISH		
575	ASSEMBLE	5/3/02	RL
600	PROOF MAGNA - FLUX	5/3/02	RL
605	CHECK HEADSPACE INSPECTED	5/3/02	RL
610	DIS-ASSEMBLE GUN MAY 3 2002	5/3/02	RL
612	MAGNAFLUX OPERATOR <u>AROS</u>		
615	ROLLMARK CALIBER	5/6/02	b
618	ROTO-BLAST	5/7	KO
620	APPLY COATINGS	5 9	TA
625 A	FINAL ASSEMBLY	5/15/02	RL
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	5-16-02	\$
655	FINAL INSPECT	5/20/02	\$
660	PACK	5/20/02	DA
		SHIP DATE	
		QAR INSPECTION DATE	

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6225466.___0
FILE DATE AND TIME: 05/17/2002 13:51


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.081
The Average Y Centroid of the Five Target Set:	-0.019
The Average Point of Impact of the Five Target Set:	0.083
The Average Mean Radius of the Five Target Set:	0.539
The Distance from POA to Centroid Target #1:	0.024
The Distance from Centroid Target #2 to Centroid Target #1:	0.118
The Distance from Centroid Target #3 to Centroid Target #1:	0.100
The Distance from Centroid Target #4 to Centroid Target #1:	0.025
The Distance from Centroid Target #5 to Centroid Target #1:	0.218

SERIAL NUMBER: C6225466. __0
TARGET NUMBER: 1
FILE DATE: 05/17/2002
FILE TIME: 13:51

POINT#	X	Y
1:	0.387	0.108
2:	0.110	0.072
3:	-0.036	0.251
4:	0.223	0.788
5:	-0.165	0.750
6:	-0.497	0.380
7:	-0.168	-0.437
8:	-0.165	-0.658
9:	0.065	-0.743
10:	0.223	-0.748

X CENTROID: -0.002
Y CENTROID: -0.024
POA TO CENTROID: 0.024
HORZ SPREAD: 0.884
VERT SPREAD: 1.536
GROUP SPREAD: 1.539
MIN RADIUS: 0.148
MAX RADIUS: 0.842
MEAN RADIUS: 0.569
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

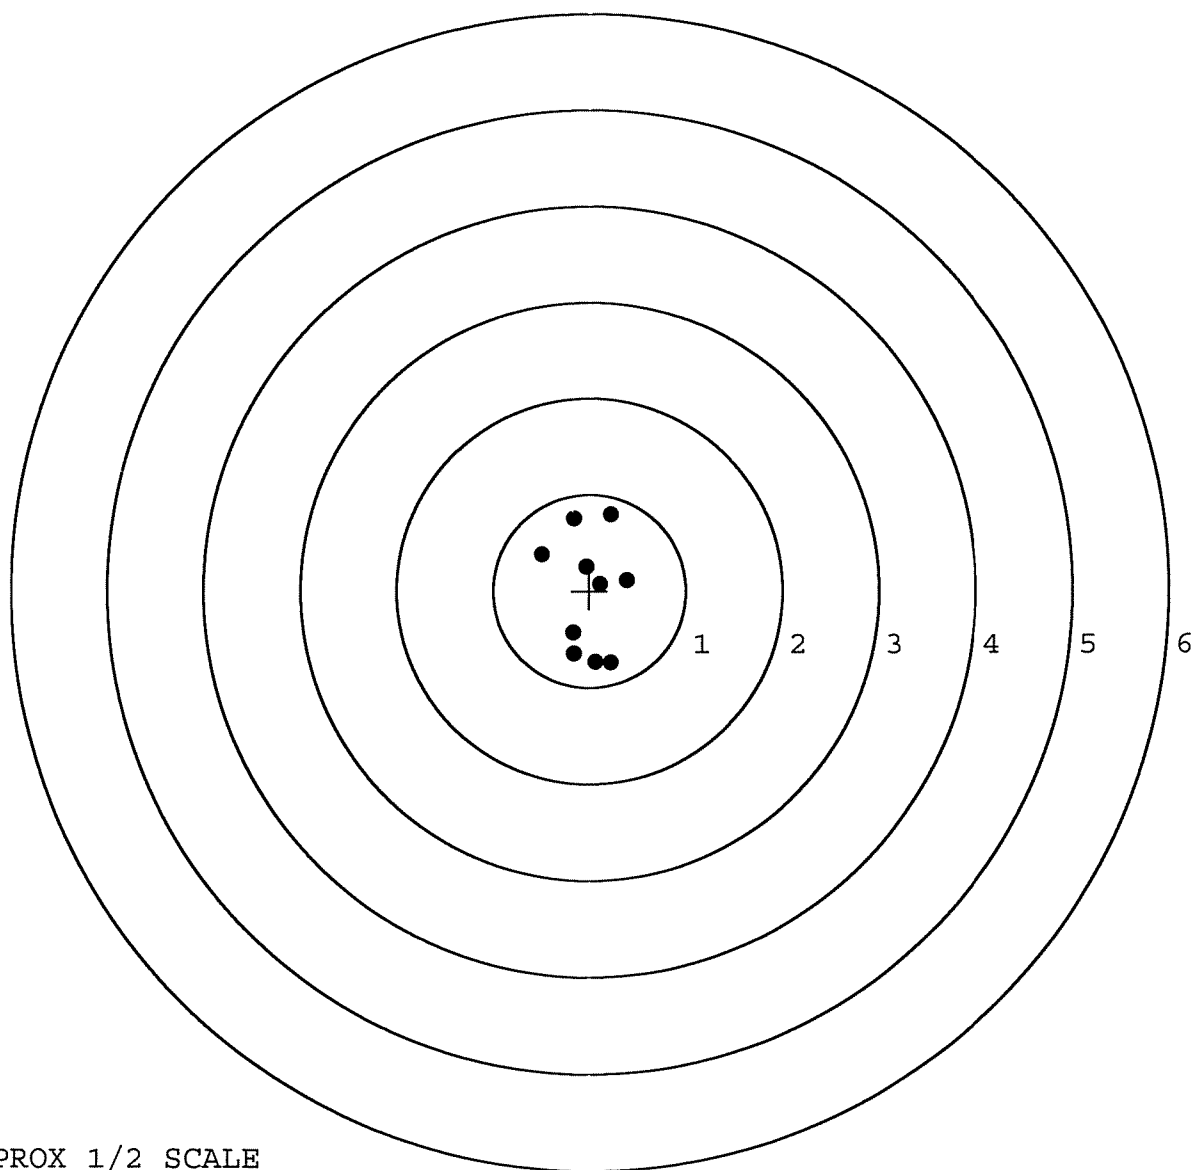


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225466. __0
TARGET NUMBER: 2
FILE DATE: 05/17/2002
FILE TIME: 13:51

POINT#	X	Y
1:	0.617	-0.282
2:	0.532	-0.150
3:	-1.101	-0.604
4:	-0.037	-0.417
5:	-0.646	0.120
6:	-0.428	0.286
7:	-0.447	-0.031
8:	0.199	0.313
9:	0.022	0.116
10:	0.152	0.023

X CENTROID: -0.114
Y CENTROID: -0.063
POA TO CENTROID: 0.130
HORZ SPREAD: 1.718
VERT SPREAD: 0.917
GROUP SPREAD: 1.748
MIN RADIUS: 0.224
MAX RADIUS: 1.126
MEAN RADIUS: 0.526
IN 1 IN DIAMETER: 6
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

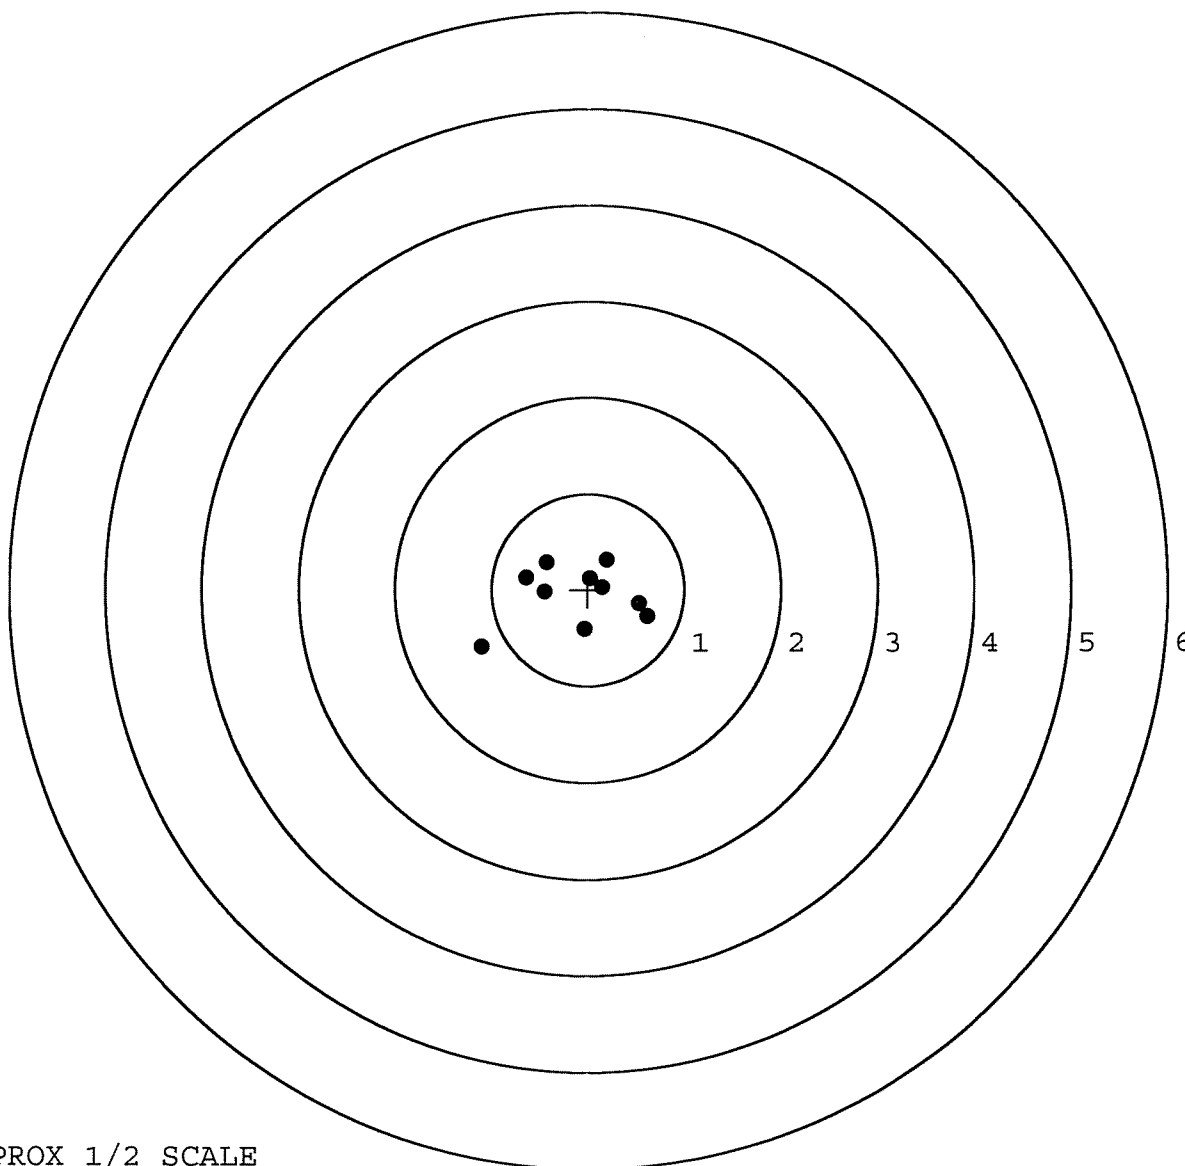


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225466. __0
TARGET NUMBER: 3
FILE DATE: 05/17/2002
FILE TIME: 13:51

POINT#	X	Y
1:	-0.697	0.091
2:	-0.490	0.263
3:	0.302	0.441
4:	0.192	0.296
5:	0.195	-0.173
6:	-0.024	-0.234
7:	-0.192	0.038
8:	0.239	0.004
9:	0.003	0.036
10:	0.008	-0.107

X CENTROID: -0.046
Y CENTROID: 0.065
POA TO CENTROID: 0.080
HORZ SPREAD: 0.999
VERT SPREAD: 0.675
GROUP SPREAD: 1.059
MIN RADIUS: 0.058
MAX RADIUS: 0.651
MEAN RADIUS: 0.330
IN 1 IN DIAMETER: 8
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

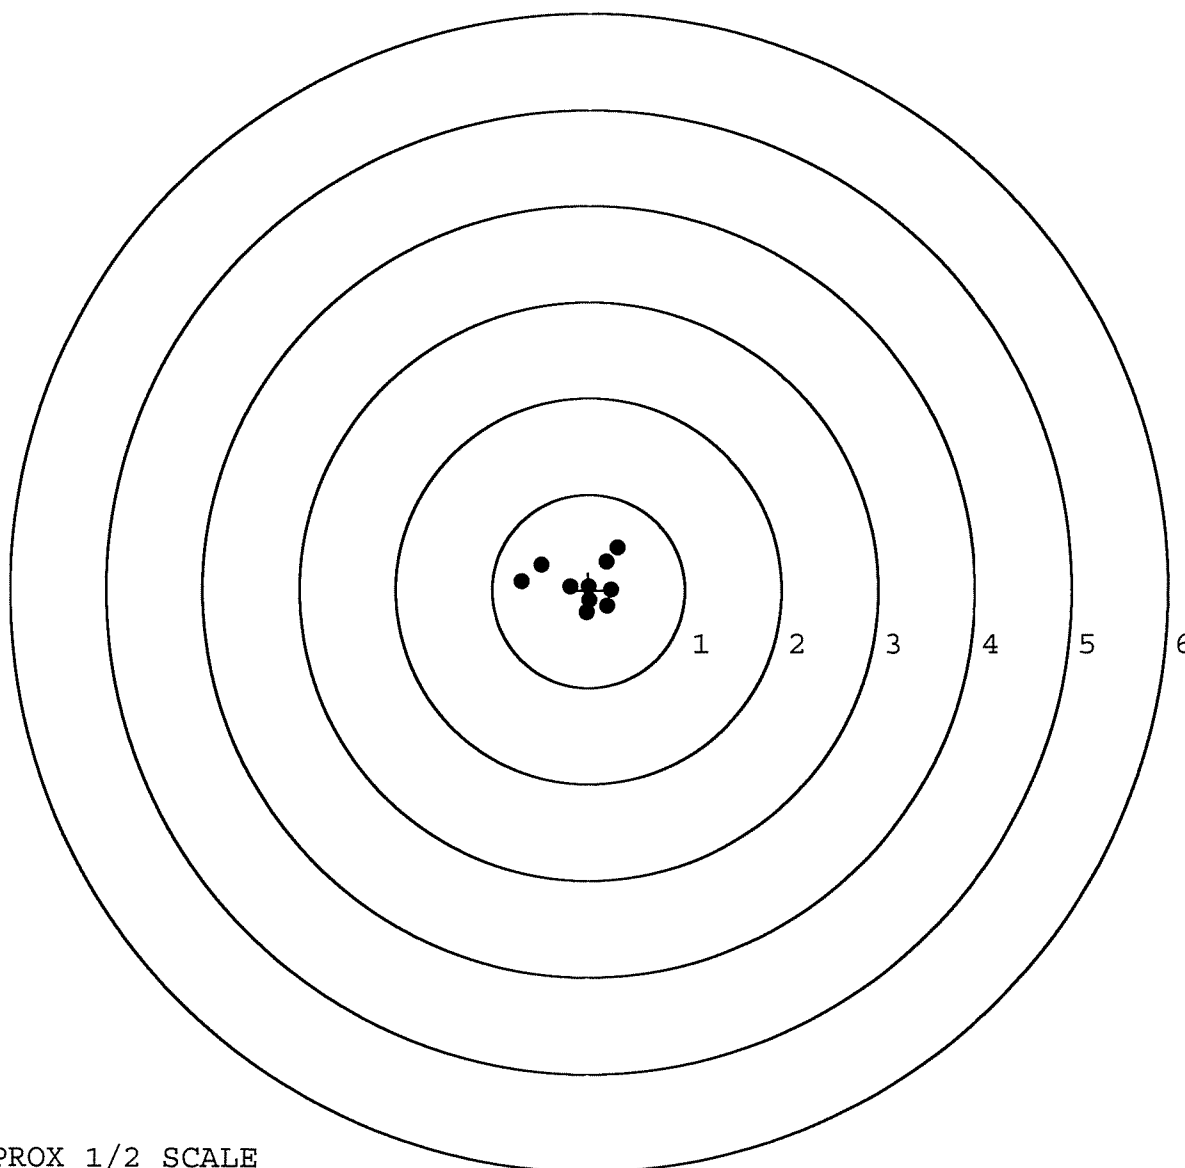


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225466. __0
TARGET NUMBER: 4
FILE DATE: 05/17/2002
FILE TIME: 13:51

POINT#	X	Y
1:	1.188	0.275
2:	0.461	0.258
3:	-0.012	0.435
4:	0.250	1.136
5:	-0.804	-0.057
6:	-0.546	-0.862
7:	-0.080	-0.697
8:	-0.203	-0.523
9:	-0.113	-0.219
10:	-0.343	-0.154

X CENTROID: -0.020
Y CENTROID: -0.041
POA TO CENTROID: 0.046
HORZ SPREAD: 1.992
VERT SPREAD: 1.998
GROUP SPREAD: 2.074
MIN RADIUS: 0.201
MAX RADIUS: 1.249
MEAN RADIUS: 0.698
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

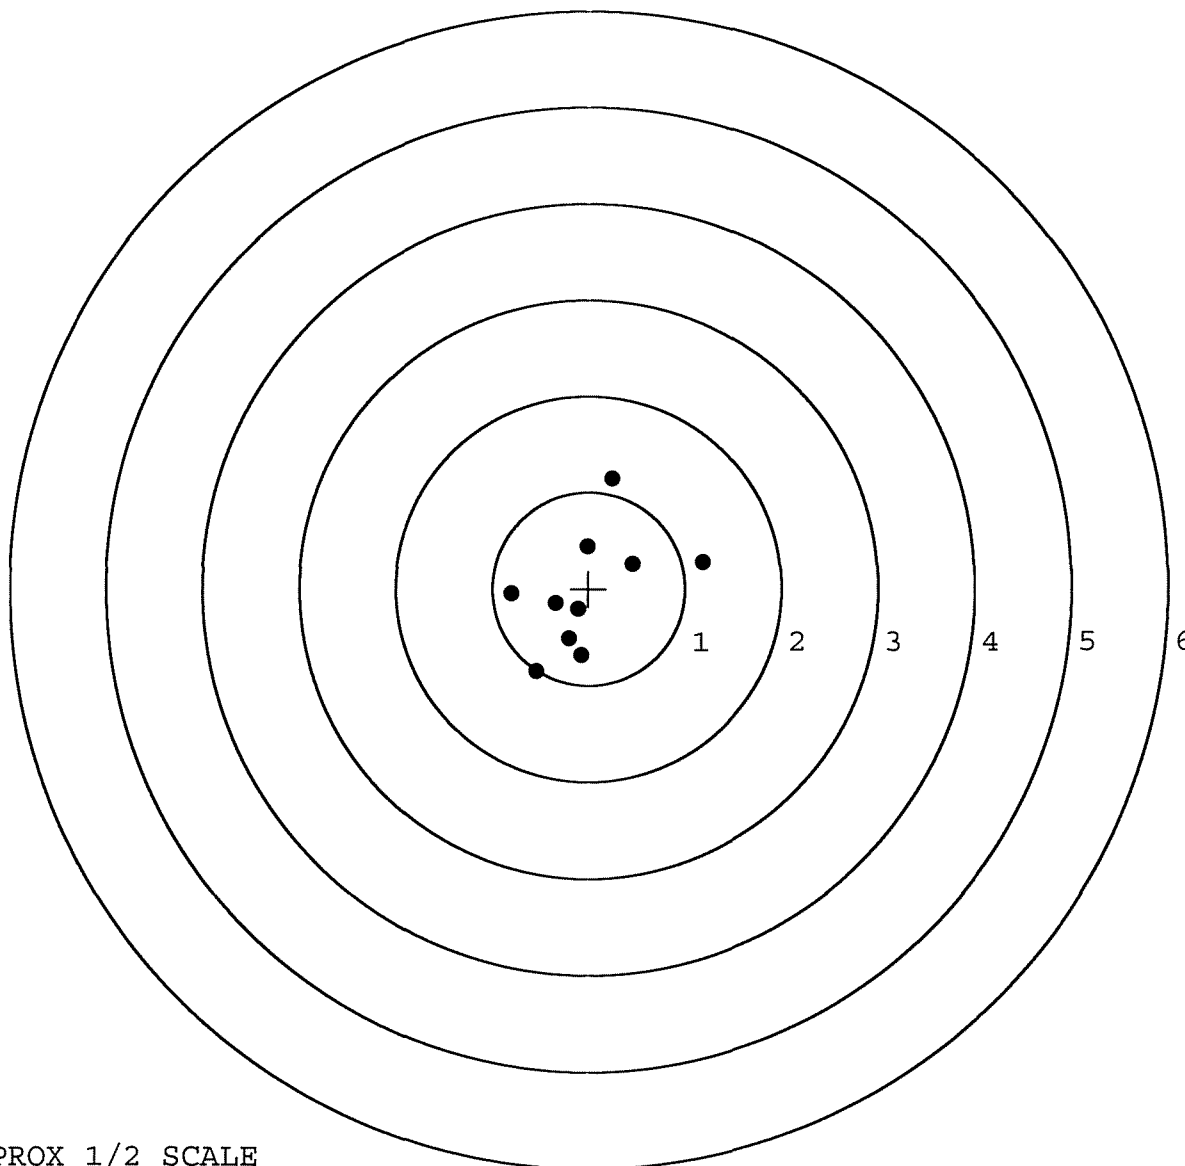


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6225466. 0
TARGET NUMBER: 5
FILE DATE: 05/17/2002
FILE TIME: 13:51

X CENTROID: -0.220
Y CENTROID: -0.034
POA TO CENTROID: 0.223
HORZ SPREAD: 1.976
VERT SPREAD: 1.414
GROUP SPREAD: 2.268
MIN RADIUS: 0.172
MAX RADIUS: 1.360
MEAN RADIUS: 0.572
IN 1 IN DIAMETER: 6
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.784	0.883
2:	-0.081	0.656
3:	-1.192	-0.230
4:	-0.626	-0.498
5:	-0.201	-0.531
6:	-0.400	-0.456
7:	-0.400	-0.051
8:	-0.308	0.114
9:	0.082	-0.257
10:	0.139	0.034

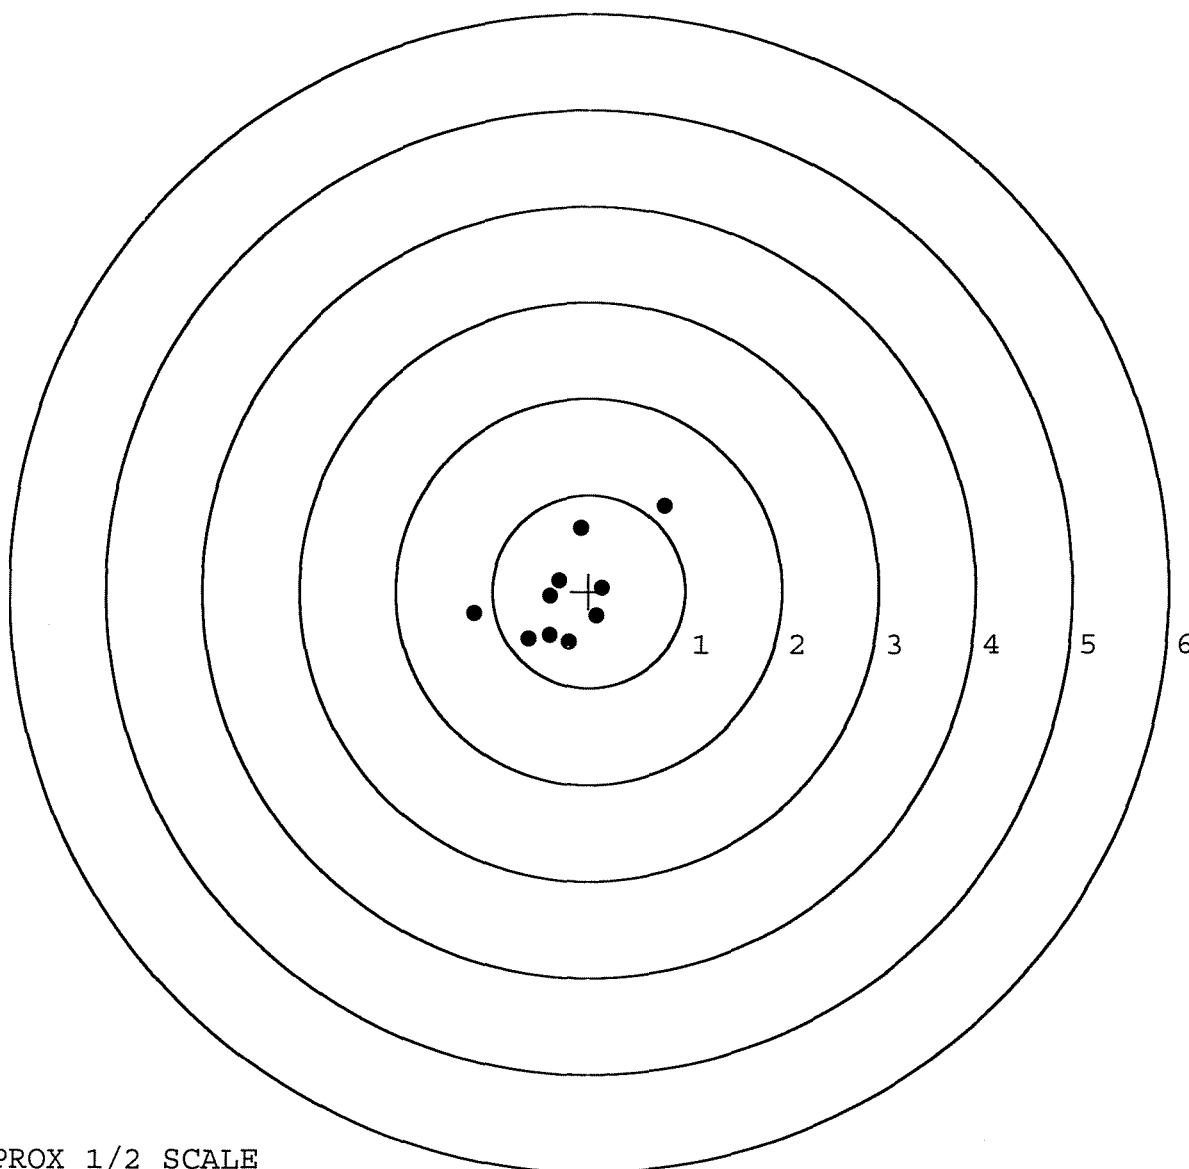

TARGET APPROX 1/2 SCALE

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00023292** Serial: **C6225466** Model: **700** Center Fire Caliber: **7.62 NATO M-24 (SWS)** Repairman:
 Verify Repair Status: **Closed 2/20/01 2:19:04 PM**

Address Information

Customer: **COMMANDER HHC 3/505TH PIR** Received From: **COMMANDER HHC 3/505TH PIR** Return To: **COMMANDER HHC 3/505TH PIR** Received From:
 Address 1: **BLDG# C7535** Address 2: **BLDG# C7535** PD Box:
 City: **FORT BRAGG** City: **FORT BRAGG** PD Box:
 State: **NC** Zip Code: **28310** Country: **US** State: **NC** Zip Code: **28310** Country: **US**
 FFL:

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information

Phone:
 Fax:
 Email:
 Comments:

Received Condition

Condition: **Poor**
 Notes:
 CSR Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	2
A008	With Swivel	2
A016	Scope Mounts	1
A017	Scope Base	1
A026	Scope	1
X	BIPOD	1

Repair Search **Refresh** **Close**


maglet 2/20/01 2:42 PM CAPS NUM INS SCRL

Start Inb Nag Micr Ar... Expl Part FBI Ma... 24

Serial Number:

C6225466

Model: **700**



RE00023292

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6225466
28 Mar 2001

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0696
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.1486
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .164092

THE AMR FOR THIS RIFLE IS: 1.075

CENTROIDAL DISTANCES

0	TO	1	.28809
1	TO	2	.171773
1	TO	3	.321622
1	TO	4	.163783
1	TO	5	.165979

4⁺ <----POA
1 5 3


PATTERN #: ☐ 1 ☐

POA TO CENTROID: .288
 MIN RADIUS : .280
 MEAN RADIUS : .905
 MAX RADIUS : 1.958
 CENTROID X : -.220
 CENTROID Y : -.186

28 Mar 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225466

CENTERFIRE PATTERN # 1

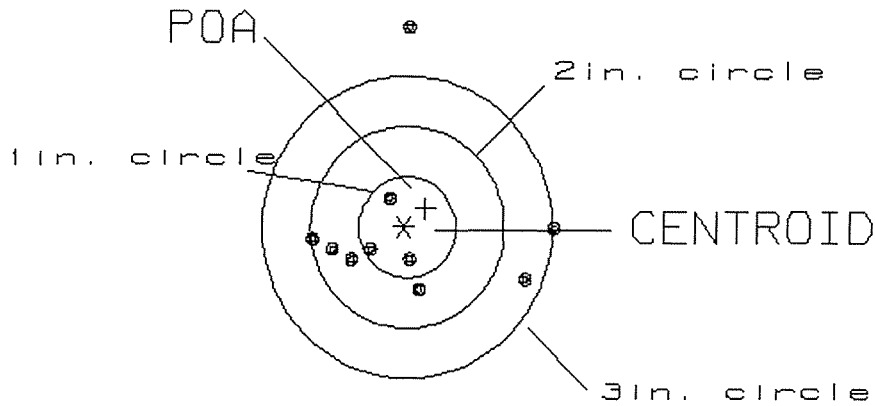

OF SHOTS= 10

IN CIRCLE

HS= 2.55

3

VS= 2.56

6

GS= 2.79

8

PATTERN #: ☐ 2 ☐

POA TO CENTROID: .136

MIN RADIUS : .428

MEAN RADIUS : 1.212

MAX RADIUS : 2.148


CENTROID X : -.061

CENTROID Y : -.121

28 Mar 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225466

CENTERFIRE PATTERN # 2

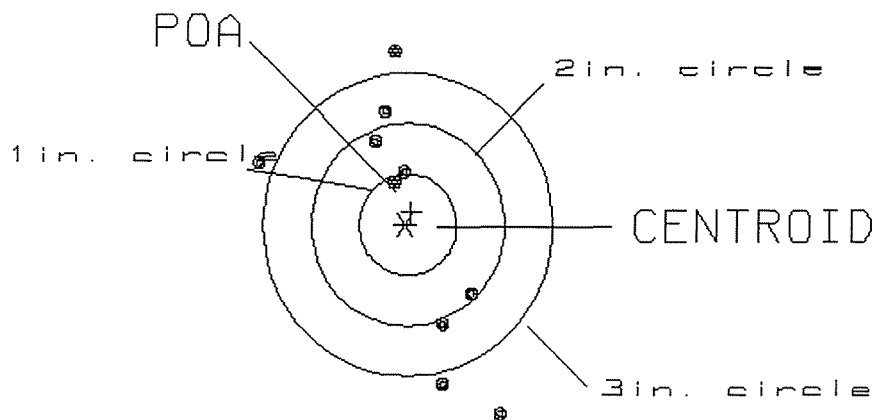

OF SHOTS= 10

IN CIRCLE

HS= 2.47

2

VS= 3.66

4

GS= 3.83

6


PATTERN #: ☐ 3 ☐

POA TO CENTROID: .230
 MIN RADIUS : .418
 MEAN RADIUS : .950
 MAX RADIUS : 1.723
 CENTROID X : .101
 CENTROID Y : -.206

28 Mar 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225466

CENTERFIRE PATTERN # 3

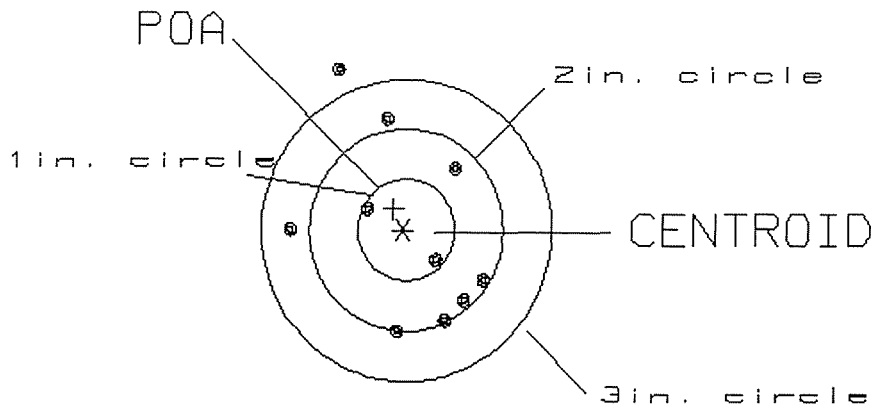

OF SHOTS= 10

IN CIRCLE

HS= 1.96
 VS= 2.58
 GS= 2.68


2
 6
 9

PATTERN #: ☐ 4 ☐
 POA TO CENTROID: .129
 MIN RADIUS : .412
 MEAN RADIUS : 1.129
 MAX RADIUS : 1.804
 CENTROID X : -.113
 CENTROID Y : -.062

28 Mar 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225466

CENTERFIRE PATTERN # 4

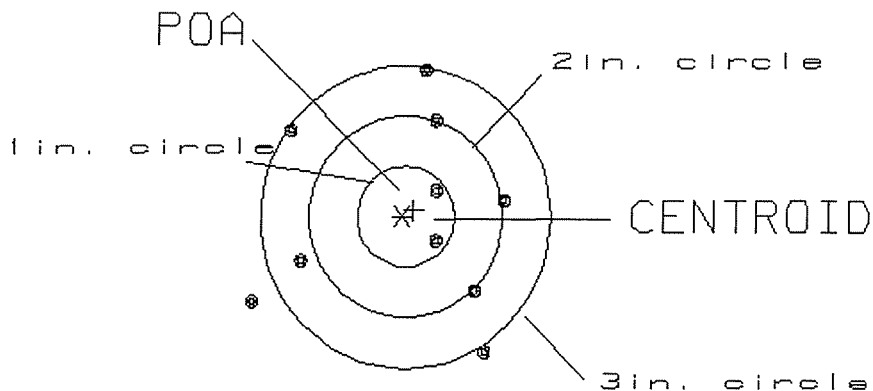

OF SHOTS= 10

IN CIRCLE

HS= 2.68
 VS= 2.77
 GS= 2.92


2
 4
 8

PATTERN #: ☐ 5 ☐
 POA TO CENTROID: .176
 MIN RADIUS : .347
 MEAN RADIUS : 1.181
 MAX RADIUS : 2.426
 CENTROID X : -.055
 CENTROID Y : -.168

28 Mar 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225466

CENTERFIRE PATTERN # 5

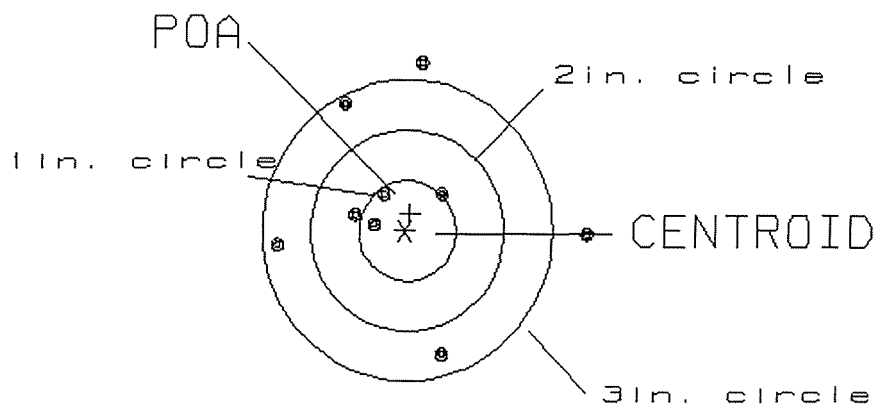

OF SHOTS= 10

IN CIRCLE

HS= 3.17

2

VS= 4.02

4

GS= 4.03

7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225466

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	12 9 88	12 9 88	RW
600	Proof	12 9 88	12 9 88	RW
607	Check Headspace	12 9 88	12 9 88	RW
610	Dis-assemble Gun	12 9 88	12 9 88	RW
612	Magnaflux Barrel Action		12 22 88	R/c.
	Magnaflux Bolt		1-3-89	R/c.
615	Rollmark Caliber		10/22/88	MB/C.
617	Drill and Tap Sight Holes	1 3 89	1 3 89	FB
618	Polish Barrel	1 2 2 88	1 2 2 88	W/T
620	Apply Coatings (Barrel Action)		1-13-89	1/3A
	Apply Coating (Bolt)			
625	Final Assembly			
	A) Clean inside of Bolt Assembly		2/9/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		2/9/89	RW
	C) Inspect Ejector Hole for Chamfer		2/9/89	RW
	D) Oil Firing Pin Ass'y		2/9/89	RW
	E) Adjust Trigger Pull to Min Setting and Stake		10/21/89	QTS

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	6	6	5			10/26/89	928
	G) Safety Off Force	4	4	4			10/26/89	928
	H) Trigger Pull Test & Retainability						8/26/89	928
	I) Firing Pin Indent	.020	.020	.020			10/26/89	928
	J) Assemble Stock						2/28/89	RW
	K) Assemble Swivel Studs						7 Mar 89	928
	L) Attach Front and Rear Sight Assemblies						2/28/89	RW
	M) Iron Sight Alignment						2/28/89	RW
	N) Detach Front & Rear Sights & place in numbered container						2/28/89	RW
	O) Attach Scope to Rifle						3/1/89	WLB
	P) Detach & Attach Scope 20 Times						3/1/89	WLB
640	Gallery Target & Test	36 R 116 L					3/2/89	DH
	A) Time						3/2/89	DH
	B) Malfunctions						3/2/89	DH
	C) Pierced Primers						3/2/89	DH
	D) Optical Clarity of Scope						3/2/89	DH
645	Inspect for Live Ammo						3/2/89	DH
655	Final Inspection							
	A) Headspace						7 Mar 89	928
	B) Trigger Pull	2.48	2.43	2.48	2.51	2.50	7 Mar 89	928
	C) Function						7 Mar 89	928
660	Pack						22 Mar 89	928

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50#+.50#
3.00#+.75#
4.00#+1.00#

SERIAL NO. 5466

DATE 3-31-90

TESTER JLL

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.44	2.22		2.18	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.41	2.30		2.12	
PULL #3	2.37	2.25		2.21	
PULL #4	2.26	2.20		2.19	
PULL #5	2.31	2.20		2.25	
TOTAL	11.79	11.17		10.95	
AVG.	2.358	2.234		2.19	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.56	3.49		
PULL #2	3.51	3.46		
PULL #3	3.47	3.40		
PULL #4	3.50	3.42		
PULL #5	3.45	3.42		
TOTAL	17.49	17.19		
AVG.	3.498	3.438		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.25	4.14		
PULL #2	4.12	4.43		
PULL #3	4.11	4.51		
PULL #4	4.24	4.52		
PULL #5	4.11	4.41		
TOTAL	20.83	22.01		
AVG.	4.166	4.402		

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225466
6 Mar 1989

CENTROIDAL DISTANCES

0 TO	1	.40948
1 TO	2	.370395
1 TO	3	.409273
1 TO	4	.672287
1 TO	5	.489634


$\frac{523}{+1}$ $\frac{4}{}$ <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .4076
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .4108
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .578701
THE AMR FOR THIS RIFLE IS: .8912

2 Mar 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6225466

CENTERFIRE PATTERNS # 1

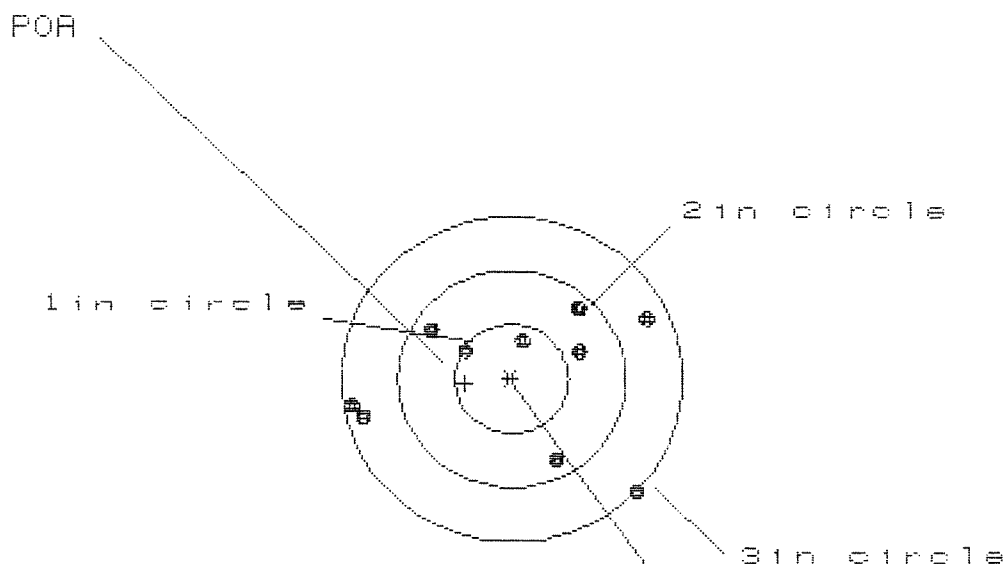

OF SHOTS = 10

IN CIR

1in = 2

2in = 6

3in = 9

HS = 2.694

VS = 1.654

GS = 2.822


CENTROID #

PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.239	1.361	1.194
MINIMUM X	:	-1.455	-1.333	-1.373
MAXIMUM Y	:	.618	.503	.453
MINIMUM Y	:	-1.036	-.874	-.924
CENTROID X	:	.407	.285	.452
CENTROID Y	:	.045	.160	.210
POA TO CENTROID in.	:	.409	.327	.498
MIN RADIUS	:	.359	.298	.189
MEAN RADIUS	:	.981	.900	.814
MAX RADIUS	:	1.506	1.431	1.477
HORIZONTAL SPREAD	:	2.694	2.694	2.567
VERTICAL SPREAD	:	1.654	1.377	1.377
EXTREME SPREAD	:	2.822	2.822	2.733
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

2 Mar 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C8225466

CENTERFIRE PATTERNS # 2

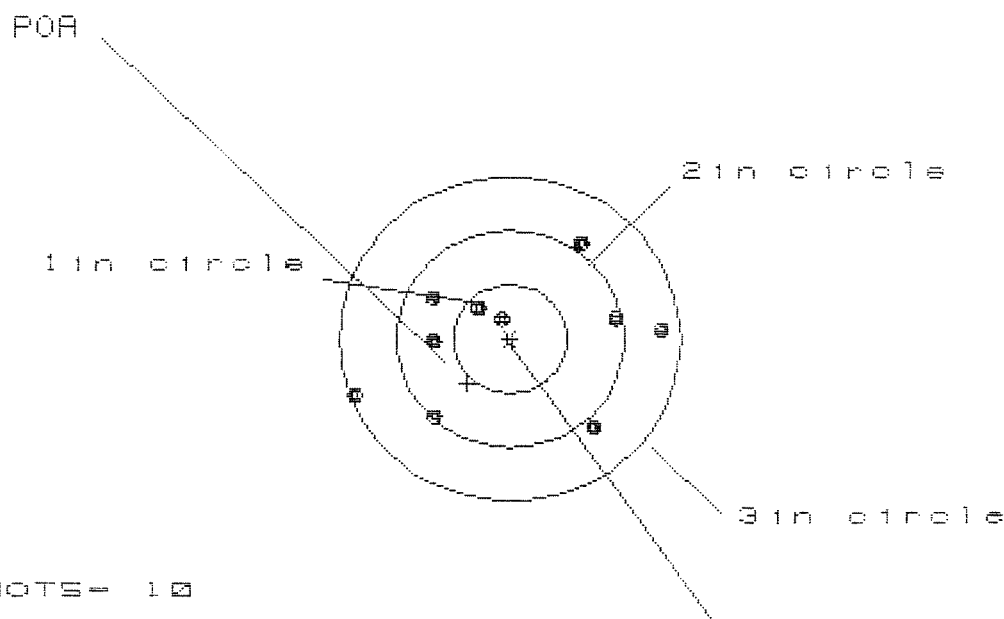

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 6

3 in = 10

HS= 2.699

VS= 1.669

GS= 2.780


CENTROID *

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.351	1.201	.953
MINIMUM X	:	-1.348	-.822	-.672
MAXIMUM Y	:	.883	.822	.828
MINIMUM Y	:	-.786	-.847	-.841
CENTROID X	:	.375	.525	.375
CENTROID Y	:	.414	.475	.469
POA TO CENTROID in.	:	.559	.708	.600
MIN RADIUS	:	.188	.270	.145
MEAN RADIUS	:	.892	.839	.755
MAX RADIUS	:	1.457	1.202	1.124
HORIZONTAL SPREAD	:	2.699	2.023	1.625
VERTICAL SPREAD	:	1.669	1.669	1.669
EXTREME SPREAD	:	2.780	2.126	2.005
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		10	

2 Mar 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C8225468

CENTERFIRE PATTERNS # 3

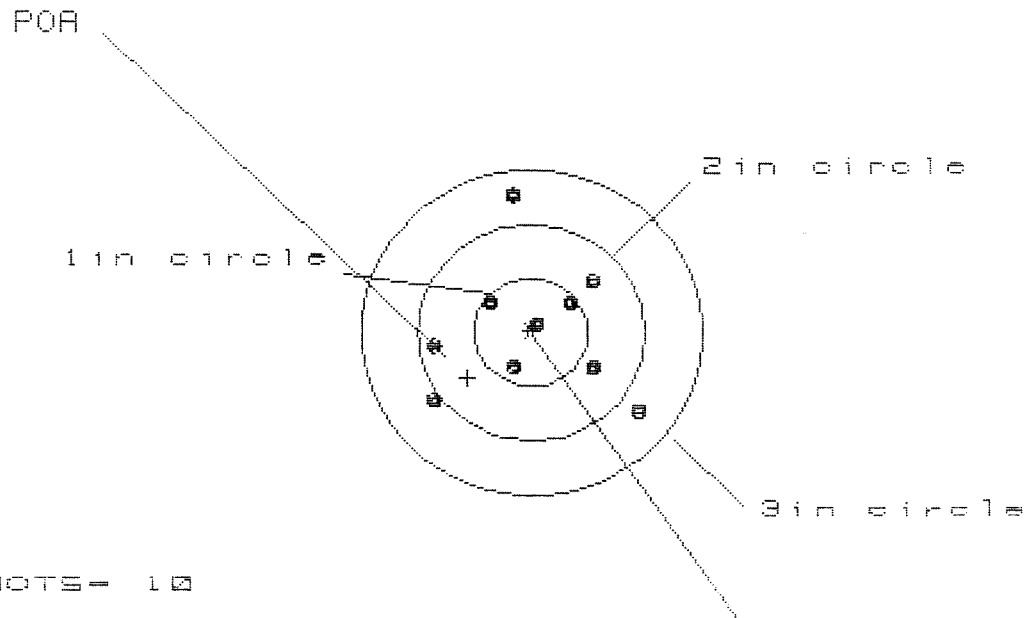

OF SHOTS = 10

IN CIR

1in = 4

2in = 7

3in = 10

HS = 1.808

VS = 2.011

GS = 2.261

CENTROID *


PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.911	.897	.631
MINIMUM X	:	-.897	-.911	-.799
MAXIMUM Y	:	1.239	.630	.551
MINIMUM Y	:	-.772	-.634	-.598
CENTROID X	:	.559	.573	.461
CENTROID Y	:	.425	.287	.366
POA TO CENTROID in.	:	.702	.641	.588
MIN RADIUS	:	.087	.224	.179
MEAN RADIUS	:	.705	.652	.583
MAX RADIUS	:	1.245	1.099	.998
HORIZONTAL SPREAD	:	1.808	1.808	1.430
VERTICAL SPREAD	:	2.011	1.264	1.149
EXTREME SPREAD	:	2.261	1.868	1.813
NUMBER IN ONE INCH CIRCLE	=		4	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		10	

2 Mar 1985

FILE:/PATTERNING/CENTERFIRE_PATT/08225468

CENTERFIRE PATTERNS

4

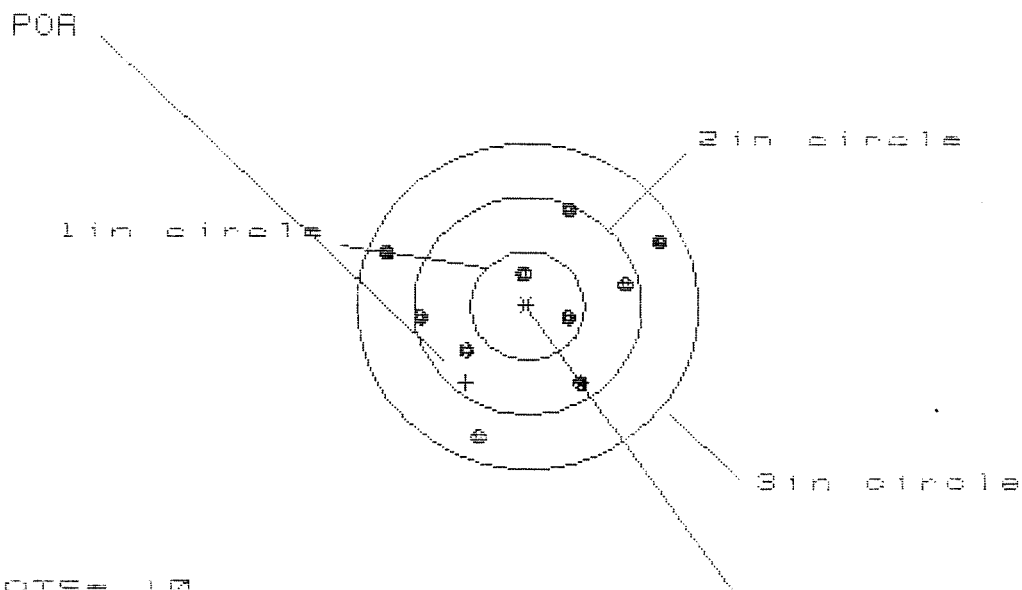

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 7

3 in = 10

HS= 2.434

VS= 2.084


GS= 2.435

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.176	1.036	.839
MINIMUM X	:	-1.258	-1.087	-.957
MAXIMUM Y	:	.912	.969	1.048
MINIMUM Y	:	-1.182	-1.125	-1.046
CENTROID X	:	.540	.680	.550
CENTROID Y	:	.704	.647	.568
POA TO CENTROID in.	:	.887	.939	.791
MIN RADIUS	:	.311	.227	.344
MEAN RADIUS	:	.886	.817	.768
MAX RADIUS	:	1.356	1.259	1.134
HORIZONTAL SPREAD	:	2.434	2.123	1.796
VERTICAL SPREAD	:	2.094	2.094	2.094
EXTREME SPREAD	:	2.435	2.378	2.241
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		10	

2 Mar 1989

FILE:/PATTERNING/CENTERFIRE_PATT/CS225456

CENTERFIRE PATTERNS # 5

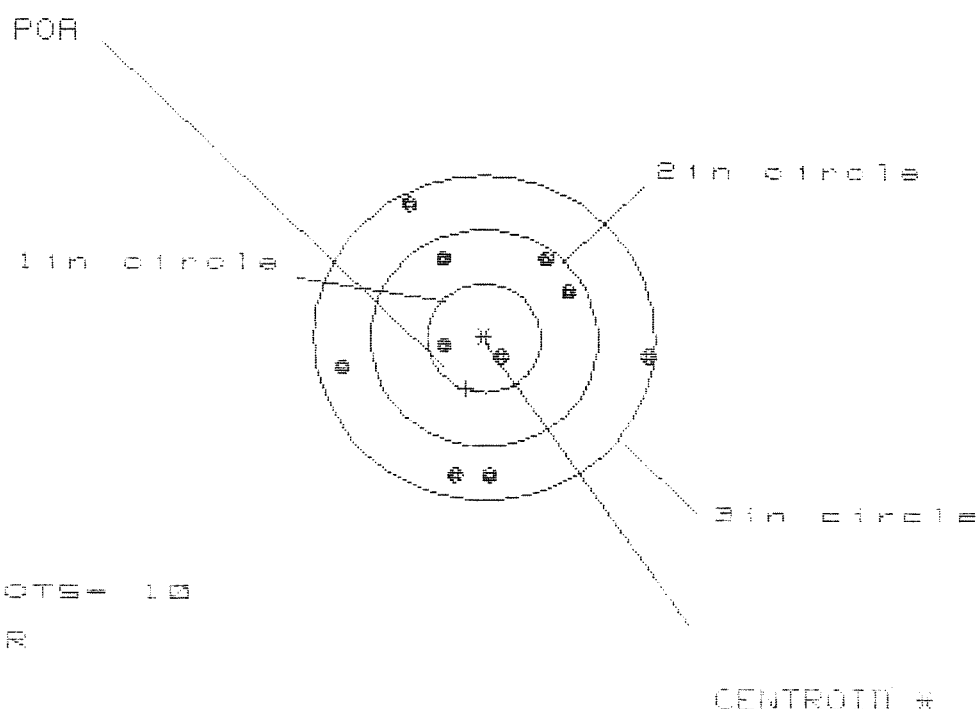

OF SHOTS = 10

IN CIR

1 in = 2

2 in = 5

3 in = 10

HS = 2.658

VS = 2.548

GS = 2.660

PATTERN #	5		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.411	1.338	.875
MINIMUM X	-1.247	-1.320	-1.153
MAXIMUM Y	1.266	.919	.918
MINIMUM Y	-1.282	-1.142	-1.143
CENTROID X	.157	.230	.063
CENTROID Y	.466	.325	.326
POR TO CENTROID in.	.491	.398	.331
MIN RADIUS	.251	.094	.237
MEAN RADIUS	.992	.932	.875
MAX RADIUS	1.425	1.338	1.161
HORIZONTAL SPREAD	2.658	2.658	2.027
VERTICAL SPREAD	2.548	2.061	2.061
EXTREME SPREAD	2.660	2.660	2.169
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	10		

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C 6725466

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel		8/15/91	WB
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)		8/22/91	1/5A
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

625 cont.	F) Safety On Force						
	G) Safety Off Force						
	H) Trigger Pull Test & Retainability						
	I) Firing Pin Indent						
	J) Assemble Stock						
	K) Assemble Swivel Studs						
	L) Attach Front and Rear Sight Assemblies						
	M) Iron Sight Alignment						
	N) Detach Front & Rear Sights & place in numbered container						
	O) Attach Scope to Rifle						
	P) Detach & Attach Scope 20 Times						
640	Gallery Target & Test						
	A) Time						
	B) Malfunctions						
	C) Pierced Primers						
	D) Optical Clarity of Scope						
645	Inspect for Live Ammo						
655	Final Inspection					9-25-91	D/H
	A) Headspace						
	B) Trigger Pull	2.31	2.36	2.28	2.35	2.34	9/24/91 RW
	C) Function						9-25-91 D/H
660	Pack						9/25/91 WB

[illegible]

Remington ®		DU PONT REG. U.S. PAT. & TM. OFF	VERY IMPORTANT: Instruction Book enclosed to assure safe use of this firearm.
MODEL 700™ H24		SERIAL NO. C6225466	ORDER NO. 5716
MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off, Marca Registrada Marque Deposee.		20	



5716 C6225466

UPC



0 47700 25716 7

#6

CUST NO: 045582 C.O.D		W/LEUPOLD 10X SCOPE	
INITIAL JJM	CUSTOMER ORDER NO.	M-24 SNIPER	
DATE RECEIVED 08/05/91	DATE OPENED 08/05/91	DATE CODE BJ 1-89	SERIAL NUMBER C6225466
MODEL AND GRADE 700 7.62 NATO		ORDER R 91-15015	
ACCESSORIES W/STUDS	W/SWIVELS	SCOPE MNTS	SCOPE BASE
HARD CASE			

FROM:

SHIP TO:

D CD 782ND MAINTANCE BA
FORT BRAGG NC 28307
USA

D CO 782ND MAINTANCE BA
FORT BRAGG NC
USA 28307

ACCOUNT NUMBER	ACCOUNT NUMBER N/C	WRITE ☐	CLEAN/TEST	PROM. DATE	ESTIMATED	VIA
						UPS

REPAIR CHARGE	TAX	INSURANCE	UPS	PARCEL POST	TOTAL

GUN CONDITION:

 NEW

☐ SLIGHTLY WORN

☒ VERY WORN

☐ MISUSED

☐ MARRED

CUSTOMER'S REQUEST

- 1) RE CROWN
- 2) POLISH CHAMBER
- 3) RE-POWDER COAT BBL ACTION & TRIGGER GUARD
- 4) CLEAN FIRE CONTROL

PARTS						
	REPAIRMAN	PROOF	CLEAN	TEST	TARGET	PATTERN
	GALLERY TESTER	DATE	DATE	DATE	DATE	DATE

OFFICE COPY

RD6925 REV. 7/90

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

M2400061563

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6225466
27 Oct 1998

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0346
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .2732
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .275382

THE AMR FOR THIS RIFLE IS: 1.067

CENTROIDAL DISTANCES

0	TO	1	.300541
1	TO	2	.223164
1	TO	3	.0687968
1	TO	4	.168505
1	TO	5	.025


s_3^2
+ <----POA

PATTERN #: ☐ 1 ☐
 POA TO CENTROID: .300
 MIN RADIUS : .745
 MEAN RADIUS : 1.191
 MAX RADIUS : 2.053
 CENTROID X : -.039
 CENTROID Y : .298

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225466

CENTERFIRE PATTERN # 1

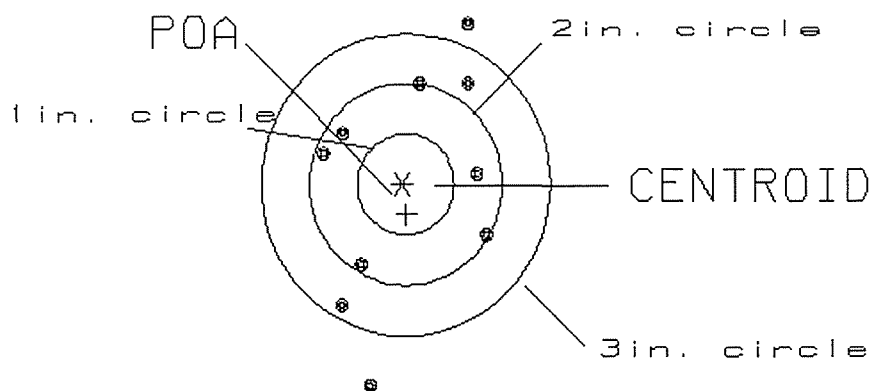

OF SHOTS= 10

IN CIRCLE

HS= 1.76

0

VS= 3.66

4

GS= 3.79

8

PATTERN #: ☐ 2 ☐

POA TO CENTROID: .376

MIN RADIUS : .262

MEAN RADIUS : 1.410

MAX RADIUS : 2.528


CENTROID X : .182

CENTROID Y : .329

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225466

CENTERFIRE PATTERN # 2

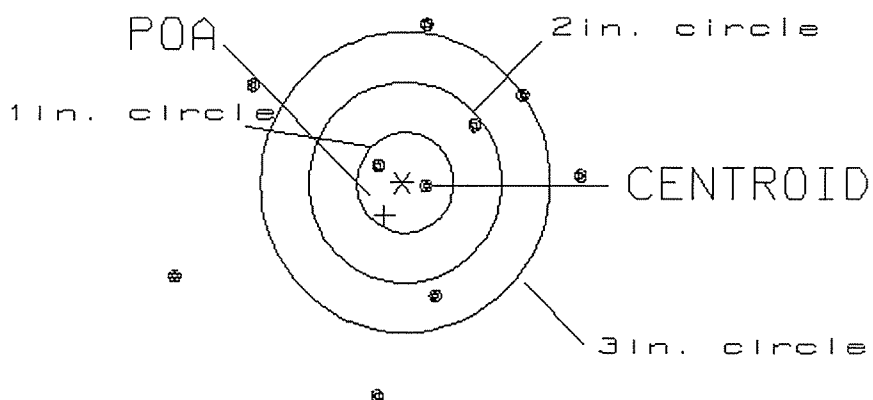

OF SHOTS= 10

IN CIRCLE

HS= 4.20

2

VS= 3.67

3

GS= 4.32


5

PATTERN #: ☐ 3 ☐
 POA TO CENTROID: .262
 MIN RADIUS : .303
 MEAN RADIUS : .819
 MAX RADIUS : 1.491
 CENTROID X : .019
 CENTROID Y : .261

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225466

CENTERFIRE PATTERN # 3

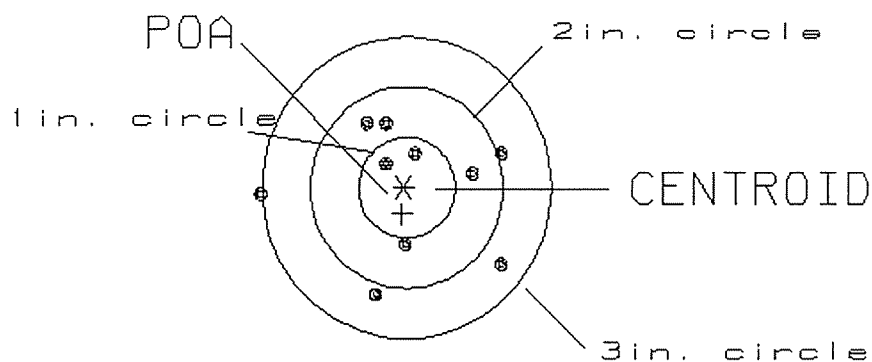

OF SHOTS= 10

IN CIRCLE

HS= 2.50

2

VS= 1.71

6

GS= 2.60


10

PATTERN #: ☐ 4 ☐
 POA TO CENTROID: .188
 MIN RADIUS : .023
 MEAN RADIUS : 1.063
 MAX RADIUS : 2.065
 CENTROID X : .074
 CENTROID Y : .173

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225466

CENTERFIRE PATTERN # 4

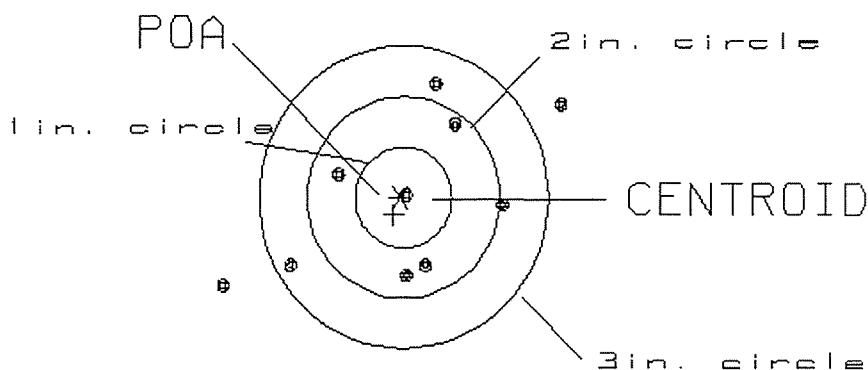

OF SHOTS= 10

IN CIRCLE

HS= 3.46
 VS= 2.02
 GS= 3.93

1
 5
 8


PATTERN #: ☐ 5 ☐

POA TO CENTROID: .311
 MIN RADIUS : .191
 MEAN RADIUS : .853
 MAX RADIUS : 1.766
 CENTROID X : -.063
 CENTROID Y : .305

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225466

CENTERFIRE PATTERN # 5

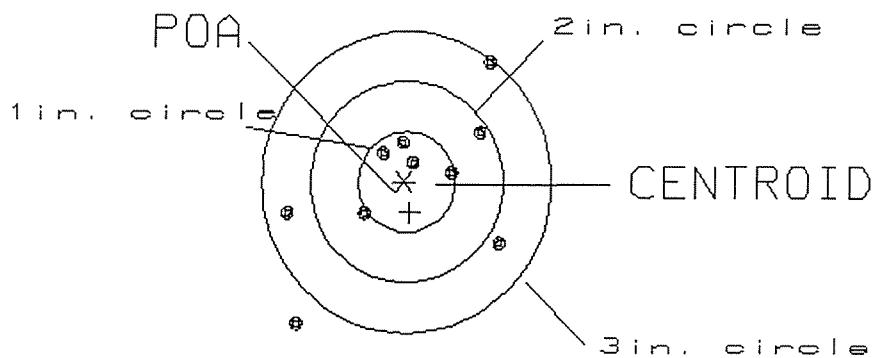

OF SHOTS= 10

IN CIRCLE

HS= 2.11
 VS= 2.52
 GS= 3.20

4
 6
 9

RECEIVING AND ESTIMATING REPORT

R 98-17475

INITIAL CUSTOMER ORDER NO.

M-24 SNIPER

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

08/31/98

08/31/98

BJ 1-89

C6225466

700 7.62

NATO

ACCESSORIES

HARD CASE

W/STUDS

N/SCOPE BASE

FROM:

SHIP TO:

US ARMY
HHC 2/505 PIR
BLDG C7535
FORT BRAGG

NC 28307

US ARMY
HHC 2/505 PIR
BLDG C7535
FORT BRAGG

NC
28307

CUST NO:192058 C.O.D

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

FROM DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

TRIGGER GROUP

BOLT ASSY.

BARREL ASSY.

REC. ASSY.

WOOD

METAL

MAIN FAULT

PARTS

COMMENTS

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD8925 REV. 7/97

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

M2400061570

1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0												
DJ OD CE NT		RI FROM	M & S	U NS IS T	QUANTITY	SUPPLE- MENTARY ADDRESS	S I G	F U N D	DIS- TRI- BU- TION	PRO- JECT	P R I	RDD EEA QLT DE	A DV	RI	O C M OG PNT ID	UNIT PRICE		DOLLARS		CTS		1. TOTAL PRICE										2. SHIP FROM HHC 2/505 FT.BRAGG N.C										3. SHIP TO REMINGTON ARMS CO.IN N.Y									
															\$5145.00	\$5145.00				4. MARK FOR																															
															5. DOC DATE					6. NMFC					7. FRT RATE					8. TYPE CARGO					9. PS																
															10. QTY. REC'D					11. UP					12. UNIT WEIGHT					13. UNIT CUBE					14. UFC					15. SL											
16. FREIGHT CLASSIFICATION NOMENCLATURE																																																			
17. ITEM NOMENCLATURE SNIPER RIFLE 7.62MM M24 SN:06225466																																																			
18. TY CONT										19. NO CONT										20. TOTAL WEIGHT										21. TOTAL CUBE																					
22. RECEIVED BY																														23. DATE RECEIVED																					

24 DOCUMENT NUMBER & SUFFIX (30-44)

W3600M

8232-6002

LIN: R05387

1005-01-240-2136

82nd PBO
Team # 3
Approved
[Signature]
Int
0003
20 Aug 98

26 RIC (4-6)
UI (23-24)
CON CODE (7-1)
DIST (55-56)
UP (74-80)

FA 00001

SFR# 06225466

REORDER Doc No. W3600M 8232-6003

M2400061572

PACKING LIST	PACKED BY	1. NO. BOXES 1	2a. REQUISITION NO. 2b. ORDER NO.		
3. END ITEM Sniper Rifle 7.62MM M24			4. DATE 20 Aug 98		
5. PAGE 1 OF 1 PAGES					
BOX NO. (a)	CONTENTS - STOCK NUMBER AND NOMENCLATURE (b)	UNIT OF ISSUE (c)	QUANTITIES REQUIRED		
			INITIAL OPERATION (d)	RUNNING SPARES (e)	TOTAL (f)
1.	1005-01-240-2136 Sniper Rifle 7.62mm M24				
6. THIS CERTIFIES THAT ITEMS LISTED HEREON ARE WITHIN THE SPECIFIED BOXES					
TYPED NAME AND TITLE Dion A JAMES Supply Sergeant		SIGNATURE Dion James			

DD Form 1750, SEP 70

USAPPC V1.00

NOTES TO CONSIGNEE

The listing shown on the reverse side, together with pertinent notations relative to each item included, is furnished for your information and guidance only. In the case of lists covering equipment sets, one copy may be retained for reference and used as a supporting document to property books and the other copy retained with the equipment as a component parts listing. For the purpose of clarification, explanations of the various entries on this Packing List are furnished.

ITEM 1. The number of boxes in a set.

ITEMS 2a. & b. The requisition number appearing on the DD Form 1348-1 or order number will be indicated in this entry. The number so referenced should be cited in any correspondence regarding this shipment.

ITEM 3. The stock number, nomenclature, type number (*when available*), and the directive under which the end item was assembled. Not applicable to shipments consisting only of miscellaneous repair parts and accessories for the assembly, set or unit in which case this entry will contain such a notation in lieu of the information cited above (*See 5.3.1.1*).

ITEM 4. Date of preparation.

ITEM 5. Self-explanatory.

Column a. This column will be used when two or more boxes are required for the equipment. It will indicate the number of the container in which the items are packed.

Column b. This space contains a listing of items contained within the box, which are identified by stock number and nomenclature. When an FSN is

not applicable, the manufacturer's code (*See 5.2.2.10*) and part number shall be used.

NOTE: As required, due to out of stock position within the DOD supply system, a component parts storage which will not hinder operational functions may be waived by higher authority and will be so indicated to the right of the nomenclature. Waivers noted thereon should be requisitioned through normal supply channels.

Column c. Self-explanatory.

Column d. "Initial Operation" - Items which are required for operation of the equipment.

Column e. "Running Spares" - Those items shipped concurrently with the equipment as spare parts and accessories.

NOTE: Columns d and e will be used on an optional basis.

"Total" - Self-explanatory.

ITEM 6. Self-explanatory.

PREVIOUS EDITION WILL BE USED

REQUEST FOR ISSUE OR TURN-IN (DA Form 710-2-1)

