

C6348770

MODEL 700TM M24

Model SMSTM

Action

Barrel Length

Capacity

Order No. 5715

*Includes 1 in chamber.

Remington

M2400063559

AVERAGE PULL FORCE BETWEEN
 INITIAL & CYCLE TESTS
 2.50 LBS (plus or minus 0.50 LBS)
 3.00 LBS (plus or minus 0.75 LBS)
 4.00 LBS (plus or minus 1.00 LBS)

SERIAL NO.

DATE 10-5-04

TESTER TRW

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.33	2.32		2.53	
PULL #2	2.31	2.08		2.17	
PULL #3	2.58	2.15		2.08	
PULL #4	2.41	2.04		2.33	
PULL #5	2.83	2.20		2.35	
TOTAL	12.46	10.79		11.46	
AVERAGE	2.49	2.15		2.29	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.02	3.35		
PULL #2	3.39	3.31		
PULL #3	3.43	3.22		
PULL #4	3.47	3.25		
PULL #5	3.44	3.18		
TOTAL	16.75	16.31		
AVERAGE	3.35	3.26		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.26	4.10		3.98
PULL #2	4.21	3.73		4.19
PULL #3	4.50	4.12		4.16
PULL #4	4.15	3.73		4.28
PULL #5	4.08	3.73		4.30
TOTAL	21.20	19.41		20.91
AVERAGE	4.24	3.88		4.18

For use of this form, see DA PAM 738-750 and 738-751: the proponent agency is DCSLOG

For use of this form, see DA PAM 738-750 and 738-751: the proponent agency is DCSLOG

DA FORM 2404, APR 79 Replaces edition of 1 Jan 64, which will be used USAPPC V1.10

M2400063562

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6348770.___0
FILE DATE AND TIME: 11/01/2004 12:00


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.016
The Average Y Centroid of the Five Target Set:	-0.067
The Average Point of Impact of the Five Target Set:	0.069
The Average Mean Radius of the Five Target Set:	0.569
The Distance from POA to Centroid Target #1:	0.135
The Distance from Centroid Target #2 to Centroid Target #1:	0.198
The Distance from Centroid Target #3 to Centroid Target #1:	0.141
The Distance from Centroid Target #4 to Centroid Target #1:	0.145
The Distance from Centroid Target #5 to Centroid Target #1:	0.133

SERIAL NUMBER: C6348770. __0
TARGET NUMBER: 1
FILE DATE: 11/01/2004
FILE TIME: 12:00

X CENTROID: -0.097
Y CENTROID: -0.093
POA TO CENTROID: 0.135
HORZ SPREAD: 1.685
VERT SPREAD: 1.519
GROUP SPREAD: 1.796
MIN RADIUS: 0.118
MAX RADIUS: 1.160
MEAN RADIUS: 0.556
IN 1 IN DIAMETER: 6
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.189	-0.963
2:	0.054	-0.504
3:	-0.410	-0.400
4:	-1.256	-0.132
5:	-0.259	-0.334
6:	0.203	0.079
7:	0.039	0.280
8:	-0.018	-0.006
9:	0.429	0.490
10:	0.060	0.556

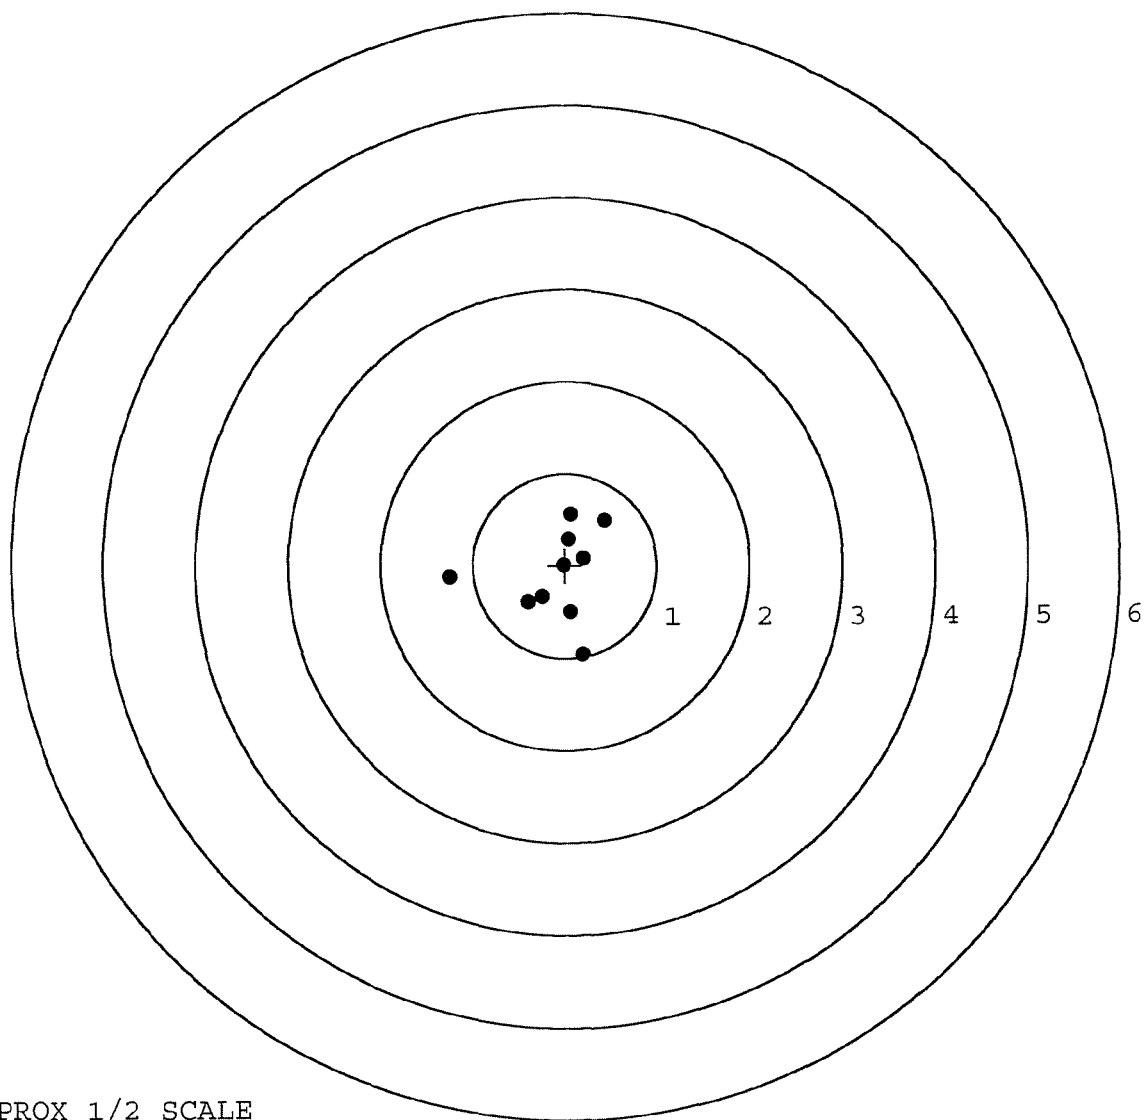


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348770. __0
TARGET NUMBER: 2
FILE DATE: 11/01/2004
FILE TIME: 12:00

X CENTROID: 0.096
Y CENTROID: -0.049
POA TO CENTROID: 0.108
HORZ SPREAD: 1.439
VERT SPREAD: 1.462
GROUP SPREAD: 1.936
MIN RADIUS: 0.064
MAX RADIUS: 1.063
MEAN RADIUS: 0.574
IN 1 IN DIAMETER: 5
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.648	-0.957
2:	-0.281	-0.750
3:	-0.767	-0.024
4:	-0.621	0.505
5:	0.031	0.318
6:	0.068	0.008
7:	0.308	-0.019
8:	0.466	0.011
9:	0.672	0.116
10:	0.434	0.300

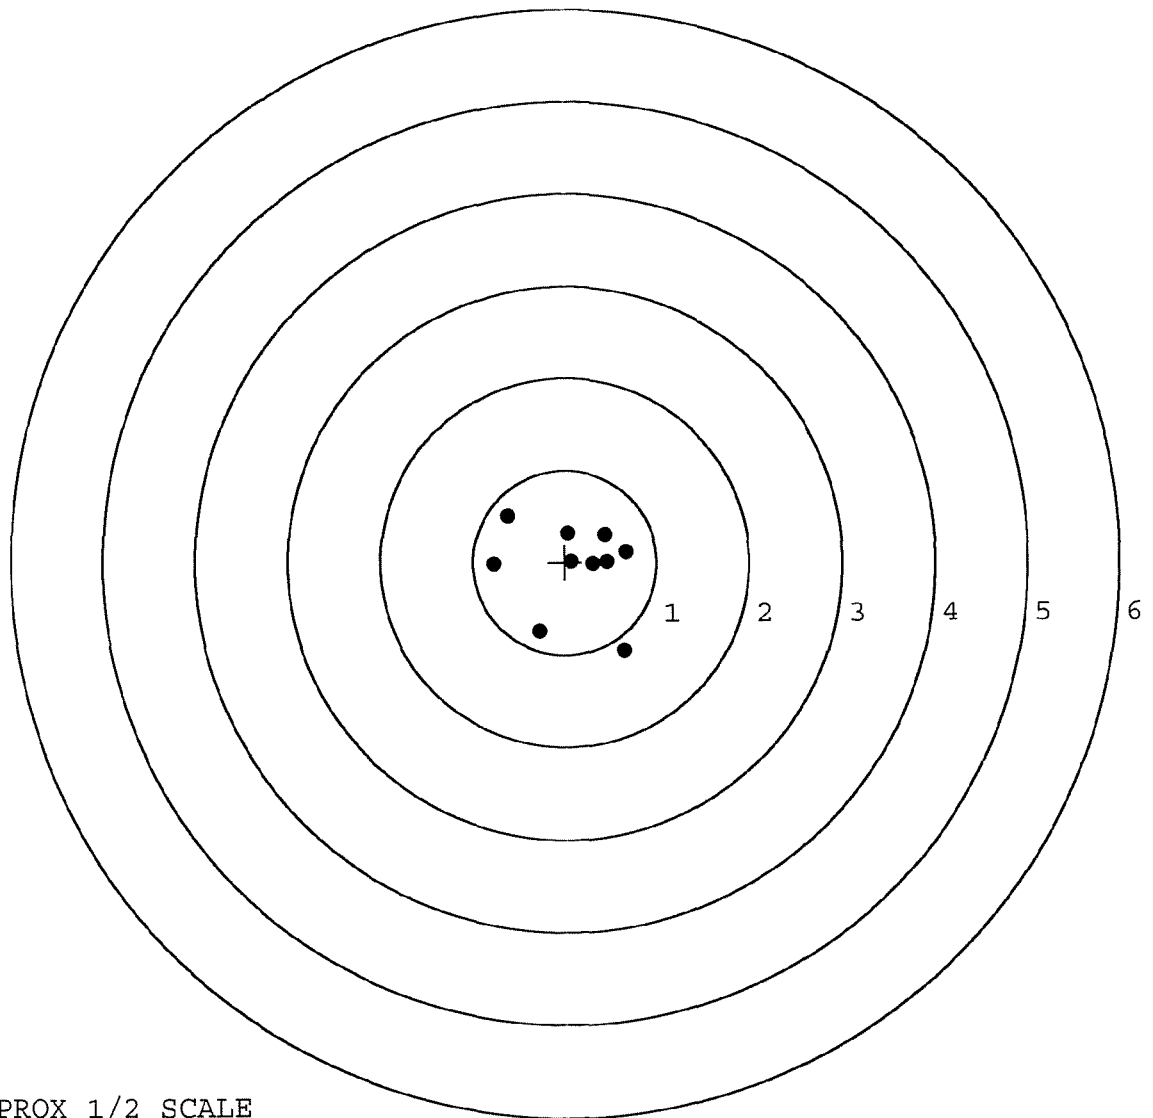


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348770. __0
TARGET NUMBER: 3
FILE DATE: 11/01/2004
FILE TIME: 12:00

X CENTROID: 0.037
Y CENTROID: -0.138
POA TO CENTROID: 0.142
HORZ SPREAD: 1.687
VERT SPREAD: 1.025
GROUP SPREAD: 1.921
MIN RADIUS: 0.340
MAX RADIUS: 1.006
MEAN RADIUS: 0.640
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.957	-0.545
2:	0.806	0.331
3:	0.538	-0.224
4:	0.351	-0.403
5:	0.046	-0.572
6:	-0.466	-0.651
7:	-0.439	-0.071
8:	-0.224	0.080
9:	-0.473	0.304
10:	-0.730	0.374

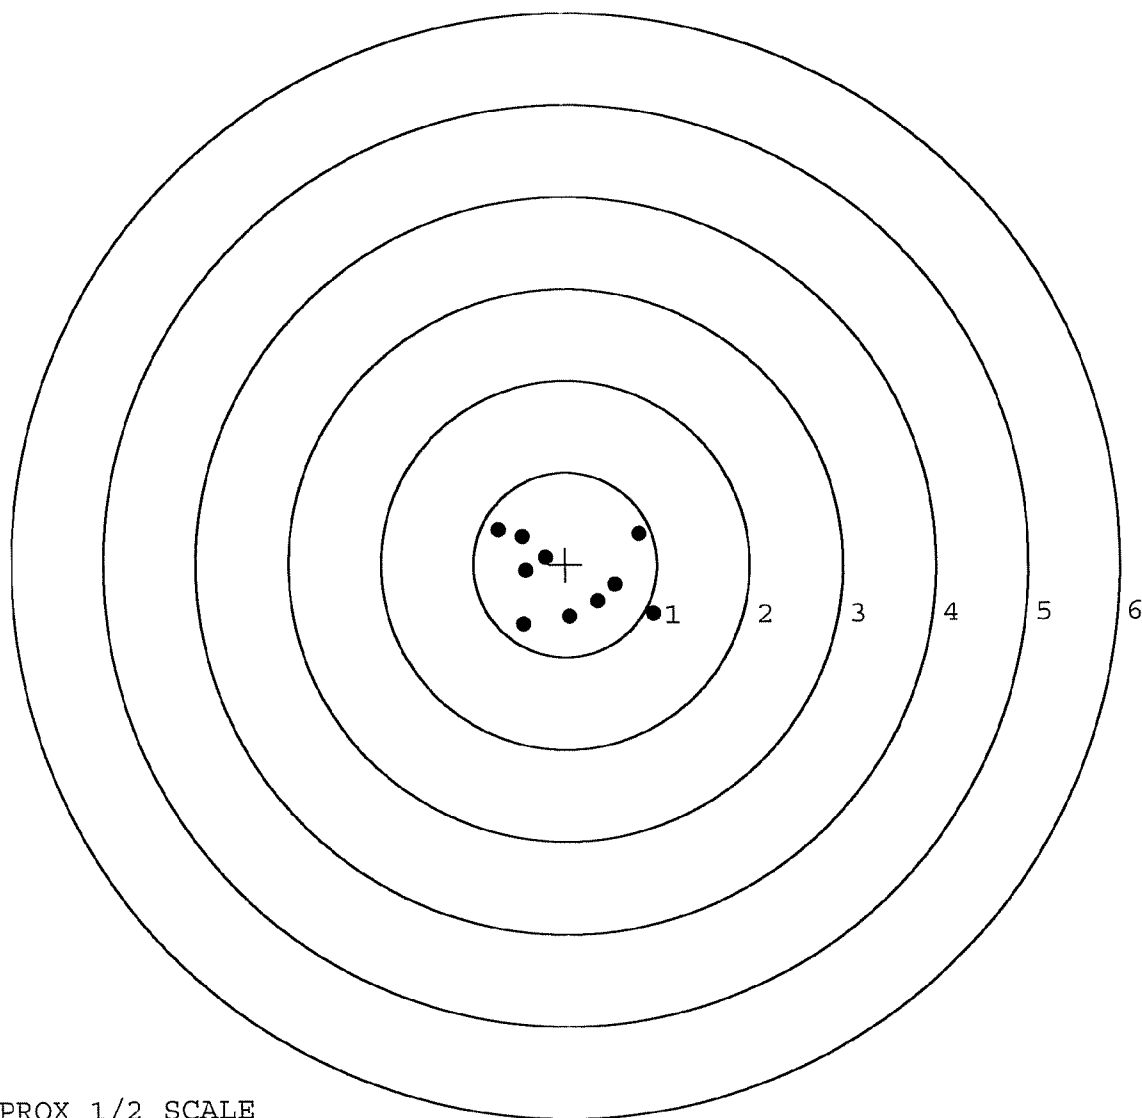


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348770. __0
TARGET NUMBER: 4
FILE DATE: 11/01/2004
FILE TIME: 12:00

POINT#	X	Y
1:	1.016	0.151
2:	-0.155	0.681
3:	-0.381	-0.596
4:	0.277	-0.313
5:	-0.332	-0.170
6:	0.145	0.055
7:	-0.124	0.282
8:	0.007	0.001
9:	-0.115	-0.219
10:	0.051	-0.300

X CENTROID: 0.039
Y CENTROID: -0.043
POA TO CENTROID: 0.058
HORZ SPREAD: 1.397
VERT SPREAD: 1.277
GROUP SPREAD: 1.584
MIN RADIUS: 0.054
MAX RADIUS: 0.996
MEAN RADIUS: 0.425
IN 1 IN DIAMETER: 7
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

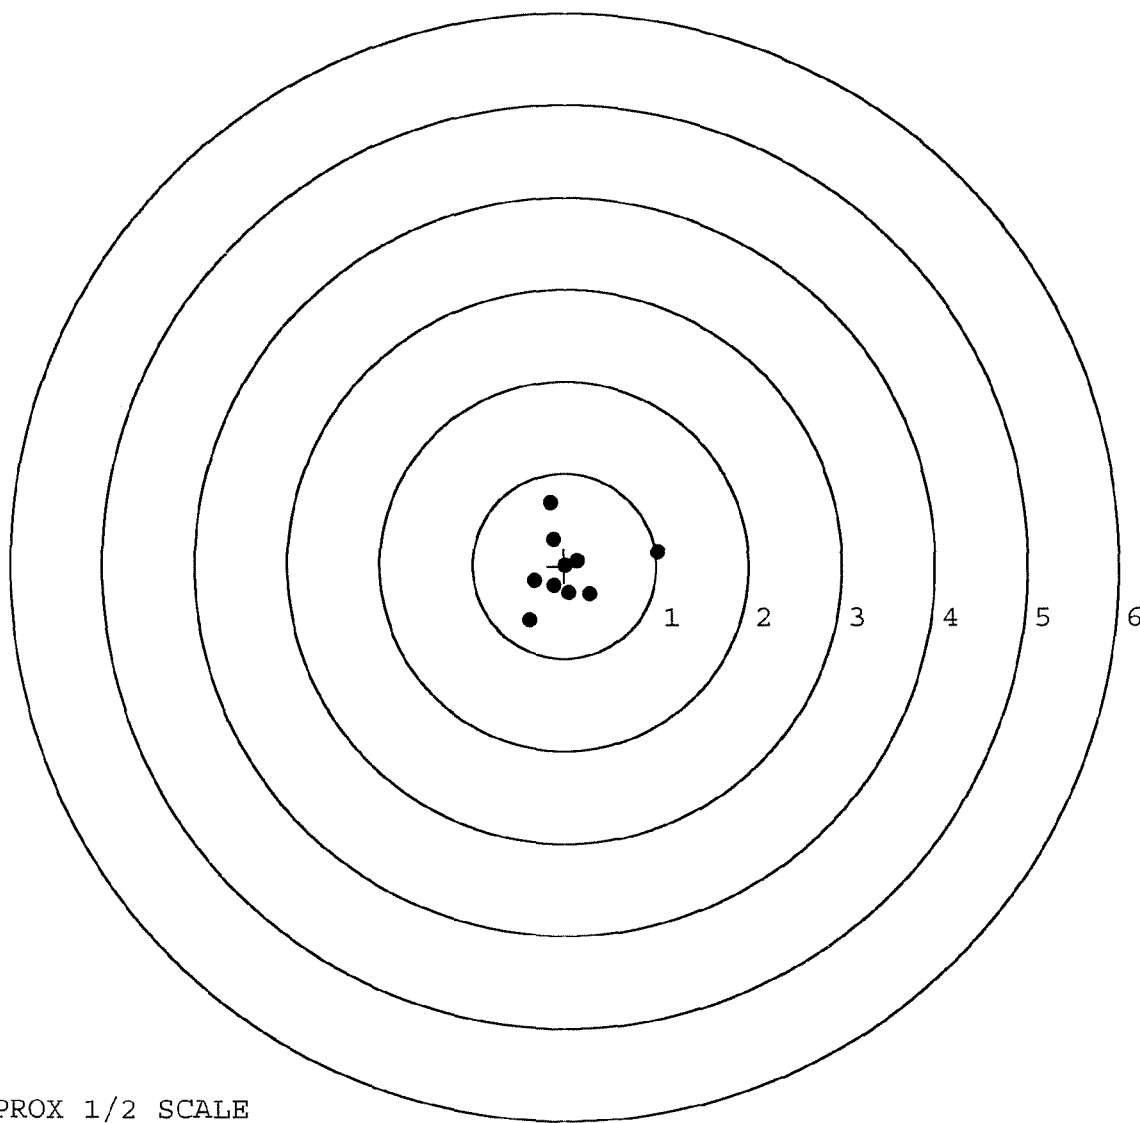


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348770.___0
TARGET NUMBER: 5
FILE DATE: 11/01/2004
FILE TIME: 12:00

X CENTROID: 0.008
Y CENTROID: -0.011
POA TO CENTROID: 0.013
HORZ SPREAD: 1.758
VERT SPREAD: 1.709
GROUP SPREAD: 2.059
MIN RADIUS: 0.200
MAX RADIUS: 1.112
MEAN RADIUS: 0.653
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	1.041	-0.239
2:	0.136	0.583
3:	-0.717	0.833
4:	-0.452	0.334
5:	-0.618	0.166
6:	0.207	-0.020
7:	0.518	0.060
8:	0.039	-0.374
9:	0.039	-0.579
10:	-0.118	-0.876

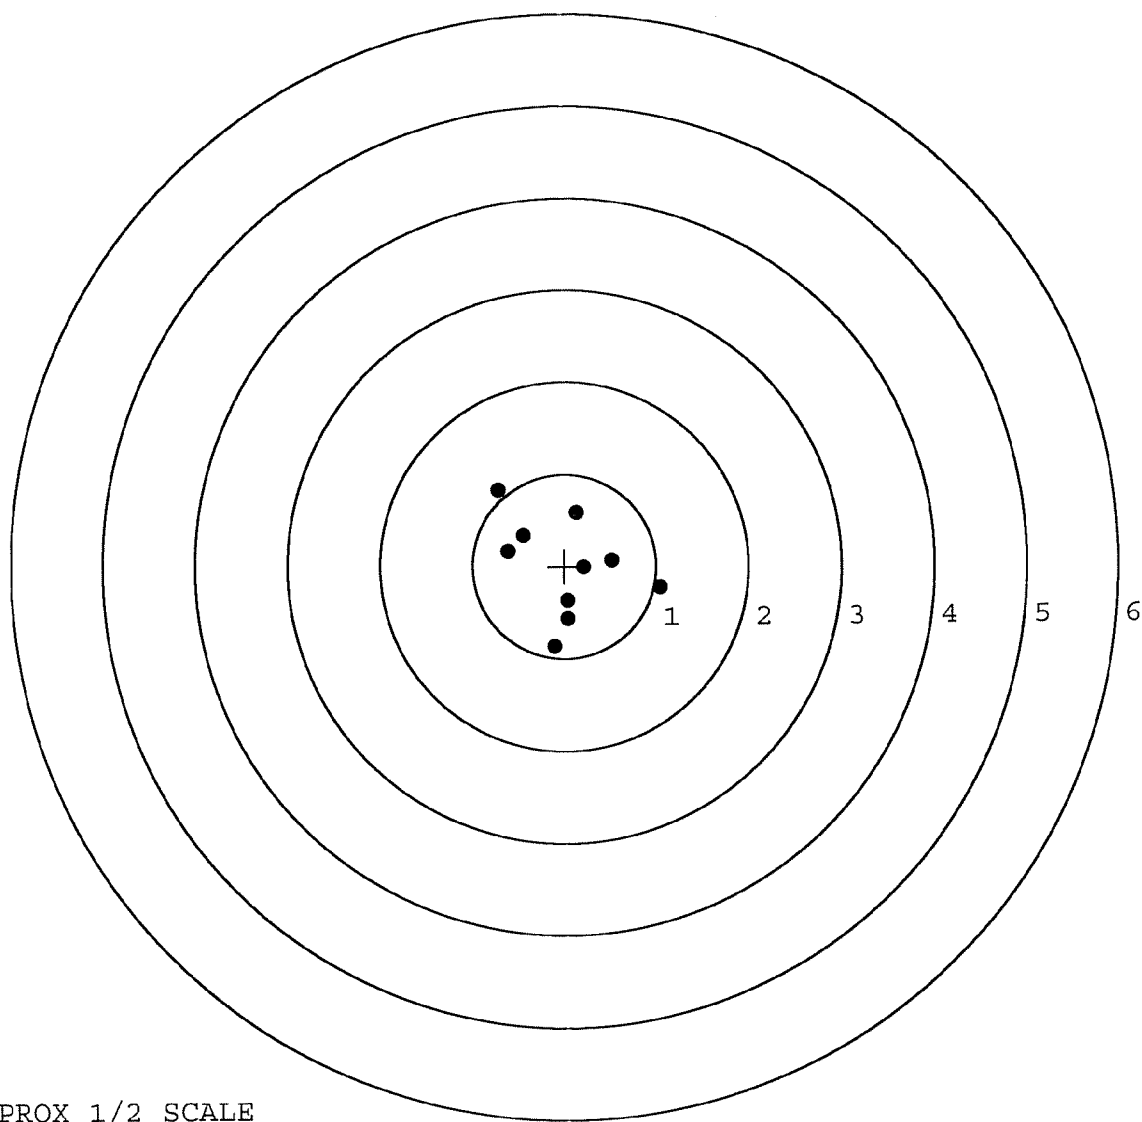

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R & E NUMBER	85644		
SERIAL NUMBER	C6348720		
LOG-IN DATE	9-28-04		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	10-7-04	RTL
560 A	RE-BARREL	10-8-04	AC
B	DRILL AND TAP	10-12-04	TRW
575	ASSEMBLE	10-8-04	RTL
600	PROOF	10-11-04	AC
605	CHECK HEADSPACE	10-12-04	RTL
610	DIS-ASSEMBLE GUN	10-12-04	RTL
612	MAGNAFLUX	OPERATOR	
615	ROLLMARK CALIBER	10/13/04	CB
618	ROTO-BLAST	10/14/04	LB
620	APPLY COATINGS	10/25/04	HP
625 A	FINAL ASSEMBLY	10-28-04	RTL
B	TRIGGER PULL TEST	11-3-04	DA
C	SAFETY "ON" FORCE	11-3-04	DA
D	SAFETY "OFF" FORCE	11-3-04	DA
E	FIRING PIN INDENT	11-3-04	DA
640	TARGET	11-1-04	TRW
655	FINAL INSPECT	11-3-04	AC
660	PACK	11-4-04	DA
		SHIP DATE	
QAR INSPECTION DATE			

Remington®



VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700™ H24

SERIAL NO.
C6348770

ORDER NO.
5716

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off, Marca Registrada Marque Deposee.

Ø1



5716 C6348770

UPC



0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6348770

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	7 25	89	RW
600	Proof	7 25	89	RW
607	Check Headspace			RW
610	Dis-assemble Gun			RW
612	Magnaflux Barrel Action		7/26/89	KR
	Magnaflux Bolt		7/26/89	KR
615	Rollmark Caliber		7/26/89	DS
7	Drill and Tap Sight Holes		7/27/89	WC
618	Polish Barrel <i>RB</i>		7/31/89	WB
620	Apply Coatings (Barrel Action)		8/2/89	TJA
	Apply Coating (Bolt)			
625	Final Assembly			
	A) Clean inside of Bolt Assembly		8/7/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		8/7/89	RW
	C) Inspect Ejector Hole for Chamfer		8/7/89	RW
	D) Oil Firing Pin Ass'y		8/7/89	RW
	E) Adjust Trigger Pull to Min Setting and Stake		8/11/89	J.C.

op. #	OP. NAME	READINGS			DATE	INIT
625 cont.	F) Safety On Force	6	6	6	8/11/89	RL
	G) Safety Off Force	3	3	3	8/11/89	RL
	H) Trigger Pull Test & Retainability					
	I) Firing Pin Indent	20	20.5	20	8/11/89	RL
	J) Assemble Stock				8/15/89	RL
	K) Assemble Swivel Studs				23 Aug 89	RL
	L) Attach Front and Rear Sight Assemblies				8/15/89	RL
	M) Iron Sight Alignment				8/15/89	RL
	N) Detach Front & Rear Sights & place in numbered container				8/15/89	RL
	O) Attach Scope to Rifle				4/15/89	RL
	P) Detach & Attach Scope 20 Times				8/15/89	RL
640	Gallery Target & Test	81 & 69L			8-18-89	DH
	A) Time				8-18-89	DH
	B) Malfunctions				8-18-89	DH
	C) Pierced Primers				8-18-89	DH
	D) Optical Clarity of Scope				8-18-89	DH
645	Inspect for Live Ammo				8-18-89	DH
655	Final Inspection					
	A) Headspace				23 Aug 89	RL
	B) Trigger Pull	283	285	281	23 Aug 89	RL
	C) Function				23 Aug 89	RL
660	Pack				19 Sep 89	RL

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06348770
21 Aug 1989

CENTROIDAL DISTANCES

0 TO	1	.443199
1 TO	2	.0475079
1 TO	3	.268963
1 TO	4	.324401
1 TO	5	.220293


3+ <----FOR

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.3478
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0534
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .351876
THE AMR FOR THIS RIFLE IS: .9264

18 Aug 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6348770

CENTERFIRE PATTERNS # 1

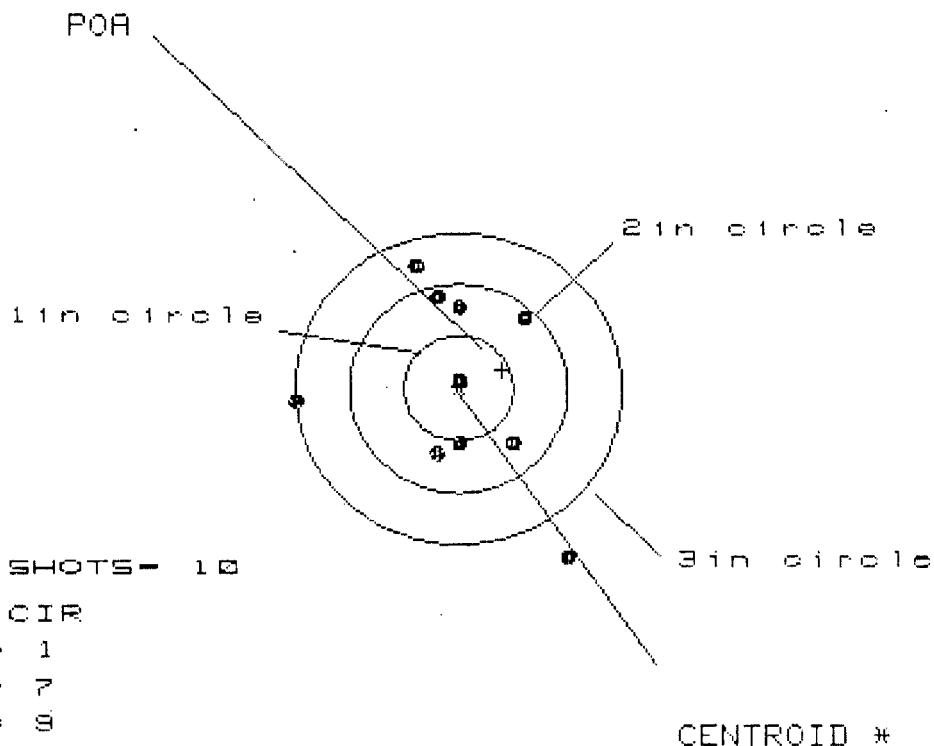

OF SHOTS- 10

IN CIR

1in = 1

2in = 7

3in = 9

HS= 2.475

VS= 2.808

GS= 3.108


PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.983	.732	.559
MINIMUM X	-1.492	-1.383	-.413
MAXIMUM Y	1.148	.964	.924
MINIMUM Y	-1.660	-.844	-.884
CENTROID X	-.405	-.514	-.342
CENTROID Y	-.180	.004	.044
POA TO CENTROID in.	.443	.514	.344
MIN RADIUS	.069	.152	.175
MEAN RADIUS	.930	.815	.720
MAX RADIUS	1.929	1.419	1.012
HORIZONTAL SPREAD	2.475	2.115	.973
VERTICAL SPREAD	2.808	1.808	1.808
EXTREME SPREAD	3.108	2.269	1.929
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	9		

18 Aug 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6348770

CENTERFIRE PATTERNS # 2

POA

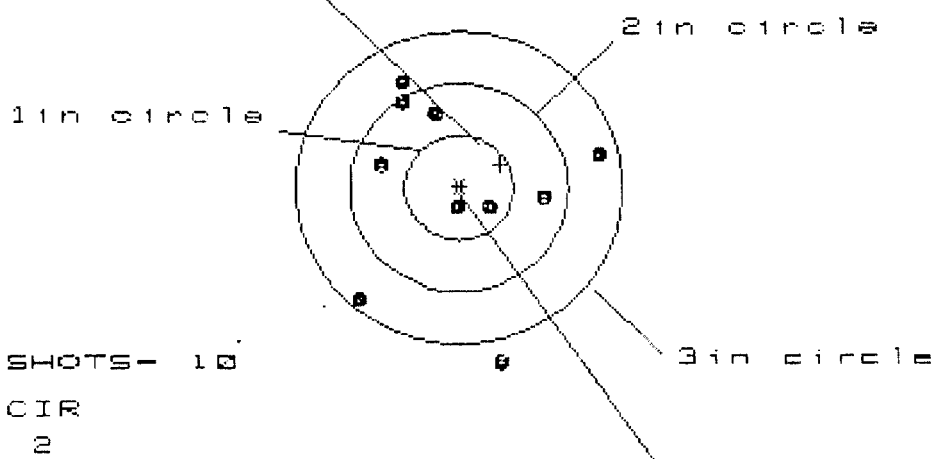

OF SHOTS- 10

IN CIR

1in - 2

2in - 6

3in - 9

HS= 2.226

VS= 2.665

GS= 2.800


CENTROID *

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.299	1.339	1.228
MINIMUM X	:	-.927	-.887	-.751
MAXIMUM Y	:	1.016	.833	.681
MINIMUM Y	:	-1.649	-1.215	-.536
CENTROID X	:	-.381	-.421	-.310
CENTROID Y	:	-.221	-.038	.114
POA TO CENTROID in.	:	.441	.423	.331
MIN RADIUS	:	.201	.387	.439
MEAN RADIUS	:	.930	.835	.747
MAX RADIUS	:	1.688	1.504	1.229
HORIZONTAL SPREAD	:	2.226	2.226	1.979
VERTICAL SPREAD	:	2.665	2.048	1.217
EXTREME SPREAD	:	2.800	2.624	1.981
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

18 Aug 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6348770

CENTERFIRE PATTERNS # 3

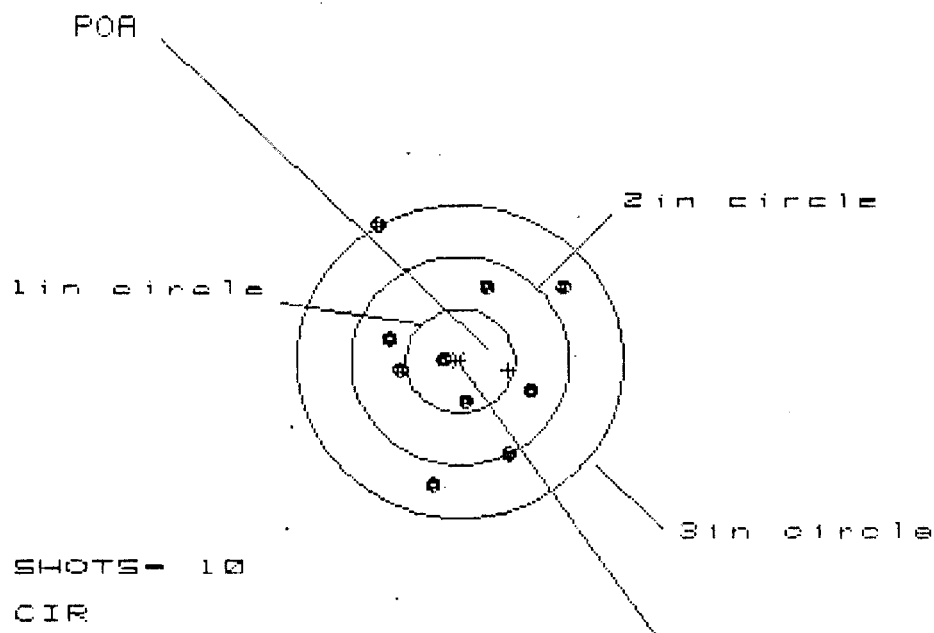

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 6

3 in = 10

HS= 1.726

VS= 2.450

GS= 2.495

CENTROID #


PATTERN #	3	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.993	.911	.867
MINIMUM X	-.733	-.755	-.799
MAXIMUM Y	1.277	.884	.755
MINIMUM Y	-1.173	-1.031	-.919
CENTROID X	-.451	-.369	-.325
CENTROID Y	.085	-.057	.071
POA TO CENTROID in.	.459	.374	.332
MIN RADIUS	.135	.239	.258
MEAN RADIUS	.824	.741	.704
MAX RADIUS	1.473	1.226	1.108
HORIZONTAL SPREAD	1.726	1.666	1.666
VERTICAL SPREAD	2.450	1.915	1.675
EXTREME SPREAD	2.495	2.244	1.753
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	10		

18 Aug 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6348770

CENTERFIRE PATTERNS

4

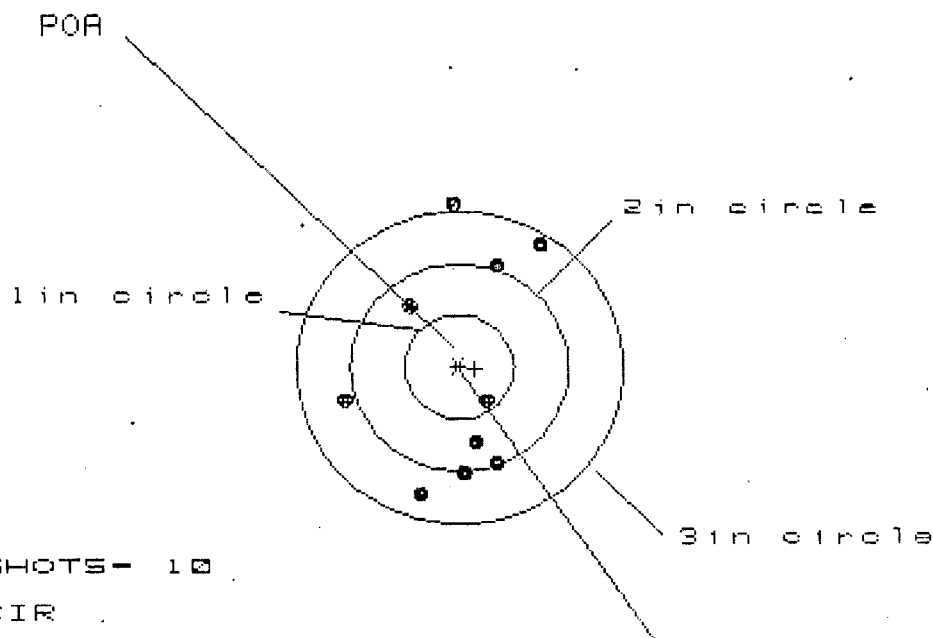

OF SHOTS- 10

IN CIR

1in = 1

2in = 5

3in = 9

HS= 1.783

VS= 2.798

GS= 2.820


CENTROID #

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.778	.777	.474
MINIMUM X	:	-1.005	-1.006	-.909
MAXIMUM Y	:	1.613	1.389	1.369
MINIMUM Y	:	-1.185	-1.005	-.832
CENTROID X	:	-.145	-.144	-.241
CENTROID Y	:	.014	-.166	-.339
POA TO CENTROID in.	:	.145	.219	.416
MIN RADIUS	:	.415	.274	.302
MEAN RADIUS	:	1.033	.924	.798
MAX RADIUS	:	1.613	1.591	1.449
HORIZONTAL SPREAD	:	1.783	1.783	1.383
VERTICAL SPREAD	:	2.798	2.394	2.201
EXTREME SPREAD	:	2.820	2.651	2.321
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		9	

18 Aug 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6346770

CENTERFIRE PATTERNS # 5

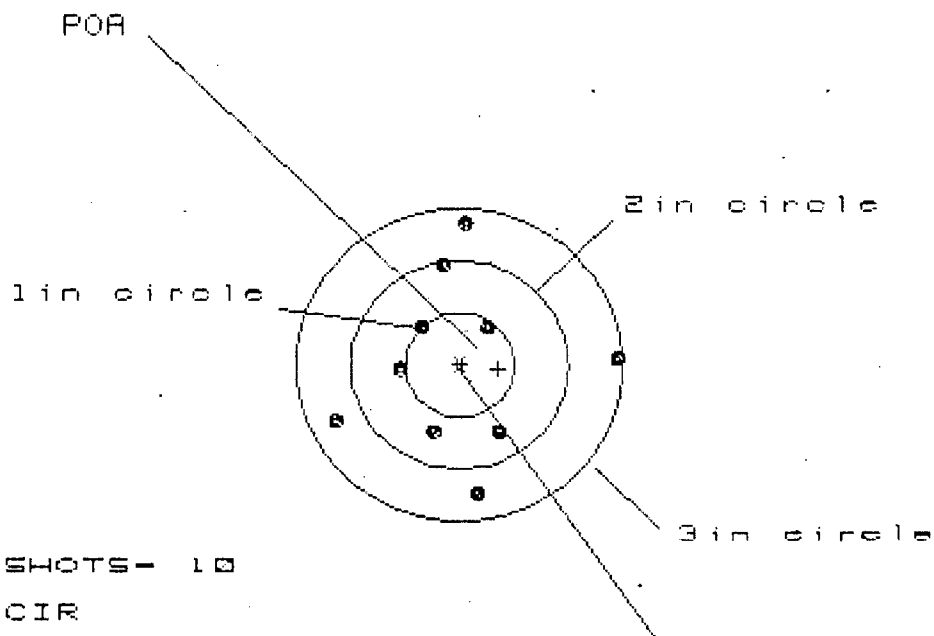

OF SHOTS- 10

IN CIR

1in = 2

2in = 6

3in = 10

HS= 2.668

VS= 2.548

GS= 2.749

CENTROID #

PATTERN #	5	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.493	.504	.527
MINIMUM X	-1.175	-1.009	-.986
MAXIMUM Y	1.321	1.330	1.127
MINIMUM Y	-1.227	-1.218	-1.051
CENTROID X	-.357	-.523	-.546
CENTROID Y	.035	.026	-.141
POA TO CENTROID in.	.359	.524	.564
MIN RADIUS	.452	.364	.368
MEAN RADIUS	.915	.832	.761
MAX RADIUS	1.496	1.343	1.130
HORIZONTAL SPREAD	2.668	1.513	1.513
VERTICAL SPREAD	2.548	2.548	2.178
EXTREME SPREAD	2.749	2.553	2.196
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	10		

RECEIVING AND ESTIMATING REPORT

COMMENTS

M-24 SNIPER

INITIAL CUSTOMER ORDER NO.

JJM

DATE RECEIVED

05/29/90

DATE OPENED

05/31/90

DATE CODE

SERIAL NUMBER

C6348770

MODEL AND GRADE

9999

7.62

NATO

ORDER

R

90-15642

ACCESSORIES

W/STUDS

W/SWIVELS

SOFT CASE

SCOPE BASE

FROM:

TRAFFIC MANAGEMENT OFFICE
BLDG 1702 - BAY 3
MCGUIRE AFB NJ 08641

SHIP TO:

TRAFFIC MANAGEMENT OFFICE
BLDG 1702 - BAY 3
MCGUIRE AFB NJ 08641

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE

☐

PROM. DATE

ESTIMATED

VIA

UPS

REPAIR CHARGE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

GUN CONDITION:

☒

NEW

☐

SLIGHTLY WORN

☐

VERY WORN

☐

MISUSED

☐

MARRED

CUSTOMER'S REQUEST

REPLACE TRIGGER ASSY.

MAIN FAULT

PARTS

REPAIRMAN

GALLERY TESTER

PROOF

DATE

CLEAN

DATE

TEST

DATE

TARGET

DATE

PATTERN

DATE

RD6925 REV. 4/88

OFFICE COPY

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400063579

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. 6348770
DATE 12 Mar 90
TESTER JS

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	235	247	2.48	262	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	244	242	2.45	257	
PULL #3	246	259	2.52	268	
PULL #4	251	266	2.57	268	
PULL #5	261	278	2.52	270	
TOTAL	1237	1292	12.54		
AVG.	2.474	2.584	2.508		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	351	341		
PULL #2	345	331		
PULL #3	347	331		
PULL #4	343	331		
PULL #5	354	332		
TOTAL	1740	1666		
AVG.	3.48	3.332		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	447	438		
PULL #2	436	438		
PULL #3	439	431		
PULL #4	439	430		
PULL #5	442	434		
TOTAL	2203	2161		
AVG.	4.406	4.322		

REPAIR AND ESTIMATING REPORT

COMMENTS

ORDER
R 98-24059

CUSTOMER ORDER NO.

JJM

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

11/12/98

11/13/98

C6348770

700 7.62

NATO

ACCESSORIES

FROM:

SHIP TO:

COMMANDER
1ST BN 1ST SFG A UNIT 35123
ATTN PROPERTY BOOK OFFICER
PSC 560 TORII STA. CA 96376

COMMANDER
1ST BN 1ST SFG A UNIT 35123
ATTN PROPERTY BOOK OFFICER
PSC 560 TORII STA. CA
96376

CUST NO: 198287 C.O.D.

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
- ☐ LIGHTLY WORN
- ☐ WORN
- ☐ VERY WORN
- ☐ UNREPAIRABLE
- ☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

PARTS

COMMENTS

Barrel

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD5925 REV. 7/97

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6348770
19 Feb 1999

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0054
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .1062
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .106337

THE AMR FOR THIS RIFLE IS: 1.183

CENTROIDAL DISTANCES

0 TO	1	.199912
1 TO	2	.39057
1 TO	3	.565305
1 TO	4	.349585
1 TO	5	.423457


$3^{\frac{5}{2}} + 1^{\frac{4}{2}} <-----POA$

PATTERN #: 5
 POA TO CENTROID: .271
 MIN RADIUS : .907
 MEAN RADIUS : 1.370
 MAX RADIUS : 2.239
 CENTROID X : -.199
 CENTROID Y : .184

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348778

CENTERFIRE PATTERN # 5

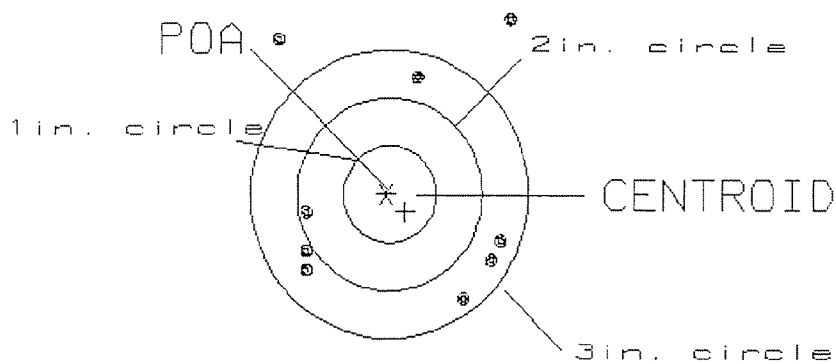

OF SHOTS= 10

IN CIRCLE

HS= 2.50

0

VS= 2.94

1

GS= 3.45


8

PATTERN #: 4
 POA TO CENTROID: .545
 MIN RADIUS : .069
 MEAN RADIUS : 1.201
 MAX RADIUS : 2.944
 CENTROID X : .516
 CENTROID Y : .177

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348770

CENTERFIRE PATTERN # 4

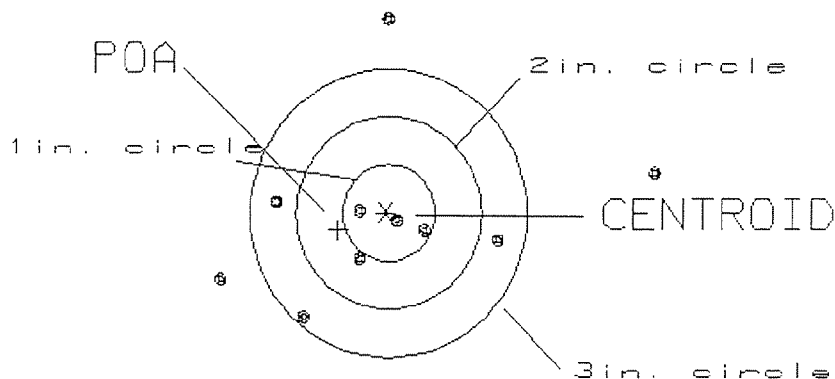

OF SHOTS= 10

IN CIRCLE

HS= 4.68
 VS= 3.05
 GS= 4.82


3
 4
 7

PATTERN #: ☐ 3 ☐
 POA TO CENTROID: .366
 MIN RADIUS : .125
 MEAN RADIUS : 1.068
 MAX RADIUS : 2.302
 CENTROID X : -.366
 CENTROID Y : -.017

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348778

CENTERFIRE PATTERN # 3

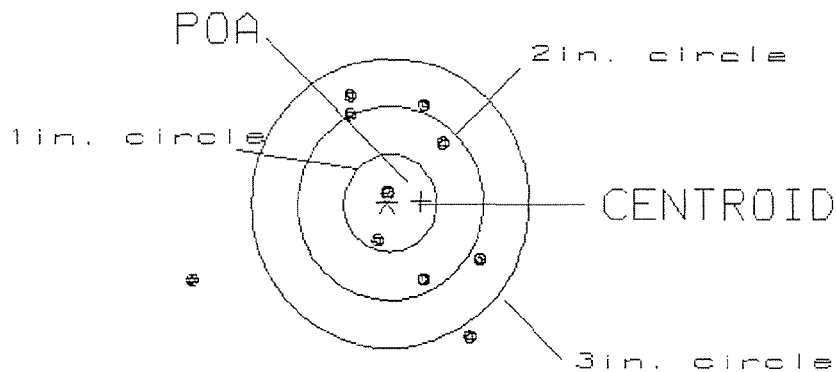

OF SHOTS= 10

IN CIRCLE

HS= 3.18

2

VS= 2.51

4

GS= 3.18


8

PATTERN #: 2
 POA TO CENTROID: .233
 MIN RADIUS : .322
 MEAN RADIUS : 1.485
 MAX RADIUS : 2.401
 CENTROID X : -.175
 CENTROID Y : .153

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348770

CENTERFIRE PATTERN # 2

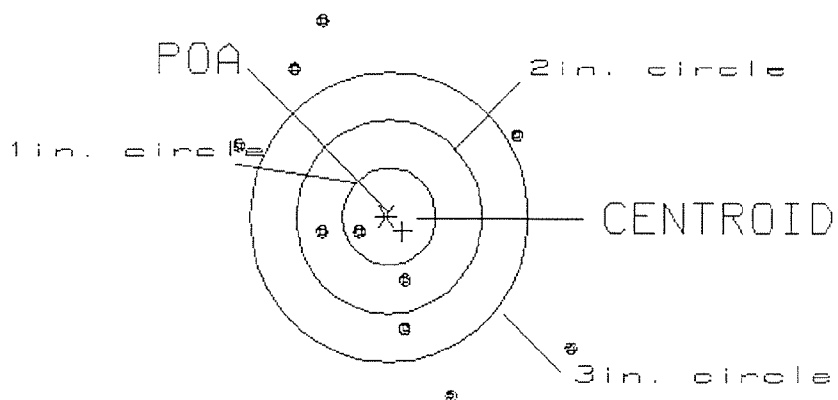

OF SHOTS= 10

IN CIRCLE

HS= 3.62

1

VS= 3.93

3

GS= 4.40


4

PATTERN #: ☐ 1 ☐
 POA TO CENTROID: .200
 MIN RADIUS : .431
 MEAN RADIUS : .790
 MAX RADIUS : 1.397
 CENTROID X : .197
 CENTROID Y : .034

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348770

CENTERFIRE PATTERN # 1

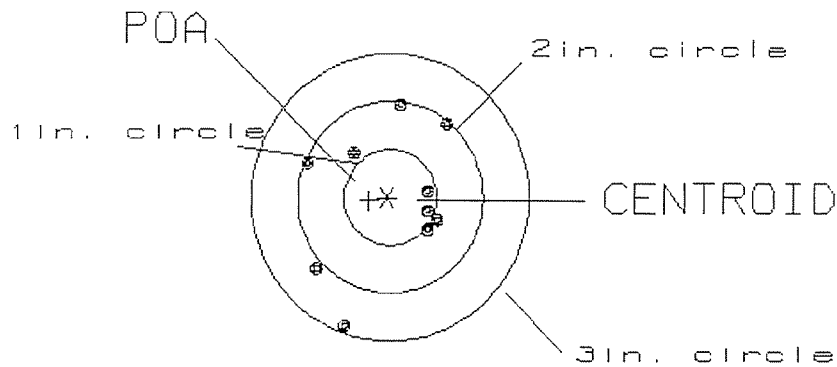

OF SHOTS= 10

IN CIRCLE

H3= 1.51
 V3= 2.29
 G3= 2.40

3
 7
 10