

C6348774

MODEL 700TM M24

Model SMSTM

Action

Barrel Length

Capacity

Order No. 5716

*Includes 1 in chamber.

Remington

Serial
Number: C6348774

Model: M24 SWS



RE00089043

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6348774.___0

FILE DATE AND TIME: 01/12/2005 11:05


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.058
The Average Y Centroid of the Five Target Set:	-0.076
The Average Point of Impact of the Five Target Set:	0.095
The Average Mean Radius of the Five Target Set:	0.856
The Distance from POA to Centroid Target #1:	0.197
The Distance from Centroid Target #2 to Centroid Target #1:	0.337
The Distance from Centroid Target #3 to Centroid Target #1:	0.181
The Distance from Centroid Target #4 to Centroid Target #1:	0.129
The Distance from Centroid Target #5 to Centroid Target #1:	0.079

SERIAL NUMBER: C6348774. __0
TARGET NUMBER: 1
FILE DATE: 01/12/2005
FILE TIME: 11:05

POINT#	X	Y
1:	0.614	-1.377
2:	0.503	-1.007
3:	0.929	0.039
4:	-0.290	-0.404
5:	-0.747	-0.443
6:	-1.354	-0.047
7:	-0.097	0.064
8:	0.107	0.236
9:	-0.233	0.472
10:	-0.607	0.882

X CENTROID: -0.118
Y CENTROID: -0.159
POA TO CENTROID: 0.197
HORZ SPREAD: 2.283
VERT SPREAD: 2.259
GROUP SPREAD: 2.568
MIN RADIUS: 0.223
MAX RADIUS: 1.421
MEAN RADIUS: 0.824
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 5
in 3 IN DIAMETER: 10

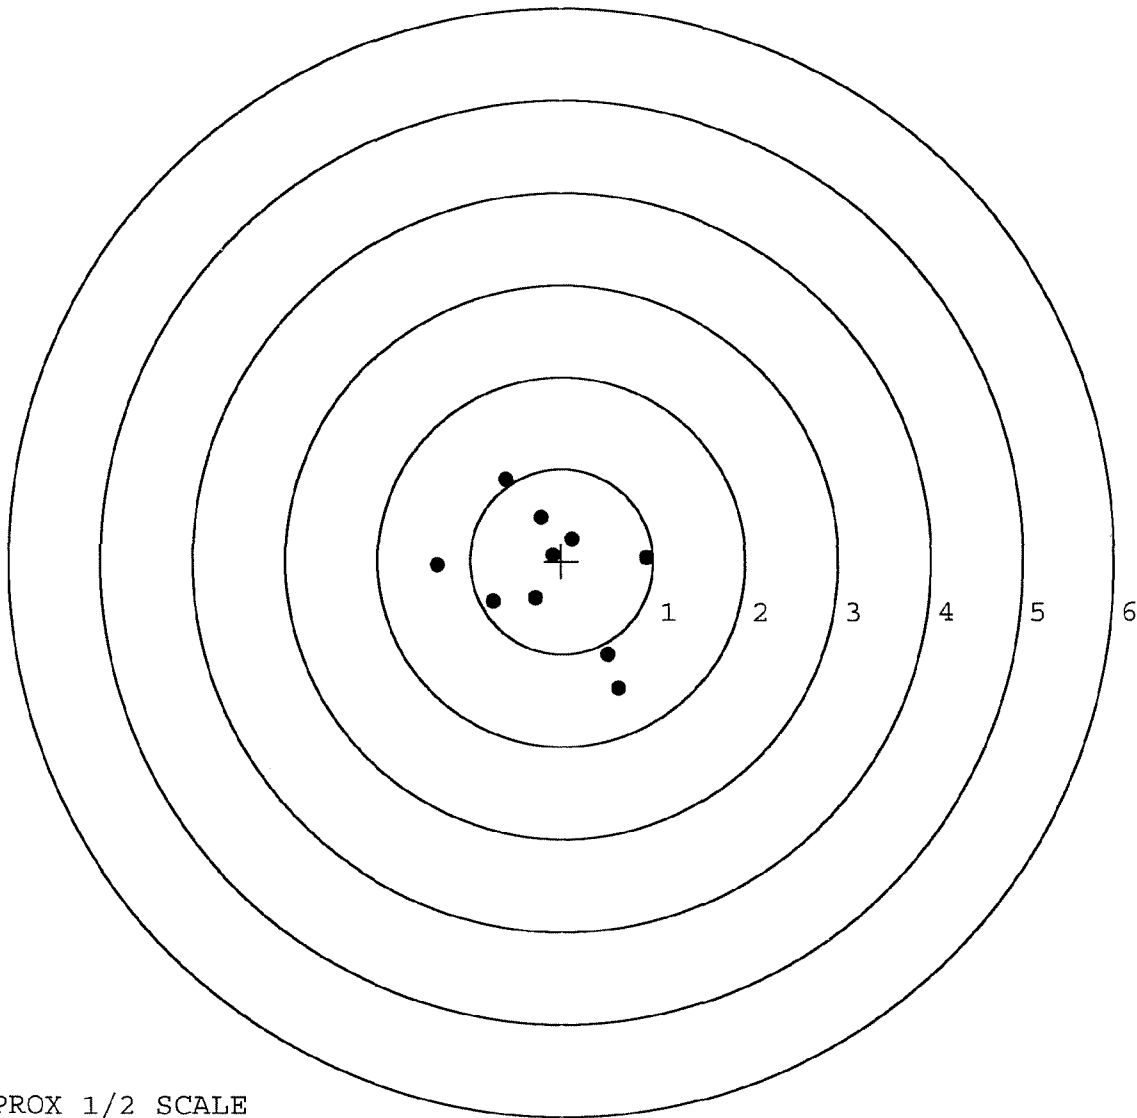


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348774. __0
TARGET NUMBER: 2
FILE DATE: 01/12/2005
FILE TIME: 11:05

POINT#	X	Y
1:	0.855	0.020
2:	0.202	-0.923
3:	-0.515	-1.160
4:	-0.288	-0.416
5:	0.369	0.244
6:	0.210	0.640
7:	1.007	1.086
8:	-0.247	0.482
9:	-0.279	0.811
10:	-0.974	0.646

X CENTROID: 0.034
Y CENTROID: 0.143
POA TO CENTROID: 0.147
HORZ SPREAD: 1.981
VERT SPREAD: 2.246
GROUP SPREAD: 2.713
MIN RADIUS: 0.350
MAX RADIUS: 1.414
MEAN RADIUS: 0.851
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 6
in 3 IN DIAMETER: 10

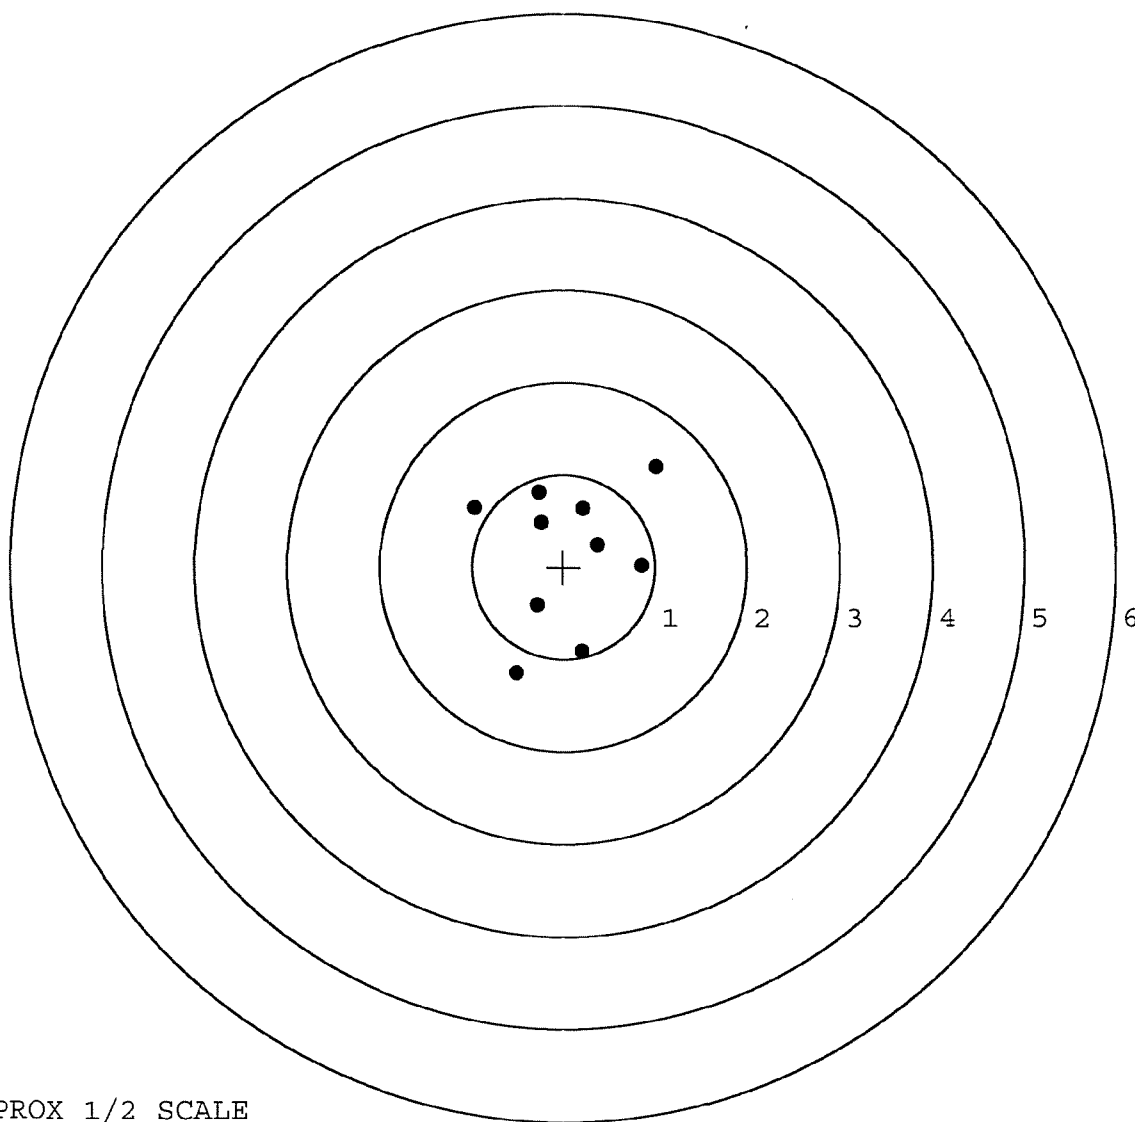


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348774. __0
TARGET NUMBER: 3
FILE DATE: 01/12/2005
FILE TIME: 11:05

POINT#	X	Y
1:	0.176	-1.722
2:	-0.539	-0.846
3:	-0.098	-0.758
4:	0.115	-0.241
5:	0.561	0.041
6:	0.487	0.321
7:	0.010	0.344
8:	-1.007	0.132
9:	-0.202	1.192
10:	0.429	1.388

X CENTROID: -0.007
Y CENTROID: -0.015
POA TO CENTROID: 0.016
HORZ SPREAD: 1.568
VERT SPREAD: 3.110
GROUP SPREAD: 3.120
MIN RADIUS: 0.257
MAX RADIUS: 1.717
MEAN RADIUS: 0.894
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 6
in 3 IN DIAMETER: 9

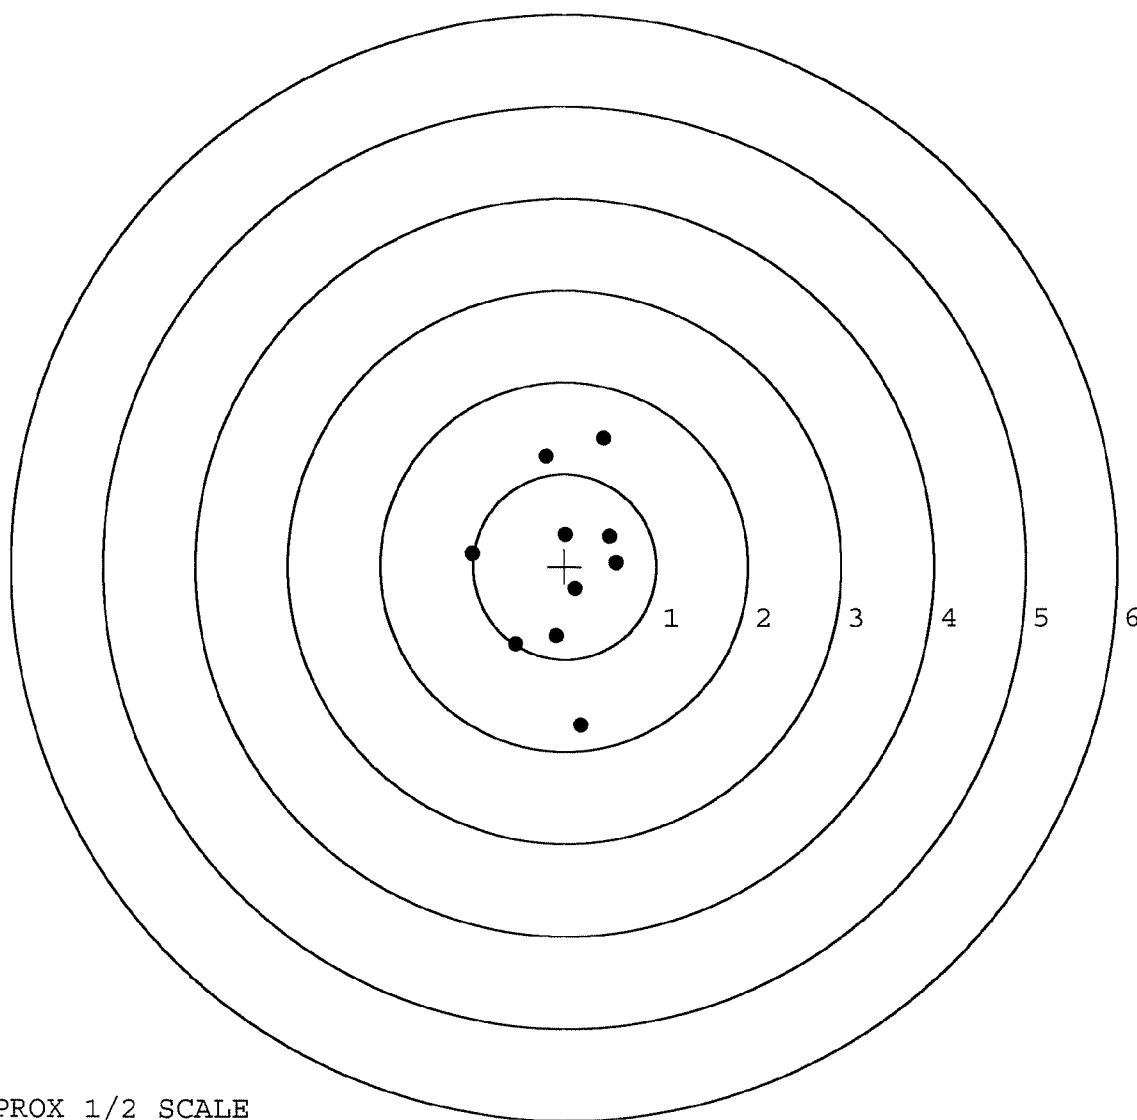


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348774. __0
TARGET NUMBER: 4
FILE DATE: 01/12/2005
FILE TIME: 11:05

POINT#	X	Y
1:	-0.073	-1.540
2:	-0.016	-1.341
3:	0.429	-0.493
4:	-0.578	-0.303
5:	0.403	0.177
6:	0.256	-0.091
7:	-0.378	0.692
8:	-0.242	0.041
9:	-0.165	0.278
10:	0.130	0.115

X CENTROID: -0.023
Y CENTROID: -0.247
POA TO CENTROID: 0.248
HORZ SPREAD: 1.007
VERT SPREAD: 2.232
GROUP SPREAD: 2.253
MIN RADIUS: 0.320
MAX RADIUS: 1.294
MEAN RADIUS: 0.668
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 10

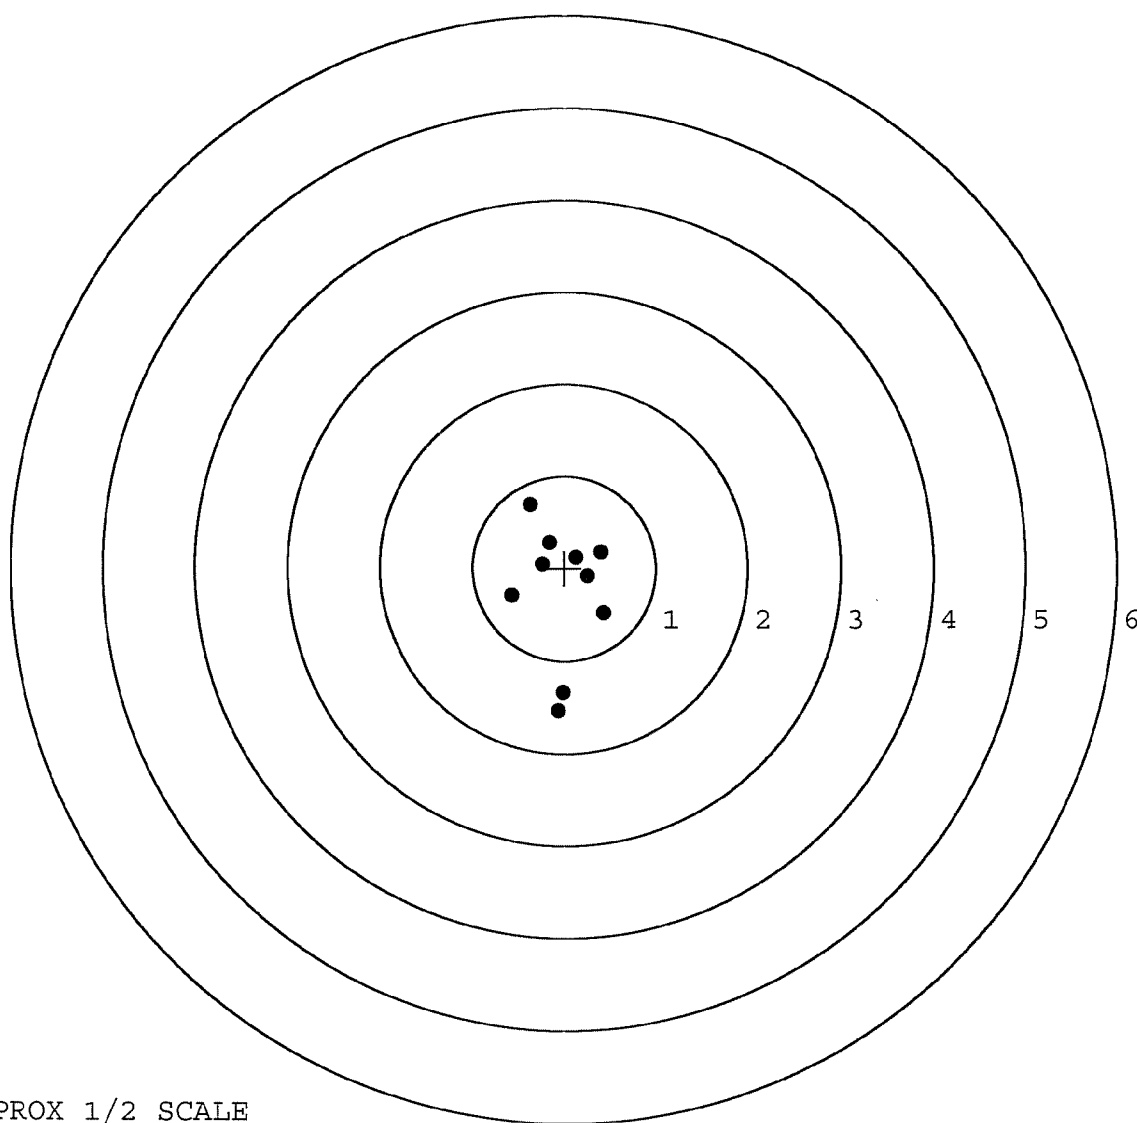


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348774.___0
TARGET NUMBER: 5
FILE DATE: 01/12/2005
FILE TIME: 11:05

POINT#	X	Y
1:	1.008	-1.662
2:	0.008	-1.155
3:	0.415	-0.159
4:	0.392	0.015
5:	0.485	1.172
6:	0.060	0.571
7:	-0.391	0.460
8:	-0.834	0.456
9:	-1.331	-0.093
10:	-1.555	-0.644

X CENTROID: -0.174
Y CENTROID: -0.104
POA TO CENTROID: 0.203
HORZ SPREAD: 2.563
VERT SPREAD: 2.834
GROUP SPREAD: 2.882
MIN RADIUS: 0.579
MAX RADIUS: 1.956
MEAN RADIUS: 1.045
IN 1 IN DIAMETER: 0
IN 2 IN DIAMETER: 5
in 3 IN DIAMETER: 9

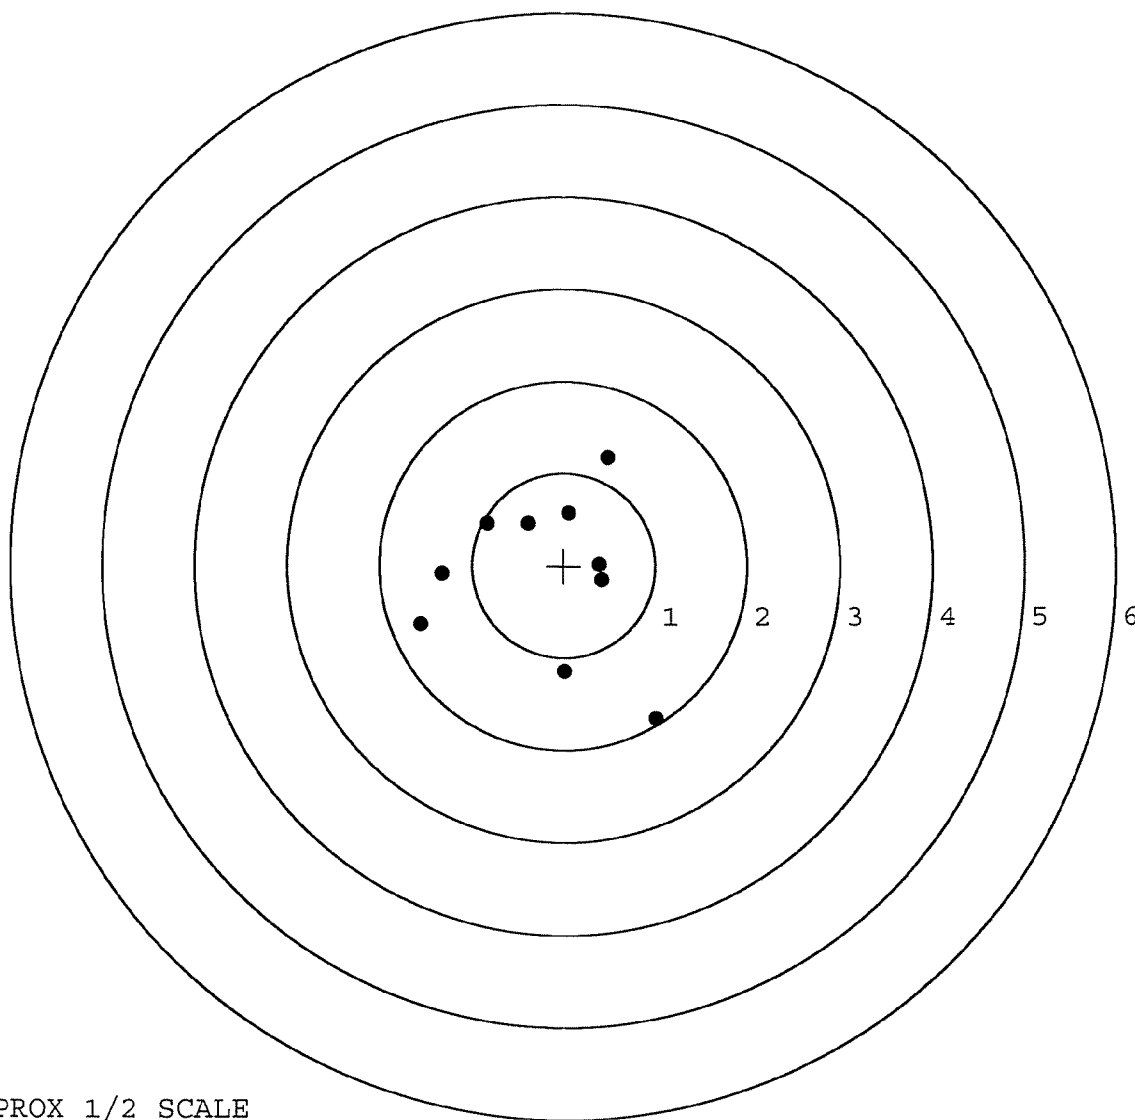

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R & E NUMBER	89043		
SERIAL NUMBER	C 6348774		
LOG-IN DATE	12-6-04		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	12-8-04	AC
560 A	RE-BARREL	12-15-04	RTZ
B	DRILL AND TAP	12-27-04	TRW
575	ASSEMBLE	12-16-04	RTZ
600	PROOF	12-16-04	RTZ
605	CHECK HEADSPACE	12-16-04	RTZ
610	DIS-ASSEMBLE GUN	12-27-04	RTZ
612	MAGNAFLUX	OPERATOR	
615	ROLLMARK CALIBER	12-27-04	CW
618	ROTO-BLAST	12/28/04	DB
620	APPLY COATINGS	1/3/05	H
625 A	FINAL ASSEMBLY	1-10-05	RTZ
B	TRIGGER PULL TEST	NA	
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	1-12-05	TRW
655	FINAL INSPECT	1-13-05	AC
660	PACK	3-1-05	RTZ
		SHIP DATE	
QAR INSPECTION DATE			

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER

R 95-10964

INITIAL CUSTOMER ORDER NO.

FJB

W/10X SCOPE SNIPER W/DEPLOYMENT KIT

ATTN: FRED MARTIN

scope S/N 90 0226

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

03/30/95

03/31/95

EJ 10-89

C6348774

700

7.62

NATO

ACCESSORIES

SLING STRAP

SCOPE MNTS

SCOPE BASE

HARD CASE

FROM:

SHIP TO:

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON

AL 36201-5025

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON

AL
36201-5025

CUST NO: 098397 C.O.D

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

7-16-96

UPS

GUN CONDITION

☐ NEW

☐ LIGHTLY WORN

☐ WORN

☐ VERY WORN

☐ UNREPAIRABLE

☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

PARTS

COMMENTS

NEW BARREL
Stock
TRIGGER ASSY
FIRING PIN ASSY

Front & Rear Sight Assy

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 1/94

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	5.5	5	6			7-16	REP
	G) Safety Off Force	5	4	4			7-16	REP
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent	.0235	.023	.023			7-16	REP
	J) Assemble Stock						7-16	REP
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle						7-16	REP
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test							
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo							
655	Final Inspection							
	A) Headspace							
	B) Trigger Pull	261	263	261	2.67	2.65	8/2	SF
	C) Function							
660	Pack							

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		7-16	REP
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		7-16	REP
	C) Inspect Ejector Hole for Chamfer		7-16	REP
	D) Oil Firing Pin Ass'y		7-16	REP
	E) Adjust Trigger Pull to Min Setting and Stake			

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. C6348774

DATE 7/23/96

TESTER SF

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.50	2.50		2.64	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.59	2.45		2.67	
PULL #3	2.45	2.42		2.65	
PULL #4	2.52	2.42		2.65	
PULL #5	2.45	2.31		2.63	
TOTAL	12.51	12.10		13.24	
AVG.	2.502	2.42		2.648	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.17	3.29		
PULL #2	3.18	3.24		
PULL #3	3.06	3.35		
PULL #4	3.09	3.24		
PULL #5	3.13	3.29		
TOTAL	15.63	16.41		
AVG.	3.126	3.282		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.34	4.12		4.12
PULL #2	4.29	4.14		4.19
PULL #3	4.33	4.15		4.17
PULL #4	4.27	4.15		4.17
PULL #5	4.39	4.16		4.12
TOTAL	21.62	20.72		20.77
AVG.	4.324	4.144		4.154

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6348774
1 Jan 1900

CENTROIDAL DISTANCES

0 TO 1	.494313
1 TO 2	.204519
1 TO 3	.438837
1 TO 4	.144586
1 TO 5	.647126


$\bar{x}_s$ <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.1592
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .1768
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .237914
THE AMR FOR THIS RIFLE IS: 1.135

1 Jan 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06348774

CENTERFIRE PATTERNS # 1

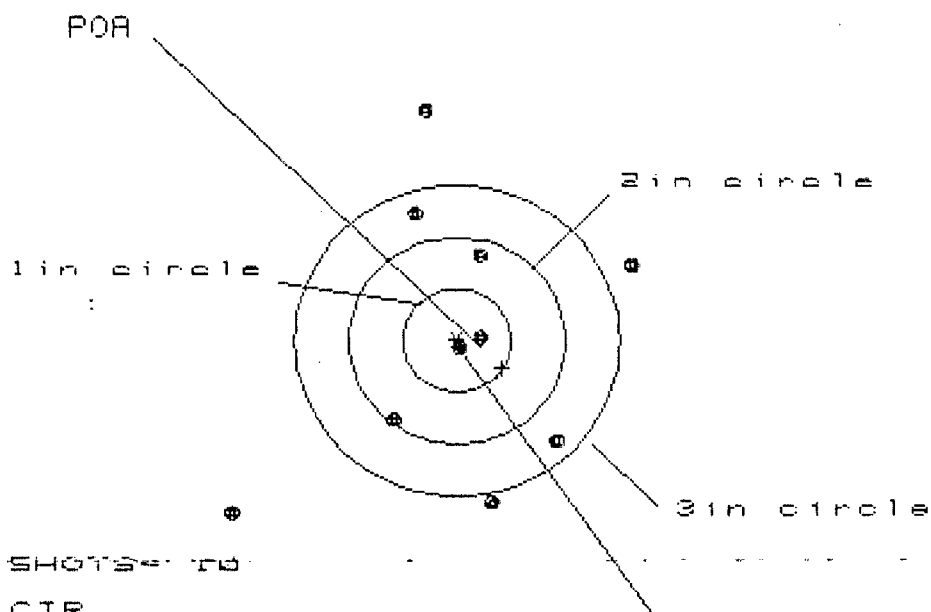

--- # OF SHOTS --- TO

IN CIR

1 in = 2

2 in = 4

3 in = 6

HS= 3.640

VS= 3.985

GS= 4.371


CENTROID #

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.592	1.365	1.303
MINIMUM X	-2.048	-1.791	-1.853
MAXIMUM Y	2.270	2.079	1.310
MINIMUM Y	-1.715	-1.763	-1.503
CENTROID X	-.416	-.189	-.127
CENTROID Y	.267	.458	.198
POA TO CENTROID in.	.495	.495	.235
MIN RADIUS	.098	.141	.127
MEAN RADIUS	1.314	1.153	1.010
MAX RADIUS	2.671	2.138	1.515
HORIZONTAL SPREAD	3.640	2.156	2.156
VERTICAL SPREAD	3.985	3.842	2.813
EXTREME SPREAD	4.371	3.893	2.914
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	6		

1 Jan 1968

FILE:/PATTERNING/CENTERFIRE_PATT/06348774

CENTERFIRE PATTERNS # 2

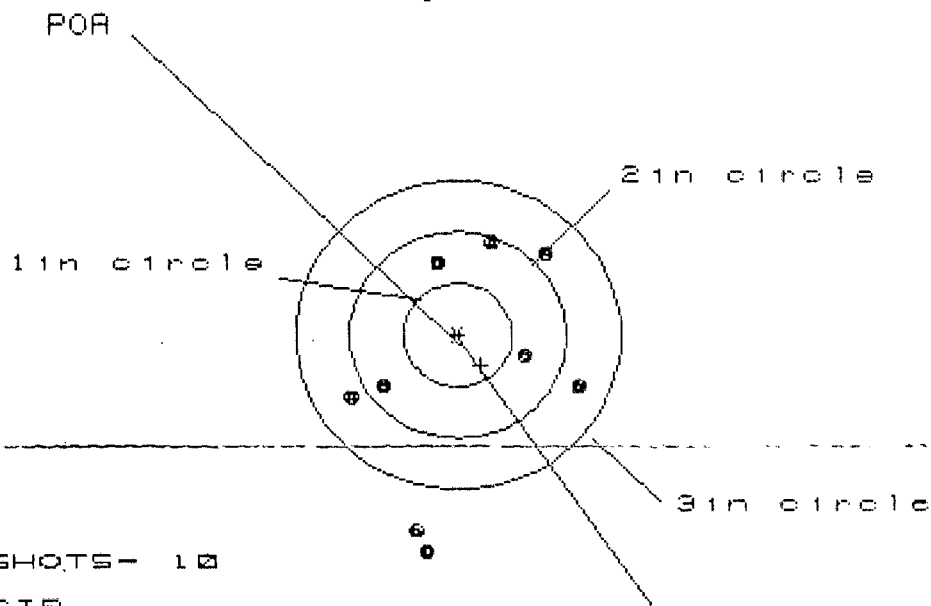

OF SHOTS- 10

IN CIR

1in = 0

2in = 4

3in = 7

HS= 2.106

VS= 5.328


GS= 5.328

PATTERN #	:	[2]		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.083	1.051	1.015
MINIMUM X	:	-1.023	-1.055	-1.091
MAXIMUM Y	:	3.253	1.310	1.096
MINIMUM Y	:	-2.075	-1.713	-1.742
CENTROID X	:	-.214	-.182	-.146
CENTROID Y	:	.299	-.063	.151
POA TO CENTROID in.	:	.368	.193	.210
MIN RADIUS	:	.628	.607	.538
MEAN RADIUS	:	1.397	1.179	1.076
MAX RADIUS	:	3.266	1.738	1.795
HORIZONTAL SPREAD	:	2.106	2.106	2.106
VERTICAL SPREAD	:	5.328	3.023	2.838
EXTREME SPREAD	:	5.328	3.077	2.925
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		7	

1 Jan 1900

FILE:/PATTERNING/CENTERFIRE_PATT/06348774

CENTERFIRE PATTERNS # 3

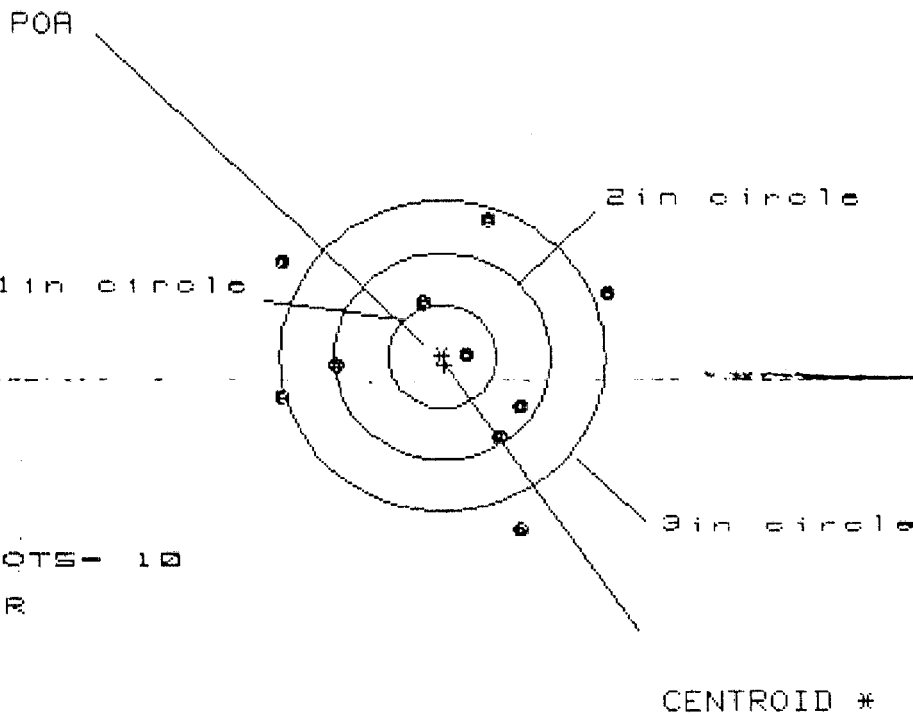

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 4

3 in = 6

HS= 3.024

VS= 2.958


GS= 3.317

PATTERN #	10	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.494	1.573	1.403
MINIMUM X	-1.530	-1.451	-1.621
MAXIMUM Y	1.319	1.137	1.225
MINIMUM Y	-1.639	-0.995	-0.907
CENTROID X	-0.019	-0.098	0.072
CENTROID Y	0.080	0.262	0.174
POA TO CENTROID in.	0.082	0.280	0.188
MIN RADIUS	0.239	0.337	0.148
MEAN RADIUS	1.176	1.099	1.017
MAX RADIUS	1.787	1.628	1.696
HORIZONTAL SPREAD	3.024	3.024	3.024
VERTICAL SPREAD	2.958	2.132	2.132
EXTREME SPREAD	3.317	3.187	3.187
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	6		

Jan 1900

FILE:/PATTERNING/CENTERFIRE_PATT/C6348774

CENTERFIRE PATTERNS # 4

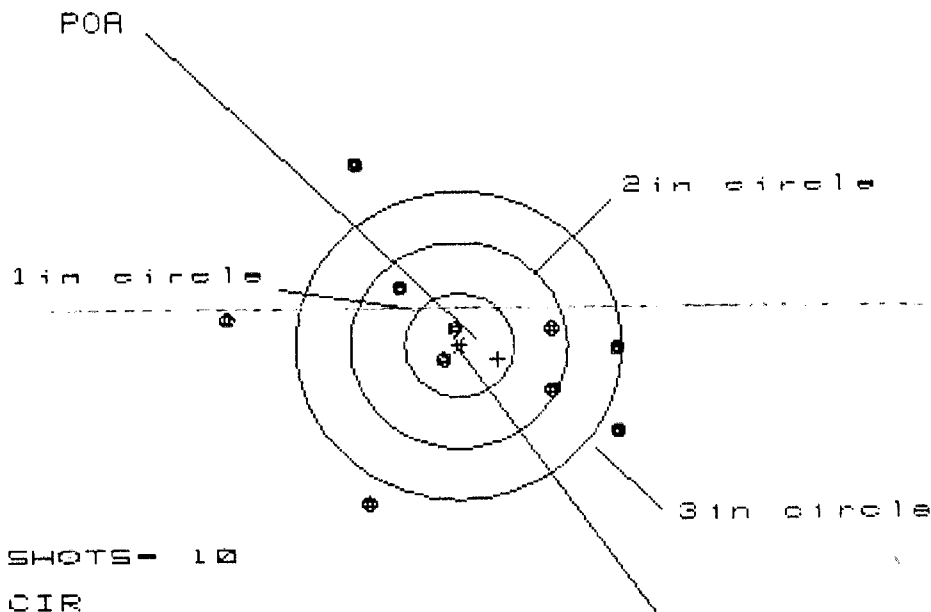

OF SHOTS- 10

IN CIR

1in = 2

2in = 5

3in = 6

HS= 3.602

VS= 3.271

GS= 3.760

PATTERN #	:	10	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.498	1.264	1.113
MINIMUM X	:	-2.104	-1.211	-1.247
MAXIMUM Y	:	1.732	1.762	.784
MINIMUM Y	:	-1.539	-1.509	-1.288
CENTROID X	:	-.357	-.123	.028
CENTROID Y	:	.135	.105	-.116
POA TO CENTROID in.	:	.382	.161	.119
MIN RADIUS	:	.156	.354	.504
MEAN RADIUS	:	1.202	1.093	.959
MAX RADIUS	:	2.122	2.138	1.793
HORIZONTAL SPREAD	:	3.602	2.475	2.360
VERTICAL SPREAD	:	3.271	3.271	2.072
EXTREME SPREAD	:	3.760	3.543	2.750
NUMBER IN ONE INCH CIRCLE	=	2		
NUMBER IN TWO INCH CIRCLE	=	5		
NUMBER IN THREE INCH CIRCLE	=	6		

1 Jan 1900

FILE:/PATTERNING/CENTERFIRE_PATT/C634B774

CENTERFIRE PATTERNS

5

POA

1 in circle

2 in circle

3 in circle

OF SHOTS- 10

IN CIR

1 in = 5

2 in = 9

3 in = 10

IS= 1.691

VS= 1.497

GS= 2.258

CENTROID #

PATTERN #	SHOTS (BEST OF)	10	9	8
MAXIMUM X		.768	.665	.646
MINIMUM X		-.923	-.792	-.709
MAXIMUM Y		.966	.624	.572
MINIMUM Y		-.531	-.424	-.275
CENTROID X		.210	.313	.230
CENTROID Y		.103	-.004	.049
POA TO CENTROID in.		.234	.313	.235
MIN RADIUS		.086	.072	.108
MEAN RADIUS		.587	.475	.441
MAX RADIUS		1.336	.917	.820
HORIZONTAL SPREAD		1.691	1.457	1.355
VERTICAL SPREAD		1.497	1.048	.846
EXTREME SPREAD		2.258	1.698	1.459
NUMBER IN ONE INCH CIRCLE	=		5	
NUMBER IN TWO INCH CIRCLE	=		9	
NUMBER IN THREE INCH CIRCLE	=		10	

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6348 774

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	9 26	89	RW
600	Proof	9 26	89	RW
607	Check Headspace	9 26	89	RW
610	Dis-assemble Gun	9 26	89	RW
612	Magnaflux Barrel Action	9/29/89		KCR
	Magnaflux Bolt	9/29/89		KCR
615	Rollmark Caliber	9/29/89		SL
7	Drill and Tap Sight Holes	9 29	89	LB
618	Polish Barrel RB	9 29	89	BT
620	Apply Coatings (Barrel Action)		10/11/89	JA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		10/12/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		10/12/89	RW
	C) Inspect Ejector Hole for Chamfer		10/12/89	RW
	D) Oil Firing Pin Ass'y		10/12/89	RW
	E) Adjust Trigger Pull to Min Setting and Stake		24 Oct 89	JS

op. #	OP. NAME	READINGS			DATE	INIT		
625 cont.	F) Safety On Force	5	5	5	10/24/89	JH		
	G) Safety Off Force	4	4	4	10/24/89	JH		
	H) Trigger Pull Test & Retainability				246/89	JH		
	I) Firing Pin Indent	.022	.021	.021	10/24/89	JH		
	J) Assemble Stock				10/25/89	RW		
	K) Assemble Swivel Studs				276/89	JH		
	L) Attach Front and Rear Sight Assemblies				12/11/89	RW		
	M) Iron Sight Alignment				12/11/89	RW		
	N) Detach Front & Rear Sights & place in numbered container				12/11/89	RW		
	O) Attach Scope to Rifle				10/25/89	JH		
	P) Detach & Attach Scope 20 Times				10/25/89	JH		
640	Gallery Target & Test				10-25-89	AC		
	A) Time				10-25-89	AC		
	B) Malfunctions				10-25-89	AC		
	C) Pierced Primers				10-25-89	AC		
	D) Optical Clarity of Scope				10-25-89	AC		
645	Inspect for Live Ammo				10-25-89	AC		
655	Final Inspection							
	A) Headspace				276/89	JH		
	B) Trigger Pull	245	246	253	253	264	276/89	JH
	C) Function						276/89	JH
660	Pack						15/Dec/89	JH

RC-28

SWS TRIGGER PULL TEST

TIME

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. 6348774DATE 13 Mon 90TESTER JS

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	222	228		210	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	224	225		208	
PULL #3	220	224		228	
PULL #4	221	226		224	
PULL #5	212	231		224	
TOTAL	1099	1136			
AVG.	2198	2272			

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	276	280		
PULL #2	279	271		
PULL #3	284	270		
PULL #4	279	269		
PULL #5	283	265		
TOTAL	1403	1355		
AVG.	2806	271		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	401	417		
PULL #2	399	393		
PULL #3	401	402		
PULL #4	402	400		
PULL #5	401	399		
TOTAL	2003	2011		
AVG.	4006	4022		

CENTROIDAL DISTANCES

0	TO	1	.660567
1	TO	2	.794331
1	TO	3	.235306
1	TO	4	.988191
1	TO	5	.446937


10^5 10^4 C --- POR

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.1588
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .1184
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .198081
THE AMR FOR THIS RIFLE IS: .987

25 Oct 1989

FILE:/PATTERNING/CENTERFIRE_PATT/08348774

CENTERFIRE PATTERNS # 1

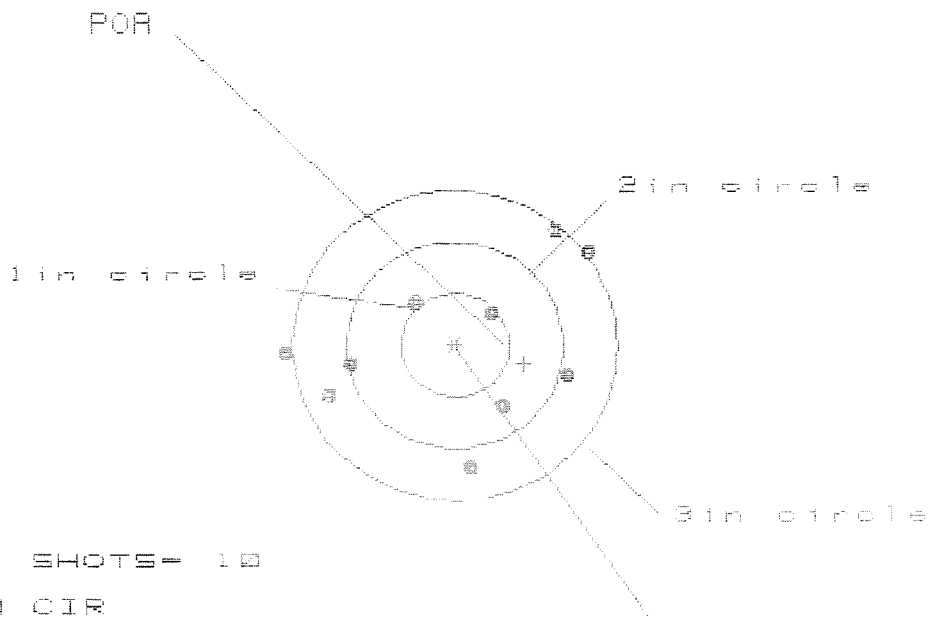

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 4

3 in = 8

HS= 2.780

VS= 2.229

GS= 2.938


CENTROID *

PATTERN #	:	10	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.238	1.066	.994
MINIMUM X	:	-1.542	-1.386	-1.252
MAXIMUM Y	:	1.084	1.079	1.132
MINIMUM Y	:	-1.145	-1.150	-1.037
CENTROID X	:	-.635	-.463	-.597
CENTROID Y	:	.182	.187	.074
POR TO CENTROID in.	:	.660	.500	.601
MIN RADIUS	:	.469	.356	.524
MEAN RADIUS	:	1.079	1.012	.958
MAX RADIUS	:	1.543	1.472	1.495
HORIZONTAL SPREAD	:	2.780	2.452	2.246
VERTICAL SPREAD	:	2.229	2.229	2.229
EXTREME SPREAD	:	2.938	2.823	2.669
NUMBER IN ONE INCH CIRCLE	=	1		
NUMBER IN TWO INCH CIRCLE	=	4		
NUMBER IN THREE INCH CIRCLE	=	8		

25 Oct 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C834B774

CENTERFIRE PATTERNS # 2

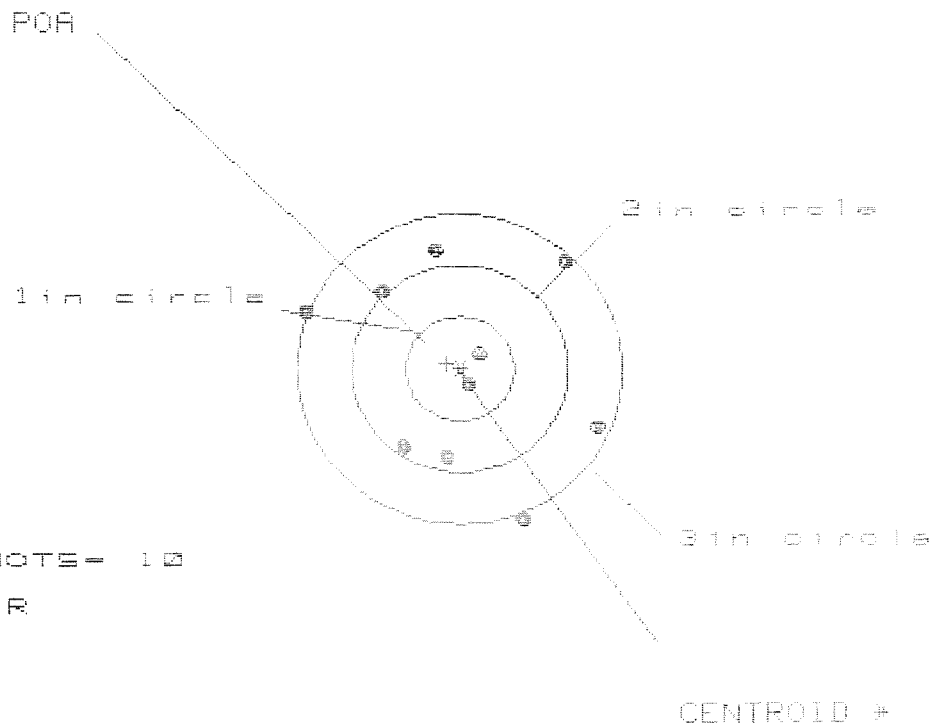

OF SHOTS = 10

IN CIR

1 in = 2

2 in = 4

3 in = 8

HS = 2.7800

VS = 2.614


GS = 2.988

PATTERN #	:	2
SHOTS (BEST OF)	:	10
MAXIMUM X	:	1.312
MINIMUM X	:	-1.468
MAXIMUM Y	:	1.173
MINIMUM Y	:	-1.441
CENTROID X	:	.125
CENTROID Y	:	-.049
POA TO CENTROID in.	:	.134
MIN RADIUS	:	.147
MEAN RADIUS	:	1.027
MAX RADIUS	:	1.569
HORIZONTAL SPREAD	:	2.780
VERTICAL SPREAD	:	2.614
EXTREME SPREAD	:	2.988
NUMBER IN ONE INCH CIRCLE =	:	2
NUMBER IN TWO INCH CIRCLE =	:	4
NUMBER IN THREE INCH CIRCLE =	:	8

25 Oct 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C8348774

CENTERFIRE PATTERNS # 3

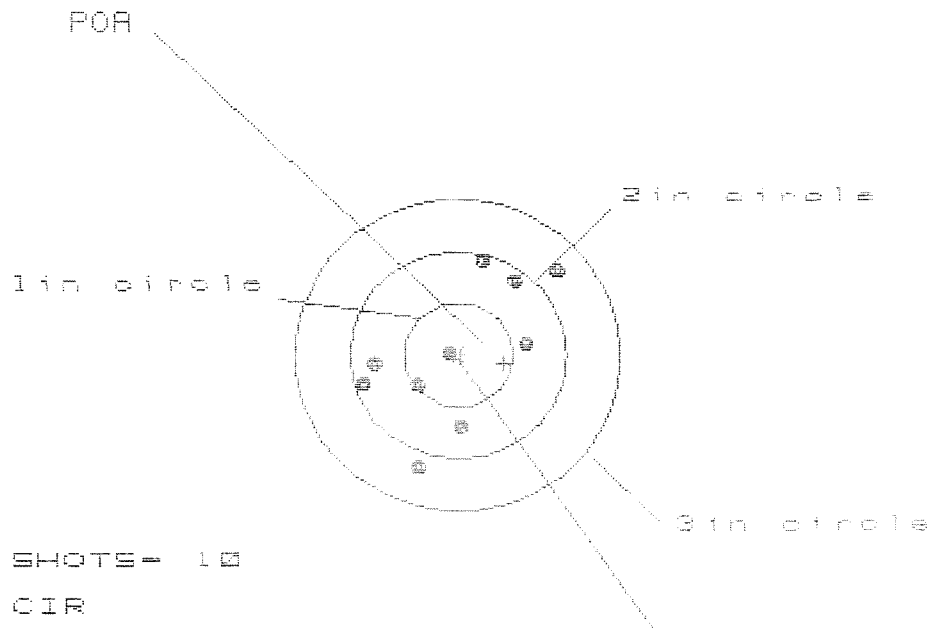

OF SHOTS- 10

IN CIR

1in = 1

2in = 8

3in = 10

HS= 1.721

VS= 2.025

GS= 2.310


CENTROID *

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.886	.748	.718
MINIMUM X	:	-.835	-.737	-.766
MAXIMUM Y	:	.894	.986	.856
MINIMUM Y	:	-1.131	-1.039	-.759
CENTROID X	:	-.422	-.520	-.490
CENTROID Y	:	.082	-.010	.120
POR TO CENTROID in.	:	.430	.520	.595
MIN RADIUS	:	.062	.139	.020
MEAN RADIUS	:	.785	.725	.673
MAX RADIUS	:	1.213	1.066	.914
HORIZONTAL SPREAD	:	1.721	1.485	1.485
VERTICAL SPREAD	:	2.025	2.025	1.615
EXTREME SPREAD	:	2.310	2.109	1.721
NUMBER IN ONE INCH CIRCLE =			1	
NUMBER IN TWO INCH CIRCLE =			8	
NUMBER IN THREE INCH CIRCLE =			10	

25 Oct 1989

FILE:/PATTERNING/CENTERFIRE_PATT/08348774

CENTERFIRE PATTERNS # 4

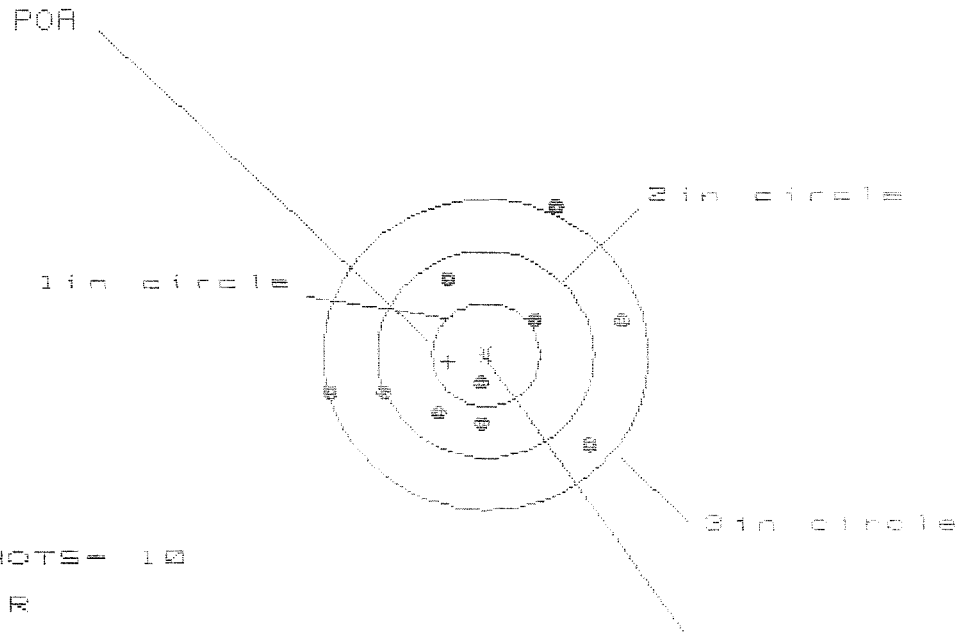

OF SHOTS= 10

IN CIR

1in = 1

2in = 5

3in = 8

HS= 2.746

VS= 2.279

GS= 2.847


CENTROID #

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.280	1.354	1.180
MINIMUM X	:	-1.466	-1.392	-1.055
MAXIMUM Y	:	1.440	.906	.380
MINIMUM Y	:	-1.839	-1.679	-1.705
CENTROID X	:	.346	.272	.446
CENTROID Y	:	.063	-.097	-.071
POA TO CENTROID in.	:	.352	.289	.451
MIN RADIUS	:	.255	.081	.212
MEAN RADIUS	:	.968	.861	.806
MAX RADIUS	:	1.588	1.459	1.288
HORIZONTAL SPREAD	:	2.746	2.746	2.235
VERTICAL SPREAD	:	2.279	1.585	1.585
EXTREME SPREAD	:	2.847	2.847	2.351
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		8	

25 Oct 1989

FILE:/PATTERNING/CENTERFIRE_PATT/G8348774

CENTERFIRE PATTERNS # 5

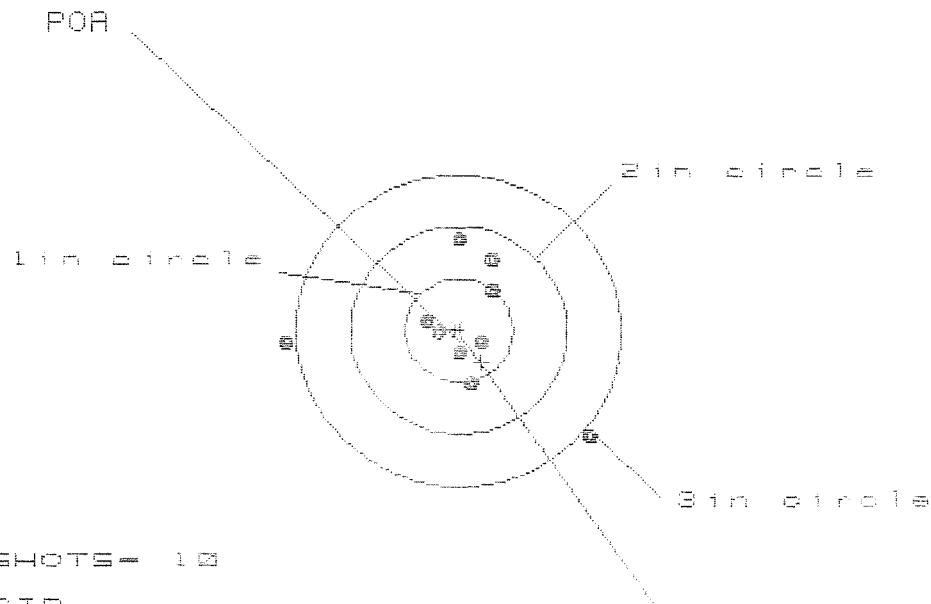

OF SHOTS= 10

IN CIR

1 in = 5

2 in = 8

3 in = 8

HS= 2.780

VS= 1.865

GS= 2.920

CENTROID +

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.177	.999	.252
MINIMUM X	:	-1.603	-.484	-.360
MAXIMUM Y	:	.850	.836	.707
MINIMUM Y	:	-1.015	-1.029	-.704
CENTROID X	:	-.208	-.030	-.154
CENTROID Y	:	.314	.327	.456
POA TO CENTROID in.	:	.376	.328	.481
MIN RADIUS	:	.164	.118	.267
MEAN RADIUS	:	.676	.576	.452
MAX RADIUS	:	1.608	1.434	.713
HORIZONTAL SPREAD	:	2.780	1.483	.612
VERTICAL SPREAD	:	1.865	1.865	1.411
EXTREME SPREAD	:	2.920	2.226	1.423
NUMBER IN ONE INCH CIRCLE	=		5	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		8	

Remington



VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700™ H24

SERIAL NO.


C6348774

ORDER NO.

5716


MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off. Marca Registrada Marque Deposee.

01



5716 C6348774

UPC



0 47700 25716 7