

C6348800

MODEL 700TM M24

Model SMSTM

Action

Barrel Length

Capacity

Order No. 5716

*Includes 1 in chamber.

Remington

Smead[®]

AVERAGE PULL FORCE BETWEEN
 INITIAL & CYCLE TESTS
 2.50 LBS (plus or minus 0.50 LBS)
 3.00 LBS (plus or minus 0.75 LBS)
 4.00 LBS (plus or minus 1.00 LBS)

SERIAL NO.

DATE 10-20-04

TESTER TRW

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.15	2.15		2.12	
PULL #2	2.20	2.26		2.15	
PULL #3	2.34	2.14		2.16	
PULL #4	2.23	2.19		2.16	
PULL #5	2.30	2.25		2.07	
TOTAL	11.22	10.99		10.66	
AVERAGE	2.24	2.19		2.13	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.33	3.15		
PULL #2	3.28	3.22		
PULL #3	3.31	3.22		
PULL #4	3.30	3.18		
PULL #5	3.28	3.15		
TOTAL	16.50	15.92		
AVERAGE	3.30	3.18		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.15	4.01		3.97
PULL #2	4.12	4.05		4.46
PULL #3	4.13	3.98		4.46
PULL #4	4.10	4.05		4.45
PULL #5	4.14	4.04		4.51
TOTAL	20.64	20.13		21.85
AVERAGE	4.12	4.02		4.37

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6348800.__0
FILE DATE AND TIME: 10/26/2004 08:03


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.024
The Average Y Centroid of the Five Target Set:	0.087
The Average Point of Impact of the Five Target Set:	0.090
The Average Mean Radius of the Five Target Set:	0.622
The Distance from POA to Centroid Target #1:	0.247
The Distance from Centroid Target #2 to Centroid Target #1:	0.159
The Distance from Centroid Target #3 to Centroid Target #1:	0.265
The Distance from Centroid Target #4 to Centroid Target #1:	0.653
The Distance from Centroid Target #5 to Centroid Target #1:	0.368

SERIAL NUMBER: C6348800. __0
TARGET NUMBER: 1
FILE DATE: 10/26/2004
FILE TIME: 08:03

X CENTROID: 0.246
Y CENTROID: 0.024
POA TO CENTROID: 0.247
HORZ SPREAD: 1.265
VERT SPREAD: 1.289
GROUP SPREAD: 1.485
MIN RADIUS: 0.140
MAX RADIUS: 0.976
MEAN RADIUS: 0.530
IN 1 IN DIAMETER: 5
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	1.146	-0.352
2:	0.842	0.294
3:	0.652	0.349
4:	-0.095	-0.795
5:	-0.079	-0.265
6:	-0.075	0.494
7:	0.347	0.121
8:	-0.085	-0.011
9:	-0.079	0.115
10:	-0.119	0.291

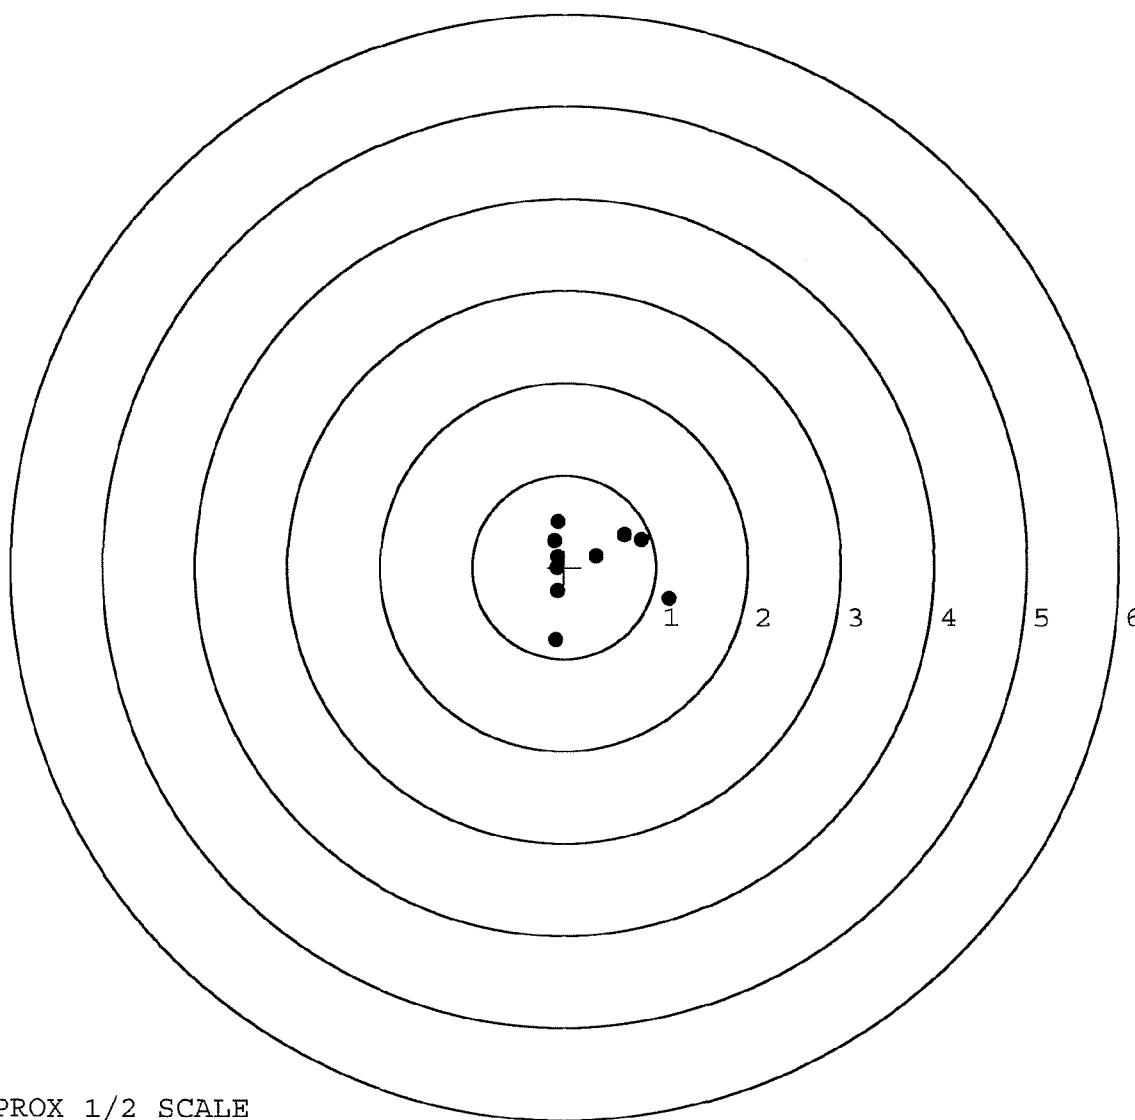


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348800. __0
TARGET NUMBER: 2
FILE DATE: 10/26/2004
FILE TIME: 08:03

POINT#	X	Y
1:	0.474	0.406
2:	-0.114	0.793
3:	-0.676	0.326
4:	-0.086	0.011
5:	-0.256	-0.100
6:	-0.992	-0.898
7:	0.610	-0.018
8:	0.782	-0.110
9:	0.600	-0.220
10:	0.528	-0.121

X CENTROID: 0.087
Y CENTROID: 0.007
POA TO CENTROID: 0.087
HORZ SPREAD: 1.774
VERT SPREAD: 1.691
GROUP SPREAD: 1.962
MIN RADIUS: 0.173
MAX RADIUS: 1.408
MEAN RADIUS: 0.638
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

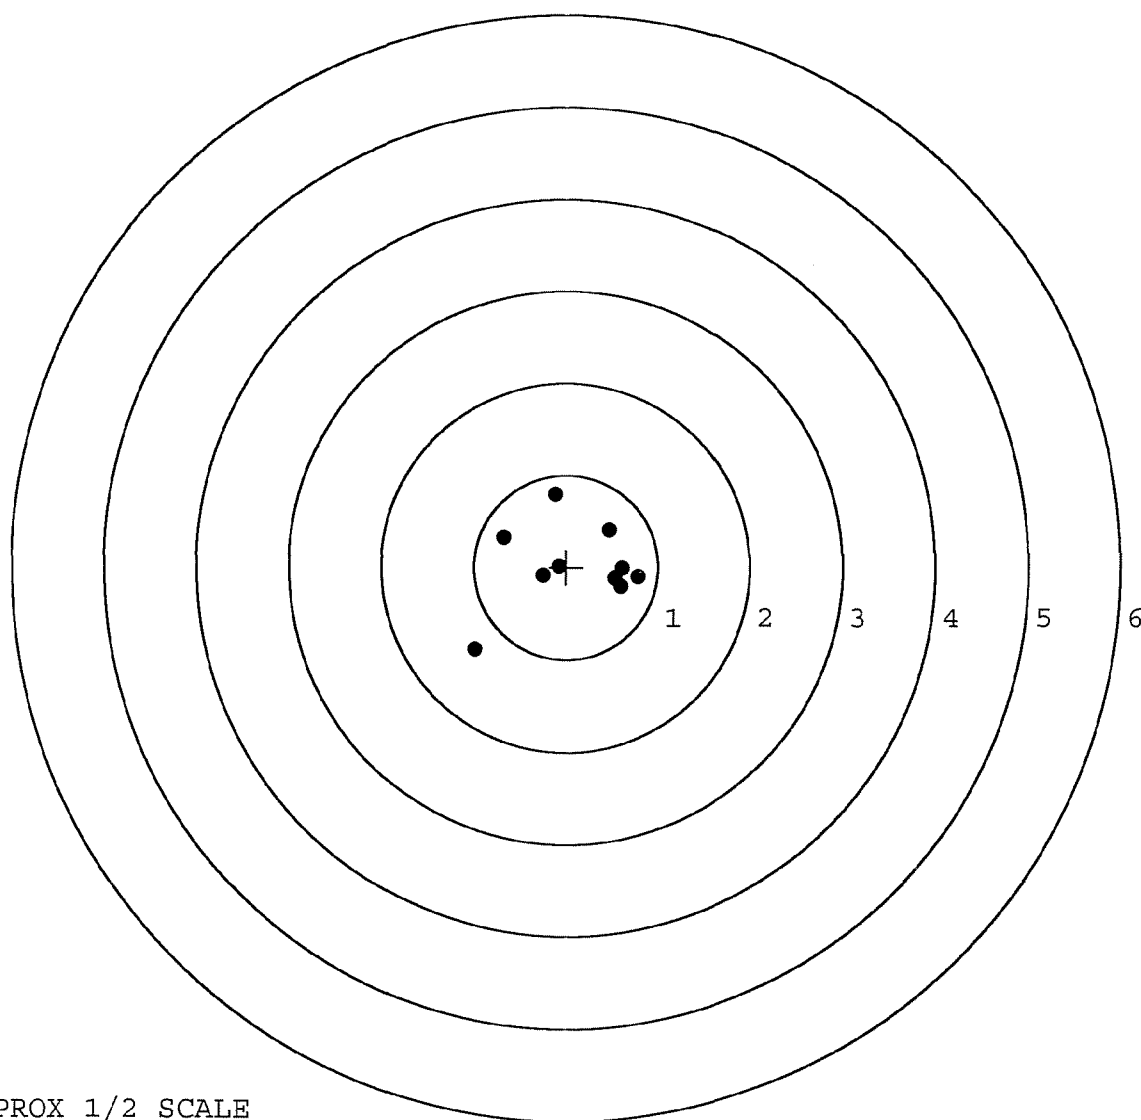

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348800. __0

TARGET NUMBER: 3

FILE DATE: 10/26/2004

FILE TIME: 08:03

POINT#	X	Y
1:	-0.937	0.918
2:	0.533	0.729
3:	0.456	0.628
4:	0.480	-0.058
5:	0.253	-0.094
6:	0.216	0.207
7:	0.230	-0.514
8:	-0.036	-0.023
9:	-0.294	0.101
10:	-0.681	-0.229

X CENTROID: 0.022

Y CENTROID: 0.166

POA TO CENTROID: 0.168

HORZ SPREAD: 1.470

VERT SPREAD: 1.432

GROUP SPREAD: 1.847

MIN RADIUS: 0.198


MAX RADIUS: 1.218

MEAN RADIUS: 0.571

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

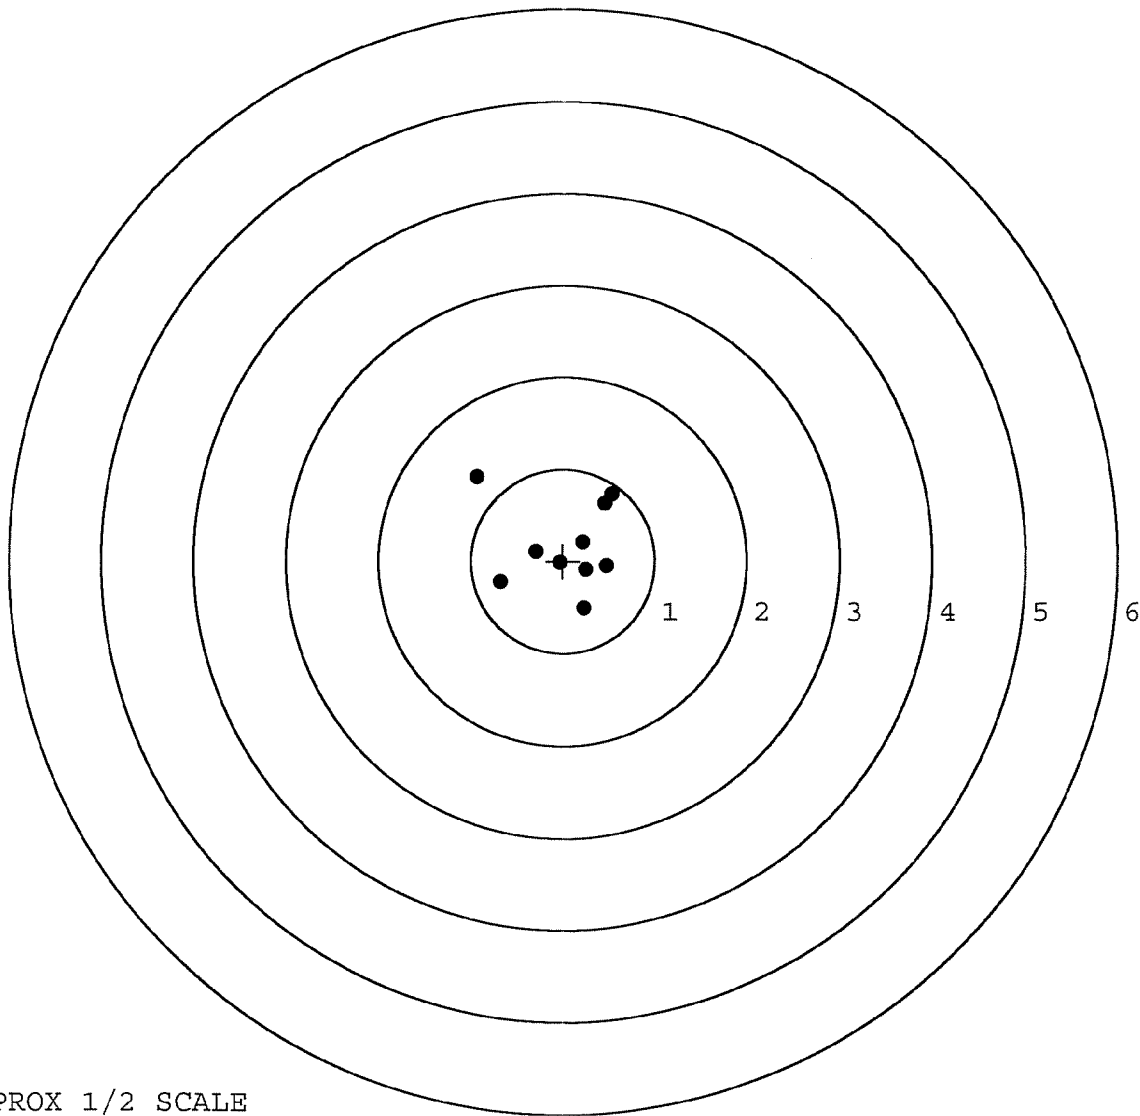


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348800.____0
TARGET NUMBER: 4
FILE DATE: 10/26/2004
FILE TIME: 08:03

POINT#	X	Y
1:	0.978	0.518
2:	0.336	0.021
3:	0.071	-0.567
4:	-1.117	-0.637
5:	-1.011	-0.385
6:	-0.104	0.270
7:	-0.592	0.281
8:	-0.399	1.109
9:	-0.706	1.075
10:	-1.031	1.054

X CENTROID: -0.357
Y CENTROID: 0.274
POA TO CENTROID: 0.450
HORZ SPREAD: 2.095
VERT SPREAD: 1.746
GROUP SPREAD: 2.392
MIN RADIUS: 0.235
MAX RADIUS: 1.358
MEAN RADIUS: 0.838
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 10

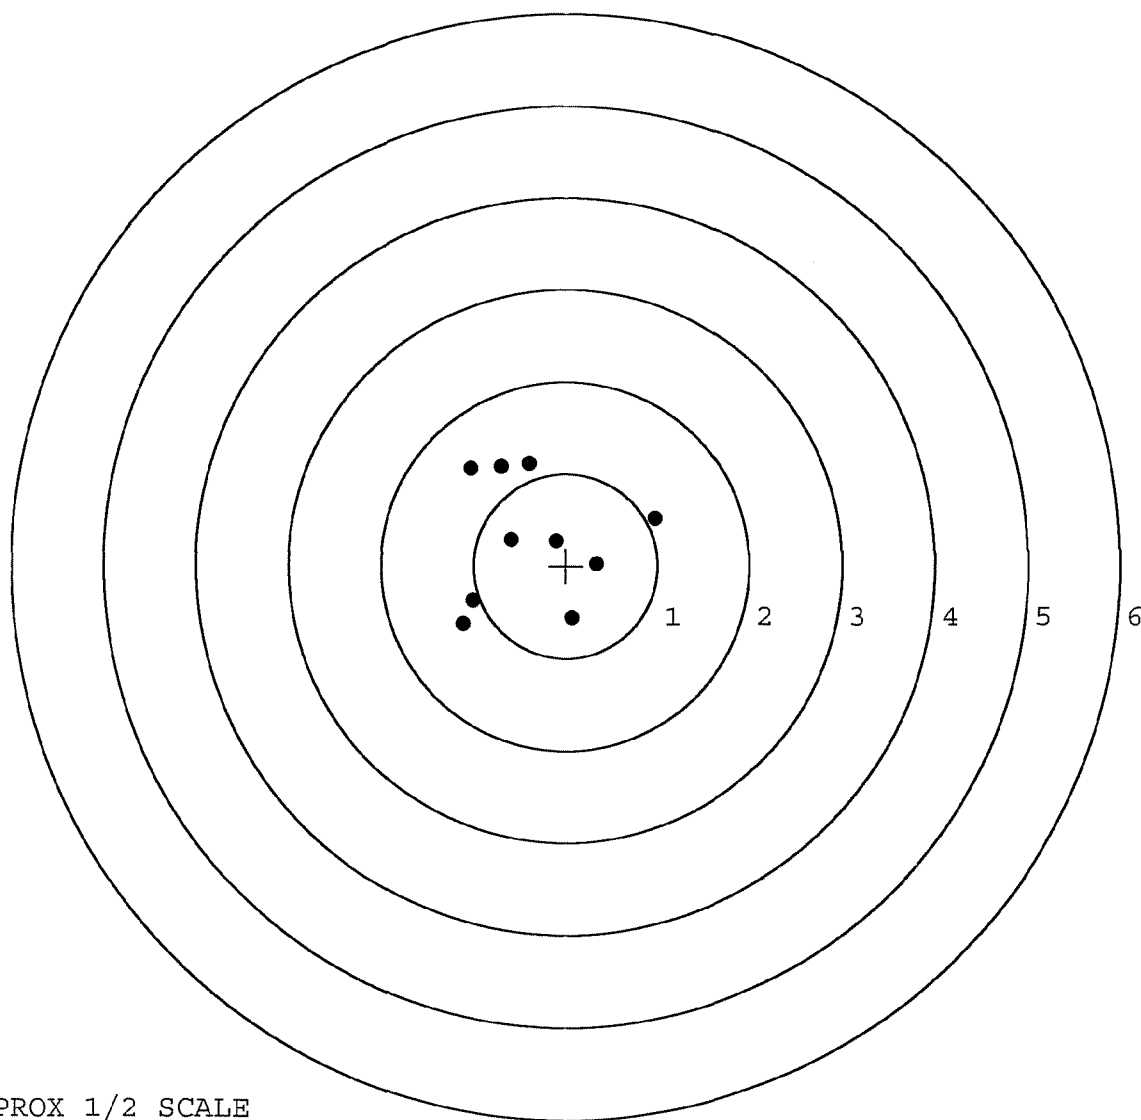


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348800. __0
TARGET NUMBER: 5
FILE DATE: 10/26/2004
FILE TIME: 08:03

X CENTROID: -0.117
Y CENTROID: -0.037
POA TO CENTROID: 0.123
HORZ SPREAD: 1.455
VERT SPREAD: 1.085
GROUP SPREAD: 1.456
MIN RADIUS: 0.247
MAX RADIUS: 0.785
MEAN RADIUS: 0.531
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.663	0.051
2:	0.244	-0.356
3:	0.204	-0.712
4:	-0.553	-0.417
5:	-0.792	-0.013
6:	0.290	0.373
7:	-0.014	0.275
8:	-0.155	0.207
9:	-0.437	0.142
10:	-0.623	0.076

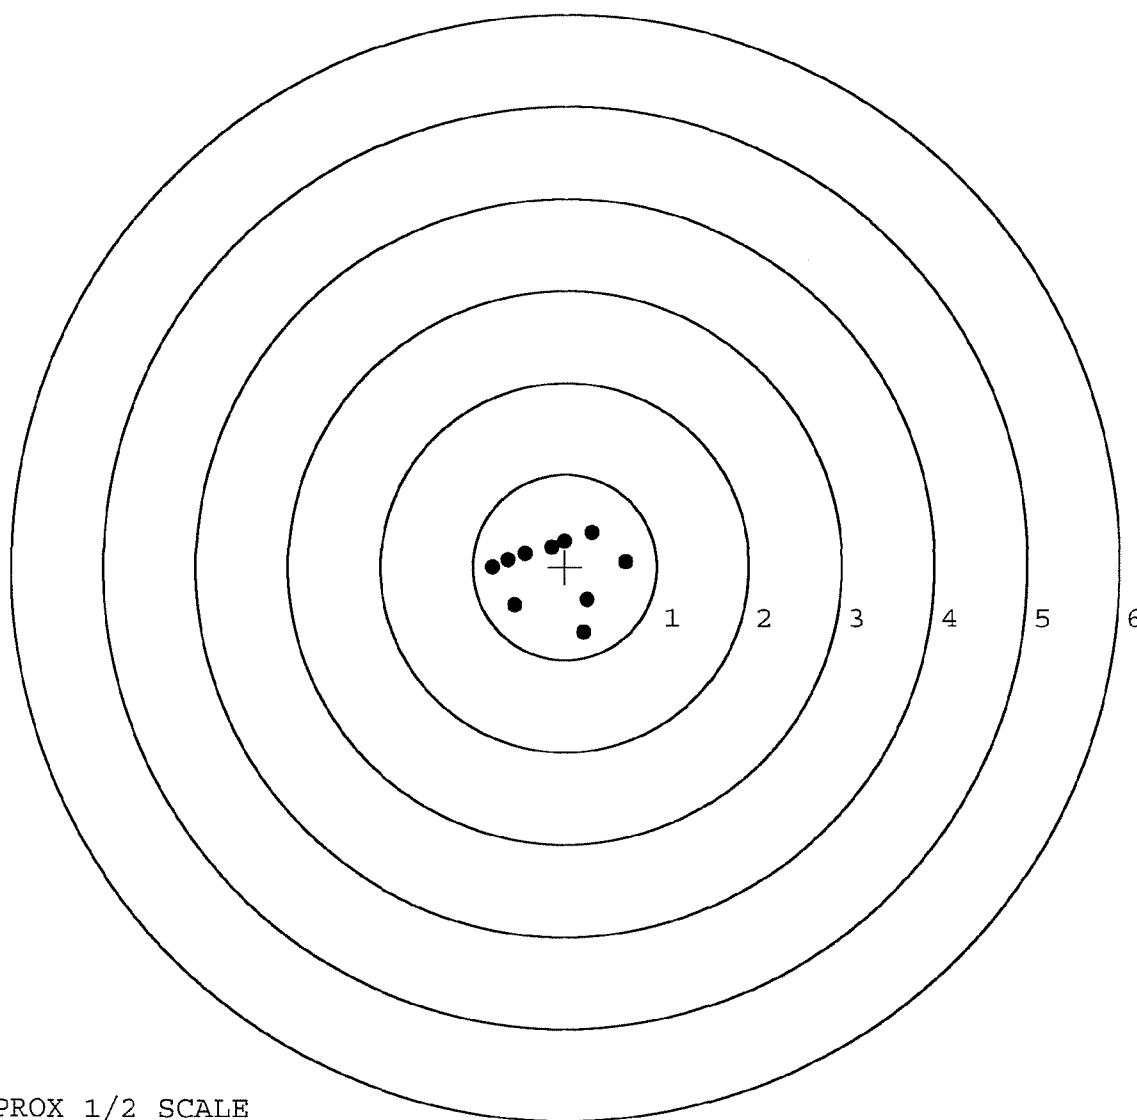

TARGET APPROX 1/2 SCALE

For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG

For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG

DA FORM 2404, APR 79 Replaces edition of 1 Jan 64, which will be used USAPPC V1.1

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R & E NUMBER	85596		
SERIAL NUMBER	C 6348800		
LOG-IN DATE	9-28-04		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	10-4-04	AC
560 A	RE-BARREL	10-6-04	AC
B	DRILL AND TAP	10-8-04	TRW
575	ASSEMBLE	10-6-04	
600	PROOF	10-7-04	
605	CHECK HEADSPACE	10-7-04	
610	DIS-ASSEMBLE GUN	10-7-04	
612	MAGNAFLUX		
615	ROLLMARK CALIBER	10-11-04	SB/CW
618	ROTO-BLAST	10-11-04	LB
620	APPLY COATINGS	10/19/04	HP
625 A	FINAL ASSEMBLY	10-21-04	KTC
B	TRIGGER PULL TEST	11-3-04	RA
C	SAFETY "ON" FORCE	11-3-04	RA
D	SAFETY "OFF" FORCE	11-3-04	RA
E	FIRING PIN INDENT	11-3-04	RA
640	TARGET	10-26-04	AC
655	FINAL INSPECT	11-3-04	
660	PACK	11-4-04	RA
		SHIP DATE	
	QAR INSPECTION DATE		

Remington®



VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700™ H24

SERIAL NO.
C6348800

ORDER NO.
5716

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off, Marca Registrada Marque Deposee.

01



5716 C6348800

UPC



0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6348800

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	QUALITY 11	89	RW
600	Proof	QUALITY 11	89	RW
607	Check Headspace	AUDIT 11	89	RW
610	Dis-assemble Gun			RW
612	Magnaflux Barrel Action		7/13	KCR
	Magnaflux Bolt		7/13	KCR
615	Rollmark Caliber		7/13	M.S.
7	Drill and Tap Sight Holes	7 13	89	FB
618	Polish Barrel RB	7 13	89	BT
620	Apply Coatings (Barrel Action)		7/21/89	TJA
	Apply Coating (Bolt)			
625	Final Assembly			
	A) Clean inside of Bolt Assembly		7/25/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		7/25/89	RW
	C) Inspect Ejector Hole for Chamfer		7/25/89	RW
	D) Oil Firing Pin Ass'y		7/25/89	RW
	E) Adjust Trigger Pull to Min Setting and Stake		7/28/89	J.U.

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	6	6 1/4	6			7/28/89	WB
	G) Safety Off Force	3	3	3			7/28/89	WB
	H) Trigger Pull Test & Retainability						7/28/89	WB
	I) Firing Pin Indent	.0227	.0225	.0225			7/28/89	WB
	J) Assemble Stock						7/31/89	RW
	K) Assemble Swivel Studs						1 Aug 89	JS
	L) Attach Front and Rear Sight Assemblies						7/31/89	RW
	M) Iron Sight Alignment						7/31/89	RW
	N) Detach Front & Rear Sights & place in numbered container						7/31/89	RW
	O) Attach Scope to Rifle						7/31/89	JS
	P) Detach & Attach Scope 20 Times						7/31/89	JS
640	Gallery Target & Test	84 R	64 L				7/31/89	
	A) Time						7-31-89	
	B) Malfunctions						7-31-89	
	C) Pierced Primers						7-31-89	
	D) Optical Clarity of Scope						7-31-89	
645	Inspect for Live Ammo						7-31-89	
655	Final Inspection						1 Aug 89	JS
	A) Headspace						1 Aug 89	JS
	B) Trigger Pull	268	2.59	2.74	2.85	2.80	1 Aug 89	JS
	C) Function						1 Aug 89	JS
660	Pack						19 Sep 89	JS

repaired Stock at front Survival 13 Sept 89

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6348800
1 Aug 1989

CENTROIDAL DISTANCES

0 TO 1	.346771
1 TO 2	.380865
1 TO 3	.346954
1 TO 4	.498293
1 TO 5	.642153

+²₄₅ <----POB

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .5344
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.2182
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .57723
THE AMR FOR THIS RIFLE IS: 1.185

31 Jul 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6346880

CENTERFIRE PATTERNS

1

POA

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS- 10

IN CIR

1in = 2

2in = 5

3in = 8

HS= 2.386

VS= 3.450


GS= 4.195

PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.211	1.031	.901
MINIMUM X	:	-1.175	-1.041	-.961
MAXIMUM Y	:	1.934	.831	.668
MINIMUM Y	:	-1.516	-1.301	-1.198
CENTROID X	:	.341	.207	.337
CENTROID Y	:	-.063	-.278	-.115
POA TO CENTROID in.	:	.347	.346	.356
MIN RADIUS	:	.040	.249	.075
MEAN RADIUS	:	1.047	.934	.791
MA. RADIUS	:	2.282	1.666	1.198
HORIZONTAL SPREAD	:	2.386	2.072	1.862
VERTICAL SPREAD	:	3.450	2.132	1.866
EXTREME SPREAD	:	4.195	2.948	2.081
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		8	

31 Jul 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C63468800

CENTERFIRE PATTERNS # 2

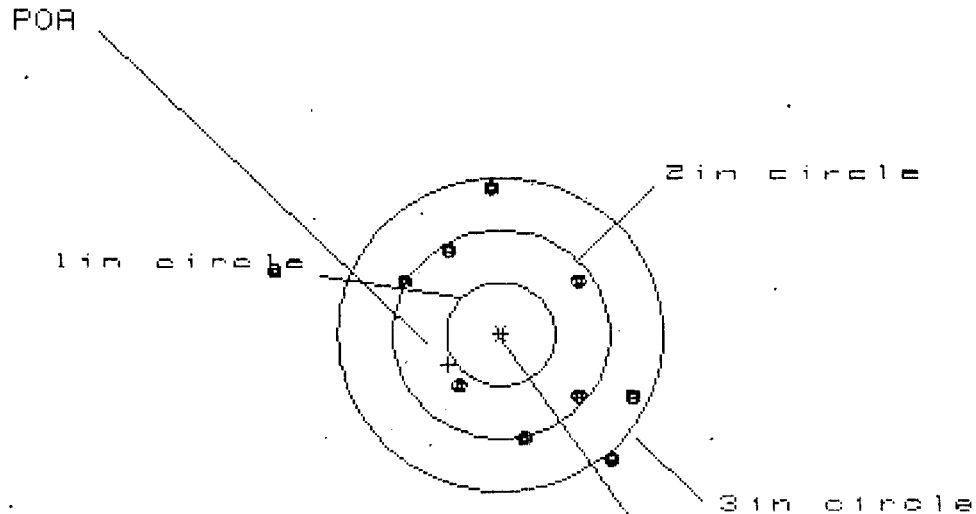

OF SHOTS- 10
IN CIR
1in = 0
2in = 4
3in = 8
HS= 3.382
VS= 2.575
GS= 3.642

CENTROID *

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.258	1.022	1.120
MINIMUM X	:	-2.124	-1.109	-1.011
MAXIMUM Y	:	1.382	1.453	1.313
MINIMUM Y	:	-1.193	-1.122	-1.093
CENTROID X	:	.484	.720	.622
CENTROID Y	:	.290	.219	.359
POA TO CENTROID in.	:	.564	.752	.718
MIN RADIUS	:	.599	.678	.739
MEAN RADIUS	:	1.198	1.058	1.018
MAY RADIUS	:	2.219	1.489	1.332
HORIZONTAL SPREAD	:	3.382	2.131	2.131
VERTICAL SPREAD	:	2.575	2.575	2.406
EXTREME SPREAD	:	3.642	2.804	2.424
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		8	

31 Jul 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6346880

CENTERFIRE PATTERNS

3

POA

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS - 10

IN CIR

1 in = 1

2 in = 5

3 in = 7

HS= 3.119

VS= 3.251


GS= 3.327

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.473	1.487	1.283
MINIMUM X	:	-1.646	-1.632	-1.022
MAXIMUM Y	:	1.133	.898	.877
MINIMUM Y	:	-2.118	-.943	-.964
CENTROID X	:	.405	.391	.595
CENTROID Y	:	-.404	-.169	-.148
POA TO CENTROID in.	:	.572	.426	.613
MIN RADIUS	:	.375	.545	.425
MEAN RADIUS	:	1.141	1.017	.909
MAX RADIUS	:	2.121	1.641	1.300
HORIZONTAL SPREAD	:	3.119	3.119	2.305
VERTICAL SPREAD	:	3.251	1.841	1.841
EXTREME SPREAD	:	3.327	3.144	2.322
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		7	

31 Jul 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C63468800

CENTERFIRE PATTERNS # 4

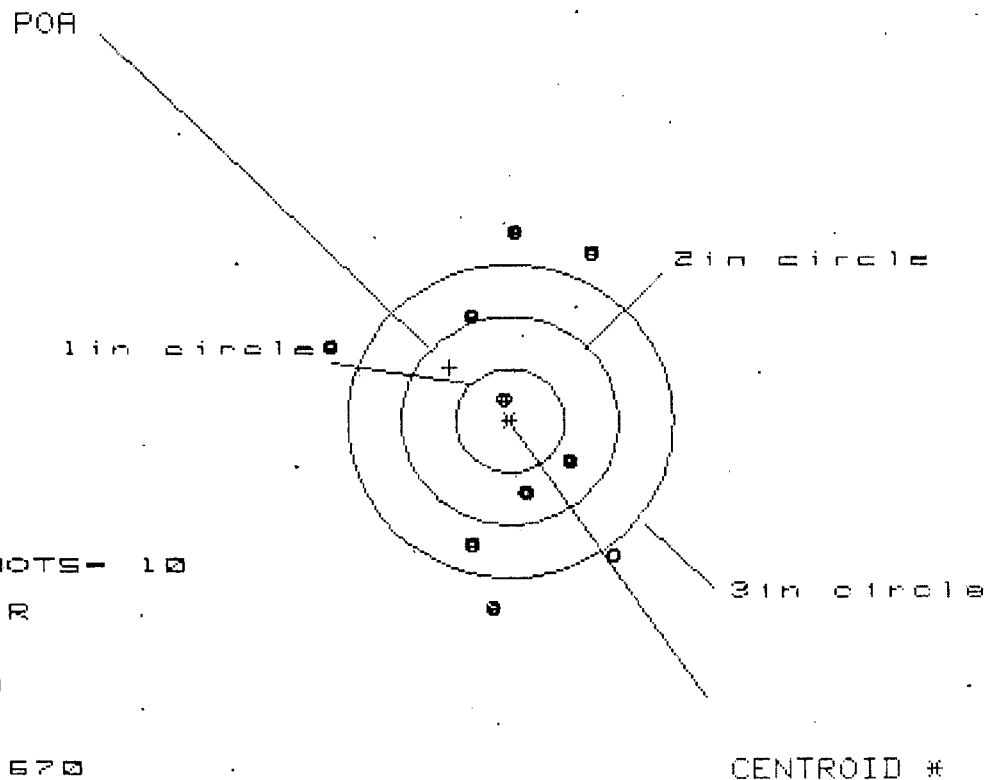

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 3

3 in = 5

HS= 2.670

VS= 3.531


GS= 3.534

PATTERN #	54	54	54
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.993	.806	.785
MINIMUM X	-1.677	-.500	-.521
MAXIMUM Y	1.729	1.860	1.913
MINIMUM Y	-1.752	-1.671	-1.439
CENTROID X	.555	.742	.763
CENTROID Y	-.513	-.594	-.826
POA TO CENTROID in.	.756	.950	1.125
MIN RADIUS	.190	.337	.376
MEAN RADIUS	1.256	1.176	1.051
MAX RADIUS	1.829	1.868	1.983
HORIZONTAL SPREAD	2.670	1.306	1.306
VERTICAL SPREAD	3.531	3.531	3.352
EXTREME SPREAD	3.534	3.534	3.462
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	5		

31 Jul 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6346800

CENTERFIRE PATTERNS # 5

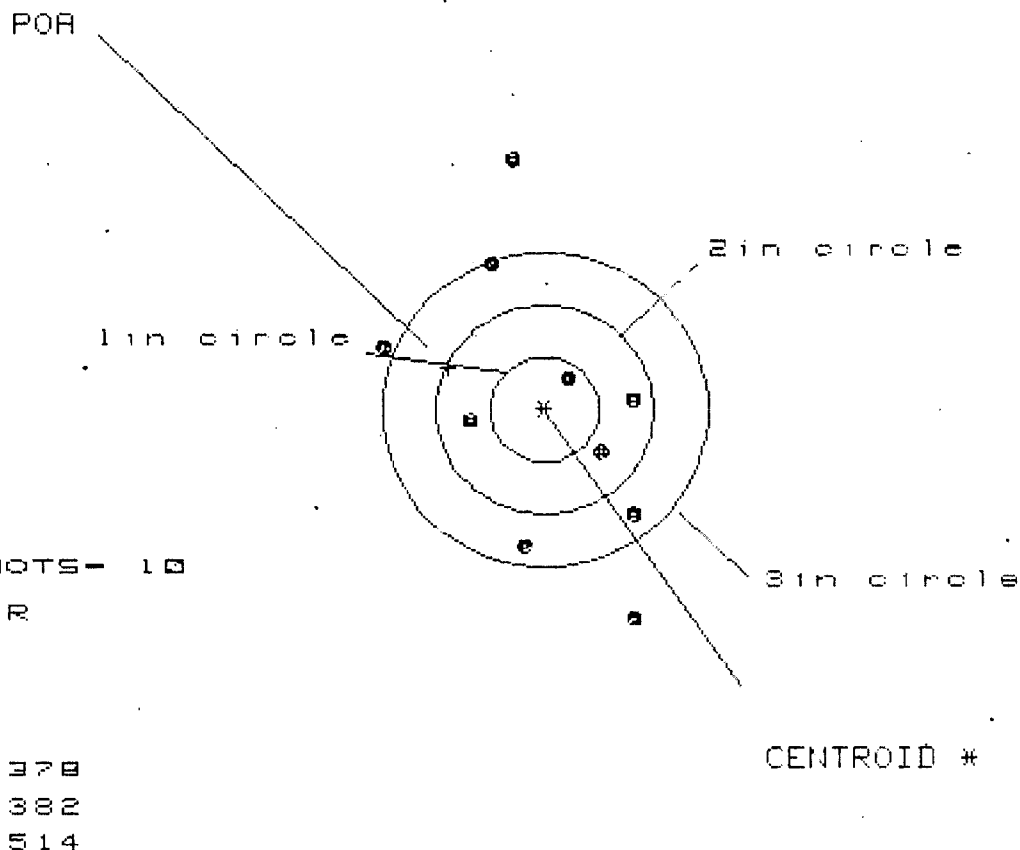

PATTERN #	:	157		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.852	.819	.912
MINIMUM X	:	-1.526	-1.559	-1.466
MAXIMUM Y	:	2.427	1.630	1.420
MINIMUM Y	:	-1.955	-1.686	-1.283
CENTROID X	:	.887	.920	.827
CENTROID Y	:	-.401	-.670	-.460
POA TO CENTROID in.	:	.973	1.139	.946
MIN RADIUS	:	.377	.502	.459
MEAN RADIUS	:	1.284	1.137	1.041
MAX RADIUS	:	2.446	1.844	1.616
HORIZONTAL SPREAD	:	2.378	2.378	2.378
VERTICAL SPREAD	:	4.382	3.316	2.703
EXTREME SPREAD	:	4.514	3.540	2.829
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		7	

RECEIVING AND ESTIMATING REPORT

M-24 SNIPER

CUSTOMER ORDER NO.

90-15632

SCOPE BASE

SHIP TO:

TRAFFIC MANAGEMENT OFFICE
BLDG 1702 - BAY 3
MCGUIRE AFB NJ
08641

WRITE

UP'S

TOTAL	100
-------	-----

☐ MARRED

CUSTOMER'S REQUEST

REPLACE TRIGGER ASSY.

MAIN FAULT

PARTS

PATTERN

DATE	
------	--

RD6925 REV. 6/88

OFFICE COPY

M2400064436

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6348800

DATE 4-9-90

TESTER JH

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.31	2.34	2.70	2.27	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.24	2.36	2.60	2.53	
PULL #3	2.27	2.41	2.72	2.47	
PULL #4	2.35	2.37	2.65	2.55	
PULL #5	2.33	2.39	2.73	2.56	
TOTAL	11.50	11.92	13.40	12.38	
AVG.	2.3	2.384	2.68	2.476	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.54	3.49		
PULL #2	3.31	3.46		
PULL #3	3.53	3.46		
PULL #4	3.53	3.32		
PULL #5	3.57	3.42		
TOTAL	17.48	17.15		
AVG.	3.496	3.43		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.28	4.16		
PULL #2	4.26	4.31		
PULL #3	4.30	4.33		
PULL #4	4.33	4.39		
PULL #5	4.33	4.41		
TOTAL	21.50	21.60		
AVG.	4.3	4.32		

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 98-24056

INITIAL

CUSTOMER ORDER NO.

JJM

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

11/12/98

11/13/98

C6348800

700 7.62

NATO

ACCESSORIES

FROM:

SHIP TO:

COMMANDER
1ST BN 1ST SFG A UNIT 35123
ATTN PROPERTY BOOK OFFICER
PSC 560 TORII STA. CA 96376

COMMANDER
1ST BN 1ST SFG A UNIT 35123
ATTN PROPERTY BOOK OFFICER
PSC 560 TORII STA. CA
96376

CUST NO: 198287 C.O.D.L.

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

PARTS

COMMENTS

Barrel

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6625 REV 7/97

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400064438

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6348800
19 Feb 1999

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .135
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.17
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .217083

THE AMR FOR THIS RIFLE IS: 1.067

CENTROIDAL DISTANCES

Ø TO	1	.144534
1 TO	2	.370277
1 TO	3	.296665
1 TO	4	.322591
1 TO	5	.691417


4
1+ <----POA
5
3
2

PATTERN #: 5
 POA TO CENTROID: .630
 MIN RADIUS : .369
 MEAN RADIUS : 1.184
 MAX RADIUS : 2.856
 CENTROID X : .622
 CENTROID Y : -.103

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348800

CENTERFIRE PATTERN # 5

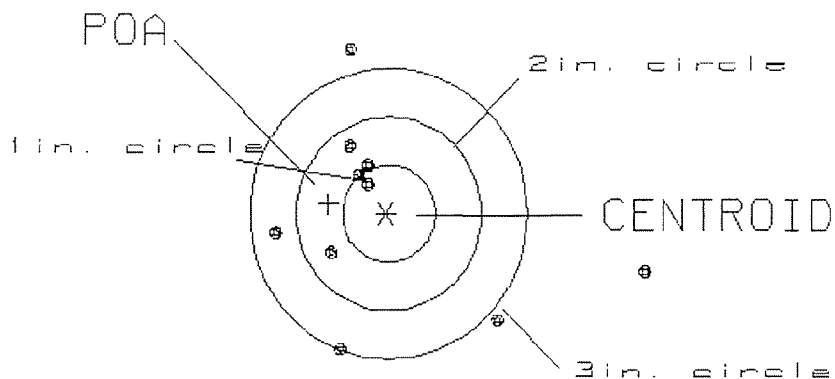

OF SHOTS= 10

IN CIRCLE

HS= 4.03
 VS= 3.05
 GS= 4.06


2
 5
 7

PATTERN #: 4
 POA TO CENTROID: .218
 MIN RADIUS : .645
 MEAN RADIUS : 1.222
 MAX RADIUS : 2.441
 CENTROID X : -.101
 CENTROID Y : .194

19 Feb 1999

FILE://Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348888

CENTERFIRE PATTERN # 4

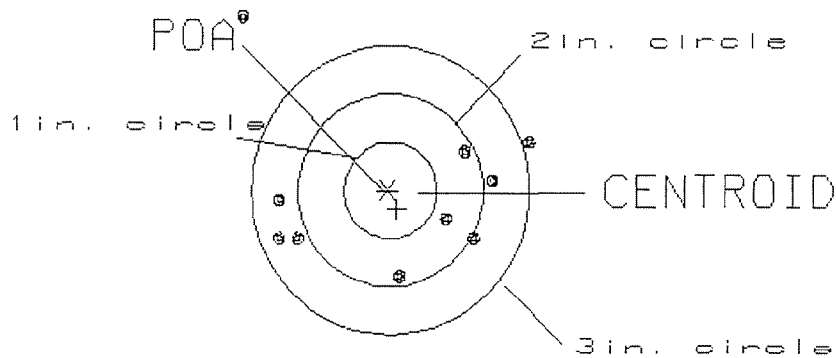

OF SHOTS= 10

IN CIRCLE

HS= 3.10
 VS= 2.76
 GS= 3.43

0
 3
 8


PATTERN #: 3

POA TO CENTROID: .382
 MIN RADIUS : .157
 MEAN RADIUS : .856
 MAX RADIUS : 2.119
 CENTROID X : .104
 CENTROID Y : -.368

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348800

CENTERFIRE PATTERN # 3

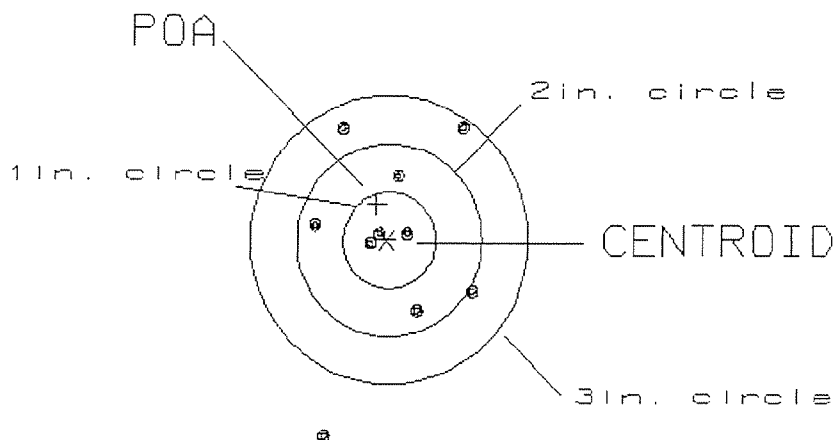

OF SHOTS= 10

IN CIRCLE

HS= 1.68
 VS= 3.15
 GS= 3.46

3
 6
 9


PATTERN #: 2

POA TO CENTROID: .461
 MIN RADIUS : .320
 MEAN RADIUS : .940
 MAX RADIUS : 1.734
 CENTROID X : .119
 CENTROID Y : -.446

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348800

CENTERFIRE PATTERN # 2

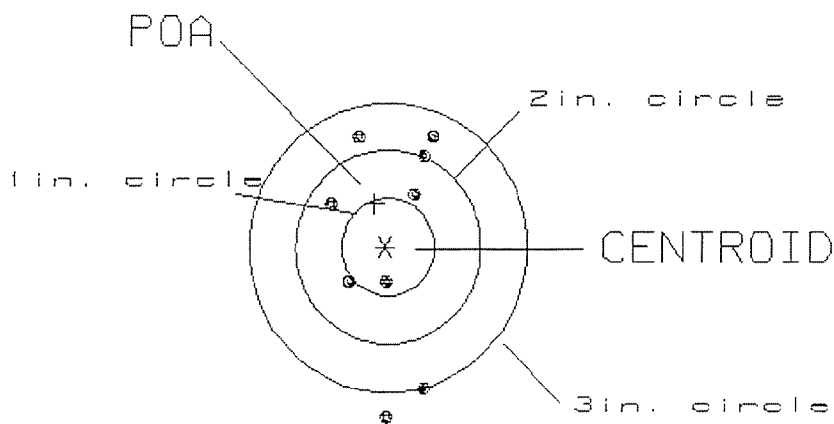

OF SHOTS= 10

IN CIRCLE

HS= 1.14

2

VS= 2.91

6

GS= 2.96


8

PATTERN #: ☐ 1 ☐
 POA TO CENTROID: .145
 MIN RADIUS : .147
 MEAN RADIUS : 1.132
 MAX RADIUS : 3.399
 CENTROID X : -.069
 CENTROID Y : -.127

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348800

CENTERFIRE PATTERN # 1

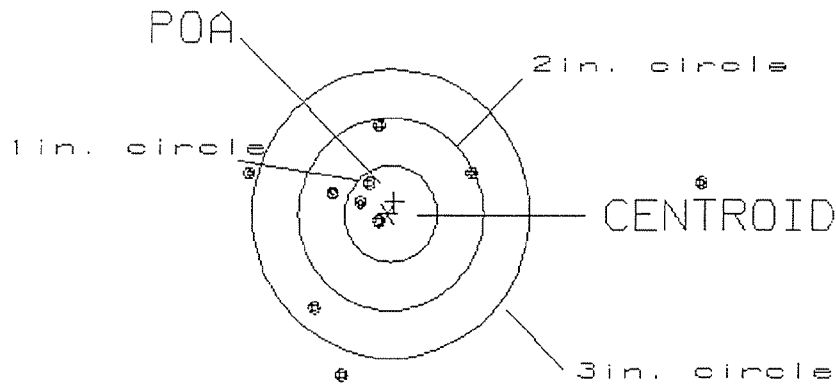

OF SHOTS= 10

IN CIRCLE

HS= 4.92
 VS= 2.61
 GS= 4.92

3
 6
 7