

C5611419

MODEL 700™ M24

Model **SMS**™

Action

Barrel Length

Capacity

Order No. **5715**

* Includes 1 in chamber.



Call
Remington

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00089037** Serial: C6611419 Model: M24 SWS Center Fire Caliber: 7.62 NATO Repairman: Status: Closed 12/6/2004 7:41:43 AM

Verify Repair

Address Information

Customer: Received From: Return To: Received From:

Name: **TRANSPORTATION OFFICER** **TRANSPORTATION OFFICER**

Address 1: **DEF DIST DEPOT ANNISTON AL** **DEF DIST DEPOT ANNISTON AL**

Address 2: **PO Box** **PO Box**

City: **ANNISTON** **ANNISTON**

State: **AL** Zip Code: **36201** Country: **US** State: **AL** Zip Code: **36201** Country: **US**

FFL ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information

Phone:

Fax:

Email:

Comments:

Received Condition

Condition: **Good**

Condition Notes:

CSR Notes:

Accessories Received

Code	Desc	Qty
A006	Sling Strap	1
A007	With Stud	3
A010	Hard Case	1
A017	Scope Base	1
A026	Scope W/CASE	1
A065	Deployment Kit	1
A057	Front and Rear Sgt Base	1

Repair Search Refresh Close

maglev 12/6/2004 8:53 AM TCAPS NUM JINS SOPL

start 2 2 2 2

Serial Number: **C6611419**

Model: **M24 SWS**

RE00089037

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6611419.__0
FILE DATE AND TIME: 01/06/2005 07:16

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.035
The Average Y Centroid of the Five Target Set:	-0.068
The Average Point of Impact of the Five Target Set:	0.077
The Average Mean Radius of the Five Target Set:	0.646
The Distance from POA to Centroid Target #1:	0.049
The Distance from Centroid Target #2 to Centroid Target #1:	0.079
The Distance from Centroid Target #3 to Centroid Target #1:	0.143
The Distance from Centroid Target #4 to Centroid Target #1:	0.071
The Distance from Centroid Target #5 to Centroid Target #1:	0.057

SERIAL NUMBER: C6611419.___0

TARGET NUMBER: 1

FILE DATE: 01/06/2005

FILE TIME: 07:16

POINT#	X	Y
1:	0.972	0.476
2:	-0.100	1.032
3:	0.005	0.568
4:	-0.504	0.522
5:	0.364	0.058
6:	-0.029	0.132
7:	0.047	-0.285
8:	-0.483	-0.646
9:	0.295	-0.736
10:	-0.589	-1.615

X CENTROID: -0.002

Y CENTROID: -0.049

POA TO CENTROID: 0.049

HORZ SPREAD: 1.561

VERT SPREAD: 2.647

GROUP SPREAD: 2.692

MIN RADIUS: 0.183


MAX RADIUS: 1.672

MEAN RADIUS: 0.756

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 9

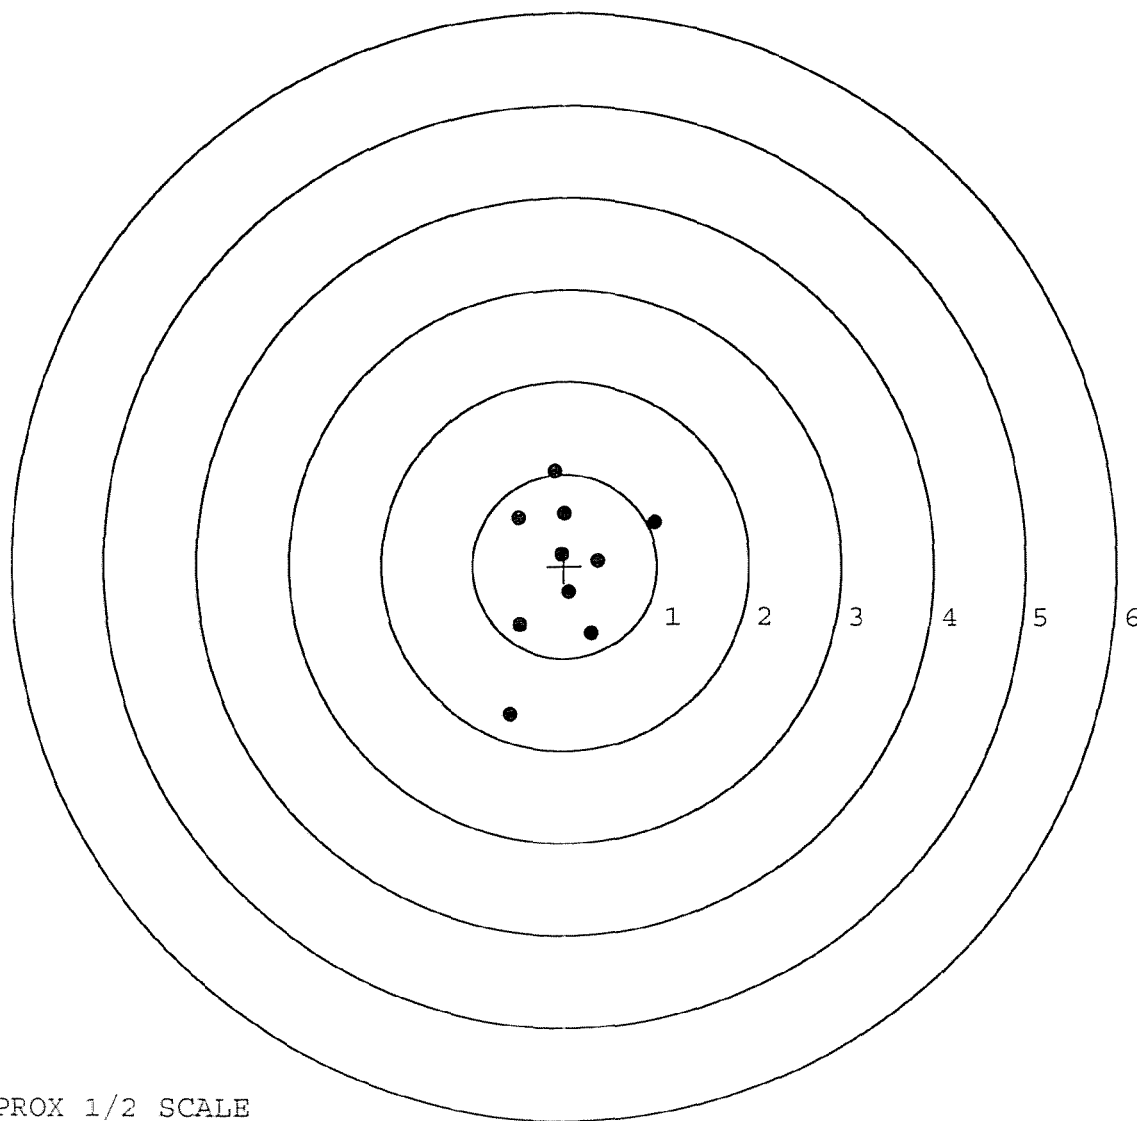


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6611419. __0
TARGET NUMBER: 2
FILE DATE: 01/06/2005
FILE TIME: 07:16

X CENTROID: 0.007
Y CENTROID: 0.029
POA TO CENTROID: 0.030
HORZ SPREAD: 1.765
VERT SPREAD: 2.125
GROUP SPREAD: 2.198
MIN RADIUS: 0.334
MAX RADIUS: 1.134
MEAN RADIUS: 0.729
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	1.018	0.265
2:	0.495	-0.965
3:	0.223	-0.269
4:	-0.010	-0.340
5:	-0.330	-0.389
6:	-0.099	-0.691
7:	-0.747	0.379
8:	-0.031	0.361
9:	-0.381	0.776
10:	-0.066	1.160

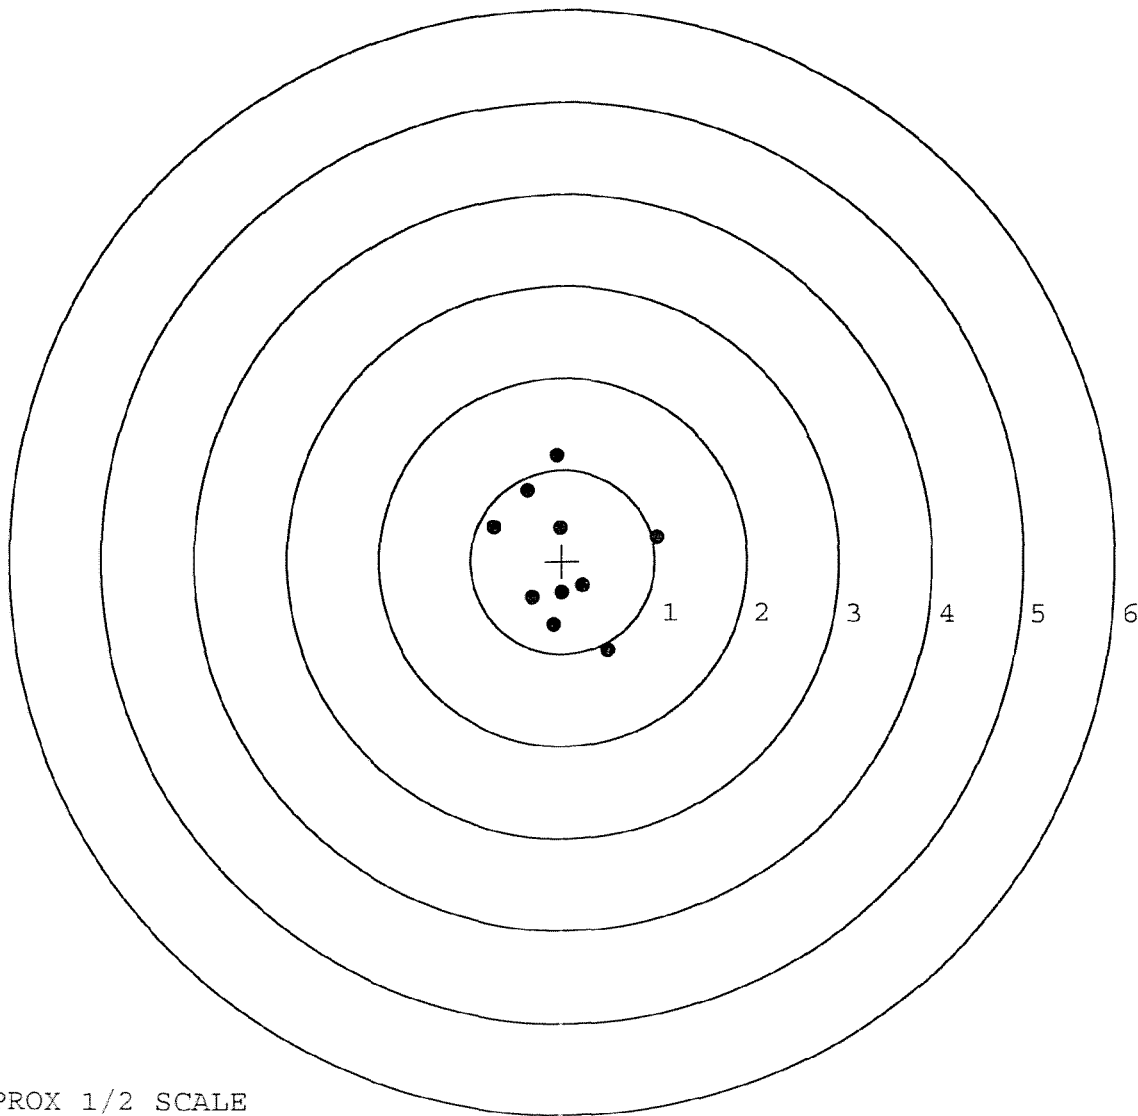

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6611419. __ 0

TARGET NUMBER: 3

FILE DATE: 01/06/2005

FILE TIME: 07:16

POINT#	X	Y
1:	0.531	-0.247
2:	0.148	-1.165
3:	-0.018	-0.421
4:	-0.458	-0.443
5:	0.128	0.167
6:	0.142	0.628
7:	-0.357	0.693
8:	-0.583	0.481
9:	-0.218	-0.279
10:	-0.627	-0.524

X CENTROID: -0.131

Y CENTROID: -0.111

POA TO CENTROID: 0.172

HORZ SPREAD: 1.158

VERT SPREAD: 1.858

GROUP SPREAD: 1.925

MIN RADIUS: 0.189


MAX RADIUS: 1.090

MEAN RADIUS: 0.614

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

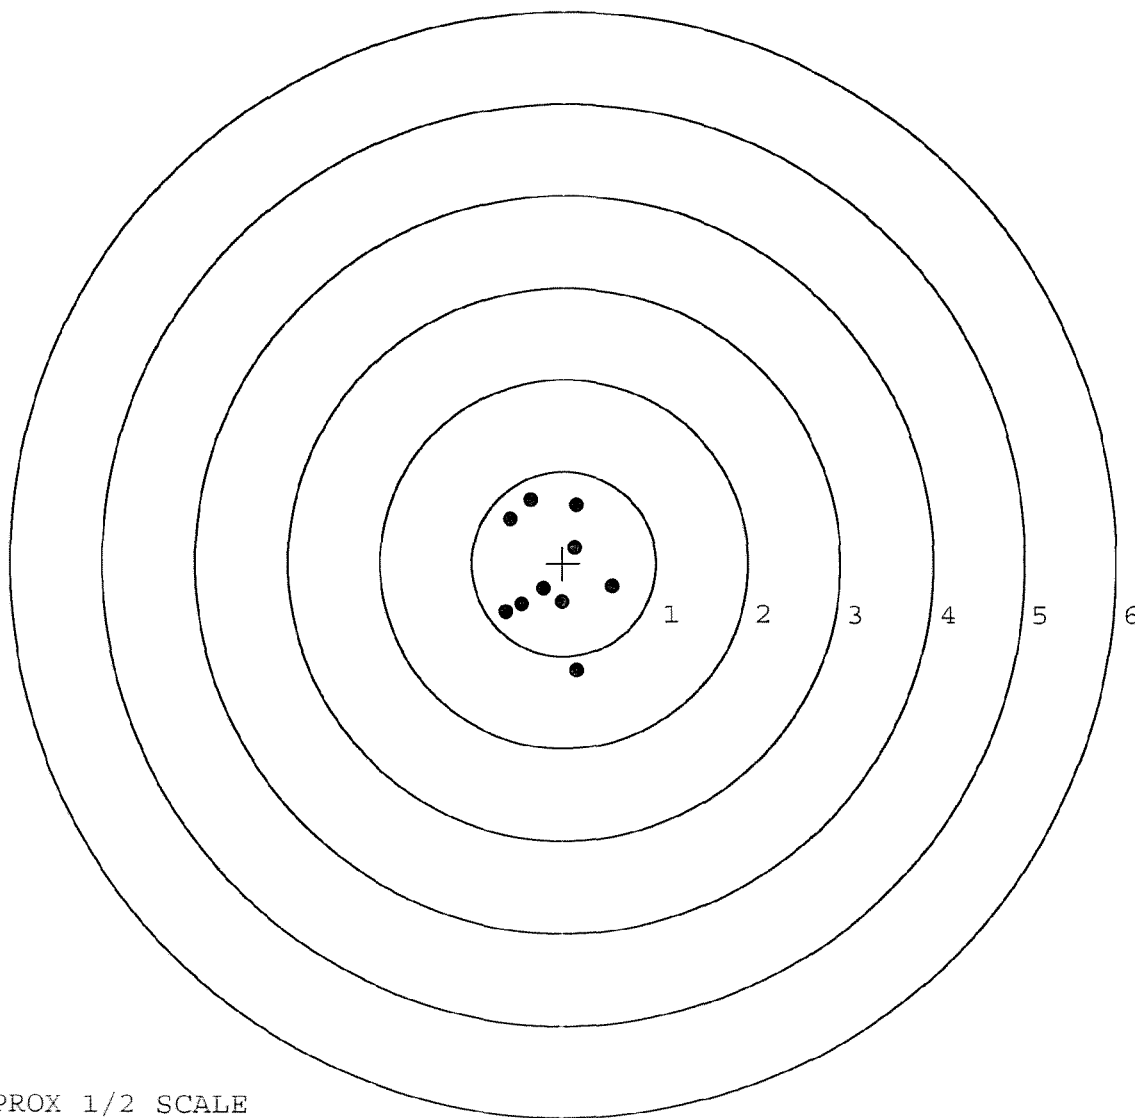


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6611419. __0
TARGET NUMBER: 4
FILE DATE: 01/06/2005
FILE TIME: 07:16

X CENTROID: -0.007
Y CENTROID: -0.120
POA TO CENTROID: 0.120
HORZ SPREAD: 1.020
VERT SPREAD: 1.654
GROUP SPREAD: 1.663
MIN RADIUS: 0.105
MAX RADIUS: 0.949
MEAN RADIUS: 0.528
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.032	-1.068
2:	-0.497	-0.750
3:	-0.511	-0.038
4:	-0.203	0.586
5:	0.143	0.482
6:	0.509	0.066
7:	0.386	-0.419
8:	-0.124	0.116
9:	0.016	-0.017
10:	0.245	-0.156

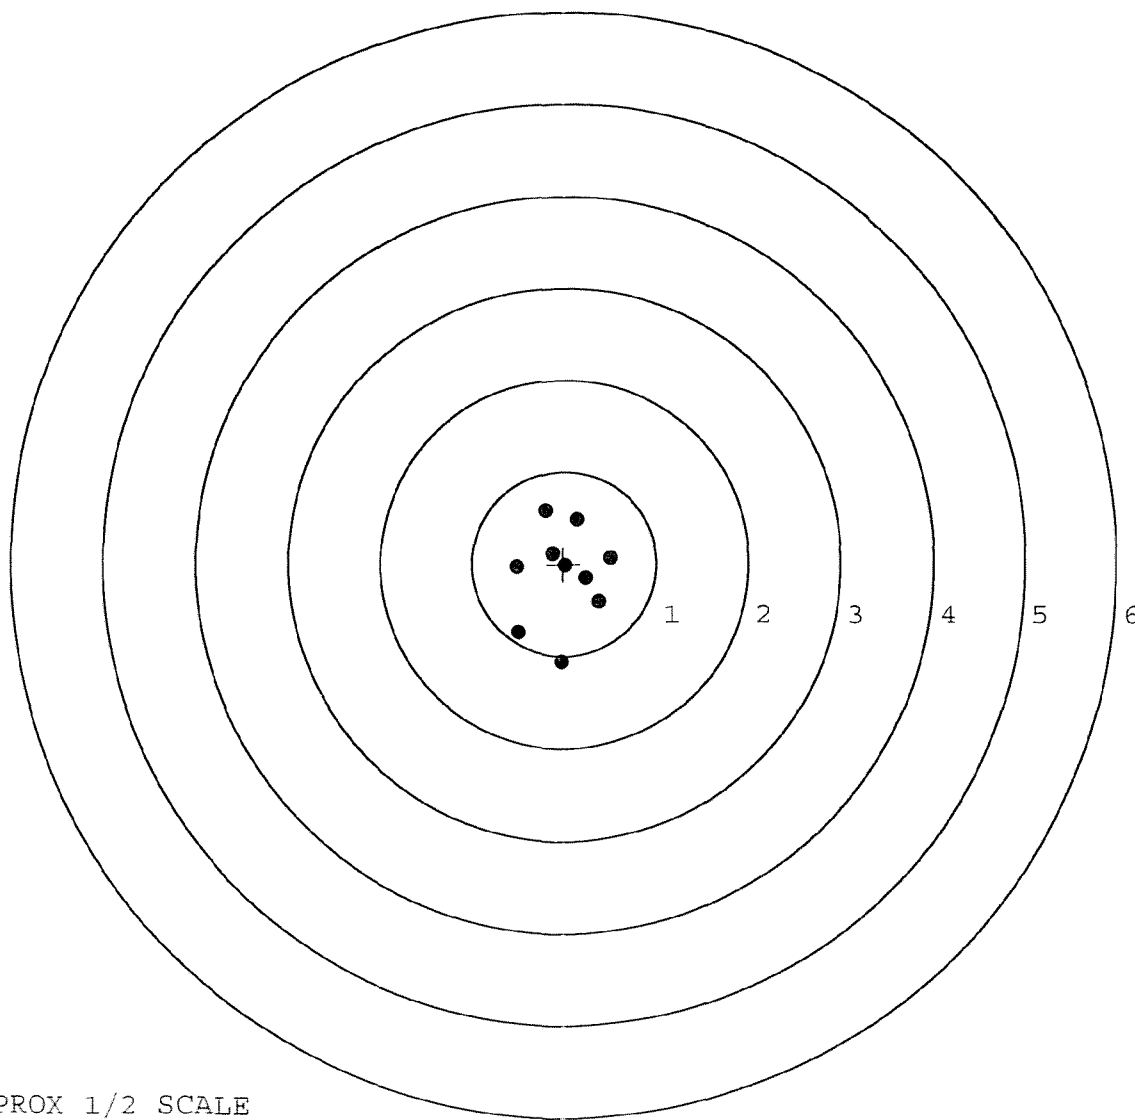


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6611419.___0
TARGET NUMBER: 5
FILE DATE: 01/06/2005
FILE TIME: 07:16

X CENTROID: -0.044
Y CENTROID: -0.088
POA TO CENTROID: 0.098
HORZ SPREAD: 1.796
VERT SPREAD: 1.905
GROUP SPREAD: 2.309
MIN RADIUS: 0.224
MAX RADIUS: 1.279
MEAN RADIUS: 0.604
IN 1 IN DIAMETER: 6
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.828	-1.023
2:	0.261	-0.695
3:	-0.477	0.882
4:	-0.968	0.124
5:	-0.332	0.294
6:	-0.044	0.296
7:	0.288	0.124
8:	0.148	-0.203
9:	-0.221	-0.282
10:	0.075	-0.397

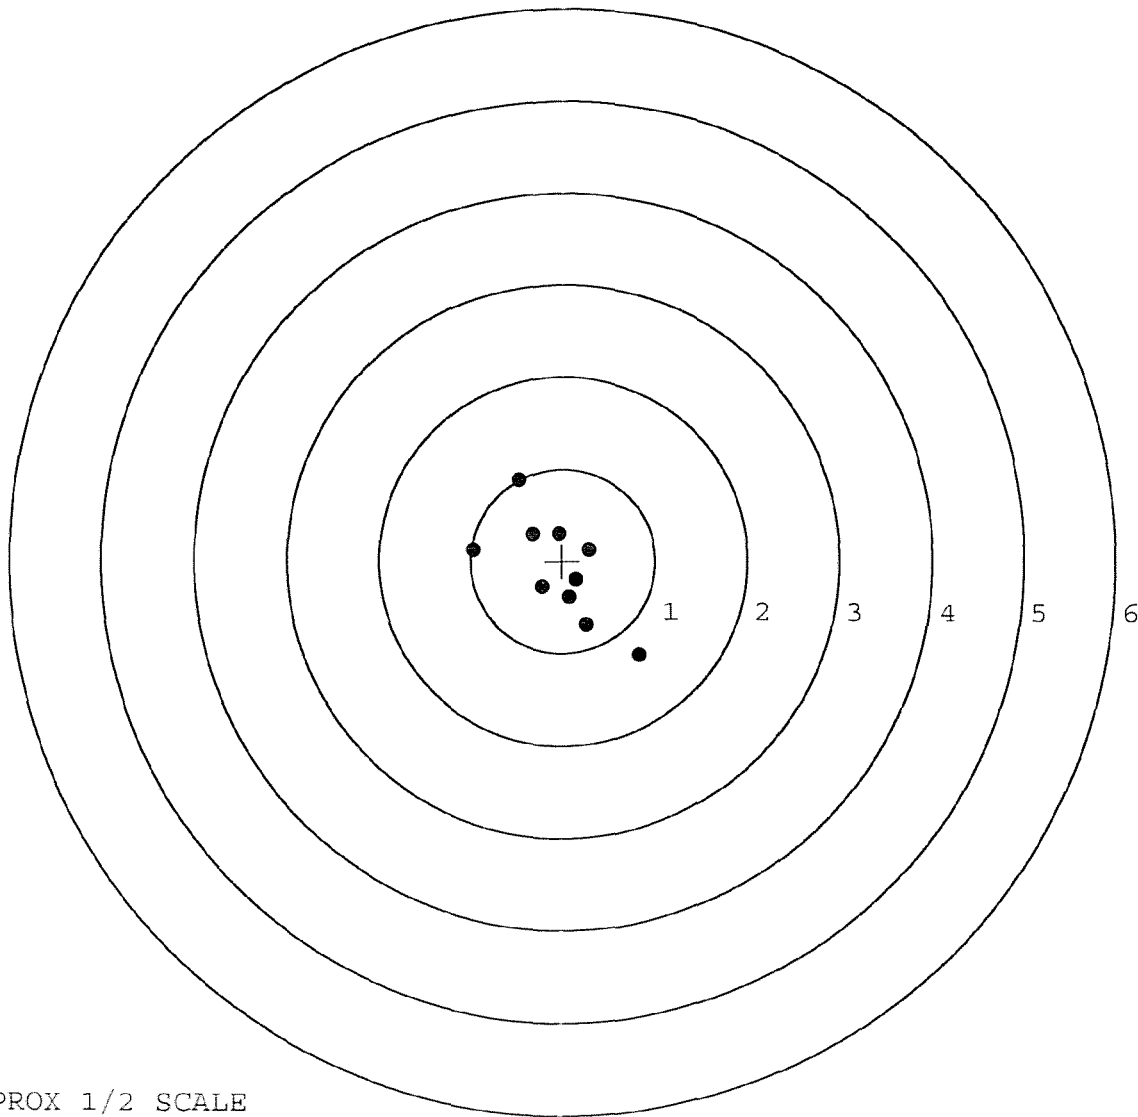

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R & E NUMBER	89037		
SERIAL NUMBER	C 6611419		
LOG-IN DATE	12-6-04		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	12-7-04	AC
560 A	RE-BARREL	12-16-04	RTZ
B	DRILL AND TAP	12-27-04	TRW
575	ASSEMBLE	12-16-04	RTZ
600	PROOF	12-16-04	RTZ
605	CHECK HEADSPACE	12-16-04	RTZ
610	DIS-ASSEMBLE GUN	12-27-04	RTZ
612	MAGNAFLUX	OPERATOR	
615	ROLLMARK CALIBER	12/27/04	CW
618	ROTO-BLAST	12/28/04	DG
620	APPLY COATINGS	1/3/05	HP
625 A	FINAL ASSEMBLY	1-5-05	RTZ
B	TRIGGER PULL TEST	N/A	
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	1-6-05	TRW
655	FINAL INSPECT	1-11-05	AC
660	PACK	3-1-05	ADA
		SHIP DATE	
		QAR INSPECTION DATE	

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 95-20290

INITIAL
JUM

CUSTOMER ORDER NO.

W/DEPLOYMENT KIT, LEUPOLD 10X SCOPE

Scope S/N 89-0593

DATE RECEIVED
08/16/95

DATE OPENED
08/16/95

DATE CODE

SERIAL NUMBER
C6611419

NEW SERIAL NUMBER

MODEL AND GRADE
700 7.62

NATO

ACCESSORIES

SLING STRAP

W/STUDS

W/SWIVELS

SOFT CASE

HARD CASE

FROM:

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON AL 36201

SHIP TO:

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON AL 36201

CUST NO: 098397 C.E.D.

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

PARTS

COMMENTS

Trigger Assy
Front & Rear Sight Assy

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400076552

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. C6611419

DATE 7-16-96

TESTER DA

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.50	2.65	2.72	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.69	2.84	2.88	
PULL #3	2.71	2.67	2.32	
PULL #4	2.58	2.68	2.74	
PULL #5	2.68	2.80	2.73	
TOTAL	1316	1364	1339	
AVG.	2.63	2.72	2.67	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.20	3.13	
PULL #2	3.15	3.18	
PULL #3	3.29	3.12	
PULL #4	3.19	3.23	
PULL #5	2.94	3.10	
TOTAL	1577	15.76	
AVG.	3.15	3.15	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.28	4.22		4.10
PULL #2	4.16	4.18		4.17
PULL #3	4.14	4.03		4.13
PULL #4	4.00	4.04		4.00
PULL #5	4.17	4.11		4.04
TOTAL	20.75	20.58		20.44
AVG.	4.15	4.11		4.08

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	5	5	5			8/2	SF
	G) Safety Off Force	3.5	4	4.5			8/2	SF
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent	.023	.022	.0215			8/2	SF
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test							
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo							
655	Final Inspection A) Headspace							
	B) Trigger Pull	2.39	2.55	2.56	2.48	2.47	8/2	SF
	C) Function							
660	Pack							

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock			
600	Proof			
607.	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			5
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

Remington
 MODEL 700TM H24

VERY IMPORTANT:
 Instruction Book
 enclosed to assure
 safe use of this
 firearm.


REG. U.S. PAT. & TM. OFF.

SERIAL NO.
 C6811419


ORDER NO.
 5716

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

20



UPC



0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C 6611419

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		3/17/91	K.S.
600	Proof		3/17/91	K.S.
607	Check Headspace		3/17/91	K.S.
610	Dis-assemble Gun		3/17/91	K.S.
612	Magnaflux Barrel Action		3/28/91	KR
	Magnaflux Bolt		"	KR
615	Rollmark Caliber		3/28/91	LS
617	Drill and Tap Sight Holes	APR 3 1991		LS
618	Polish Barrel	APR 3 1991		LS
620	Apply Coatings (Barrel Action)		4-19-91	LS
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		5/1/91	LS
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		5/1/91	LS
	C) Inspect Ejector Hole for Chamfer		5/1/91	LS
	D) Oil Firing Pin Ass'y		5/1/91	LS
	E) Adjust Trigger Pull to Min Setting and Stake		5-10-91	DH

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	5	5	5			5-10-91	DH
	G) Safety Off Force	2	2	2			5-10-91	DH
	H) Trigger Pull Test & Retainability						5-10-91	DH
	I) Firing Pin Indent	.020	.021	.022			5-10-91	DH
	J) Assemble Stock						5/14/91	K-S
	K) Assemble Swivel Studs						5-20-91	AC
	L) Attach Front and Rear Sight Assemblies						5/14/91	K-S
	M) Iron Sight Alignment						5/14/91	K-S
	N) Detach Front & Rear Sights & place in numbered container						5/14/91	K-S
	O) Attach Scope to Rifle						5/14/91	K-S
	P) Detach & Attach Scope 20 Times						5/14/91	K-S
640	Gallery Target & Test						5-15-91	AF
	A) Time						"	AF
	B) Malfunctions						"	AF
	C) Pierced Primers						"	AF
	D) Optical Clarity of Scope						"	AF
645	Inspect for Live Ammo						5-19-91	AF
655	Final Inspection							
	A) Headspace						5-20-91	AC
	B) Trigger Pull	2.67	2.30	2.42	2.45	2.47	5-20-91	AC
	C) Function						5-20-91	AC
660	Pack						6-17-91	N

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. CCG11419

DATE 5-10-91

TESTER DH

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.65	2.71	2.71	2.67	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.65	2.56	2.74	2.50	
PULL #3	2.65	2.66	2.64	2.42	
PULL #4	2.58	2.40	2.74	2.45	
PULL #5	2.56	2.71	2.72	2.47	
TOTAL					
AVG.					

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.34	3.22		
PULL #2	3.37	3.27		
PULL #3	3.27	3.35		
PULL #4	3.27	3.36		
PULL #5	2.97	3.26		
TOTAL				
AVG.				

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.35	4.28		4.21
PULL #2	4.26	4.36		4.13
PULL #3	4.29	4.43		4.28
PULL #4	4.31	4.21		4.14
PULL #5	4.21	4.36		4.25
TOTAL				
AVG.				

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6611419
15 May 1991

CENTROIDAL DISTANCES

0 TO	1	.0912634
1 TO	2	.125718
1 TO	3	.405824
1 TO	4	.127456
1 TO	5	.135665

3B <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0542
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0016
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0542236
THE AMR FOR THIS RIFLE IS: .9616

15 May 1991

FILE:/PATTERNING/CENTERFIRE_PATT/G6611419

CENTERFIRE PATTERNS

1

POA

1 in circle

2 in circle

3 in circle

OF SHOTS- 10

IN CIR

1 in = 0

2 in = 4

3 in = 9

HS= 2.517

VS= 2.567

GS= 2.809

CENTROID *

PATTERN #



SHOTS (BEST OF)

10

9

8

MAXIMUM X

1.331

.908

.911

MINIMUM X

-1.186

-1.038

-1.035

MAXIMUM Y

1.405

1.294

1.130

MINIMUM Y

-1.162

-1.273

-1.111

CENTROID X

.052

-.096

-.099

CENTROID Y

.075

.186

.024

POA TO CENTROID in.

.091

.209

.102

MIN RADIUS

.568

.529

.608

MEAN RADIUS

1.106

1.022

.981

MAX RADIUS

1.665

1.350

1.454

HORIZONTAL SPREAD

2.517

1.946

1.946

VERTICAL SPREAD

2.567

2.567

2.244

EXTREME SPREAD

2.809

2.598

2.585

NUMBER IN ONE INCH CIRCLE =

0

NUMBER IN TWO INCH CIRCLE =

4


NUMBER IN THREE INCH CIRCLE =

9

15 May 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6611419

CENTERFIRE PATTERNS # 2

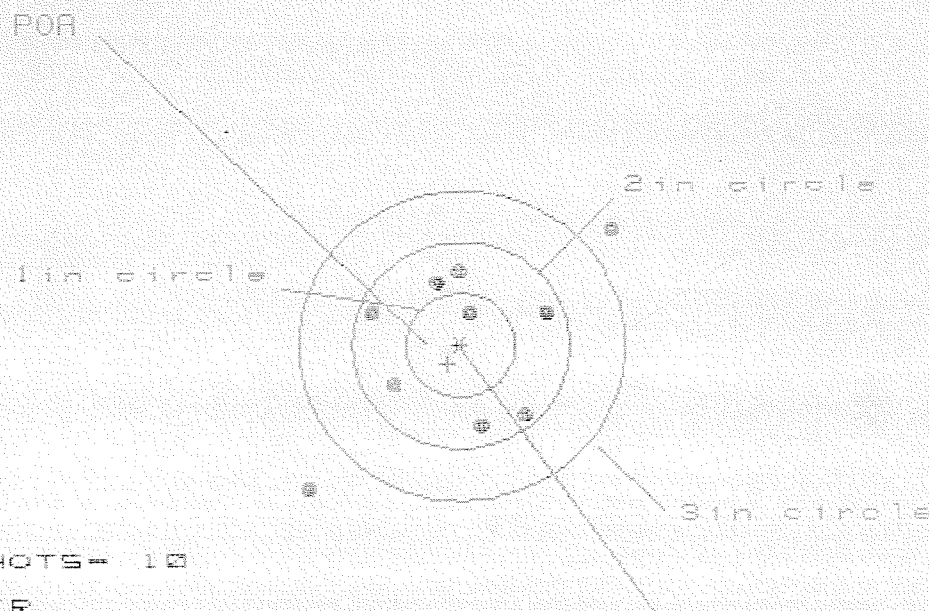

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 8

3 in = 8

HS= 2.801

VS= 2.454

GS= 3.724

PATTERN #	1	2	3
SHOTS (BEST OF)	10	8	8
MAXIMUM X	1.336	1.173	.809
MINIMUM X	-1.465	-.934	-.787
MAXIMUM Y	1.085	.933	.655
MINIMUM Y	-1.369	-.938	-.813
CENTROID X	.118	.291	.104
CENTROID Y	.182	.334	.217
POA TO CENTROID (in.)	.217	.436	.255
MIN RADIUS	.300	.142	.262
MEAN RADIUS	.940	.793	.704
MAX RADIUS	2.005	1.499	.868
HORIZONTAL SPREAD	2.801	2.107	1.596
VERTICAL SPREAD	2.454	1.863	1.468
EXTREME SPREAD	3.724	2.454	1.614
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		8	
NUMBER IN THREE INCH CIRCLE =		8	

15 May 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6611419

CENTERFIRE PATTERNS

3

POA

1 in circle

2 in circle

3 in circle

OF SHOTS- 10

IN CIR

1 in = 4

2 in = 5

3 in = 7

HS= 1.713

VS= 2.768

GS= 2.997

CENTROID *

PATTERN #

3

SHOTS (BEST OF)

10

9

8

MAXIMUM X

.863

.768

.834

MINIMUM X

-.850

-.897

-.831

MAXIMUM Y

1.268

1.102

.910

MINIMUM Y

-1.500

-1.535

-1.723

CENTROID X

-.195

-.100

-.166

CENTROID Y

-.247

-.081

.111

POA TO CENTROID in.

.315

.129

.200

MIN RADIUS

.209

.119

.093

MEAN RADIUS

.975

.800

.657

MAX RADIUS

1.724

1.654

1.812

HORIZONTAL SPREAD

1.713

1.665

1.665

VERTICAL SPREAD

2.768

2.637

2.633

EXTREME SPREAD

2.997

2.997

2.647

NUMBER IN ONE INCH CIRCLE =

4

NUMBER IN TWO INCH CIRCLE =

5

NUMBER IN THREE INCH CIRCLE =

7

15 May 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C8611419

CENTERFIRE PATTERNS

4

POA

1 in circle

2 in circle

3 in circle

OF SHOTS - 10

IN CIR

1 in = 2

2 in = 5

3 in = 9

HS = 2.557

VS = 2.155

GS = 2.631

CENTROID *

PATTERN #

SHOTS (BEST OF)

MAXIMUM X

MINIMUM X

MAXIMUM Y

MINIMUM Y

CENTROID X

CENTROID Y

POA TO CENTROID in.

MIN RADIUS

MEAN RADIUS

MAX RADIUS

HORIZONTAL SPREAD

VERTICAL SPREAD

EXTREME SPREAD

NUMBER IN ONE INCH CIRCLE =

NUMBER IN TWO INCH CIRCLE =

NUMBER IN THREE INCH CIRCLE =

9

1.203

-1.364

.585

-.883

.095

.175

.199

.303

.881

1.433

2.567

2.155

2.593

2

5

9

8

1.033

-1.378

.564

-.904

.265

.196

.330

.317

.815

1.395

2.411


1.468

2.589

15 MAR 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C8611419

CENTERFIRE PATTERNS # 5

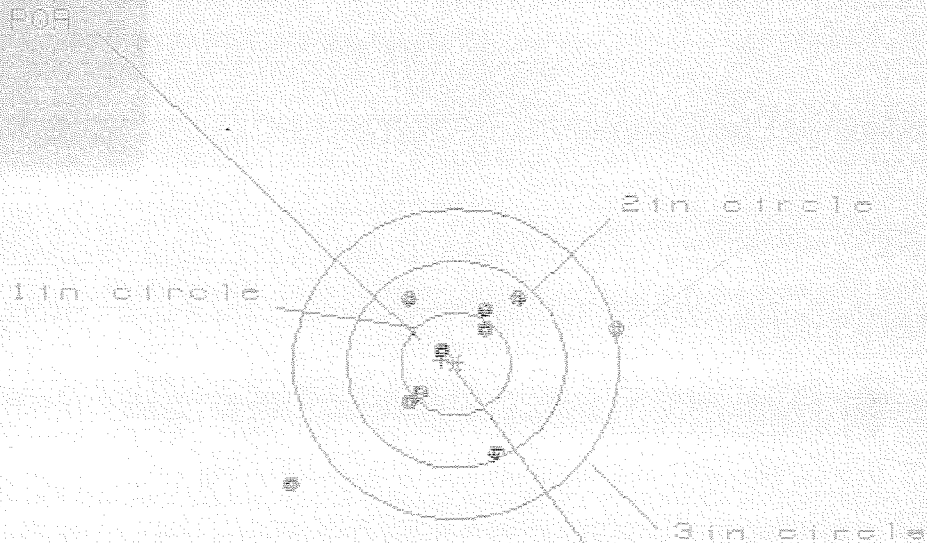

OF SHOTS= 10

IN CIR

1in = 3

2in = 8

3in = 8

HS= 3.041

VS= 1.782

GS= 3.381

CENTROID *

PATTERN #		10	9	8
SHOTS (BEST OF)		10	9	8
MAXIMUM X		1.478	1.384	.579
MINIMUM X		-1.563	-.606	-.443
MAXIMUM Y		.659	.534	.563
MINIMUM Y		-1.123	-.977	-.948
CENTROID X		.130	.384	.141
CENTROID Y		-.036	.089	.060
POA TO CENTROID in.		.135	.316	.153
MIN RADIUS		.219	.196	.171
MEAN RADIUS		.823	.683	.581
MAX RADIUS		1.925	1.325	1.013
HORIZONTAL SPREAD		3.041	1.910	1.021
VERTICAL SPREAD		1.782	1.511	1.511
EXTREME SPREAD		3.381	2.047	1.669
NUMBER IN ONE INCH CIRCLE =		3	3	3
NUMBER IN TWO INCH CIRCLE =		8	8	8
NUMBER IN THREE INCH CIRCLE =		8	8	8