

C6611577

MODEL 700™ M24

Model **SWS**™

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00092974** Serial: **C6611577** Model: **M24 SWS** Center Fire
Caliber: **7.62 NATO** Produced: **06/19/1991** Repairman: Status: **Closed 2/11/2005 7:30:28 AM**

Verify Repair

Address Information

Customer ☒ Received From Return To ☐ Received From

Name: **DEF DIST DEPOT ANNISTON** **DEF DIST DEPOT ANNISTON**

Address 1: Address 2: PO Box: PO Box:

City: **ANNISTON** **ANNISTON**

State: **AL** Zip Code: **362014199** Country: **US** State: **AL** Zip Code: **362014199** Country: **US**

FFL

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information

Phone: Fax: Email: Comments:

Received Condition

Good

Condition Notes:

CSR Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A010	Hard Case	1
A017	Scope Base	1
A026	Scope	1
A057	Fit and Rear Sgt Base	1

Repair Search Refresh Close

negat 2/14/2005 8:10 AM CAPS INUM INS SCPL

start 5 2 3 Arms Services

Serial Number: **C6611577**

Model: **M24 SWS**



RE00092974

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6611577.__1

FILE DATE AND TIME: 04/28/2005 08:04


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.126
The Average Y Centroid of the Five Target Set:	0.014
The Average Point of Impact of the Five Target Set:	0.127
The Average Mean Radius of the Five Target Set:	0.637
The Distance from POA to Centroid Target #1:	0.140
The Distance from Centroid Target #2 to Centroid Target #1:	0.485
The Distance from Centroid Target #3 to Centroid Target #1:	0.222
The Distance from Centroid Target #4 to Centroid Target #1:	0.087
The Distance from Centroid Target #5 to Centroid Target #1:	0.226

SERIAL NUMBER: C6611577. __1
TARGET NUMBER: 1
FILE DATE: 04/28/2005
FILE TIME: 08:04

POINT#	X	Y
1:	0.386	-0.333
2:	0.583	-0.175
3:	0.295	0.284
4:	0.177	0.531
5:	-0.493	0.755
6:	-0.561	0.130
7:	-0.503	-0.109
8:	-0.303	-0.302
9:	-0.451	-0.488
10:	-0.350	-0.987

X CENTROID: -0.122
Y CENTROID: -0.069
POA TO CENTROID: 0.140
HORZ SPREAD: 1.144
VERT SPREAD: 1.742
GROUP SPREAD: 1.748
MIN RADIUS: 0.295
MAX RADIUS: 0.946
MEAN RADIUS: 0.604
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

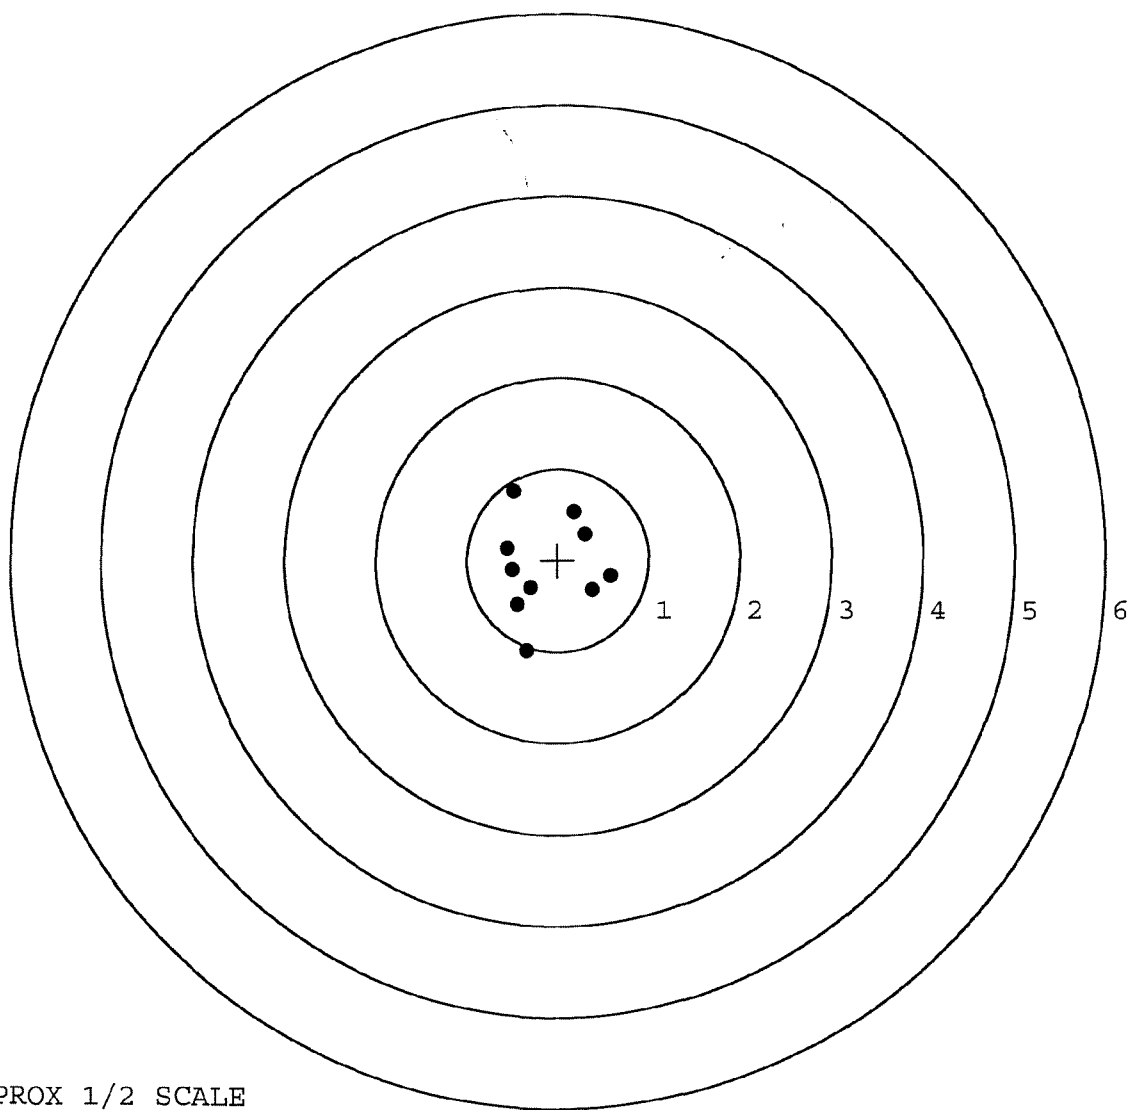

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6611577. __1

TARGET NUMBER: 2

FILE DATE: 04/28/2005

FILE TIME: 08:04

POINT#	X	Y
1:	-0.496	-0.262
2:	-0.652	-0.123
3:	-0.663	-0.419
4:	-1.021	-0.261
5:	-1.079	0.116
6:	-1.501	0.293
7:	-0.955	0.449
8:	-0.181	0.709
9:	0.260	0.336
10:	0.420	-0.164

X CENTROID: -0.587

Y CENTROID: 0.067

POA TO CENTROID: 0.591

HORZ SPREAD: 1.921

VERT SPREAD: 1.128

GROUP SPREAD: 1.975

MIN RADIUS: 0.201


MAX RADIUS: 1.033

MEAN RADIUS: 0.623

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 9


in 3 IN DIAMETER: 10

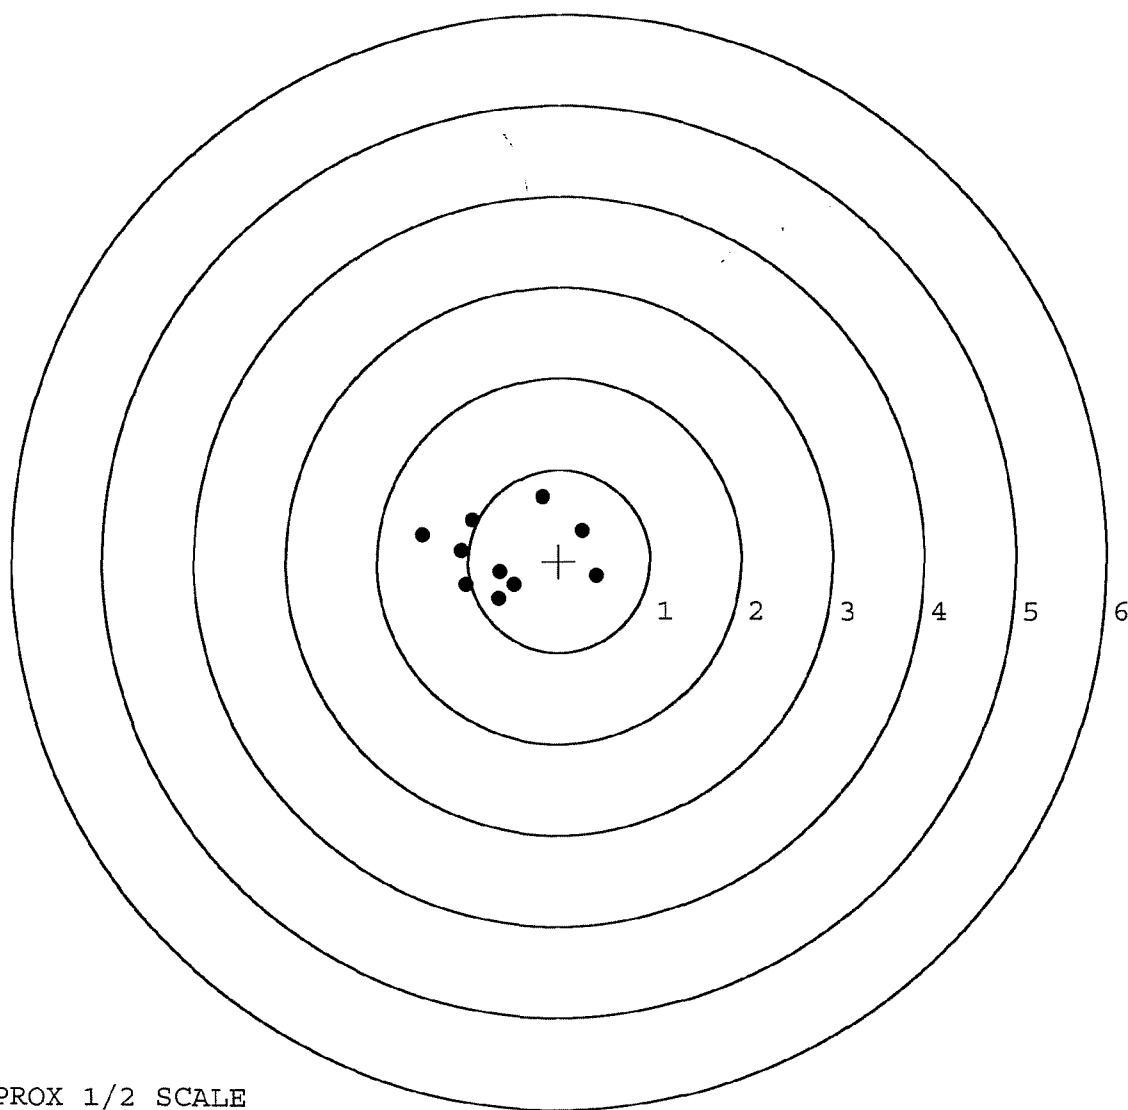

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6611577. __1
TARGET NUMBER: 3
FILE DATE: 04/28/2005
FILE TIME: 08:04

	POINT#	X	Y
	1:	-0.007	0.000
	2:	-0.368	-0.454
	3:	0.135	0.279
	4:	0.349	0.268
	5:	0.839	-0.114
	6:	0.500	-0.793
	7:	0.349	0.789
	8:	-0.826	0.295
	9:	-0.998	-0.297
	10:	0.498	0.764
X CENTROID:		0.047	
Y CENTROID:		0.074	
POA TO CENTROID:		0.087	
HORZ SPREAD:		1.837	
VERT SPREAD:		1.582	
GROUP SPREAD:		1.846	
MIN RADIUS:		0.091	
MAX RADIUS:		1.109	
MEAN RADIUS:		0.675	
# IN 1 IN DIAMETER:		3	
# IN 2 IN DIAMETER:		9	
# in 3 IN DIAMETER:		10	

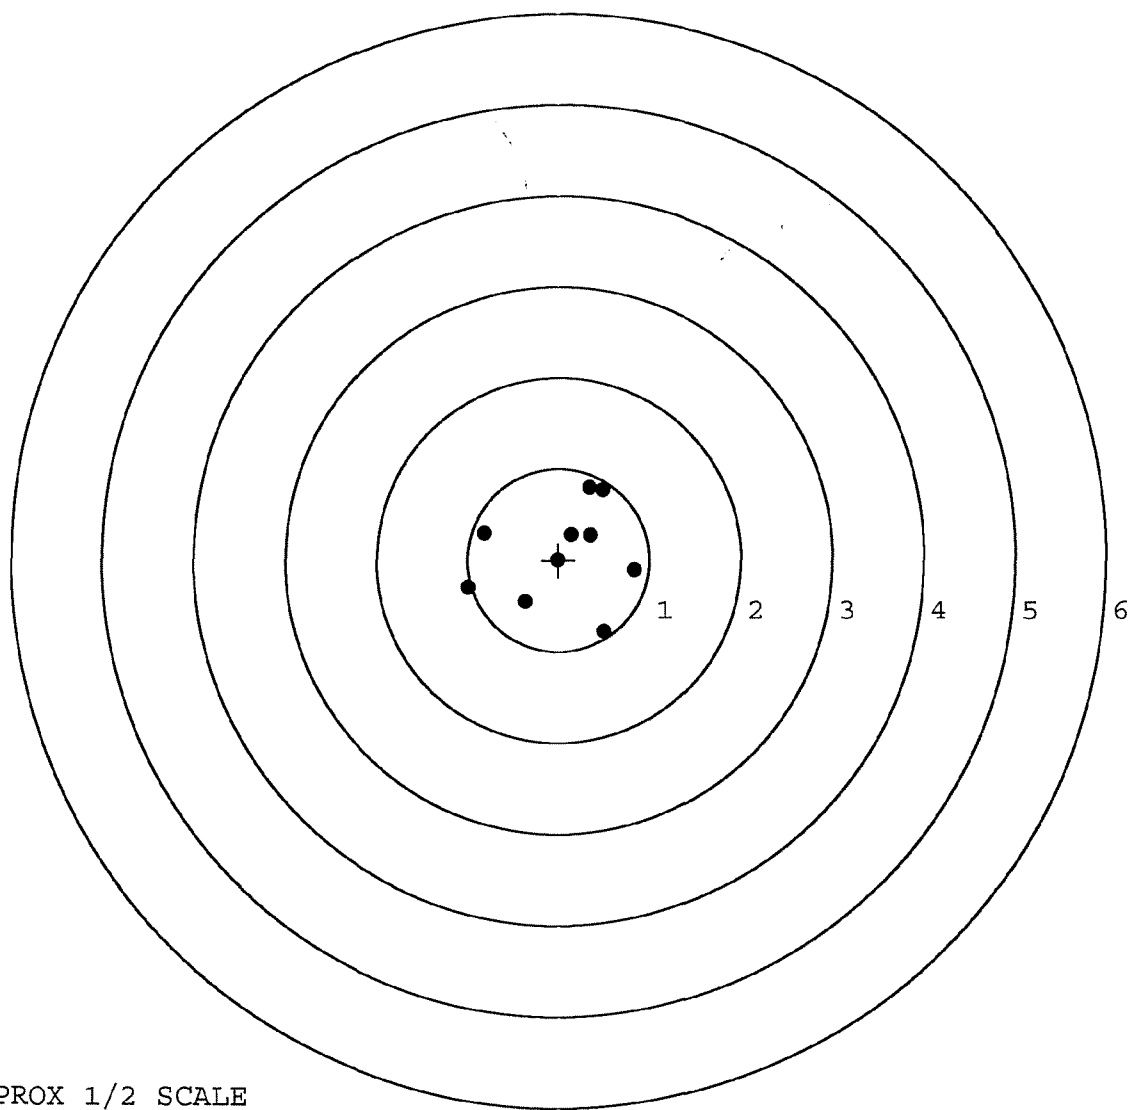

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6611577. 1

TARGET NUMBER: 4

FILE DATE: 04/28/2005

FILE TIME: 08:04

POINT#	X	Y
1:	0.302	0.057
2:	0.471	-0.295
3:	0.600	-0.621
4:	0.110	-0.651
5:	-0.469	-0.514
6:	-0.385	-0.006
7:	-0.548	0.134
8:	-0.772	0.381
9:	-0.092	0.502
10:	0.234	0.872

X CENTROID: -0.055

Y CENTROID: -0.014

POA TO CENTROID: 0.057

HORZ SPREAD: 1.372

VERT SPREAD: 1.523

GROUP SPREAD: 1.554

MIN RADIUS: 0.330


MAX RADIUS: 0.932

MEAN RADIUS: 0.627

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

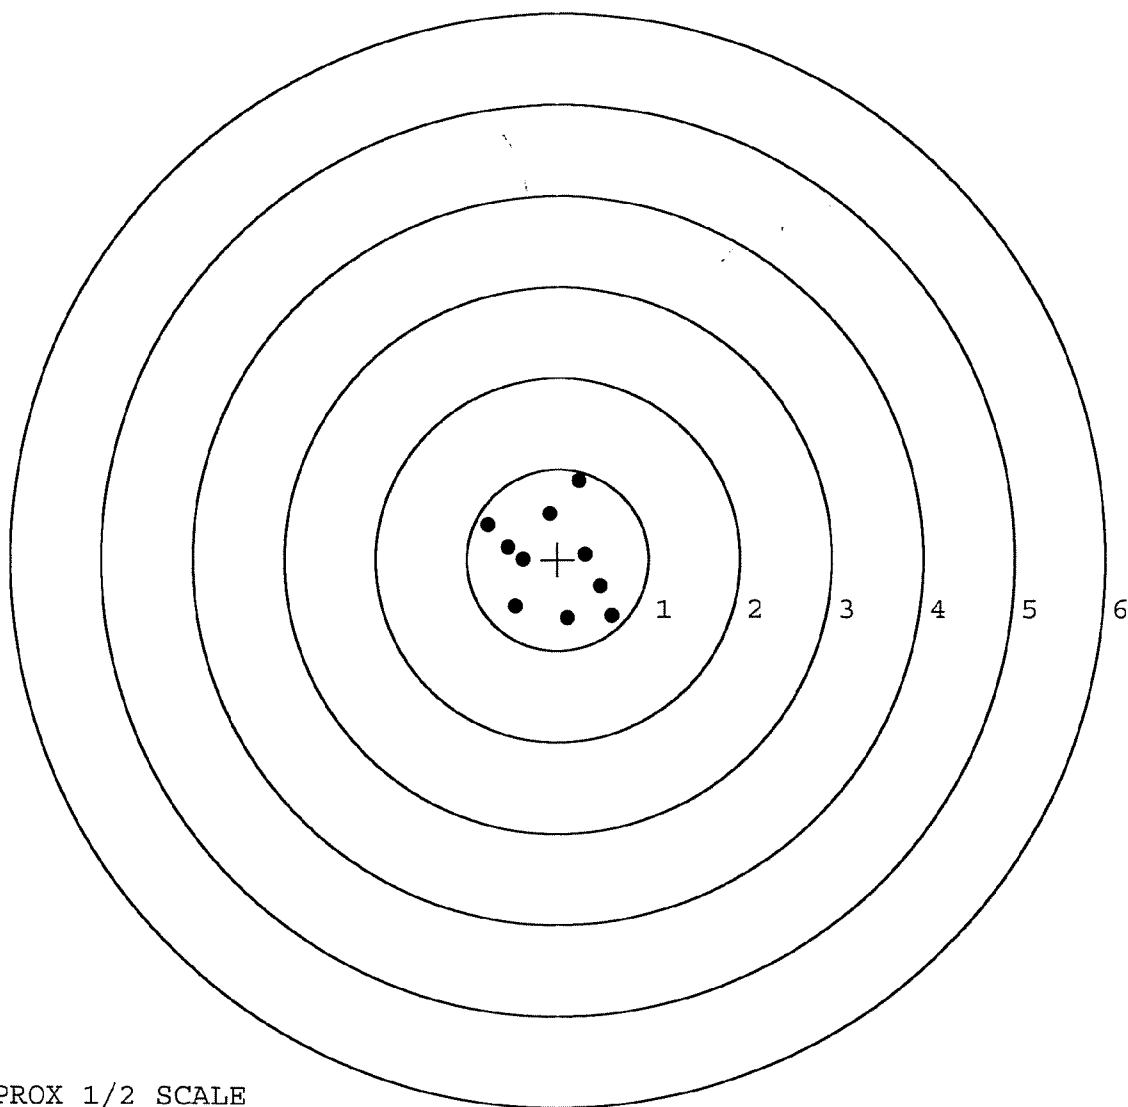


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6611577. __1
TARGET NUMBER: 5
FILE DATE: 04/28/2005
FILE TIME: 08:04

	POINT#	X	Y
	1:	0.209	-0.161
	2:	0.470	-0.277
	3:	0.791	-0.637
	4:	0.967	0.133
	5:	0.342	0.277
	6:	0.044	0.714
	7:	-0.259	0.684
	8:	-0.795	-0.067
	9:	-0.467	-0.019
	10:	-0.424	-0.511

X CENTROID: 0.088
Y CENTROID: 0.014
POA TO CENTROID: 0.089
HORZ SPREAD: 1.762
VERT SPREAD: 1.351
GROUP SPREAD: 1.687
MIN RADIUS: 0.213
MAX RADIUS: 0.958
MEAN RADIUS: 0.654
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

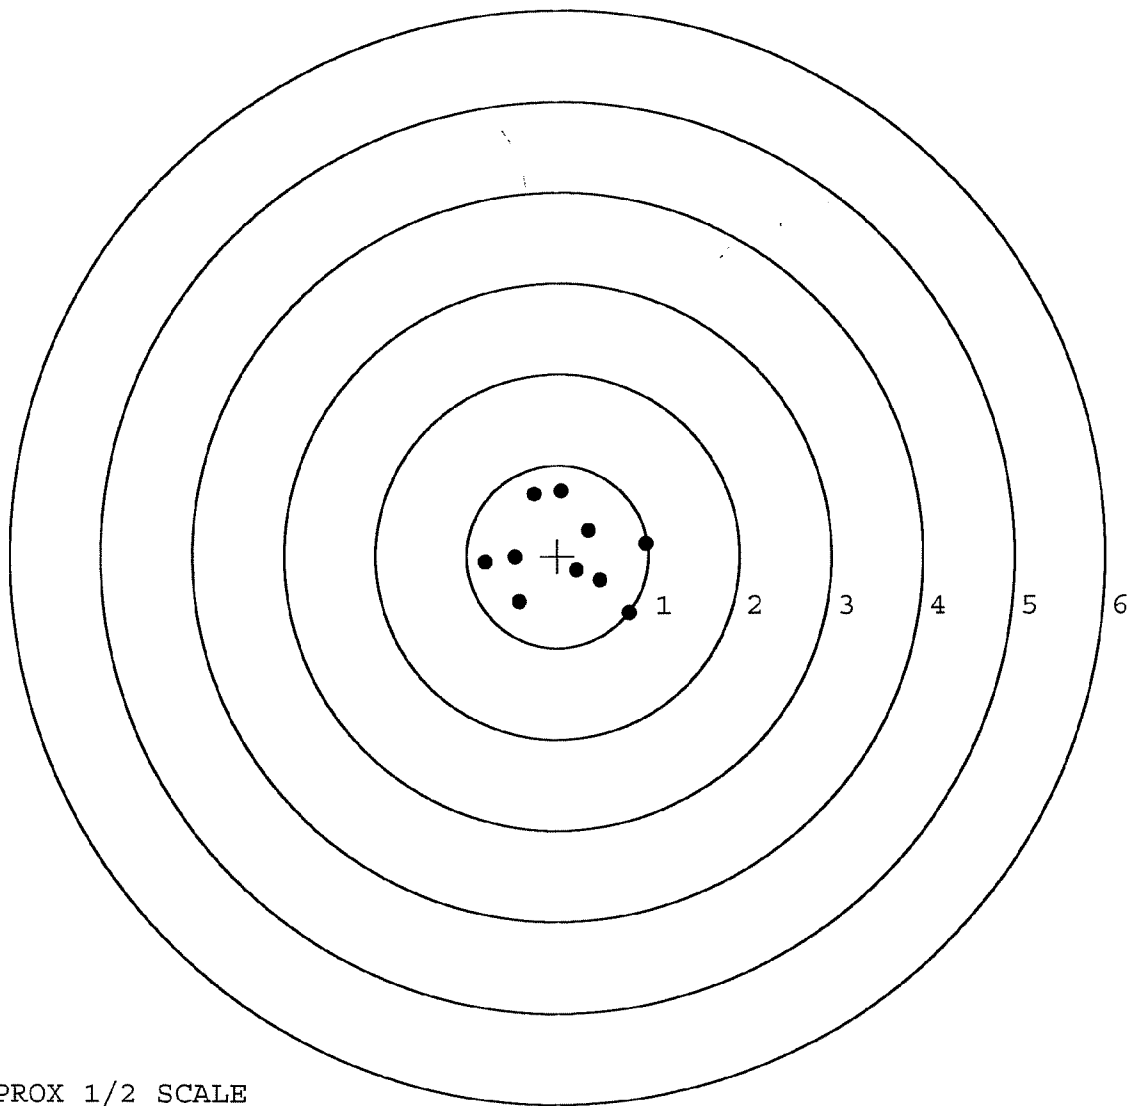

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R & E NUMBER	92974		
SERIAL NUMBER	C6611577		
LOG-IN DATE	2-11-05		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	2-18-05	RTZ
560 A	RE-BARREL		
B	DRILL AND TAP		
575	ASSEMBLE		
600	PROOF		
605	CHECK HEADSPACE		
610	DIS-ASSEMBLE GUN		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT	3-10-05	AC
640	TARGET	2-21-05	AC
655	FINAL INSPECT	3-10-05	AC
660	PACK	3-14-05	DA
		SHIP DATE	
QAR INSPECTION DATE			

Remington® **DUPONT**
REG. U.S. PAT. & TM. OFF.

MODEL 700™ M24

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

VERY IMPORTANT: Instruction Book enclosed to assure safe use of this firearm.

SERIAL NO.
C6611577


ORDER NO.
5716

20



5716 C6611577

UPC



0 47700 25716 2

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6611577

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	3 28 91		RW
600	Proof	3 28 91		RW
607	Check Headspace	3 28 91		RW
610	Dis-assemble Gun	3 28 91		RW
612	Magnaflux Barrel Action	APR	2 1991	K.R
	Magnaflux Bolt	APR	2 1991	K.R
615	Rollmark Caliber	APR	2 1991	JS
617	Drill and Tap Sight Holes	APR	5 1991	LB
618	Polish Barrel	APR	5 1991	WB
620	Apply Coatings (Barrel Action)		4-10-91	JS
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		4/10/91	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		4/10/91	RW
	C) Inspect Ejector Hole for Chamfer		4/10/91	RW
	D) Oil Firing Pin Ass'y		4/10/91	RW
	E) Adjust Trigger Pull to Min Setting and Stake		4/23/91	JS

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	5	5	5			4/23/91	JH
	G) Safety Off Force	4	4	4			4/23/91	JH
	H) Trigger Pull Test & Retainability						4/23/91	JH
	I) Firing Pin Indent	.023	.023	.023			4/23/91	JH
	J) Assemble Stock						4/30/91	RW
	K) Assemble Swivel Studs						5-11-91	DH
	L) Attach Front and Rear Sight Assemblies						4/30/91	RW
	M) Iron Sight Alignment						4/30/91	RW
	N) Detach Front & Rear Sights & place in numbered container						4/30/91	RW
	O) Attach Scope to Rifle						4/30/91	RW
	P) Detach & Attach Scope 20 Times						4/30/91	RW
640	Gallery Target & Test						4-30-91	AF
	A) Time						"	AF
	B) Malfunctions						"	AF
	C) Pierced Primers						"	AF
	D) Optical Clarity of Scope						"	AF
645	Inspect for Live Ammo						4-30-91	AF
655	Final Inspection							
	A) Headspace						5-11-91	DH
	B) Trigger Pull	2.26	2.16	2.19	2.18	2.20	5/10/91	JH
	C) Function						5-11-91	DH
660	Pack						6-18-91	AF

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. C6611577
DATE 4/23/91
TESTER [Signature]

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.23	2.41	2.33	2.26	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.26	2.34	2.30	2.16	
PULL #3	2.20	2.37	2.46	2.19	
PULL #4	2.55	2.27	2.40	2.18	
PULL #5	2.41	2.43	2.42	2.20	
TOTAL					
AVG.					

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.51	3.22		
PULL #2	3.56	3.23		
PULL #3	3.30	3.32		
PULL #4	3.37	3.20		
PULL #5	3.19	3.21		
TOTAL				
AVG.				

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.22	4.58		4.34
PULL #2	4.31	4.46		4.39
PULL #3	4.22	4.44		4.41
PULL #4	4.31	4.48		4.45
PULL #5	4.53	4.56		4.59
TOTAL				
AVG.				

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06611577
30 Apr 1991

CENTROIDAL DISTANCES

0 TO	1	.208435
1 TO	2	.309011
1 TO	3	.221382
1 TO	4	.289389
1 TO	5	.461108

85 -----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0258
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0582
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0564418

THE AMP FOR THIS RIFLE IS: 1.123

30 Apr 1991

FILE://PATTERNING/CENTERFIRE_PATT/06611577

CENTERFIRE PATTERNS # 1

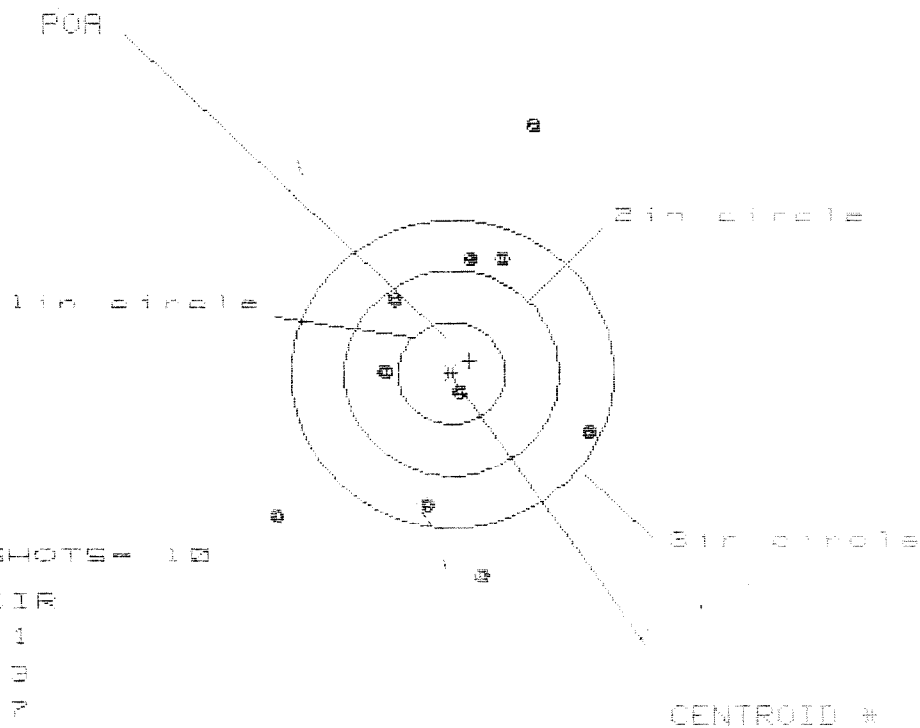

OF SHOTS = 10

IN CIR

1 in = 1

2 in = 3

3 in = 7

HS = 2.855

VS = 4.352


GS = 4.511

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.294	1.385	1.188
MINIMUM X	-1.662	-1.571	-1.772
MAXIMUM Y	2.414	1.383	1.247
MINIMUM Y	-1.938	-1.670	-1.806
CENTROID X	-1.169	-1.260	-1.063
CENTROID Y	-1.122	-1.390	-1.254
POA TO CENTROID in.	.289	.469	.262
MIN RADIUS	.237	.211	.077
MEAN RADIUS	1.354	1.215	1.100
MAX RADIUS	2.547	1.912	1.812
HORIZONTAL SPREAD	2.956	2.956	1.960
VERTICAL SPREAD	4.352	3.053	3.053
EXTREME SPREAD	4.511	3.289	3.063
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	7		

30 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/06611577

CENTERFIRE PATTERNS # 2

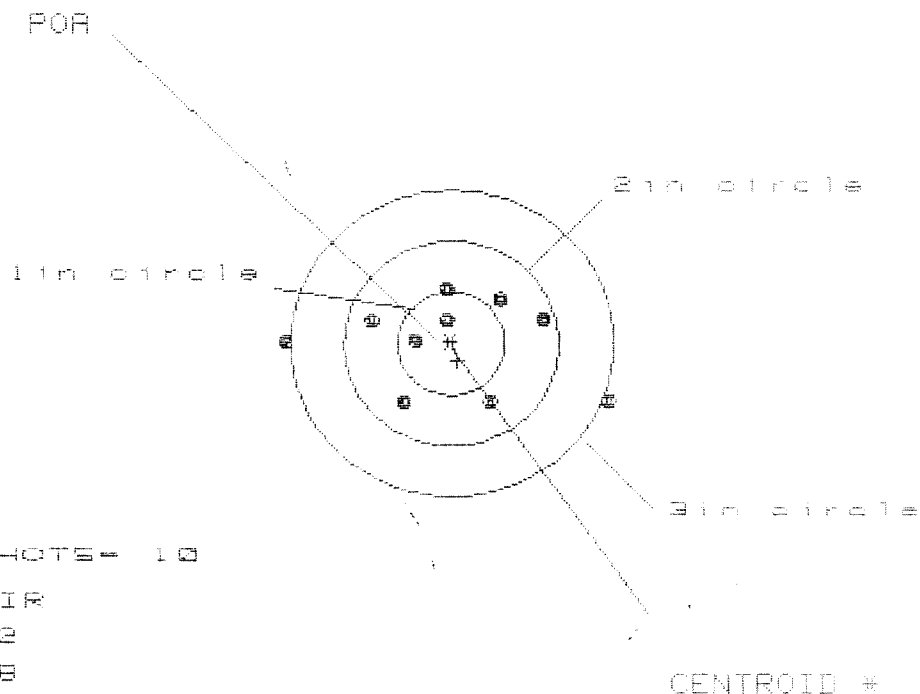

OF SHOTS= 10

IN CIR

1in = 2

2in = 8

3in = 0

HS= 2.858

VS= 1.097


GS= 3.013

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.414	1.243	.826
MINIMUM X	:	-1.543	-.925	-.770
MAXIMUM Y	:	.520	.522	.454
MINIMUM Y	:	-.577	-.575	-.643
CENTROID X	:	-.057	.114	-.041
CENTROID Y	:	.166	.164	.232
POA TO CENTROID in.	:	.176	.199	.235
MIN RADIUS	:	.193	.268	.130
MEAN RADIUS	:	.778	.697	.577
MAX RADIUS	:	1.544	1.357	.835
HORIZONTAL SPREAD	:	2.958	2.168	1.596
VERTICAL SPREAD	:	1.097	1.097	1.097
EXTREME SPREAD	:	3.013	2.318	1.598
NUMBER IN ONE INCH CIRCLE	=	2		
NUMBER IN TWO INCH CIRCLE	=	8		
NUMBER IN THREE INCH CIRCLE	=	0		

30 Apr 1981

FILE:/PATTERNING/CENTERFIRE_PATT/06611577

CENTERFIRE PATTERNS # 3

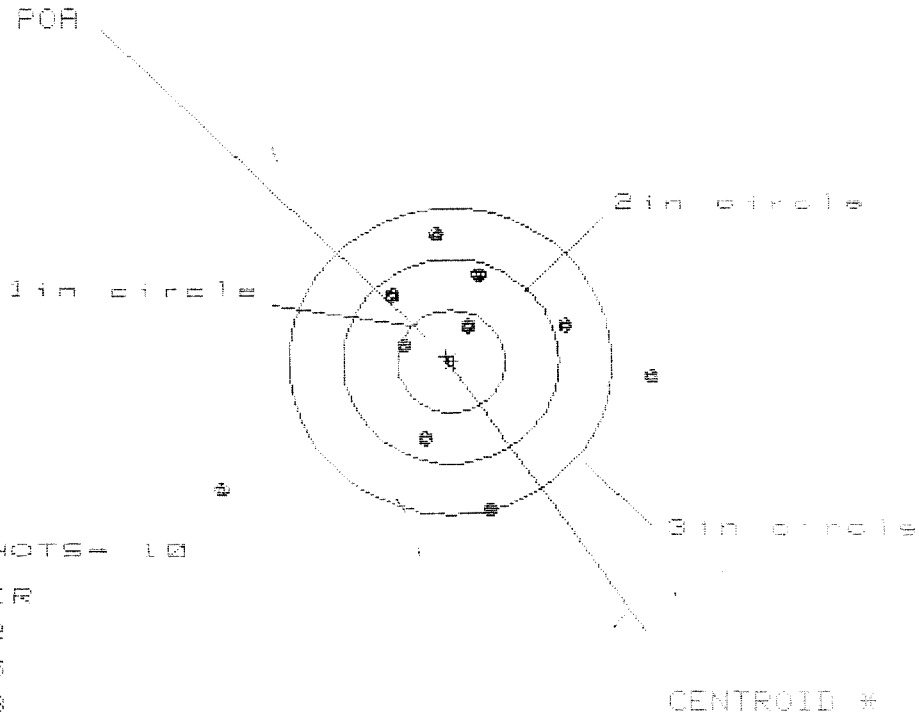

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 5

3 in = 8

HS= 4.000

VS= 2.678


GS= 4.161

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.822	1.579	.988
MINIMUM X	:	-2.187	-.809	-.611
MAXIMUM Y	:	1.277	1.139	1.106
MINIMUM Y	:	-1.481	-1.539	-1.572
CENTROID X	:	.040	.283	.085
CENTROID Y	:	-.049	.089	.122
POA TO CENTROID in.	:	.063	.296	.149
MIN RADIUS	:	.383	.198	.195
MEAN RADIUS	:	1.146	.964	.851
MAX RADIUS	:	2.514	1.601	1.598
HORIZONTAL SPREAD	:	4.069	2.388	1.596
VERTICAL SPREAD	:	2.678	2.678	2.678
EXTREME SPREAD	:	4.161	2.728	2.728
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		8	

30 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/08611577

CENTERFIRE PATTERNS # 4

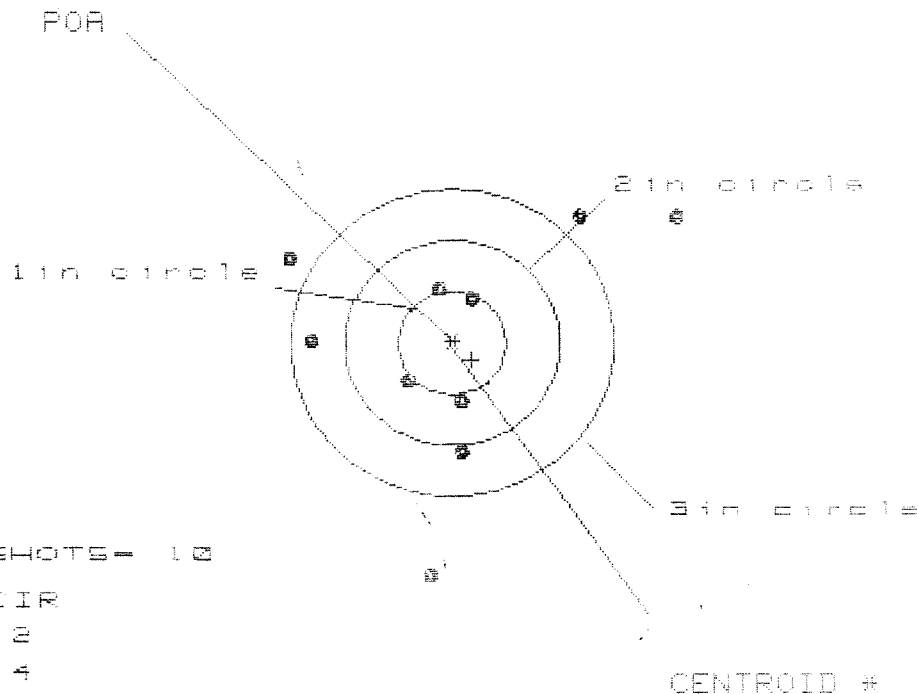

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 4

3 in = 6

HS= 2.581

VS= 3.567


GS= 4.260

PATTERN #	4	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	2.065	1.370	1.366
MINIMUM X	-1.516	-1.296	-1.290
MAXIMUM Y	1.264	1.374	1.103
MINIMUM Y	-2.303	-2.162	-1.175
CENTROID X	-1.184	-1.414	-1.410
CENTROID Y	.167	.026	.296
POA TO CENTROID in.	.249	.415	.506
MIN RADIUS	.496	.272	.391
MEAN RADIUS	1.265	1.111	.973
MAX RADIUS	2.422	2.162	1.756
HORIZONTAL SPREAD	3.581	2.656	2.656
VERTICAL SPREAD	3.567	3.536	2.278
EXTREME SPREAD	4.260	3.805	2.787
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	6		

30 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/08611577

CENTERFIRE PATTERNS # 5

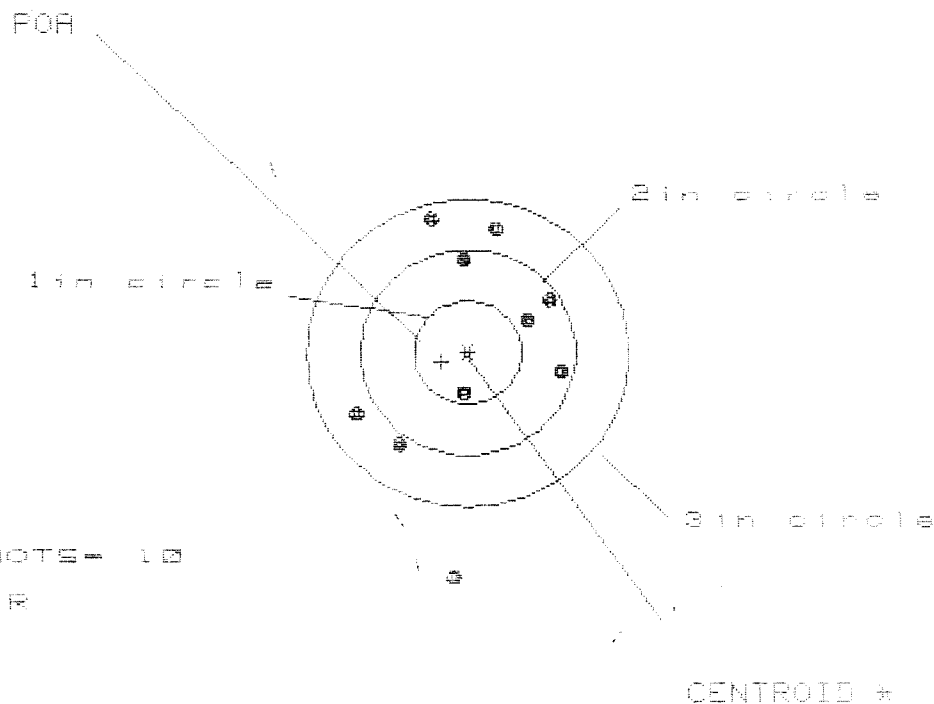

OF SHOTS = 10

IN CIR

1in = 1

2in = 5

3in = 9

HS = 1.0000

VS = 3.507

GS = 3.511

PATTERN #	5	5	5
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.848	.828	.781
MINIMUM X	-1.050	-1.070	-1.117
MAXIMUM Y	1.358	1.119	1.119
MINIMUM Y	-2.149	-1.160	-1.020
CENTROID X	.241	.261	.308
CENTROID Y	.089	.328	.188
FOR TO CENTROID in.	.257	.419	.361
MIN RADIUS	.418	.503	.497
MEAN RADIUS	1.074	.925	.880
MAX RADIUS	2.157	1.349	1.308
HORIZONTAL SPREAD	1.898	1.898	1.898
VERTICAL SPREAD	3.507	2.279	2.139
EXTREME SPREAD	3.511	2.321	2.321
NUMBER IN ONE INCH CIRCLE =	1	1	1
NUMBER IN TWO INCH CIRCLE =	5	5	5
NUMBER IN THREE INCH CIRCLE =	9	9	9