

G6360972

Raphael

C-6225309

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Evaluate History

Repair Inquiry

Repair Number: **RE00163632** Serial: **G6360972** Model **M24 SWS** Center Fire Repairman: _____
 Verify Repair _____ Caliber: **7.62 NATO** Status: **Closed 3/3/2009 11:25:39 AM**

Address Information

Customer: _____ Received From: _____ Return To: _____ Received From: _____
 Name: **ISD ARMSROOM** **ISD ARMSROOM**
 Address 1: **8TH DESERT STORM** **8TH DESERT STORM**
 Address 2: **BLDG 5210 BAY DOOR #30** PO Box: _____ **BLDG 5210 BAY DOOR #30** PO Box: _____
 City: **FORT CAMPBELL** **FORT CAMPBELL**
 State: **KY** Zip Code: **42223** Country: **US** State: **KY** Zip Code: **42223** Country: **US**

FFL: _____

Contact / Condition	Problems	Estimate	History / Status	Shipping / Billing																		
Contact Information Phone: NN Fax: _____ Email: _____ Comments: _____	Received Condition Fair Condition Notes: _____ CSR Notes: _____	Accessories Received <table border="1"> <thead> <tr> <th>Code</th> <th>Desc</th> <th>Qty</th> </tr> </thead> <tbody> <tr> <td>A007</td> <td>With Stud</td> <td>3</td> </tr> <tr> <td>A010</td> <td>Hard Case</td> <td>1</td> </tr> <tr> <td>A026</td> <td>Scope</td> <td>1</td> </tr> <tr> <td>A057</td> <td>Fit and Rear Sgt Base</td> <td>1</td> </tr> <tr> <td>D000</td> <td>MARS RAIL</td> <td>1</td> </tr> </tbody> </table>			Code	Desc	Qty	A007	With Stud	3	A010	Hard Case	1	A026	Scope	1	A057	Fit and Rear Sgt Base	1	D000	MARS RAIL	1
Code	Desc	Qty																				
A007	With Stud	3																				
A010	Hard Case	1																				
A026	Scope	1																				
A057	Fit and Rear Sgt Base	1																				
D000	MARS RAIL	1																				


Repair Search **Refresh** **Close**

Refresh **Close**

Repair

maglet 3/4/2009 12:39 PM CAPS NUM INS SCRL

start 10 Micro... 8 Micro... My Docum... Arms Serv... DMS - Glo... Google Ne... Part Sear... 12:39 PM

Serial Number: **G6360972**
 Model: **M24 SWS**

RE00163632

M-24
INSPECTION CHECKLIST - REPAIRS
CONTRACT #: W52H09-07-C-0207
ISSUED 10/1/2007

R & E NUMBER <u>163632</u>			
SERIAL NUMBER <u>G6360972</u>			
LOG-IN DATE <u>3-3-09</u>			

OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	3-10-09	RTZ
505	RE-BARREL	3-26-09	RTZ
420	ASSEMBLE	3-26-09	RTZ
440	PROOF	3-27-09	TC
460	CHECK HEADSPACE	3-27-09	TC
470	DIS-ASSEMBLE GUN		
480	MAGNAFLUX	4-2-09	RT
510	DRILL AND TAP	3-28-09	SP
500	ROLLMARK CALIBER	4-12-09	RT
520	GOFF BLAST BBL / REC	4-2	RT
530 & 540	APPLY COATINGS	4-3	TC
560	FINAL ASSEMBLY	4-4-09	TC
640	FUNCTION TEST AND	4-4-09	TC
650	TARGET	4-4-09	TC
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	4-4-09 CM5
670	FINAL INSPECTION	4-4-09	RTZ
	A) HEADSPACE	PASS FAIL	4-4-09 RTZ
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS 261 259 258 260 257 4-4-09 RTZ	
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX 50 50 40 4-4-09 RTZ	
	G) SAFETY OFF FORCE	2 LBS MIN 60 60 60 4-4-09 RTZ	
	I) FIRING PIN INDENT	.020 .024 .024 .024 4-4-09 RTZ	
690	PACK	4-4-09	TC

F006 REV 1/2009

MAINTENANCE REQUEST For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG			PAGE NO	NO OF PAGES	REQUIREMENT CONTROL SYMBOL CSGLD-1047(R1)
SECTION I - CUSTOMER DATA			SECTION II - MAINTENANCE ACTIVITY DATA		
1a. UIC CUSTOMER WFBIBITD	1b. CUSTOMER UNIT NAME HHC-3-187 INF	1c. PHONE NO 798-3915	3a. WORK ORDER NUMBER (WON) 270-798-3915	3b. SHOP Recon PLT	3c. PHONE NO 270-956-1448
2a. SAMS-2 UIC/SAMS-I/TDA	2b. UTILIZATION CODE	2c. MCSR	4a. UIC SUPPORT UNIT	4b. SUPPORT UNIT NAME	
SECTION III - EQUIPMENT DATA					
5. TYPE MNT REQ CODE	6. ID	7. NSN 110050124021316	15a. FAILURE DETECTED DURING/WHEN DISCOVERED CODE (Enter code) See DA Pamphlets 738-750 and 738-751		
8. MODEL m24 SWS			15b. FIRST INDICATION OF TROUBLE/HOW RECOGNIZED CODE (Enter Code) See DA Pamphlets 738-750 and 738-751		
9. NOUN			16. MILES/KILOMETERS/HOURS/ROUNDS M K		
10a. ORG WON/DOC NO		10b. EIC	H R		
11. SERIAL NUMBER 663609172	12. QTY	13. PD	17. PROJECT CODE (if assigned)	18. ACCOUNT PROCESSING CODE	19. IN WARRANTY? (enter Y or N)
14. MALFUNCTION DESCRIPTION (for DSU, GSU/AVIM, DEPOT use)			20. ADMIN NO		
			21. REIMBURSABLE CUSTOMER (if Intransit customer enter Y or N)		
			22. LEVEL OF WORK		
			23. SIGNATURE		
24. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURES IN EQUIPMENT TM (Do not prescribe repairs) Barrel has logged over 5000 Rps and needs replacement					
25. REMARKS					
PREPARATION INSTRUCTIONS FOR THIS PAGE					
SECTION I Block 1a. Enter UIC of submitting organization. Block 1b. Enter name of submitting organization. Block 1c. Enter number to be called when maint. is completed. Block 2a. Enter UIC of supporting SAMS-2/SAMS-I/TDA if work is requested while intransit and away from your support maintenance unit. Block 2b. Enter utilization code. See DA Pamphlets 738-750 and 738-751. Block 2c. Enter "Y" if reportable under AR 700-138. If not, leave blank.			SECTION III (Cont'd) Block 12. Enter the quantity of items being submitted. Block 13. Enter the maintenance priority designator determined from DA PAM 710-2-1. Block 14. For DSU, GSU/AVIM, DEPOT use. Block 15a. Enter the code that most accurately describes when the fault or deficiency was detected. See DA Pamphlets 738-750 and 738-751. Block 15b. Select one. Enter the code. See DA Pamphlets 738-750 and 738-751. Block 16. Enter the accumulated usage data in blocks, when equipment is subject to usage reporting. Block 17. Enter the project code if one has been assigned. If not, leave blank. Block 18. See DA Pamphlets 738-750 and 738-751. Block 19. Enter "Y" or "N" to indicate whether equipment is still under manufacturer's warranty. Block 20. Enter the admin number assigned for property control purposes for the equipment being submitted. Block 21. For DSU/GSU/AVIM/Depot use. Block 22. Enter level of work performed "O" for UNIT LEVEL/AVUM, "F" for DSU/AVIM, "H" for GSU, "D" for DEPOT, "K" for contractor or "L" for Spc Rpr Act. Block 23. Enter the signature of the CO or the CO's designated representative when the priority designator is 01-10. For priority designators 11-15, leave blank. Block 24. Enter a brief description of the deficiencies or symptoms that you feel require attention at this level of maint. Block 25. Self-explanatory.		
SECTION II Leave blank. To be completed by the support maintenance DSU/GSU/AVIM/DEPOT.					
SECTION III Block 5. Enter the Type Maintenance Request Code. See DA Pamphlets 738-750 and 738-751. Block 6. Enter ID associated with block 7. See DA Pamphlets 738-750 and 738-751. Block 7. Enter the NSN or stock number of the item being submitted. Block 8. Enter model of item being submitted. Block 9. Enter noun/nomenclature of item being submitted. Block 10a. Enter Work Order Number (WON)/DOC NO assigned when item is submitted. Otherwise, leave blank. Block 10b. Enter End Item Code. See AMDF. Block 11. Enter serial number of item being submitted.					
34a. SUBMITTED BY	35a. ACCEPTED BY	35c. DATE	Block 34a. Enter first initial and last name of submitter. Block 34b. Enter ordinal date submitted (YYDDD). Block 35a. Enter first initial and last name of person accepting maint. request. Block 35b. Enter the initial status. See DA Pamphlets 738-750 and 738-751. Block 35c. Enter ordinal date accepted (YYDDD). Block 35d. Enter military time.		
34b. DATE	35b. STATUS	35d. TIME			

DA FORM 2407, JUL 94

PREVIOUS EDITIONS OF DA FORM 2407 AND DA FORM 5504 ARE OBSOLETE

RECEIPT COPY 1

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6360972.___1
FILE DATE AND TIME: 04/06/2009 05:40

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.007
The Average Y Centroid of the Five Target Set:	0.015
The Average Point of Impact of the Five Target Set:	0.017
The Average Mean Radius of the Five Target Set:	0.553
The Distance from POA to Centroid Target #1:	0.153
The Distance from Centroid Target #2 to Centroid Target #1:	0.300
The Distance from Centroid Target #3 to Centroid Target #1:	0.245
The Distance from Centroid Target #4 to Centroid Target #1:	0.204
The Distance from Centroid Target #5 to Centroid Target #1:	0.170

SERIAL NUMBER: G6360972. 1

TARGET NUMBER: 1

FILE DATE: 04/06/2009

FILE TIME: 05:40

POINT#	X	Y
1:	-0.086	0.916
2:	0.575	0.776
3:	0.016	-0.276
4:	0.416	-0.421
5:	0.444	-0.190
6:	0.259	0.091
7:	-0.227	0.117
8:	-0.668	-0.007
9:	-0.627	0.306
10:	-0.396	0.190

X CENTROID: -0.029

Y CENTROID: 0.150

POA TO CENTROID: 0.153

HORZ SPREAD: 1.243

VERT SPREAD: 1.337

GROUP SPREAD: 1.469

MIN RADIUS: 0.200


MAX RADIUS: 0.870

MEAN RADIUS: 0.551

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

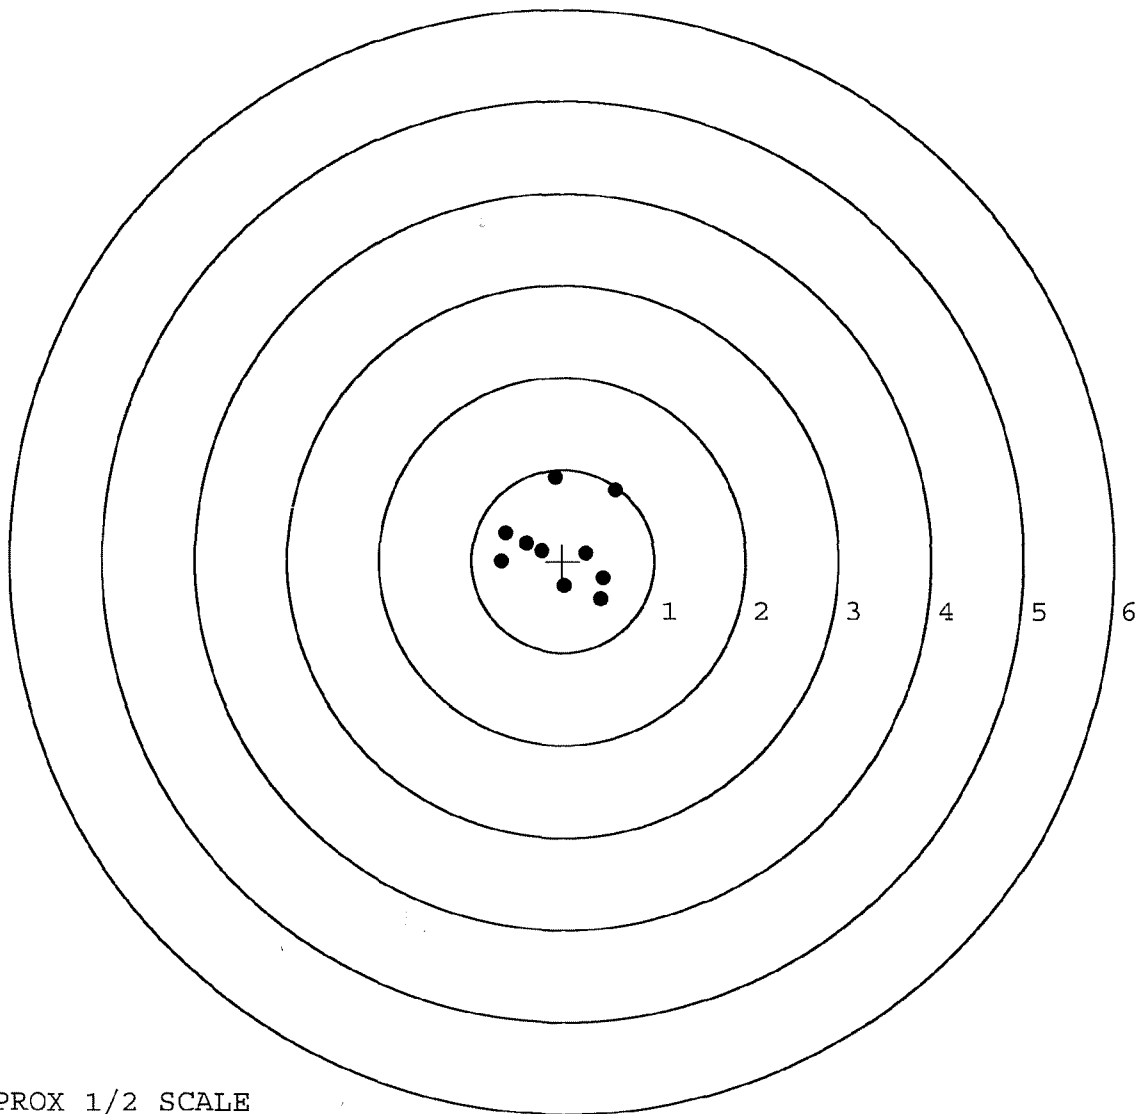

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6360972. __1

TARGET NUMBER: 2

FILE DATE: 04/06/2009

FILE TIME: 05:40

POINT#	X	Y
1:	0.002	-0.007
2:	0.659	0.179
3:	0.218	-0.949
4:	-0.381	-0.517
5:	-0.437	-1.001
6:	-0.815	-0.939
7:	-0.397	0.258
8:	-0.267	0.448
9:	-0.048	0.588
10:	-0.337	0.844

X CENTROID: -0.180

Y CENTROID: -0.110

POA TO CENTROID: 0.211

HORZ SPREAD: 1.474

VERT SPREAD: 1.845

GROUP SPREAD: 1.850

MIN RADIUS: 0.209


MAX RADIUS: 1.044

MEAN RADIUS: 0.712

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

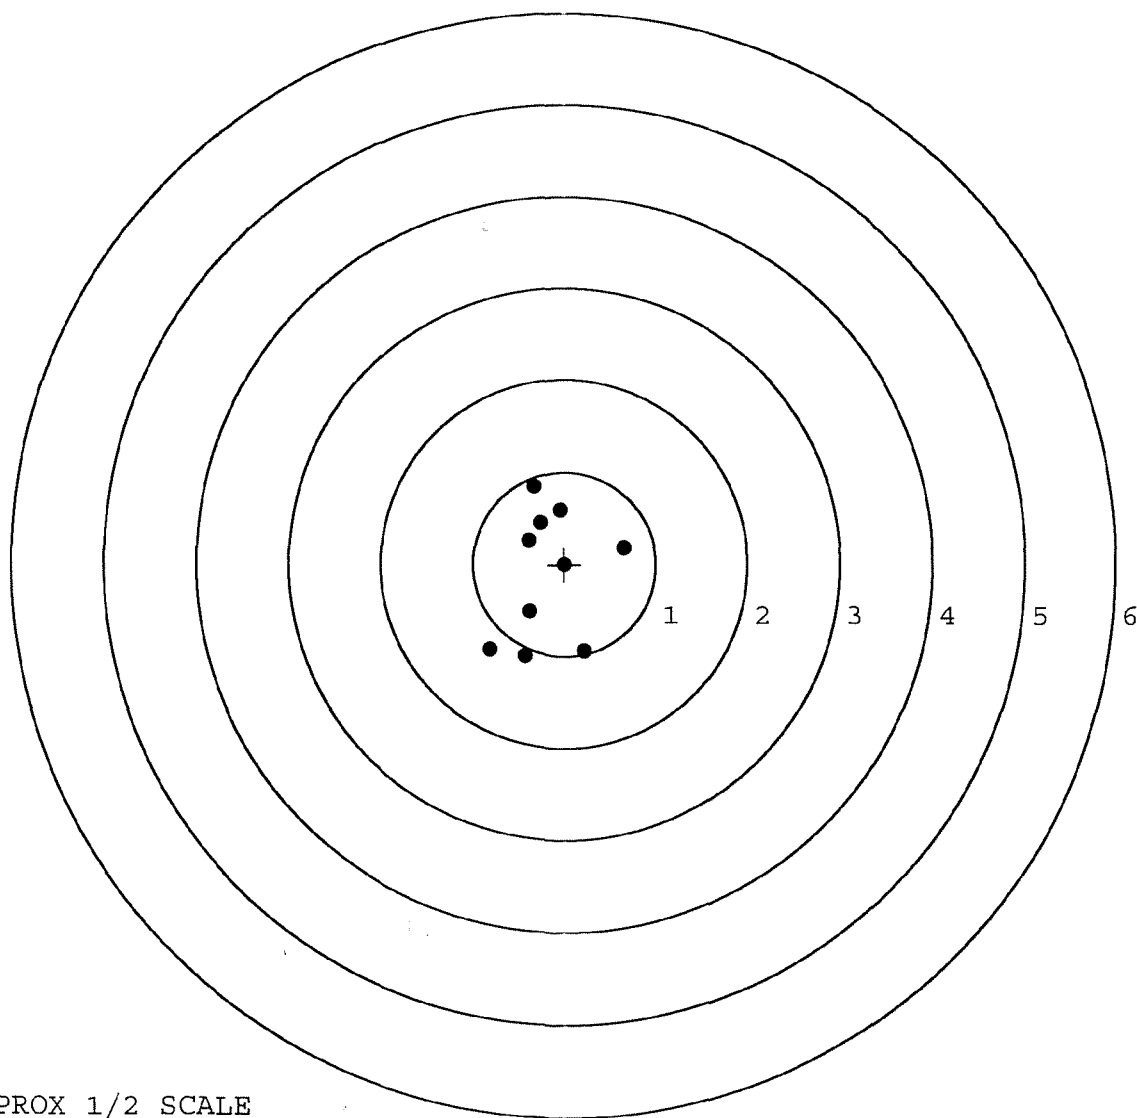

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6360972. 1

TARGET NUMBER: 3

FILE DATE: 04/06/2009

FILE TIME: 05:40

POINT#	X	Y
1:	-0.816	-0.569
2:	0.402	-0.680
3:	-0.090	-0.360
4:	0.582	-0.088
5:	-0.462	0.023
6:	0.037	0.399
7:	-0.218	0.145
8:	-0.021	0.047
9:	0.105	0.044
10:	0.388	0.101

X CENTROID: -0.009

Y CENTROID: -0.094

POA TO CENTROID: 0.094

HORZ SPREAD: 1.398

VERT SPREAD: 1.079

GROUP SPREAD: 1.478

MIN RADIUS: 0.141


MAX RADIUS: 0.936

MEAN RADIUS: 0.456

IN 1 IN DIAMETER: 7

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

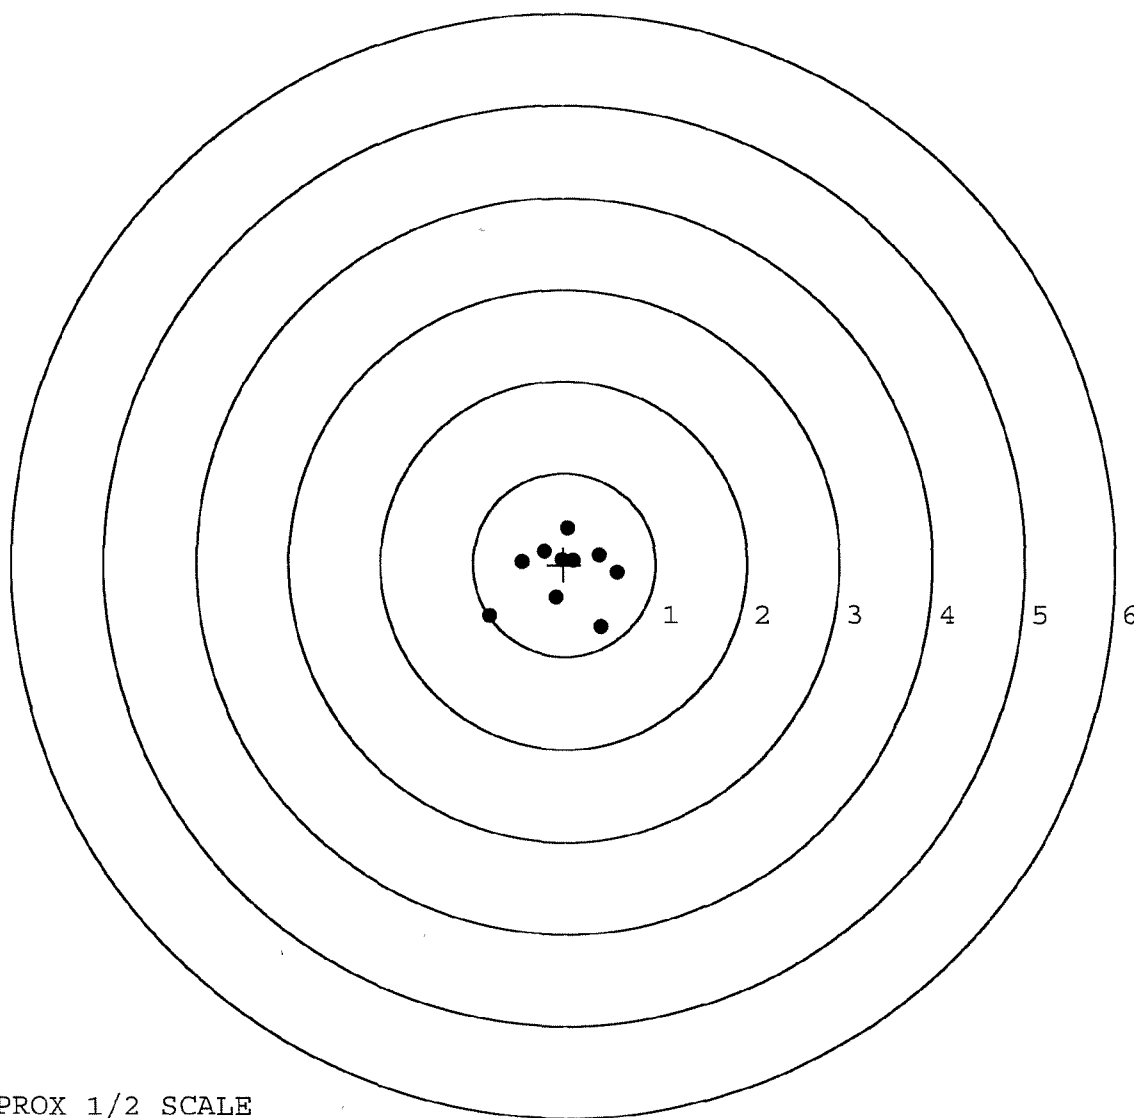


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6360972. __1
TARGET NUMBER: 4
FILE DATE: 04/06/2009
FILE TIME: 05:40

POINT#	X	Y
1:	0.380	0.659
2:	0.902	-0.146
3:	-0.034	0.280
4:	0.247	-0.276
5:	0.384	-0.112
6:	0.089	-0.028
7:	-0.228	-0.100
8:	-0.431	-0.415
9:	-0.334	-0.260
10:	-0.550	-0.008

X CENTROID: 0.043
Y CENTROID: -0.041
POA TO CENTROID: 0.059
HORZ SPREAD: 1.452
VERT SPREAD: 1.074
GROUP SPREAD: 1.459
MIN RADIUS: 0.048
MAX RADIUS: 0.866
MEAN RADIUS: 0.459
IN 1 IN DIAMETER: 6
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

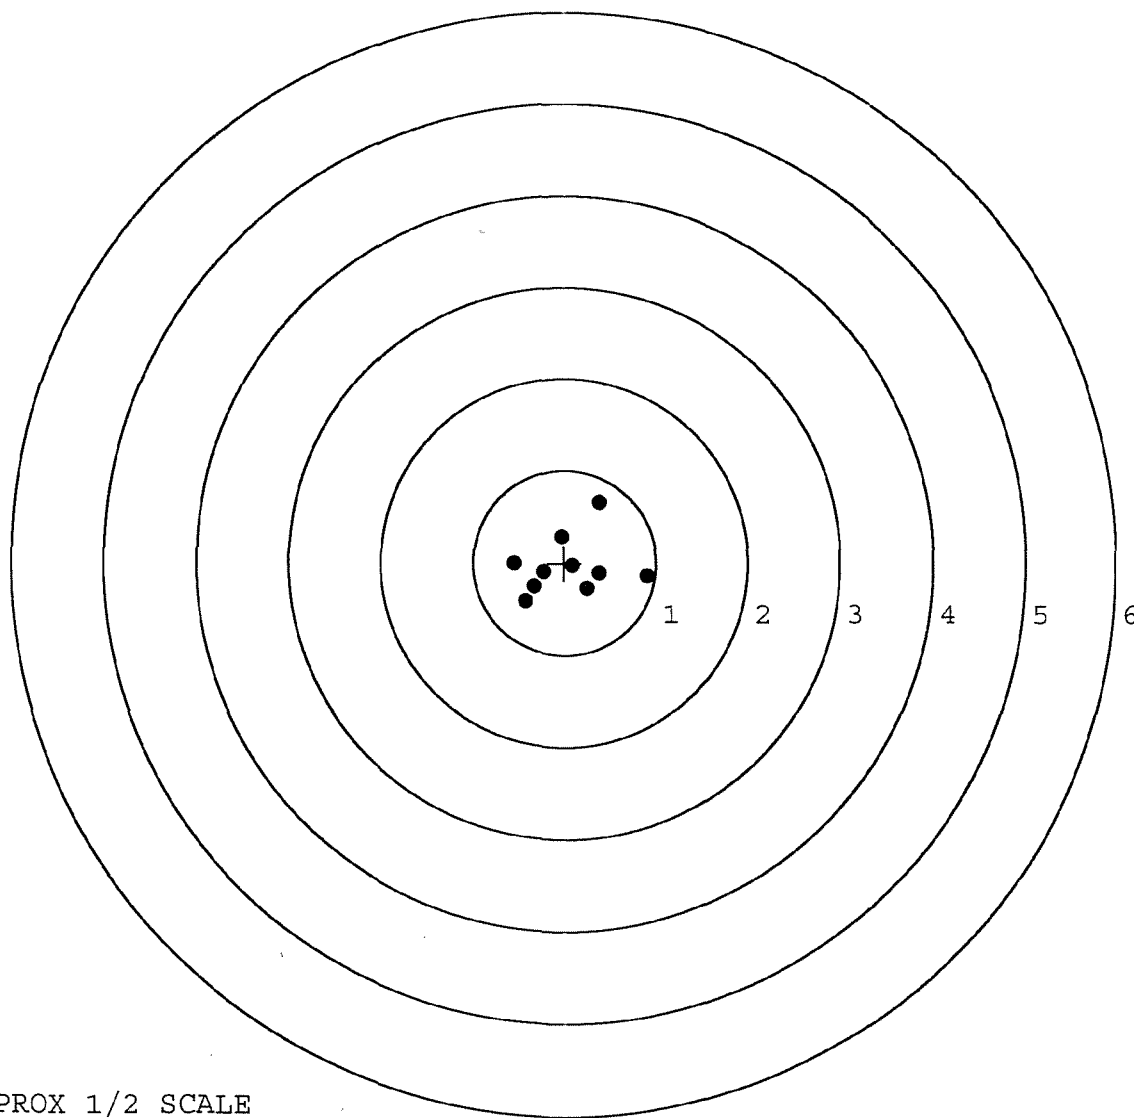

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6360972. __1

TARGET NUMBER: 5

FILE DATE: 04/06/2009

FILE TIME: 05:40

POINT#	X	Y
1:	1.166	0.795
2:	-0.123	1.032
3:	0.399	0.205
4:	-0.026	0.356
5:	0.580	-0.263
6:	0.450	-0.127
7:	0.128	-0.318
8:	-0.256	0.021
9:	-0.531	0.108
10:	-0.391	-0.130

X CENTROID: 0.140

Y CENTROID: 0.168

POA TO CENTROID: 0.218

HORZ SPREAD: 1.697

VERT SPREAD: 1.350

GROUP SPREAD: 1.831

MIN RADIUS: 0.251


MAX RADIUS: 1.203

MEAN RADIUS: 0.585

IN 1 IN DIAMETER: 5

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

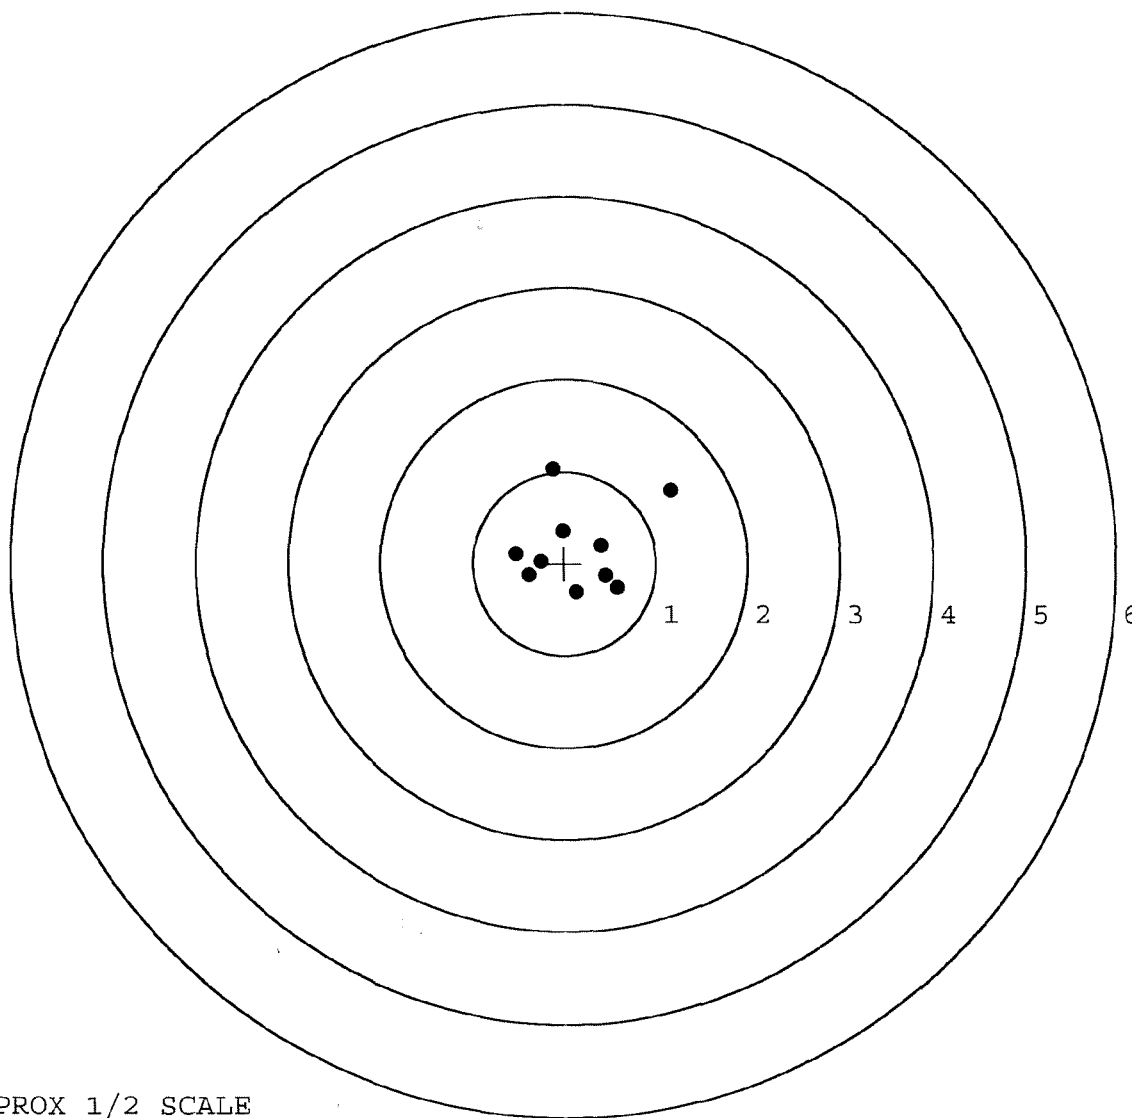

TARGET APPROX 1/2 SCALE

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Evaluate History

Repair Inquiry

Repair Number: RE00163788

Serial: G6360884 Model M24 SWS Center Fire
Caliber: 7.62 NATO

Repairman:

Status:

Closed 3/4/2009 9:56:10 AM

Verify Repair

Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: SD ARMSROOM

SD ARMSROOM

Address 1: 8TH DESERT STORM

8TH DESERT STORM

Address 2: BLDG 5210 BAY DOOR #30

PO Box:

BLDG 5210 BAY DOOR #30

PO Box:

City: FORT CAMPBELL

FORT CAMPBELL

State: KY

Zip Code: 42223

Country: US

State: KY

Zip Code: 42223

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone:

Fax:

Email:

Comments:

Received Condition

Fair

Condition

Notes:

CSR

Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A008	With Swivel	2
A010	Hard Case	1
A057	Fit and Rear Sgt Base	1
D000	FLASH SUPPRESSOR	1

Refresh

Close

Repair Search

Refresh

Close

Repair

naglet

3/4/2009

10:58 AM

CAPS

NUM

INS

SCRL

start

10 Micro...

8 Micros...

My Docum...

Arms Serv...

DMS - Glo...

Option Ma...

Part Searc...

10:58 AM

Serial Number: G6360884

Model: M24 SWS



RE00163788

M-24
INSPECTION CHECKLIST - REPAIRS
CONTRACT #: W52H09-07-C-0207
ISSUED 10/1/2007

R & E NUMBER <u>163288</u>		Remme Scope Boon	
SERIAL NUMBER <u>G10360884</u>			
LOG-IN DATE <u>3-4-09</u>			

OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	3-11-09	RTZ
505	RE-BARREL	3-16-09	RTZ
420	ASSEMBLE	3-16-09	RTZ
440	PROOF	3-17-09	TL
460	CHECK HEADSPACE	3-17-09	TL
470	DIS-ASSEMBLE GUN	3-17-09	RTZ
480	MAGNAFLUX	3-20-09	(N)
510	DRILL AND TAP	3-17-09	SP
500	ROLLMARK CALIBER	3-24-09	RT
520	GOFF BLAST BBL / REC	3-24-09	BT
530 & 540	APPLY COATINGS	3-31-09	TL
560	FINAL ASSEMBLY	4-3-09	RTZ
640	FUNCTION TEST AND	PASS FAIL	4-3-09 TL
650	TARGET	PASS FAIL	4-3-09 TL
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	4-13-09 cms
670	FINAL INSPECTION	PASS FAIL	4-4-09 RTZ
	A) HEADSPACE		4-4-09 RTZ
	B) TRIGGER PULL	2.48 2.48 2.45 2.41 2.44	4-3-09 TL
680	F) SAFETY ON FORCE	5.0 5.0 4.0	4-4-09 RTZ
	G) SAFETY OFF FORCE	6.0 5.2 5.0	4-4-09 RTZ
	I) FIRING PIN INDENT	.031 .032 .032	4-4-09 RTZ
690	PACK		4-6-09 FM

F006 REV 1/2009

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6360884.__1
FILE DATE AND TIME: 04/04/2009 05:16


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.063
The Average Y Centroid of the Five Target Set:	-0.044
The Average Point of Impact of the Five Target Set:	0.077
The Average Mean Radius of the Five Target Set:	0.656
The Distance from POA to Centroid Target #1:	0.073
The Distance from Centroid Target #2 to Centroid Target #1:	0.111
The Distance from Centroid Target #3 to Centroid Target #1:	0.373
The Distance from Centroid Target #4 to Centroid Target #1:	0.104
The Distance from Centroid Target #5 to Centroid Target #1:	0.466

SERIAL NUMBER: G6360884. 1
TARGET NUMBER: 1
FILE DATE: 04/04/2009
FILE TIME: 05:16

X CENTROID: -0.072
Y CENTROID: 0.010
POA TO CENTROID: 0.073
HORZ SPREAD: 0.915
VERT SPREAD: 2.263
GROUP SPREAD: 2.263
MIN RADIUS: 0.081
MAX RADIUS: 1.229
MEAN RADIUS: 0.564
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.081	1.045
2:	-0.355	0.634
3:	-0.425	0.429
4:	-0.164	0.270
5:	0.490	-0.199
6:	-0.035	-1.218
7:	-0.124	-0.803
8:	-0.023	-0.192
9:	0.085	0.045
10:	-0.087	0.090

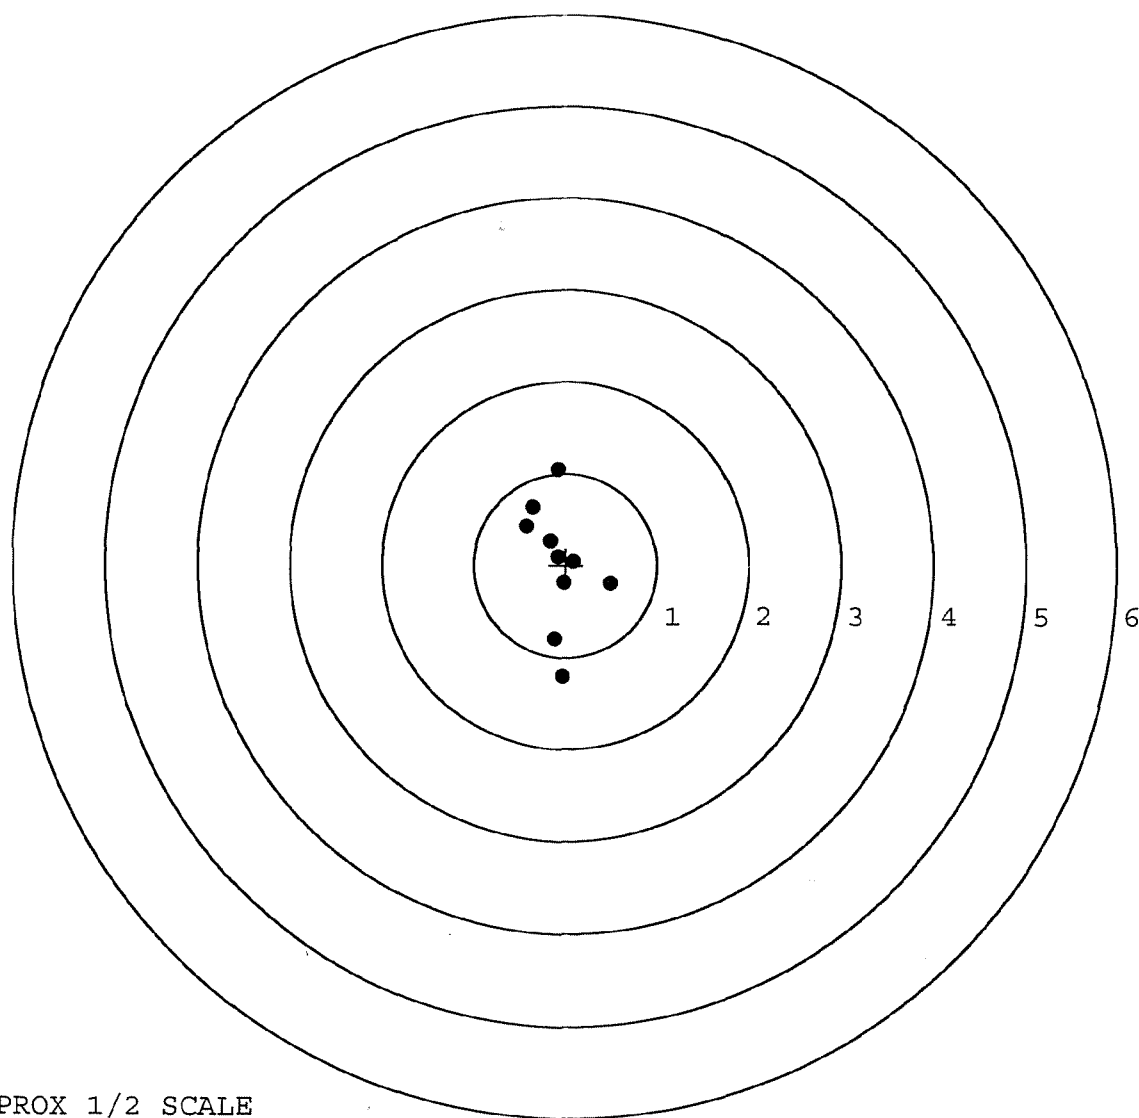


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6360884. __1
TARGET NUMBER: 2
FILE DATE: 04/04/2009
FILE TIME: 05:16

X CENTROID: 0.038
Y CENTROID: -0.006
POA TO CENTROID: 0.038
HORZ SPREAD: 0.876
VERT SPREAD: 1.861
GROUP SPREAD: 1.873
MIN RADIUS: 0.234
MAX RADIUS: 1.171
MEAN RADIUS: 0.580
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.063	-1.172
2:	0.386	-0.753
3:	0.165	-0.363
4:	0.497	-0.259
5:	0.150	0.689
6:	-0.256	0.165
7:	-0.379	0.445
8:	-0.015	0.222
9:	0.018	0.460
10:	-0.123	0.509

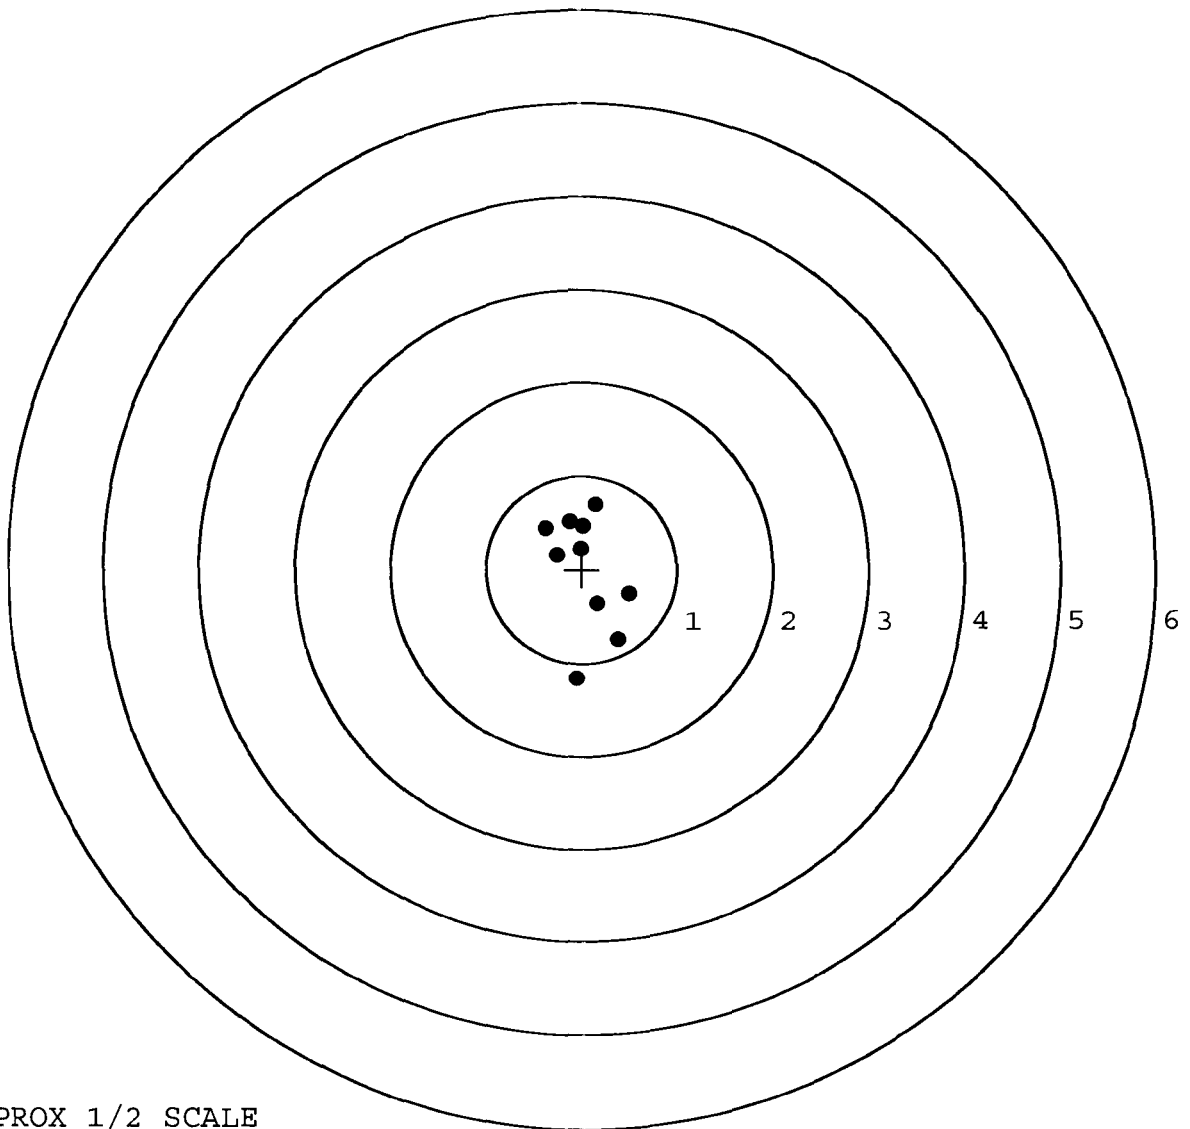


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6360884. __1
TARGET NUMBER: 3
FILE DATE: 04/04/2009
FILE TIME: 05:16

X CENTROID: 0.094
Y CENTROID: -0.324
POA TO CENTROID: 0.337
HORZ SPREAD: 1.412
VERT SPREAD: 2.849
GROUP SPREAD: 3.089
MIN RADIUS: 0.263
MAX RADIUS: 2.372
MEAN RADIUS: 0.684
IN 1 IN DIAMETER: 5
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.890	0.013
2:	-0.046	-0.547
3:	-0.145	-0.435
4:	-0.162	-0.243
5:	-0.078	0.039
6:	-0.331	0.092
7:	0.250	0.118
8:	0.414	0.104
9:	0.673	0.234
10:	-0.522	-2.615

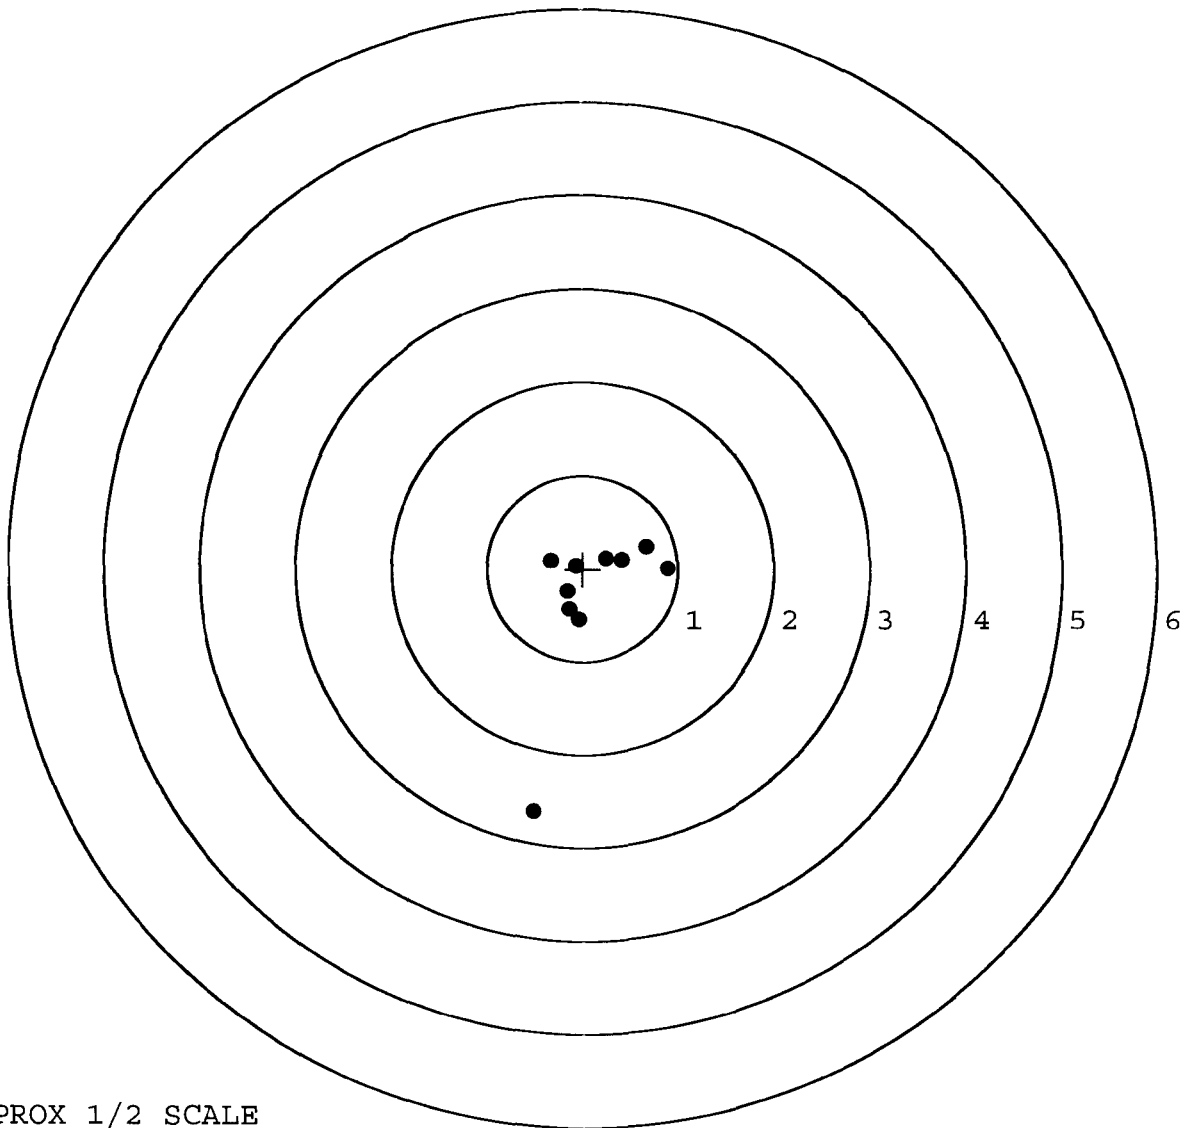


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6360884. __1
TARGET NUMBER: 4
FILE DATE: 04/04/2009
FILE TIME: 05:16

POINT#	X	Y
1:	-0.004	0.012
2:	-0.063	-0.240
3:	0.315	-0.398
4:	0.144	-0.776
5:	-0.469	-0.494
6:	-0.763	-0.756
7:	-0.611	0.288
8:	-0.145	0.840
9:	0.539	0.468
10:	-0.014	0.176

X CENTROID: -0.107
Y CENTROID: -0.088
POA TO CENTROID: 0.139
HORZ SPREAD: 1.302
VERT SPREAD: 1.616
GROUP SPREAD: 1.787
MIN RADIUS: 0.144
MAX RADIUS: 0.936
MEAN RADIUS: 0.573
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

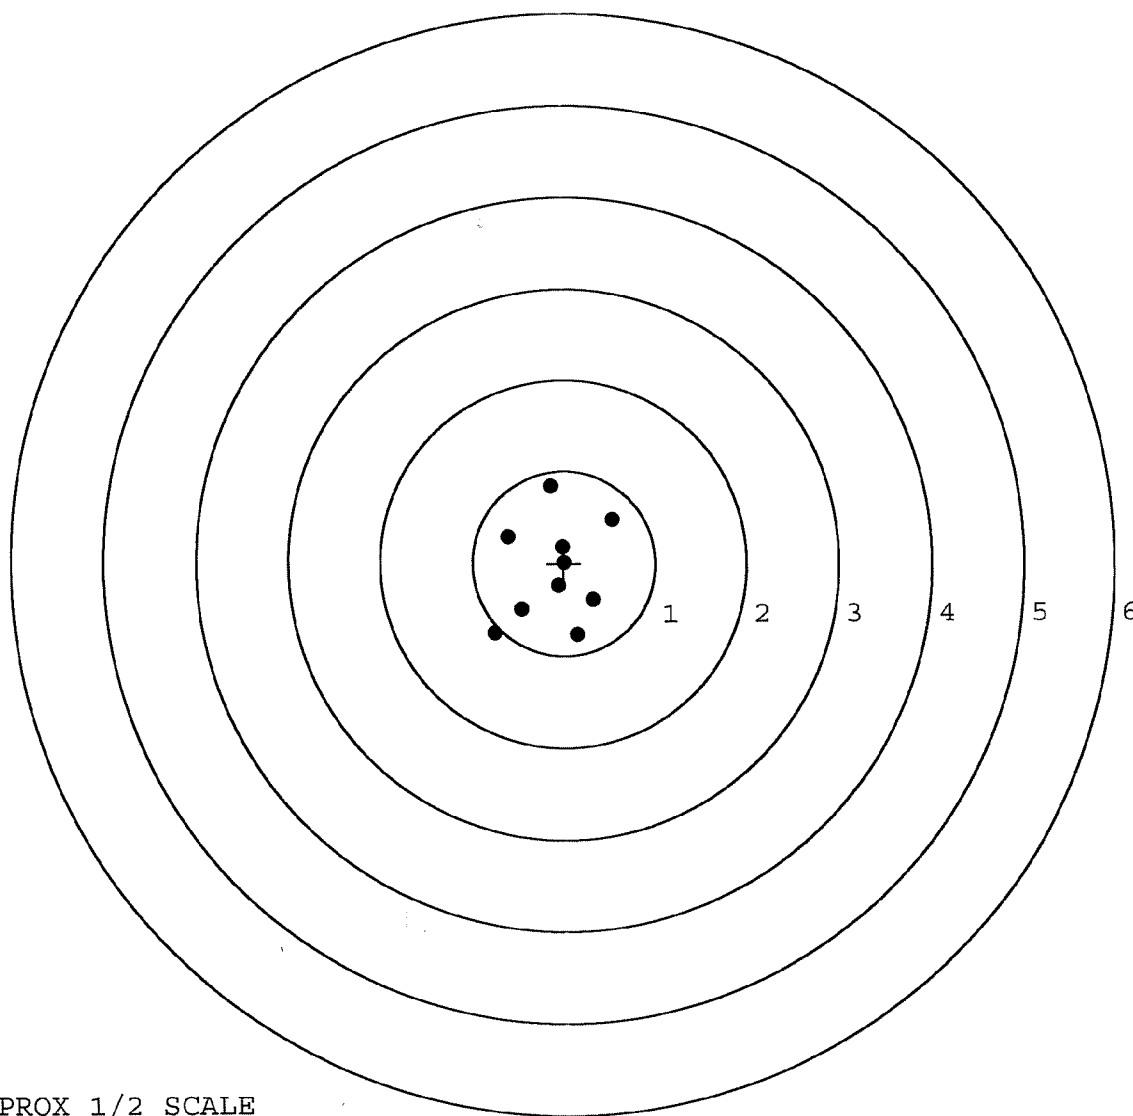

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6360884. __1

TARGET NUMBER: 5

FILE DATE: 04/04/2009

FILE TIME: 05:16

POINT#	X	Y
1:	-0.819	0.014
2:	-0.506	-0.788
3:	1.634	-0.300
4:	1.105	1.618
5:	1.220	1.113
6:	0.761	0.316
7:	0.210	0.287
8:	0.157	0.001
9:	-0.148	-0.087
10:	-0.012	-0.319

X CENTROID: 0.360

Y CENTROID: 0.185

POA TO CENTROID: 0.405

HORZ SPREAD: 2.453

VERT SPREAD: 2.406

GROUP SPREAD: 2.896

MIN RADIUS: 0.181


MAX RADIUS: 1.615

MEAN RADIUS: 0.882

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 5

in 3 IN DIAMETER: 9

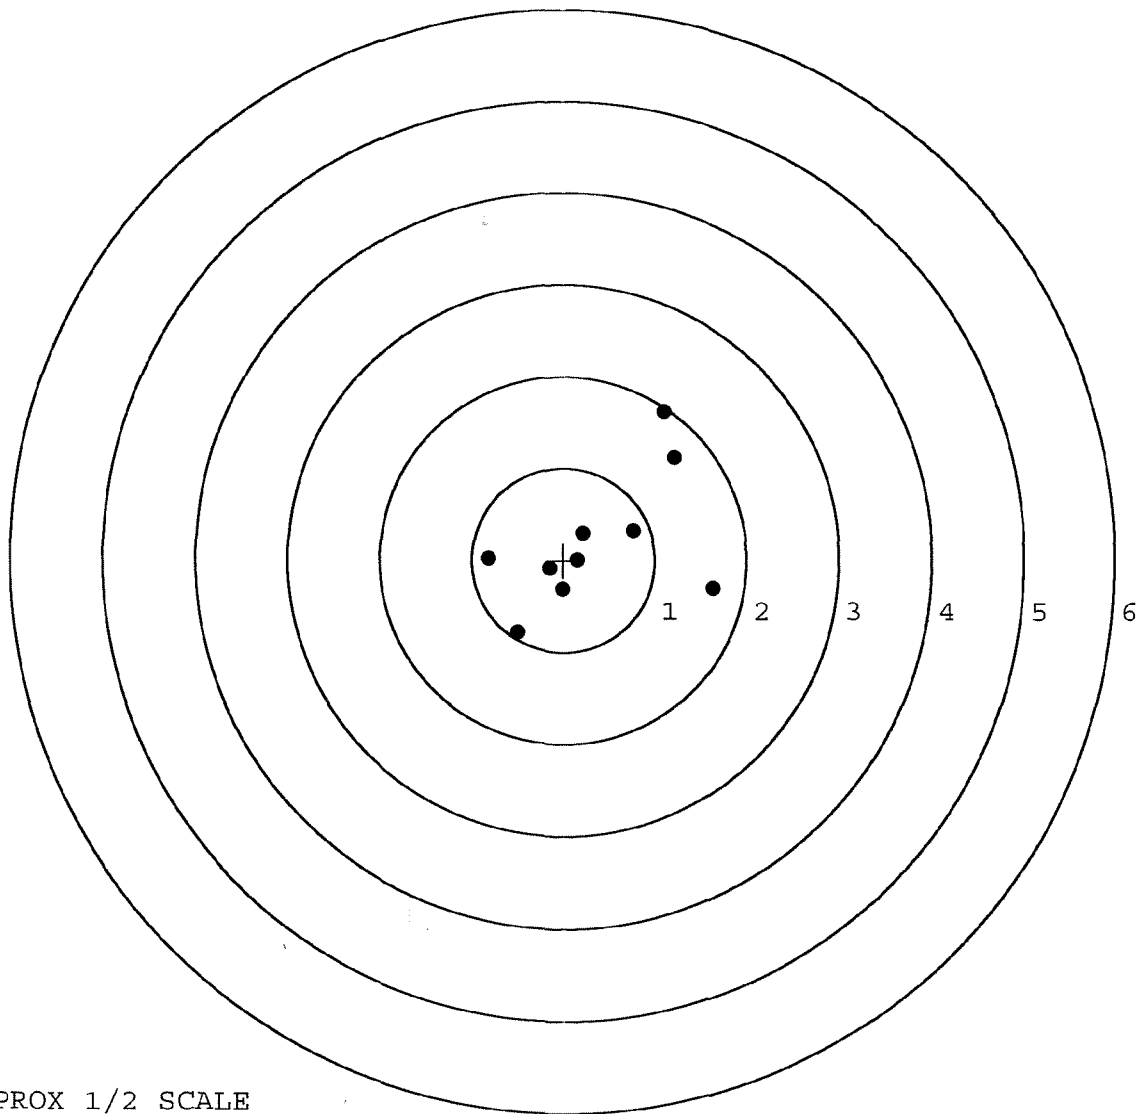

TARGET APPROX 1/2 SCALE

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Evaluate History

Repair Inquiry

Repair Number: RE00163790

Serial: G6360871 Model M24 SWS Center Fire
Caliber: 7.62 NATO

Repairman:

Status: Closed 3/4/2009 9:56:23 AM

Verify Repair

Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: ISD ARMSROOM

ISD ARMSROOM

Address 1: 8TH DESERT STORM

8TH DESERT STORM

Address 2: BLDG 5210 BAY DOOR #30

PO Box:

BLDG 5210 BAY DOOR #30

PO Box:

City: FORT CAMPBELL

FORT CAMPBELL

State: KY

Zip Code: 42223

Country: US

State: KY

Zip Code: 42223

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NN

Fax:

Email:

Comments:

Received Condition

Fair

Condition

Notes:

CSR

Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A010	Hard Case	1
A057	Fit Sgt Base	1
D000	FLASH SUPPRESSOR	1

Refresh

Close

Repair Search

Refresh

Close

Repair

nagletj

3/4/2009

10:58 AM

CAPS

NUM

INS

SCRL

H start

10 Micro...

8 Microso...

My Docum...

Arms Servi...

DMS - Glob...


Option Ma...

Part Seac...

10:58 AM

Serial Number: G6360871

Model: M24 SWS



RE00163790

M-24
INSPECTION CHECKLIST - REPAIRS
CONTRACT #: W52H09-07-C-0207
ISSUED 10/1/2007

R & E NUMBER <u>163790</u>		<i>Remove scope Base</i>	
SERIAL NUMBER <u>G6360871</u>			
LOG-IN DATE <u>3-4-09</u>			

OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	3-11-09	RTZ
505	RE-BARREL	3-16-09	RTZ
420	ASSEMBLE	3-16-09	RTZ
440	PROOF	3-17-09	TC
460	CHECK HEADSPACE	3-17-09	TC
470	DIS-ASSEMBLE GUN	3-17-09	RTZ
480	MAGNAFLUX	3-20-09	(P)
510	DRILL AND TAP	3-17-09	SP
500	ROLLMARK CALIBER	3-24-09	RT
520	GOFF BLAST BBL / REC	3-24-09	BT
530 & 540	APPLY COATINGS	3-31-09	
560	FINAL ASSEMBLY	4-3-09	RTZ
640	FUNCTION TEST AND	4-3-09	TC
650	TARGET	4-3-09	TC
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION	4-4-09	RTZ
	A) HEADSPACE	4-3-09	N/A
	B) TRIGGER PULL	2.50 2.36 2.35 2.44 2.41 4-3-09	TC
680	F) SAFETY ON FORCE	5.0 5.0 5.0 4-4-09	RTZ
	G) SAFETY OFF FORCE	6.0 6.0 6.0 4-4-09	RTZ
	I) FIRING PIN INDENT	.025 .024 .024 4-4-09	RTZ
690	PACK	4-4-09	RTZ

F006 REV 1/2009

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6360871.___1
FILE DATE AND TIME: 04/04/2009 05:08

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.064
The Average Y Centroid of the Five Target Set:	0.049
The Average Point of Impact of the Five Target Set:	0.081
The Average Mean Radius of the Five Target Set:	0.578
The Distance from POA to Centroid Target #1:	0.124
The Distance from Centroid Target #2 to Centroid Target #1:	0.065
The Distance from Centroid Target #3 to Centroid Target #1:	0.185
The Distance from Centroid Target #4 to Centroid Target #1:	0.242
The Distance from Centroid Target #5 to Centroid Target #1:	0.050

SERIAL NUMBER: G6360871. 1

TARGET NUMBER: 1

FILE DATE: 04/04/2009

FILE TIME: 05:08

POINT#	X	Y
1:	-0.262	0.721
2:	0.623	0.805
3:	0.429	0.082
4:	0.250	0.216
5:	-0.291	0.170
6:	-0.598	-0.313
7:	-0.336	-0.284
8:	0.071	-0.196
9:	0.086	0.060
10:	-0.022	-0.024

X CENTROID: -0.005

Y CENTROID: 0.124

POA TO CENTROID: 0.124

HORZ SPREAD: 1.221

VERT SPREAD: 1.118

GROUP SPREAD: 1.656

MIN RADIUS: 0.111


MAX RADIUS: 0.927

MEAN RADIUS: 0.442

IN 1 IN DIAMETER: 6

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

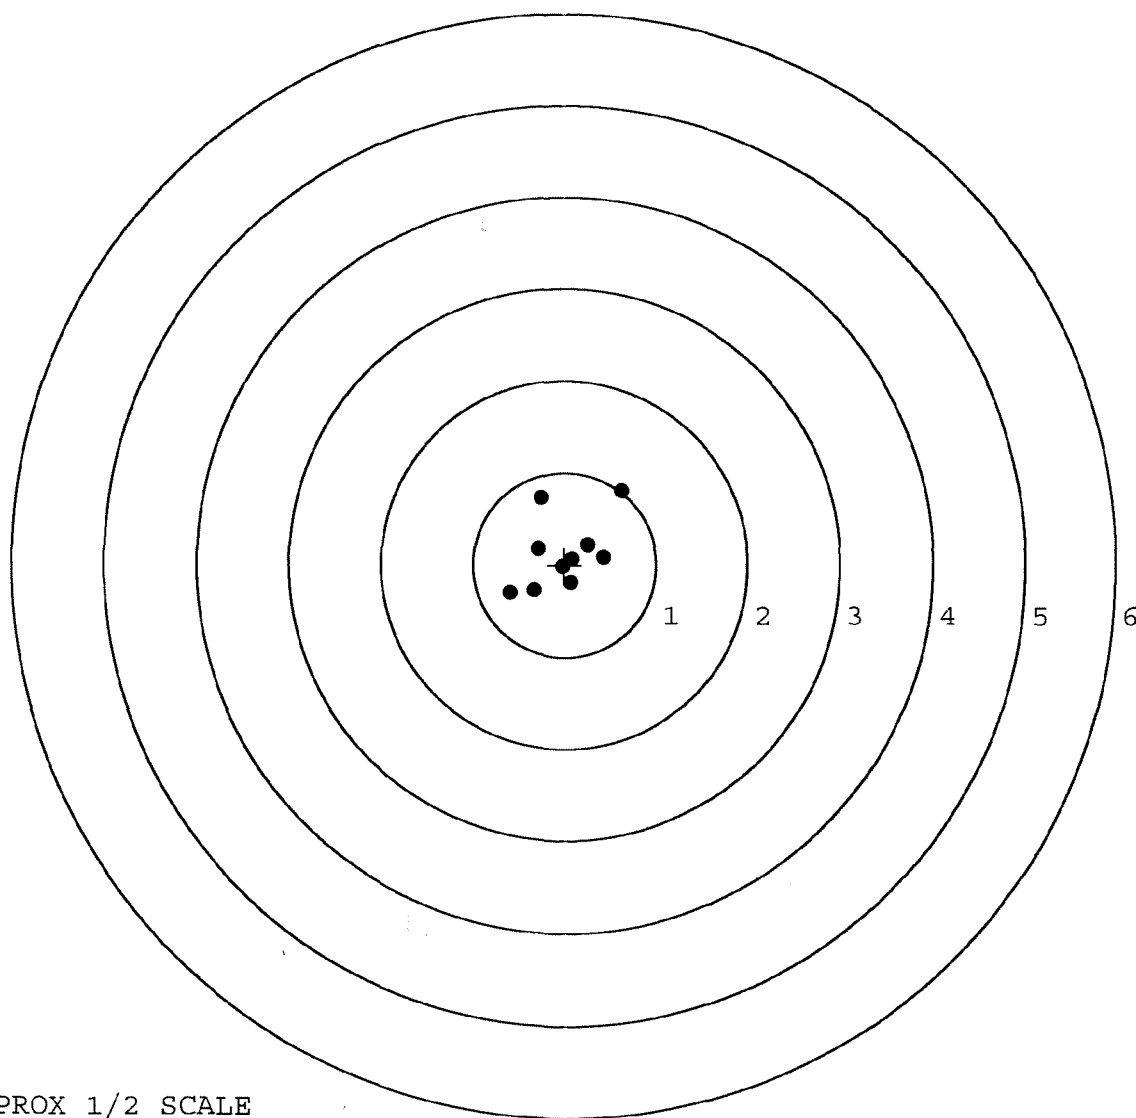


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6360871. __1
TARGET NUMBER: 2
FILE DATE: 04/04/2009
FILE TIME: 05:08

POINT#	X	Y
1:	-0.622	0.597
2:	-0.664	-0.083
3:	0.088	1.058
4:	0.075	0.611
5:	0.098	0.237
6:	0.671	0.625
7:	-0.261	-0.804
8:	0.104	-0.641
9:	-0.034	-0.411
10:	-0.113	-0.189

X CENTROID: -0.066
Y CENTROID: 0.100
POA TO CENTROID: 0.120
HORZ SPREAD: 1.335
VERT SPREAD: 1.862
GROUP SPREAD: 1.894
MIN RADIUS: 0.214
MAX RADIUS: 0.970
MEAN RADIUS: 0.648
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

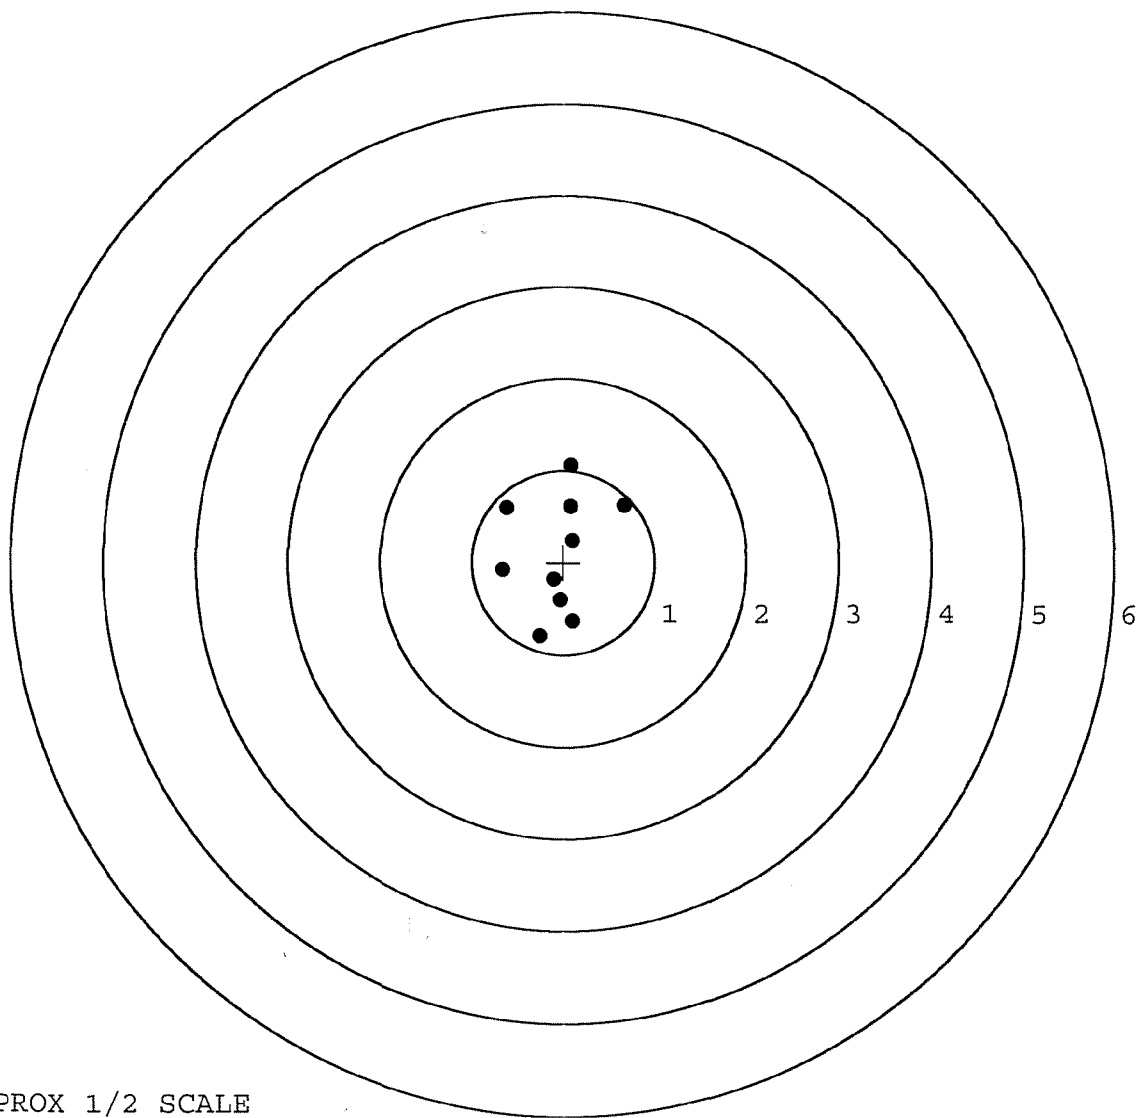

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6360871. 1

TARGET NUMBER: 3

FILE DATE: 04/04/2009

FILE TIME: 05:08

POINT#	X	Y
1:	-1.191	0.046
2:	0.337	-0.875
3:	0.276	-0.408
4:	0.479	0.013
5:	0.435	0.412
6:	-0.395	-0.310
7:	-0.025	0.289
8:	-0.384	0.364
9:	-0.509	0.601
10:	-0.675	0.178

X CENTROID: -0.165

Y CENTROID: 0.031

POA TO CENTROID: 0.168

HORZ SPREAD: 1.670

VERT SPREAD: 1.476

GROUP SPREAD: 1.784

MIN RADIUS: 0.294


MAX RADIUS: 1.036

MEAN RADIUS: 0.634

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

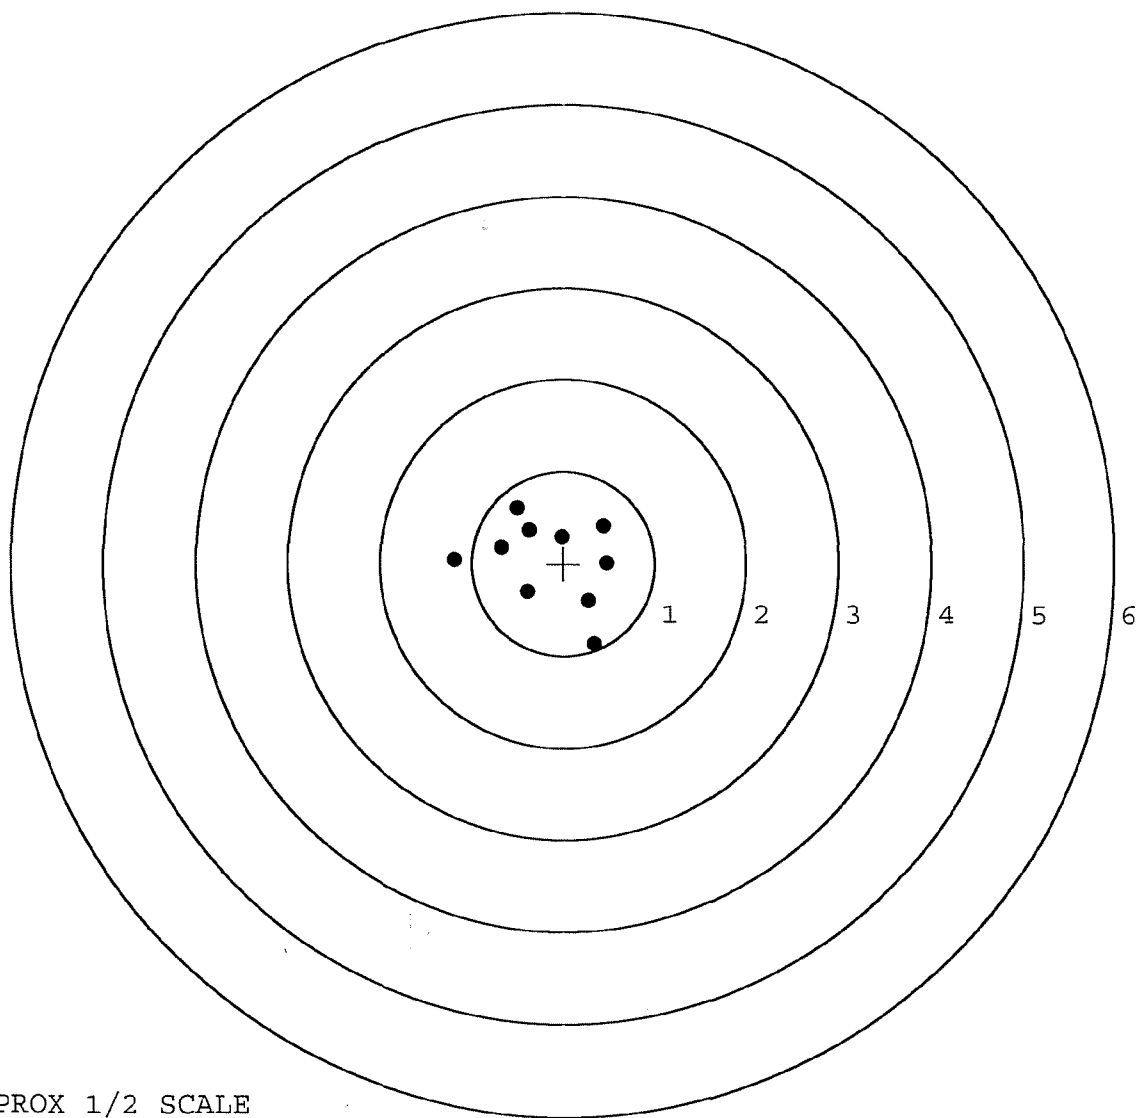

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6360871. 1

TARGET NUMBER: 4

FILE DATE: 04/04/2009

FILE TIME: 05:08

POINT#	X	Y
1:	0.362	-0.784
2:	-0.396	-0.655
3:	0.358	-0.192
4:	0.000	-0.341
5:	0.108	0.398
6:	0.071	0.743
7:	-0.118	0.107
8:	-0.394	-0.021
9:	-0.808	-0.219
10:	0.499	-0.200

X CENTROID: -0.032

Y CENTROID: -0.116

POA TO CENTROID: 0.121

HORZ SPREAD: 1.307

VERT SPREAD: 1.527

GROUP SPREAD: 1.554

MIN RADIUS: 0.227


MAX RADIUS: 0.866

MEAN RADIUS: 0.538

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

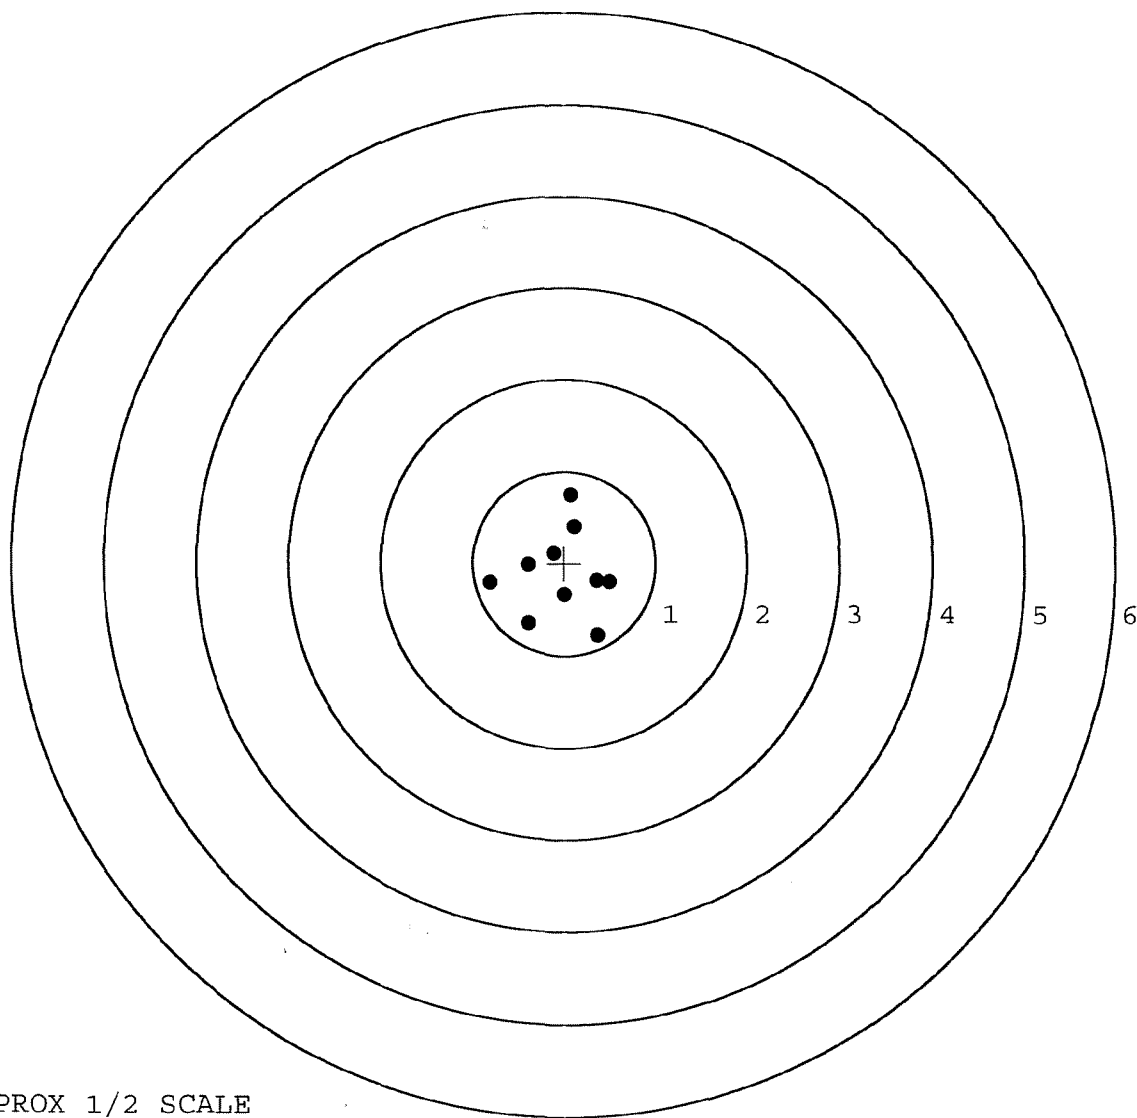

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6360871. __1

TARGET NUMBER: 5

FILE DATE: 04/04/2009

FILE TIME: 05:08

POINT#	X	Y
1:	-0.787	0.811
2:	0.482	0.812
3:	-0.440	0.365
4:	-0.122	0.320
5:	-0.107	-0.016
6:	-0.508	-0.141
7:	-0.779	-0.324
8:	0.840	-0.405
9:	0.575	-0.310
10:	0.318	-0.036

X CENTROID: -0.053

Y CENTROID: 0.108

POA TO CENTROID: 0.120

HORZ SPREAD: 1.627

VERT SPREAD: 1.217

GROUP SPREAD: 2.031

MIN RADIUS: 0.135


MAX RADIUS: 1.029

MEAN RADIUS: 0.627

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

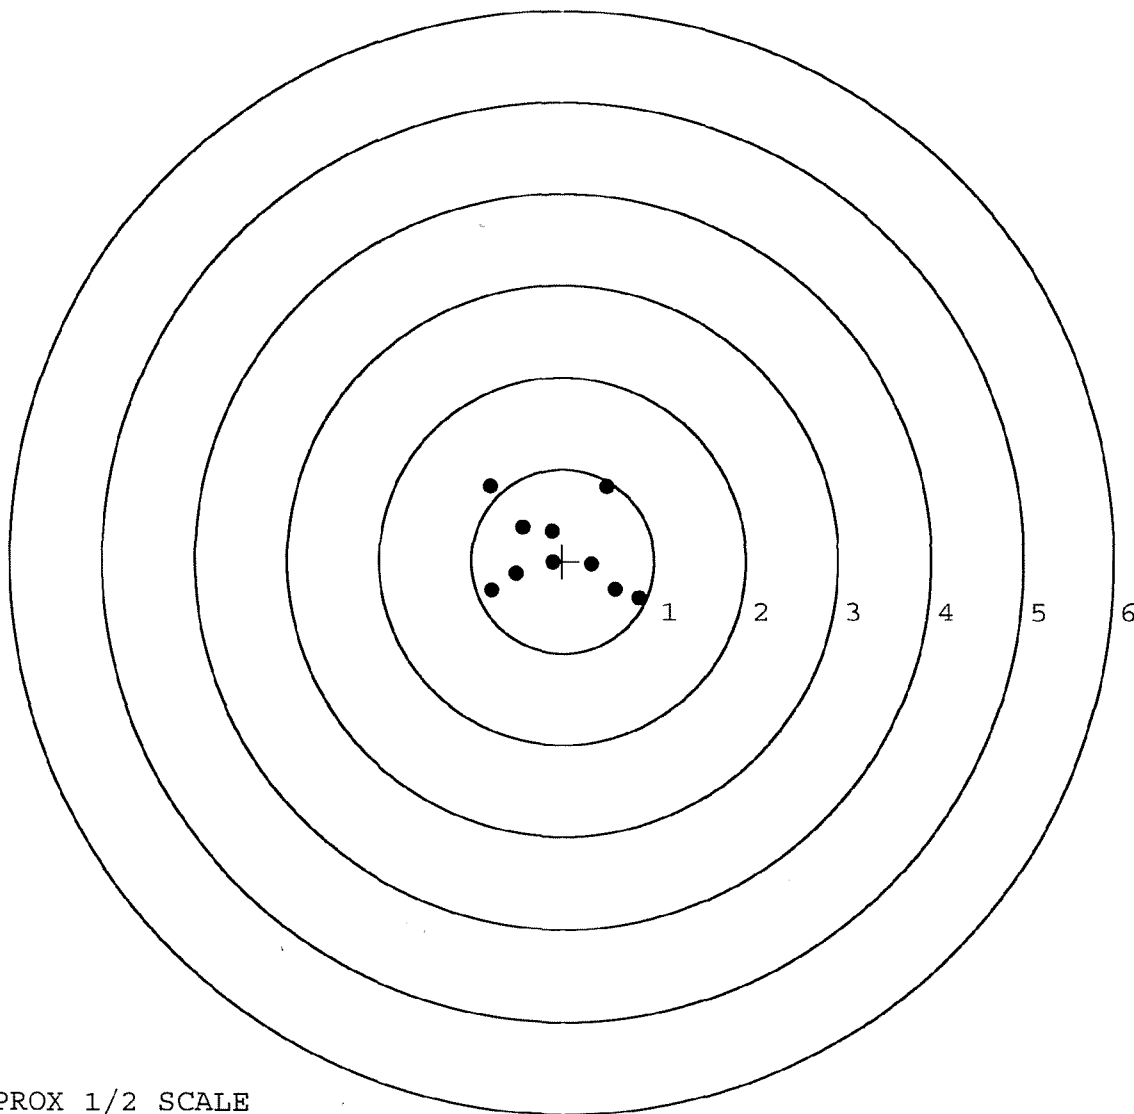

TARGET APPROX 1/2 SCALE

Repair Inquiry

Repair Number: RE00126625

Serial: G6360972 Model M24 SWS Center Fire

Repairman:

Verify Repair

Status:

New 3/14/2007 5:26:44 AM

Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: TRANSPORTATION OFFICE

TRANSPORTATION OFFICE

Address 1: BLDG 7199

BLDG 7199

Address 2: GLIDER ROAD

PO Box:

GLIDER ROAD

PO Box:

City: FORT CAMPBELL

FORT CAMPBELL

State: KY

Zip Code: 42223

Country: US

State: KY

Zip Code: 42223

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NA

Fax:

Email:

Comments:

Received Condition

Fair

Condition
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A010	Hard Case	1
A017	Scope Base	1
A057	Frt and Rear Sgt Base	2

Repair Search

Refresh

Close

nagletj

3/14/2007

7:34 AM

CAPS

NUM

INS

SCRL



4 Micro...

Arms Ser...

Part Sear...

RAC0179...

5 Inter...

7:34 AM

Serial
Number:

G6360972

Model: M24 SWS



RE00126625

DA FORM 2407, JUL 94

ORGANIZATION COPY 4

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6360972.___0
FILE DATE AND TIME: 04/03/2007 23:44

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.019
The Average Y Centroid of the Five Target Set:	0.002
The Average Point of Impact of the Five Target Set:	0.019
The Average Mean Radius of the Five Target Set:	0.526
The Distance from POA to Centroid Target #1:	0.103
The Distance from Centroid Target #2 to Centroid Target #1:	0.267
The Distance from Centroid Target #3 to Centroid Target #1:	0.360
The Distance from Centroid Target #4 to Centroid Target #1:	0.148
The Distance from Centroid Target #5 to Centroid Target #1:	0.042

SERIAL NUMBER: G6360972. __ 0

TARGET NUMBER: 1

FILE DATE: 04/03/2007

FILE TIME: 23:44

POINT#	X	Y
1:	-0.633	0.556
2:	-0.036	0.549
3:	-0.392	0.086
4:	0.281	-0.205
5:	0.663	0.410
6:	1.212	1.225
7:	0.160	-0.582
8:	-0.118	-1.058
9:	-1.094	-0.624
10:	0.582	0.463

X CENTROID: 0.062

Y CENTROID: 0.082

POA TO CENTROID: 0.103

HORZ SPREAD: 2.306

VERT SPREAD: 2.283

GROUP SPREAD: 2.956

MIN RADIUS: 0.361


MAX RADIUS: 1.621

MEAN RADIUS: 0.826

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 9

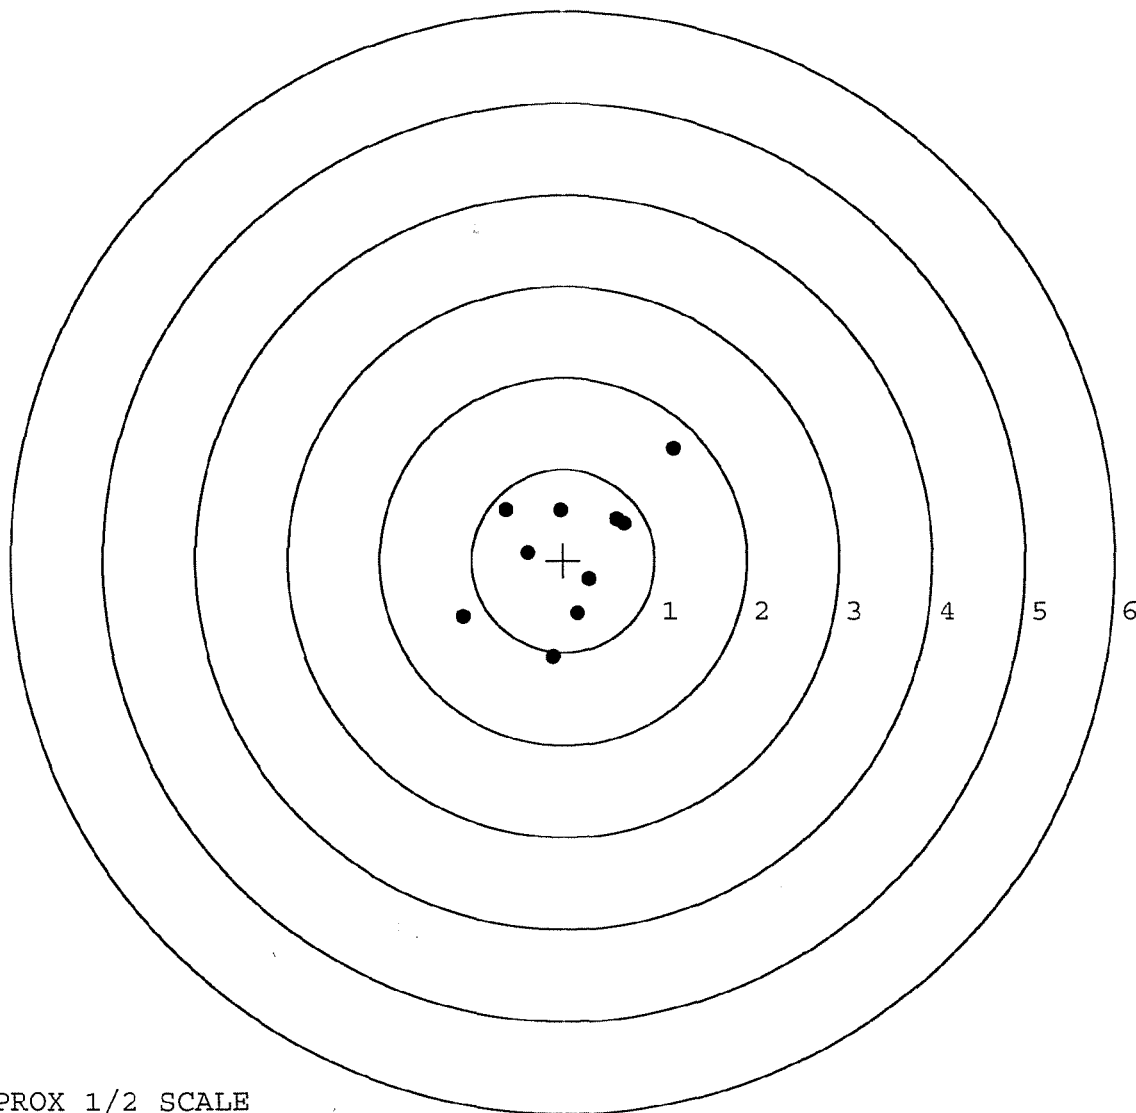


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6360972. __0
TARGET NUMBER: 2
FILE DATE: 04/03/2007
FILE TIME: 23:44

POINT#	X	Y
1:	-0.145	0.795
2:	0.166	0.402
3:	0.632	0.149
4:	0.136	-0.388
5:	-0.205	-0.739
6:	-0.208	-0.571
7:	-0.225	-0.321
8:	-0.272	-0.102
9:	-0.550	0.155
10:	-0.984	0.054

X CENTROID: -0.166
Y CENTROID: -0.057
POA TO CENTROID: 0.175
HORZ SPREAD: 1.616
VERT SPREAD: 1.534
GROUP SPREAD: 1.535
MIN RADIUS: 0.116
MAX RADIUS: 0.852
MEAN RADIUS: 0.554
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

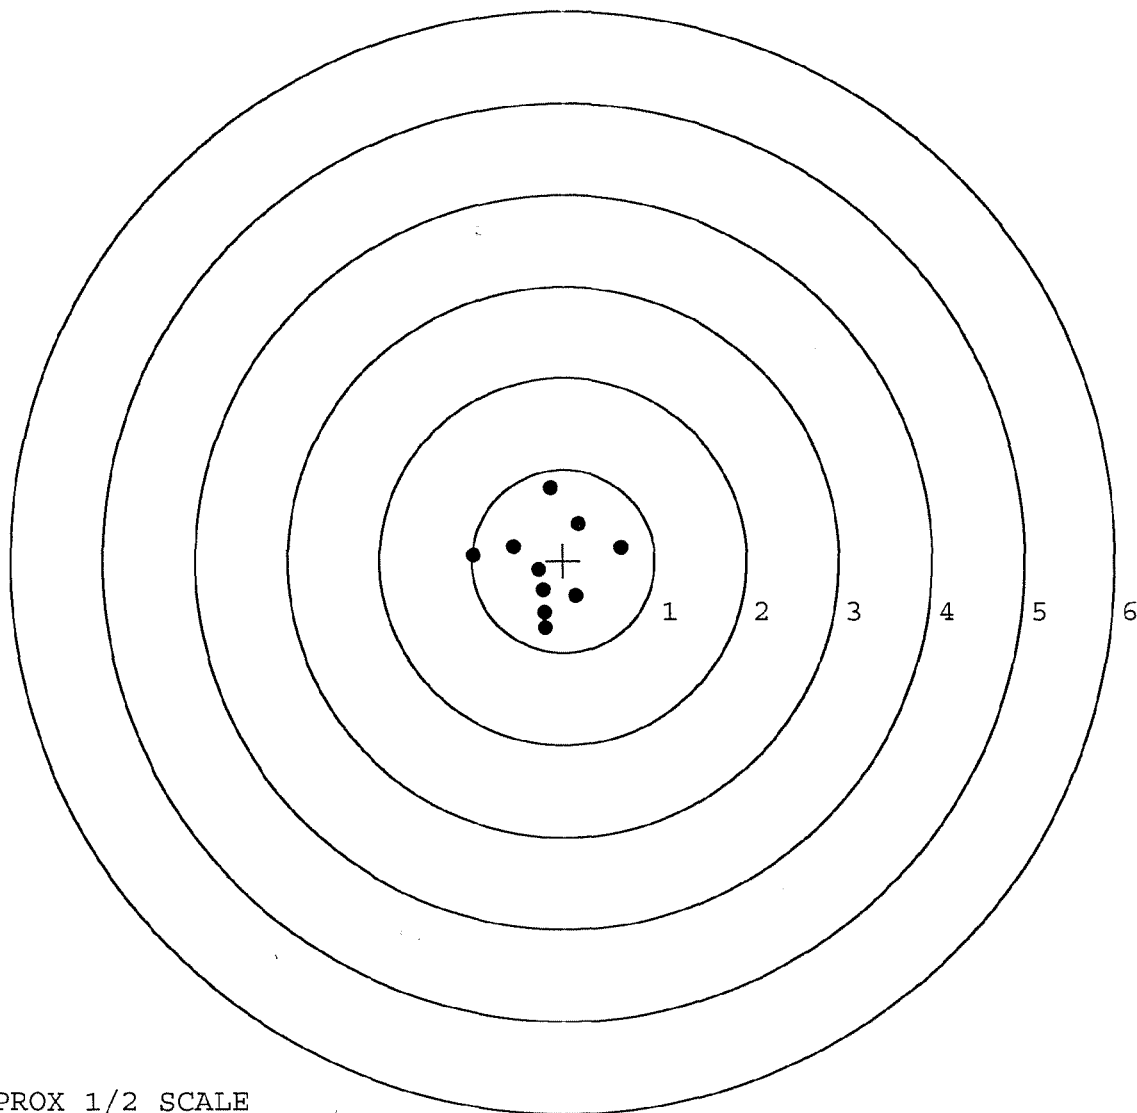

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6360972. __0

TARGET NUMBER: 3

FILE DATE: 04/03/2007

FILE TIME: 23:44

POINT#	X	Y
1:	-0.416	0.180
2:	-0.389	-0.035
3:	-0.234	-0.249
4:	0.057	-0.345
5:	0.248	-0.168
6:	0.454	-0.335
7:	0.393	0.219
8:	0.062	-0.941
9:	0.088	-0.651
10:	0.079	-0.441

X CENTROID: 0.034

Y CENTROID: -0.277

POA TO CENTROID: 0.279

HORZ SPREAD: 0.870

VERT SPREAD: 1.160

GROUP SPREAD: 1.219

MIN RADIUS: 0.072


MAX RADIUS: 0.665

MEAN RADIUS: 0.396

IN 1 IN DIAMETER: 7

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

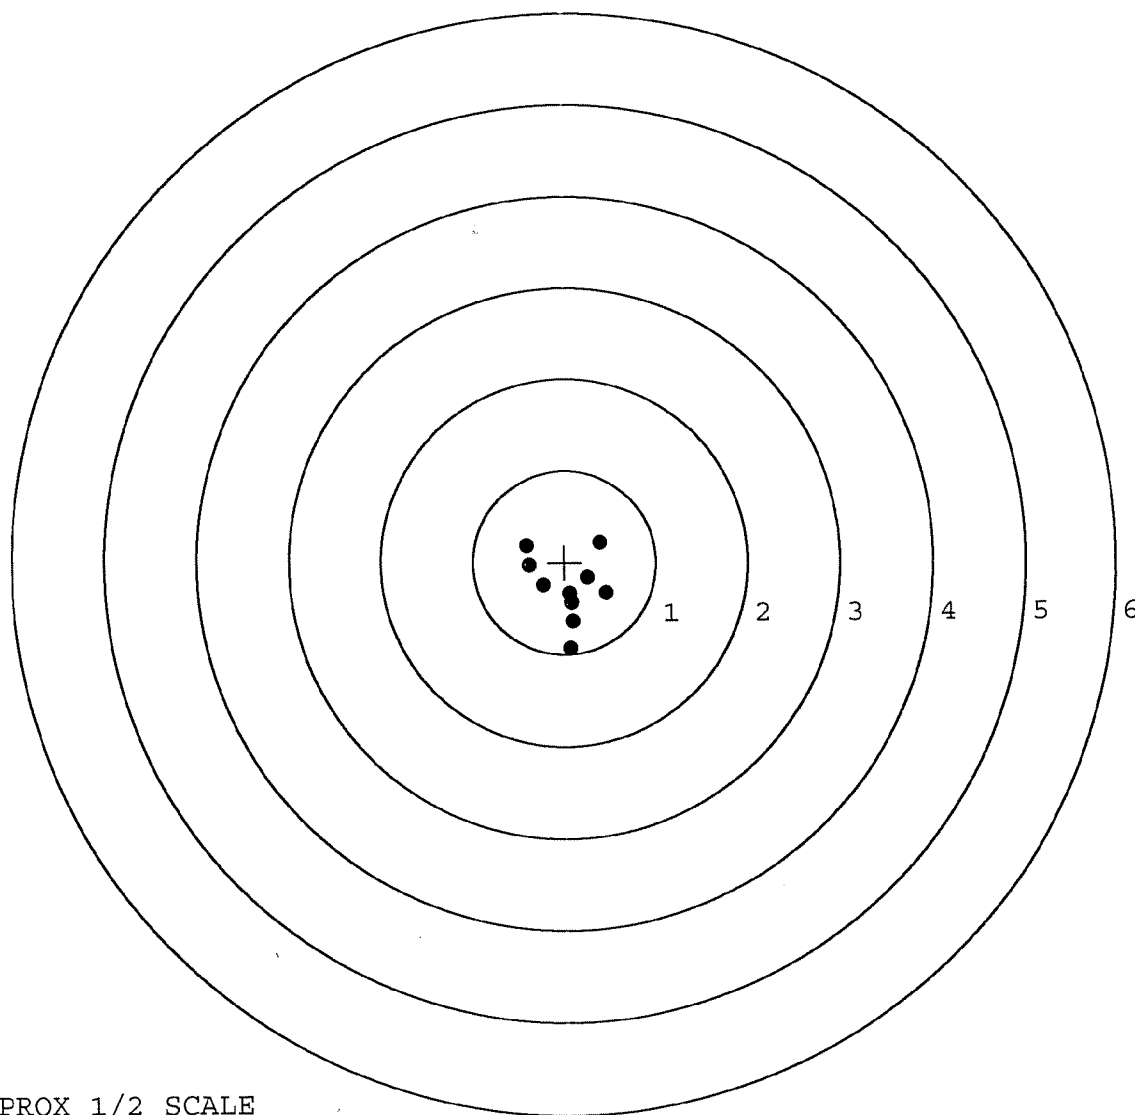


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6360972. 0
TARGET NUMBER: 4
FILE DATE: 04/03/2007
FILE TIME: 23:44

X CENTROID: -0.074
Y CENTROID: 0.139
POA TO CENTROID: 0.157
HORZ SPREAD: 1.323
VERT SPREAD: 1.169
GROUP SPREAD: 1.433
MIN RADIUS: 0.092
MAX RADIUS: 0.889
MEAN RADIUS: 0.427

POINT#	X	Y
1:	-0.773	0.688
2:	-0.576	0.519
3:	-0.037	0.296
4:	0.153	-0.018
5:	-0.131	-0.067
6:	-0.143	-0.260
7:	0.055	-0.481
8:	0.247	0.253
9:	0.550	0.227
10:	-0.084	0.230

IN 1 IN DIAMETER: 6
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

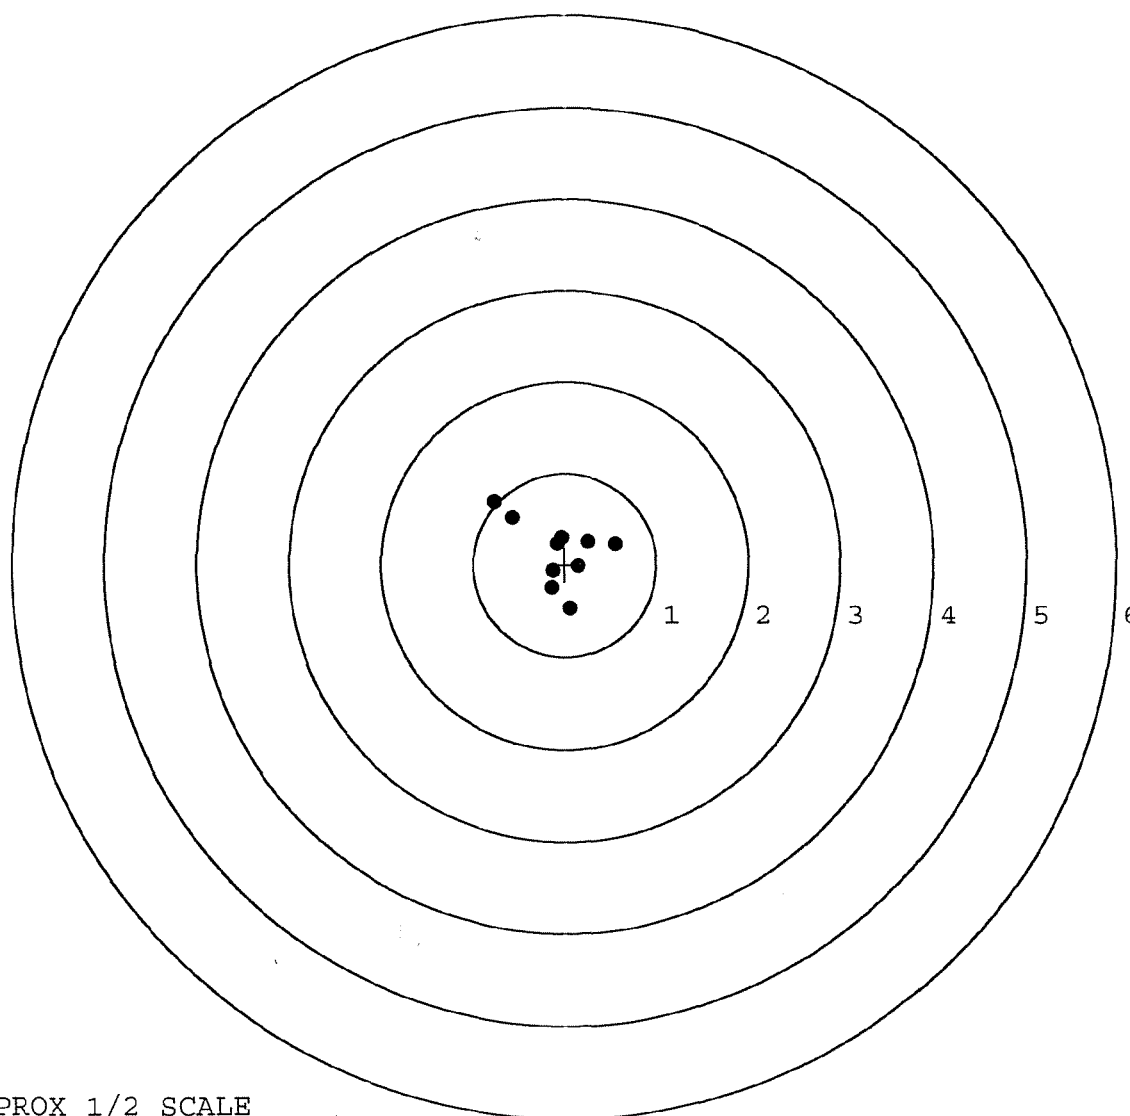

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6360972. __ 0

TARGET NUMBER: 5

FILE DATE: 04/03/2007

FILE TIME: 23:44

POINT#	X	Y
1:	-0.366	-0.042
2:	-0.399	0.183
3:	-0.186	0.294
4:	0.188	0.443
5:	0.173	0.290
6:	0.387	0.083
7:	0.547	-0.008
8:	0.151	-0.474
9:	-0.016	-0.311
10:	-0.013	0.755

X CENTROID: 0.047

Y CENTROID: 0.121

POA TO CENTROID: 0.130

HORZ SPREAD: 0.946

VERT SPREAD: 1.229

GROUP SPREAD: 1.240

MIN RADIUS: 0.211


MAX RADIUS: 0.636

MEAN RADIUS: 0.428

IN 1 IN DIAMETER: 7

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

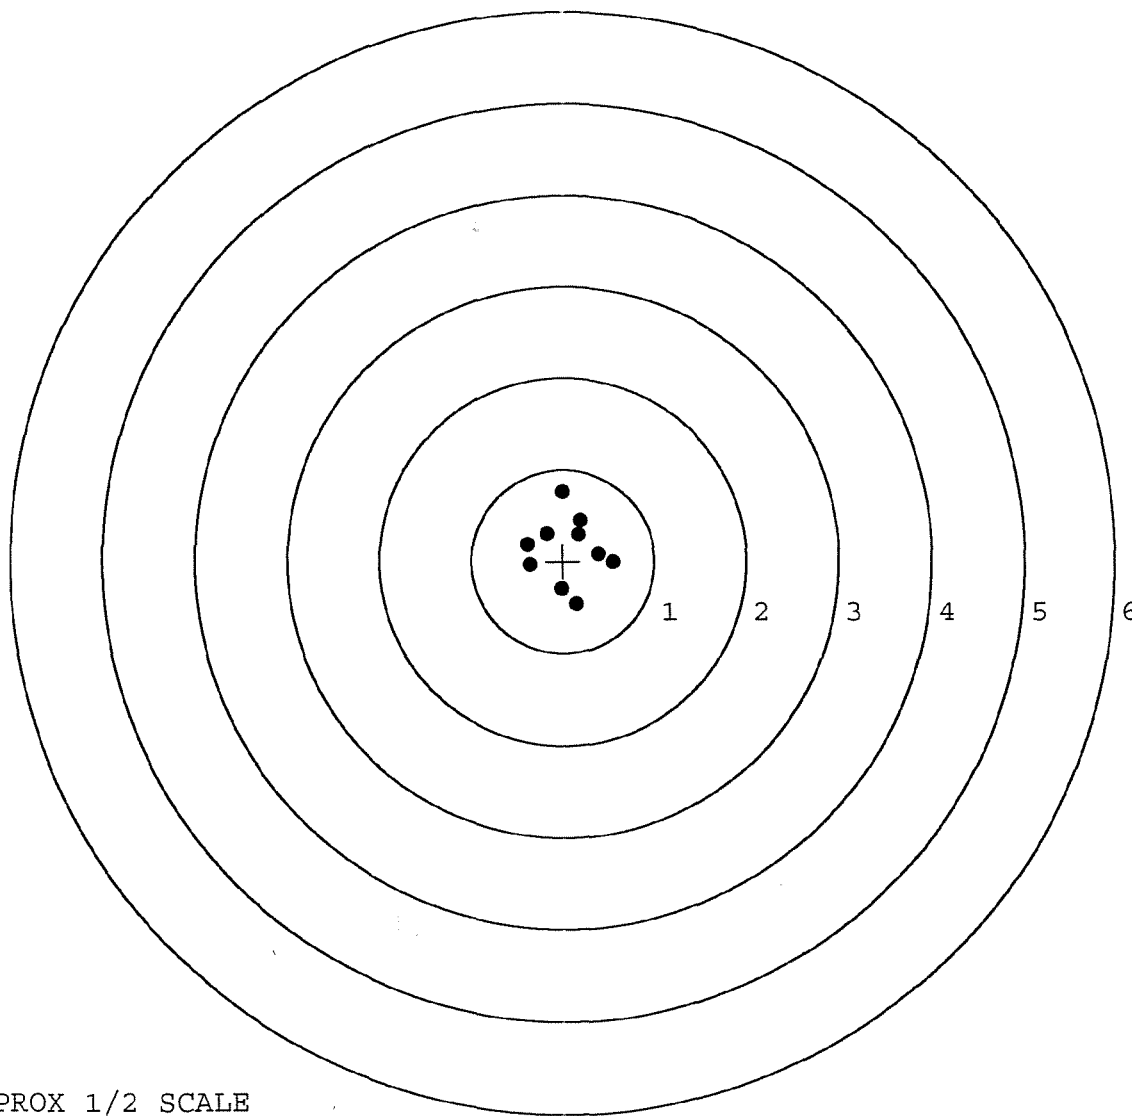

TARGET APPROX 1/2 SCALE

Repair Inquiry

Repair Number: RE00126625

Serial: G6360972 Model M24 SWS Center Fire

Repairman:

Verify Repair

Status:

New 3/14/2007 5:26:44 AM

Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: TRANSPORTATION OFFICE

TRANSPORTATION OFFICE

Address 1: BLDG 7199

BLDG 7199

Address 2: GLIDER ROAD

PO Box:

GLIDER ROAD

PO Box:

City: FORT CAMPBELL

FORT CAMPBELL

State: KY

Zip Code: 42223

Country: US

State: KY

Zip Code: 42223

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NA

Fax:

Email:

Comments:

Received Condition

Fair

Condition
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A010	Hard Case	1
A017	Scope Base	1
A057	Fit and Rear Sgt Base	2

Repair Search

Refresh

Close

nagletj

3/27/2007

2:42 PM

CAPS

NUM

INS

SCRL

start

5 Micros...

Part Search...

Arms Servi...

3 Microso...

5 Interne...

2:42 PM

INSTALL MAPS RML
RETURN SCOPE BASE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-C-0149

R & E NUMBER		126625	
SERIAL NUMBER		G6360972	
LOG-IN DATE		3-14-07	
OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	3-19-07	RTZ
505	RE-BARREL	3-22-07	RTZ
560	ASSEMBLE	3-23-07	RTZ
600	PROOF	3-23-07	TRW
605	CHECK HEADSPACE	INSPECTED	3-23-07 TRW
610	DIS-ASSEMBLE GUN	MAR 26 2007	3-23-07 RTZ
612	MAGNAFLUX	OPERATOR APD	3-26-07 APD
510	DRILL AND TAP		3-23-07 TRW
615	ROLLMARK CALIBER		3-26-07 C.W
618	ROTO-BLAST		3-26-07 LB
620	APPLY COATINGS		3-29-07 W
625	FINAL ASSEMBLY		4-3-07 RTZ
640	FUNCTION TEST AND	(PASS) FAIL	4-3-07 W
650	TARGET	(PASS) FAIL	4-5-07 W
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION		4/4/07 W
	A) HEADSPACE	(PASS) FAIL	4/4/07 W
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	2.86 2.77 2.77 2.76 2.72 4-5-07 DA
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	6.5 7.5 6.5 4-5-07 DA
	G) SAFETY OFF FORCE	2 LBS MIN	2.5 2.5 2.5 4-5-07 DA
	I) FIRING PIN INDENT	.020	0.0245 0.025 0.0245 4-5-07 DA
690	PACK		4-11-07 DA

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00083304** Serial: **C6225309** Model: **M24 SWS** Center Fire Caliber: **7.62 NATO** Repairman: Status: Closed: **7/30/2004 10:19:18 AM**

Verify Repair

Address Information

Customer: ☒ Received From Return To: ☐ Received From

Name: **TRANSPORTATION OFFICE** **TRANSPORTATION OFFICE**

Address 1: **BLDG 5210 DOOR 30** **BLDG 5210 DOOR 30**

Address 2: PO Box: PO Box:

City: **FORT CAMPBELL** **FORT CAMPBELL**

State: **KY** Zip Code: **42223** Country: **US** State: **KY** Zip Code: **42223** Country: **US**

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information

Phone:

Fax:

Email:

Comments:

Received Condition

Fair

Condition Notes:

CSR Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	2
A010	Hard Case	1
A017	Scope Base	1
A028	Spent Case	1
A042	Adjustable Butt Pad	1
A055	Deployment Kit	1

Repair Search Refresh Close

inaglej 7/30/2004 1:00 PM CAPS NUM IT S SCPL

start 3 4 2 2 11:55

66360972 New

Serial Number: **C6225309**

Model: **M24 SWS**



RE00083304

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6360972.__0
FILE DATE AND TIME: 08/18/2004 06:38


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.060
The Average Y Centroid of the Five Target Set:	0.029
The Average Point of Impact of the Five Target Set:	0.066
The Average Mean Radius of the Five Target Set:	0.749
The Distance from POA to Centroid Target #1:	0.169
The Distance from Centroid Target #2 to Centroid Target #1:	0.202
The Distance from Centroid Target #3 to Centroid Target #1:	0.359
The Distance from Centroid Target #4 to Centroid Target #1:	0.328
The Distance from Centroid Target #5 to Centroid Target #1:	0.317

SERIAL NUMBER: C6360972. __0
TARGET NUMBER: 1
FILE DATE: 08/18/2004
FILE TIME: 06:38

X CENTROID: -0.147
Y CENTROID: -0.084
POA TO CENTROID: 0.169
HORZ SPREAD: 1.147
VERT SPREAD: 4.051
GROUP SPREAD: 4.200
MIN RADIUS: 0.084
MAX RADIUS: 2.544
MEAN RADIUS: 0.937
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 6
in 3 IN DIAMETER: 8

POINT#	X	Y
1:	0.340	2.413
2:	-0.807	0.264
3:	-0.164	-1.244
4:	-0.184	-1.499
5:	-0.767	-1.638
6:	0.020	0.585
7:	-0.192	-0.014
8:	0.235	-0.087
9:	0.022	0.343
10:	0.030	0.034

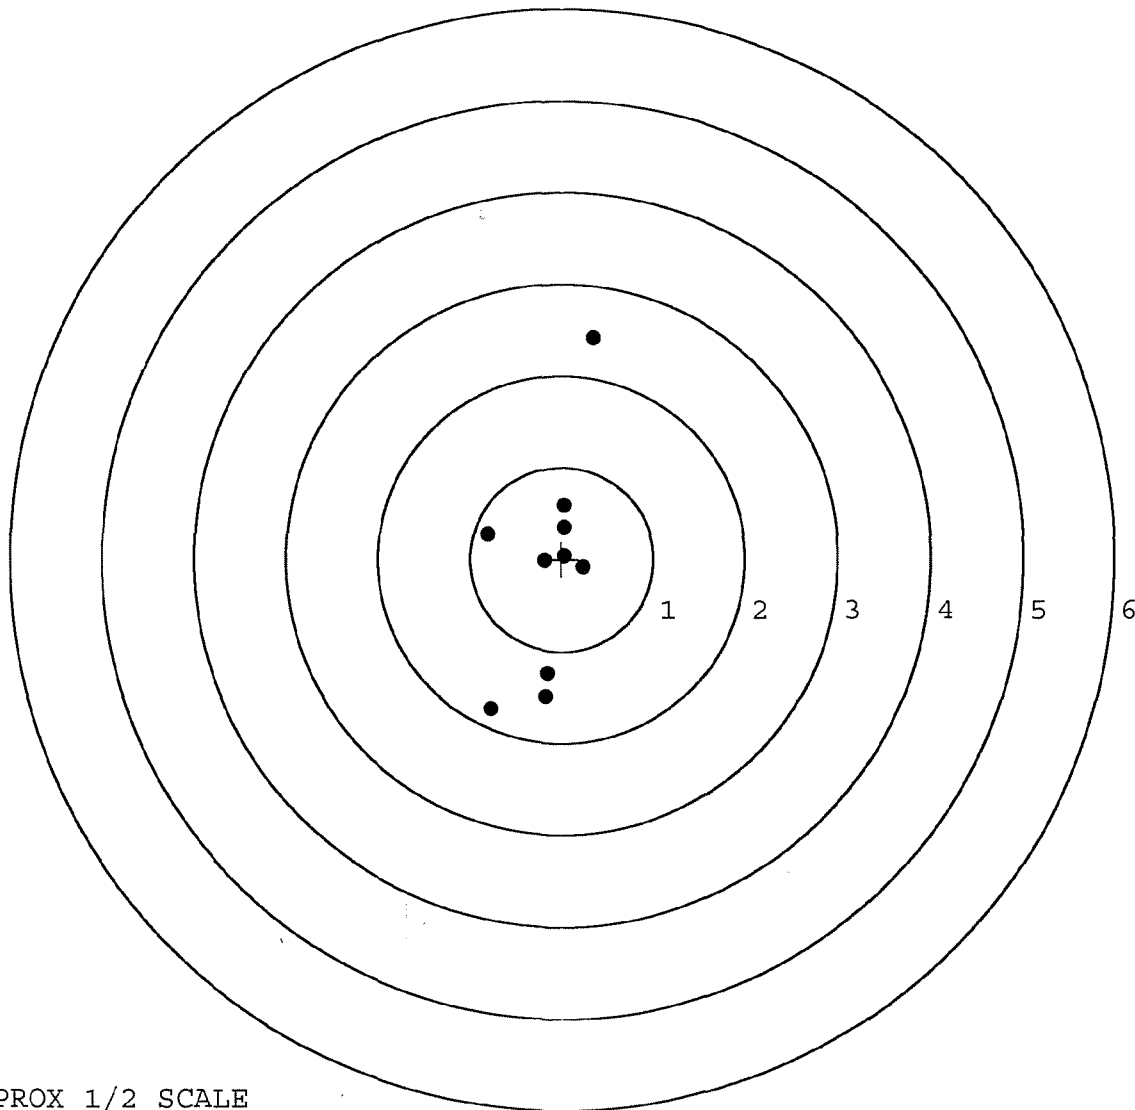

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6360972. __0

TARGET NUMBER: 2

FILE DATE: 08/18/2004

FILE TIME: 06:38

POINT#	X	Y
1:	0.634	1.529
2:	0.949	0.497
3:	-0.303	0.783
4:	0.228	-0.141
5:	-0.150	0.189
6:	-0.211	-0.038
7:	-0.663	-0.304
8:	-0.629	-0.686
9:	0.216	-0.984
10:	0.465	-1.445

X CENTROID: 0.054

Y CENTROID: -0.060

POA TO CENTROID: 0.080

HORZ SPREAD: 1.612

VERT SPREAD: 2.974

GROUP SPREAD: 2.979

MIN RADIUS: 0.192


MAX RADIUS: 1.692

MEAN RADIUS: 0.851

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 9

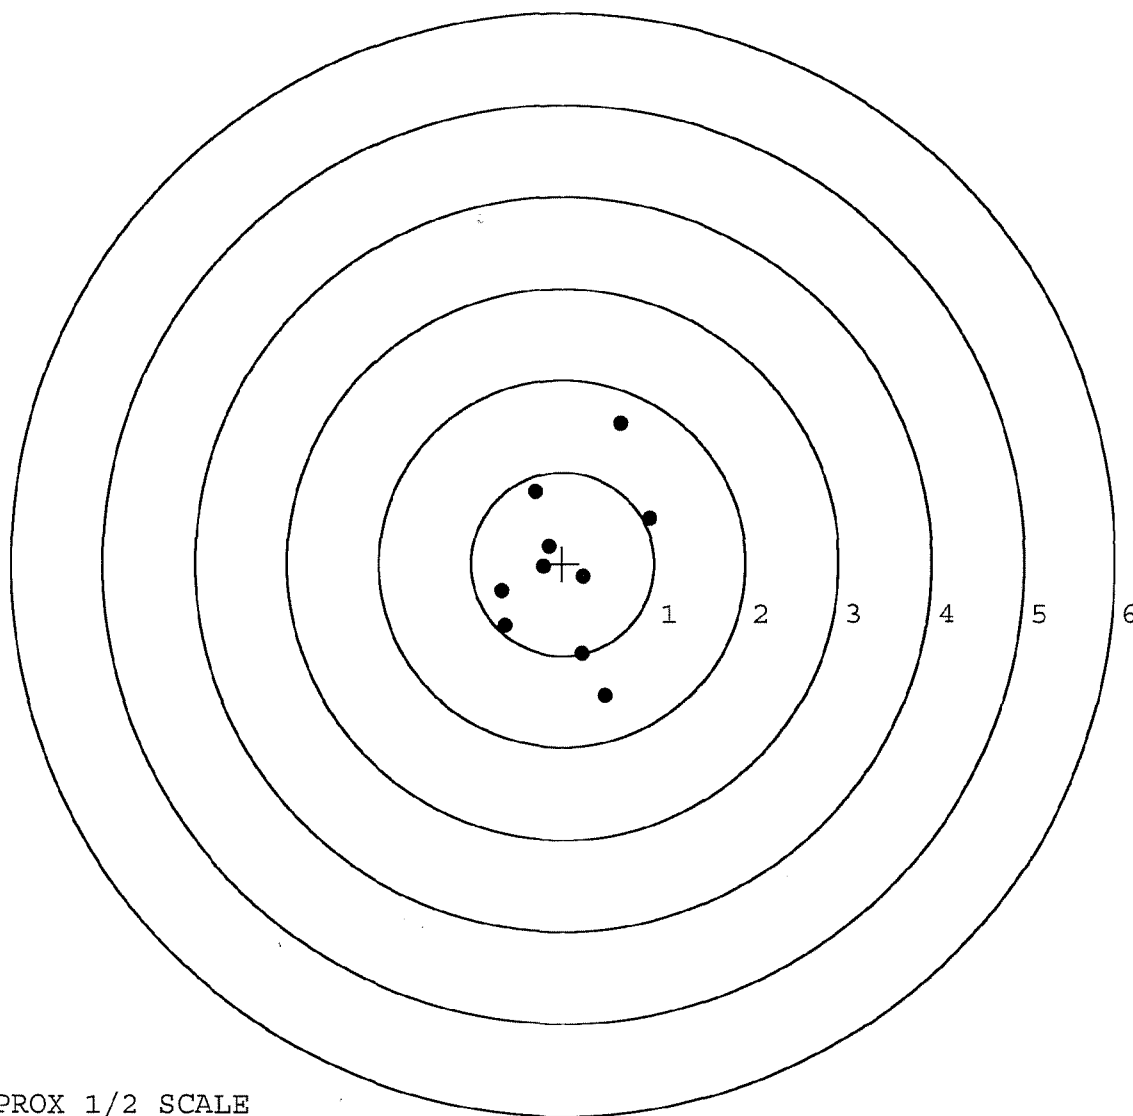

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6360972. __0

TARGET NUMBER: 3

FILE DATE: 08/18/2004

FILE TIME: 06:38

X CENTROID: 0.155

Y CENTROID: 0.111

POA TO CENTROID: 0.191

HORZ SPREAD: 1.107

VERT SPREAD: 1.984

GROUP SPREAD: 2.013

MIN RADIUS: 0.350

MAX RADIUS: 1.118


MEAN RADIUS: 0.622

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.016	-0.773
2:	0.293	-0.413
3:	-0.306	-0.390
4:	-0.023	-0.191
5:	-0.346	-0.089
6:	0.761	0.271
7:	0.630	0.385
8:	-0.049	0.581
9:	0.218	0.516
10:	0.356	1.211

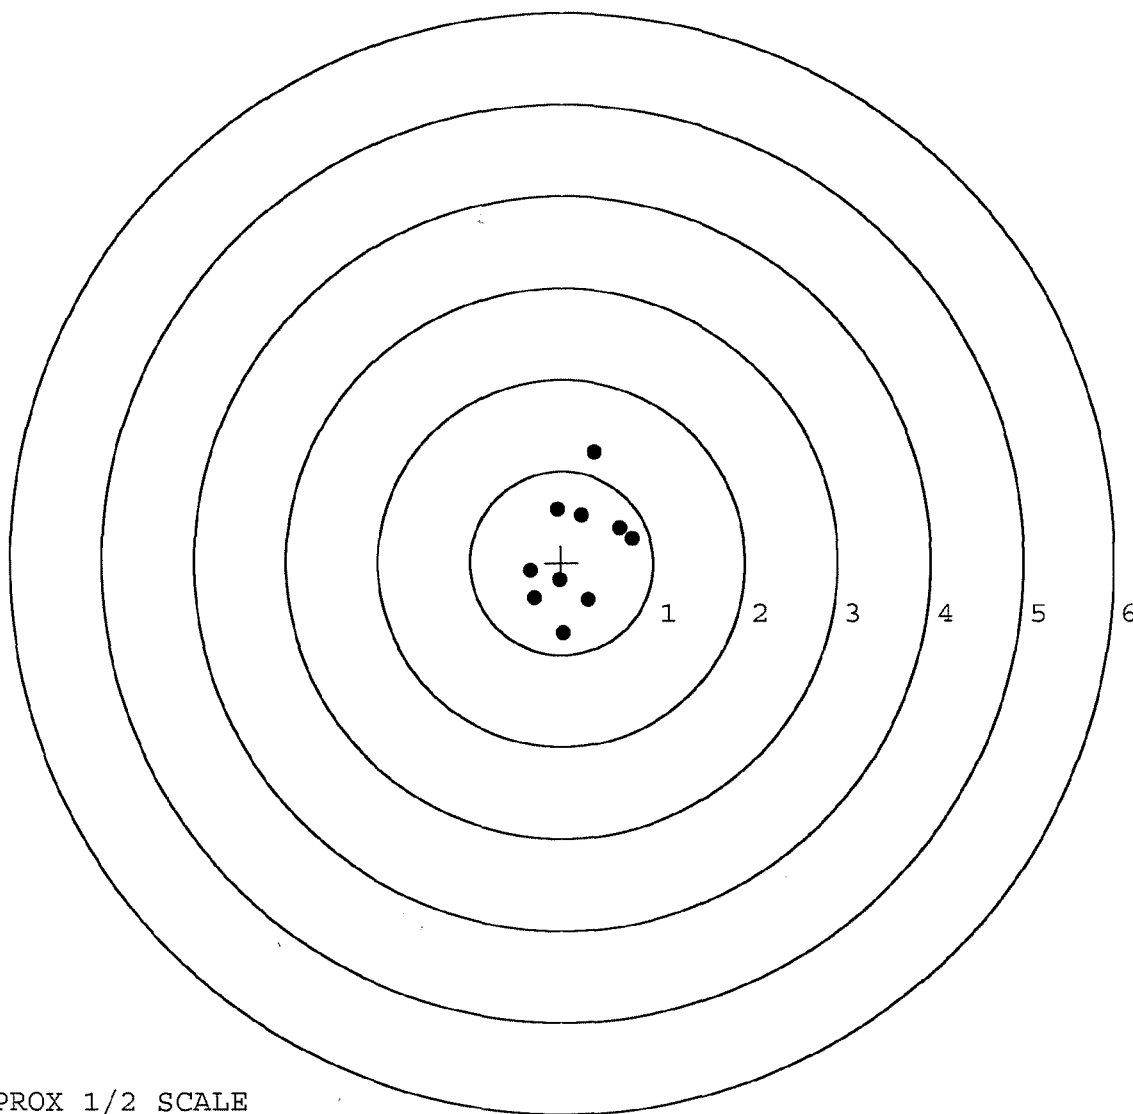

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6360972. __0

TARGET NUMBER: 4

FILE DATE: 08/18/2004

FILE TIME: 06:38

POINT#	X	Y
1:	0.134	-0.913
2:	-0.926	-0.213
3:	0.535	-0.435
4:	0.453	-0.232
5:	-0.440	0.132
6:	0.204	0.124
7:	-0.008	0.564
8:	0.121	0.779
9:	0.525	0.852
10:	0.301	0.764

X CENTROID: 0.090

Y CENTROID: 0.142

POA TO CENTROID: 0.168

HORZ SPREAD: 1.461

VERT SPREAD: 1.765

GROUP SPREAD: 1.800

MIN RADIUS: 0.116


MAX RADIUS: 1.076

MEAN RADIUS: 0.659

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

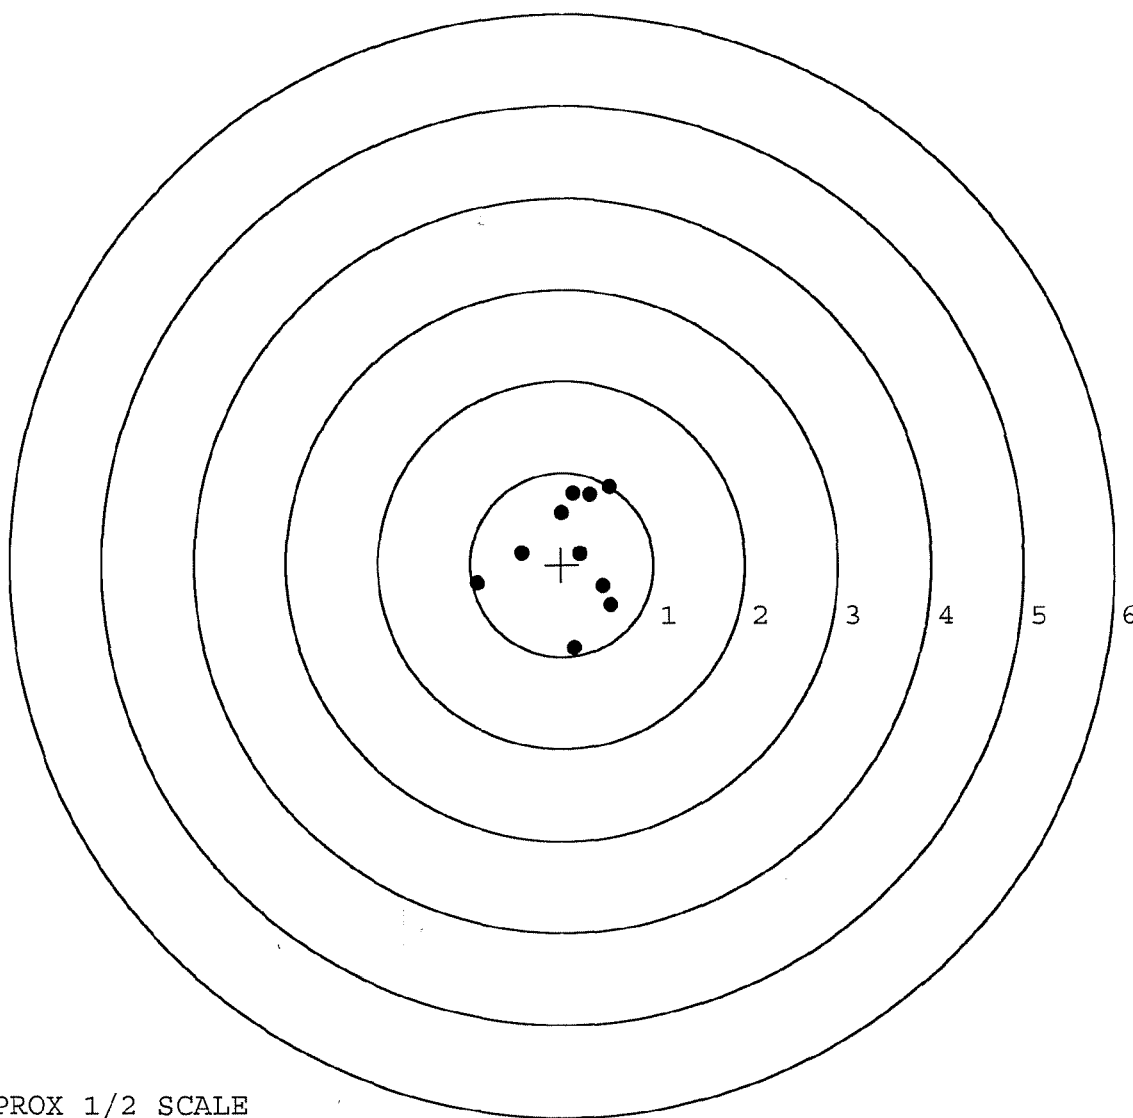


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6360972. 0
TARGET NUMBER: 5
FILE DATE: 08/18/2004
FILE TIME: 06:38

X CENTROID: 0.147
Y CENTROID: 0.036
POA TO CENTROID: 0.151
HORZ SPREAD: 2.852
VERT SPREAD: 1.161
GROUP SPREAD: 2.936
MIN RADIUS: 0.115
MAX RADIUS: 1.831
MEAN RADIUS: 0.677
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	1.839	0.736
2:	0.343	0.711
3:	0.097	0.139
4:	-0.325	0.253
5:	-1.013	0.038
6:	-0.456	-0.197
7:	-0.113	-0.387
8:	0.195	-0.375
9:	0.380	-0.137
10:	0.521	-0.425

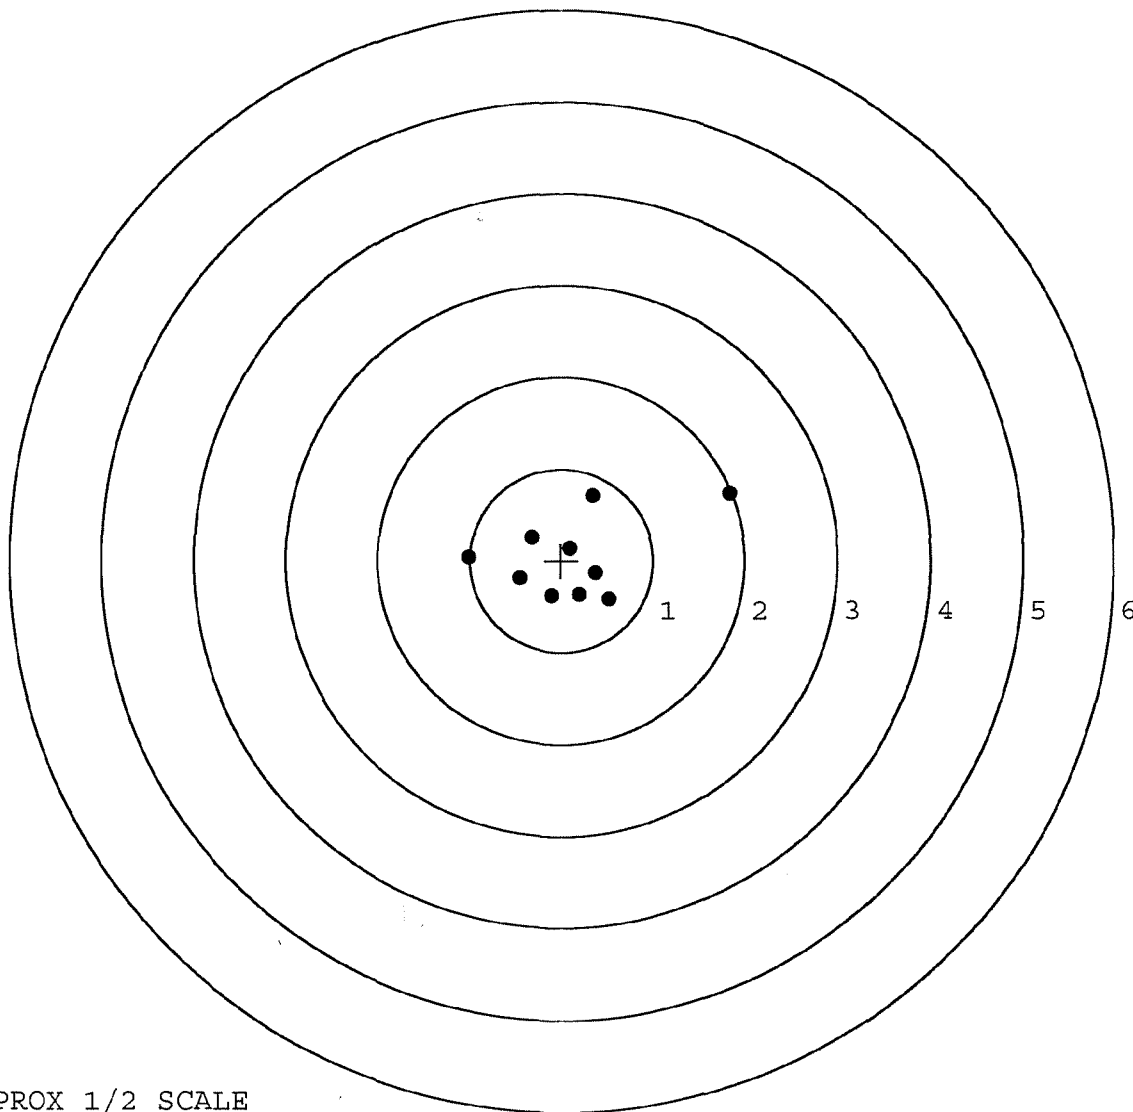

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R & E NUMBER	833 04		
SERIAL NUMBER	C 60360972 C 60360972 (New)		
LOG-IN DATE	8-3-04		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	8-9-04	RTZ
560 A	RE-BARREL	8-9-04	RTZ
B	DRILL AND TAP		
575	ASSEMBLE	8-10-04	RTZ
600	PROOF	8-10-04	RTZ
605	CHECK HEADSPACE	8-10-04	RTZ
610	DIS-ASSEMBLE GUN	8-10-04	RTZ
612	MAGNAFLUX		
615	ROLLMARK CALIBER	8-11-04	AB
618	ROTO-BLAST	8/12/04	DG
620	APPLY COATINGS	8/12	HP
625 A	FINAL ASSEMBLY	8-17-04	RTZ
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	8-18-04	AL
655	FINAL INSPECT	8-23-04	RTZ
660	PACK	8-31-04	QA
		SHIP DATE	
	QAR INSPECTION DATE		

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 94-27682

CUSTOMER ORDER NO.

M24 W/ULTRA 10X-M3A SCOPE
ATTN: FRED MARTIN

FPS

DATE RECEIVED 09/27/94	DATE OPENED 09/28/94	DATE CODE AJ 3-89	SERIAL NUMBER C6225309	NEW SERIAL NUMBER	MODEL AND GRADE 700 7.62	NATO
ACCESSORIES W/STUDS		SCOPE MNTS		SCOPE BASE	HARD CASE	

FROM:

SHIP TO:

U.S. ARMY
HHC 2/187 INF.
BLDG # 6783
FT CAMPBELL

KY 42223

U.S. ARMY
HHC 2/187 INF.
BLDG # 6783
FT CAMPBELL

KY

42223

CUST NO: 104576 C.O.D.

ACCOUNT NUMBER	ACCOUNT NUMBER N/C	WRITE ☐	PROM. DATE	ESTIMATED	VIA UPS
----------------	--------------------	--------------------------------	------------	-----------	------------

GUN CONDITION

- ☐ NEW
- ☐ LIGHTLY WORN
- ☐ WORN
- ☐ VERY WORN
- ☐ UNREPAIRABLE
- ☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

Magazine follower Cracked, Weapon Exceeds Round Count

PARTS

COMMENTS

Barrel - 96003	Repauder Coat Trigger Guard
Mag follower - 96014	Assy, Front & Rear Sight, Bases
Trigger Assy - 96024	Rezinic Scope Base, Rings & Swivel Studs

WSS H09 4222H 227	REPAIRMAN RW	PROOF ✓	CLEAN ✓	TEST ✓	TARGET ✓	PATTERN
	GALLERY TESTER RW	DATE 9/30/94	DATE 10/11/94	DATE 10/12/94	DATE 10/12/94	DATE

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400082345


U.S. GOVERNMENT BILL OF LADING

ORIGINAL

B/L
NO.

H- Q255,606

1. TRANSPORTATION COMPANY TENDERED TO BAGGETT TRANSPORTATION		2. SCAC BAGT	3. DATE B/L PREPARED 940914	4. ROUTE ORDER/RELEASE NUMBER
5. DESTINATION (Name, address and ZIP code) ILION, NY RDD:		6. SPLC (Dest.) 172856000	8. ORIGIN (Name, address and ZIP code) TRANSPORTATION OFFICE FORT CAMPBELL, KY 42223-5129	
		7. SPLC (Orig.) 297980251		
9. CONSIGNEE (Name, address and ZIP code of installation) REMINGTON ARMS CO, INC FABRICATED PRODUCTS DEP 14 HOEFLER AVENUE ILION, NY 13357-1826		10. GBLOC (Cons.) IOOI	11. SHIPPER (Name, address and ZIP code) TRANSPORTATION OFFICE FORT CAMPBELL, KY 42223-5129	
12. APPROPRIATION CHARGEABLE 214202000000762020420000000000 2217000000H0255606000000FAAD00015056			13. BILL CHARGES TO (Dept./agency, bureau/office mailing address and ZIP code) DEFENSE FINANCE & ACCOUNTING SVC-INDIANAPOLIS CENTER TRANSPORTATION OPERATIONS (DFAS-T-THA) INDIANAPOLIS, IN 46249-0611	
14. VIA (Route shipment when advantageous to the Government) "SUBSTITUTE SERVICE NOT TO BE USED."			AGENCY LOC CODE	
15. MARKS AND ANNOTATIONS (If extra services are ordered, see Administrative Directions No. 2 on reverse) "SATELLITE MOTOR SURVEILLANCE SERVICE (SM), REQUESTED. IN EVENT OF SYSTEM FAILURE, DRIVER MUST IMMEDIATELY NOTIFY THEIR DISPATCHER WHO WILL IMMEDIATELY NOTIFY DITS AT 1-800-826-0794. DRIVER MUST SUBSEQUENTLY PROVIDE DITS A TELEPHONIC LOCATION/STATUS REPORT EVERY FOUR (4) HOURS, WITH A FINAL TELEPHONIC REPORT UPON DELIVERY AT DESTINATION." "THIS SHIPMENT MUST NOT BE TRANSPORTED IN TRIP-LEASED EQUIPMENT."				

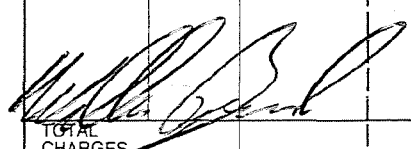16. PACKAGES		17. 18. DESCRIPTION OF ARTICLES (Use carrier's classification or tariff description if possible; otherwise use a clear nontechnical description)		19. WEIGHT* (Pounds only)	FOR USE OF BILLING CARRIER ONLY		
NO.	KIND	HM			Services	Rate	Charges
3	MX		CLASSIFICATION ITEM NO. NMFC 146230 ORDNANCE GROUP, GUNS, MACHINE OR PARTS, NOI (FOR USE OF SMALL ARMS AMMUNITION IN BOXES) TOTAL FREIGHT AS DESCRIBED ON SHEETS 2 THRU 4 BROUGHT FORWARD TOTAL CU: 71 <u>THIS GBL CONSISTS OF 5 SHEETS</u>	843			
					9-27-94  TOTAL CHARGES		

20. TARIFF/SPECIAL RATE AUTHORITY BAGT-318		21. PICKUP SERV. FURNISHED ☐ YES VEHICLE FULLY LOADED ☐ YES		SHIPPER'S INITIALS SAW	22. CARRIER WAY/FREIGHT BILL NO. AND DATE	
23. STOP THIS SHIPMENT AT		24. FURNISH INFORMATION ON CAR/TRUCKLOAD/CONTAINER SHIPMENTS				
		INITIALS & NO.	SEAL NUMBERS	LENGTH/CUBE	MARKED CAPACITY	DATE FURNISHED
FOR:		TRK # CONT #		ORDERED 410 CONTAINER	ORDERED FURNISHED	
		APPLIED BY: SHIPPER				

25. CARRIER'S PICKUP DATE (Year, month, & day) / /		26a. SIGNATURE OF AGENT			26b. PER	B/L NUMBER H- Q255,606
27. MODE A10	28. ESTIMATE 1641	29. NO. OF CLS/TLS 1	30. TYPE RATE 1	31. PSC L	32. REASON Received by the transportation company named above, subject to conditions named on the reverse hereof, the property hereinafter described, in apparent good order and condition (contents and value unknown), to be forwarded to destination by the said company and connecting lines, there to be delivered in like good order and condition to said consignee.	

FOR USE OF ISSUING OFFICE					CERTIFICATE OF CARRIER BILLING—CONSIGNEE MUST NOT PAY ANY CHARGES	
33a. ISSUING OFFICE (Name and complete address) TRANSPORTATION OFFICE FORT CAMPBELL, KY 42223-5129					34a. DELIVERED ON (Year, month & day) / /	34b. AT (Actual delivery point)
33b. GBLOC FAAT					34c. BY (Name of delivering carrier)	
33c. ISSUING OFFICER MICHAEL F. BOWERS, CH, TRANS DIV					34d. DELIVERED THIS CONSIGNMENT COMPLETE & IN APPARENT GOOD ORDER EXCEPT AS MAY BE INDICATED ☐ SHORTAGE ☐ DAMAGED	
33d. CONTRACT/PURCHASE ORDER NO. OR OTHER AUTHORITY				33e. DATED	34e. ☐ CARRIER OS&D REPORT ATTACHED ☐ DELIVERY AT DESTINATION FURNISHED ☐ ACCESSORIAL SERVICES CERTIFICATION ATTACHED	
33f. FOB POINT NAMED IN CONTRACT				34f. NAME OF BILLING CARRIER		
				34g. SIGNATURE OF CARRIER'S AGENT		

*Show also cubic measurements for shipments via air, truck or water carrier in cases where required.

NSN7540-01-049-1118

1103-123

STANDARD FORM 1103 (Rev. 4-85)
PRESCRIBED BY GSA, FPMR (41 CFR) 101-41.3CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400082346

U.S. GOVERNMENT BILL OF LADING CONTINUATION SHEET

ORIGINAL

B/L NO. H-0255606

SHEET NO.
5 OF 5

(This form is to be used as a continuation sheet for SF 1103, U.S. Government Bill of Lading—Original, or SF 1203, U.S. Government Bill of Lading—Privately Owned Personal Property—Original.)

ISSUING OFFICE (Name and complete address)

TRANSPORTATION OFFICE
FORT CAMPBELL, KY 42223-5129

PACKAGES		HM	DESCRIPTION OF ARTICLES (Use carrier's classification or tariff description if possible; otherwise use a clear nontechnical description.)	WEIGHT* (Pounds only)	FOR USE OF BILLING CARRIER ONLY		
NO.	KIND				SERVICES	RATE	CHARGES
			"SHIPPER TO LOAD AND CONSIGNEE TO UNLOAD." "FLAME OR HEAT PRODUCING TOOLS WILL NOT BE USED TO REMOVE SECURITY DEVICES." "SHIPPER SEALS APPLIED. CARRIER MAY REMOVE SEALS AND REPLACE WITH EQUIVALENT SEALS ON PRIOR CONSENT OF CONSIGNOR. IF SEALS ARE BROKEN IN EMERGENCIES, NOTIFY CONSIGNOR, TRANSPORTATION OFFICER, FT CAMPBELL, KY AC 502-798-7154 AFTER DUTY HRS AC 502-798-9793 AS SOON AS POSSIBLE. CARRIER MUST ANNOTATE SEAL CHANGES ON GBL. APPLICATION OF SHIPPER SEALS DOES NOT CONSTITUTE A REQUEST FOR EXCLUSIVE USE OF VEHICLE" "DUAL DRIVER PROTECTIVE SERVICE (DD) REQUESTED. SIGATURE AND TALLY RECORD (DD FORM 1907) FURNISHED TO THE CARRIER." "410 CONTAINER SERVICE REQUESTED."				

*Show also cubic measurements for shipments via air, truck or water carrier in cases where required.

NSN7540-00-656-1477
1109-114

STANDARD FORM 1109 (REV. 4-85)
PRESCRIBED BY GSA, FPMR (41 CFR) 101-41.3

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400082347

CONSIGNEE'S RECEIPT FOR DELIVERY AT STOPOFF UNLOADING POINT				
FROM: (Consignee at Stopoff Point) TOAD Comsec		1. B/L NUMBER H 0255606		
		2. STOPOFF POINT		
TO: Remington Arms ILION NY.				
3. CAR INITIALS AND NUMBER OR MOTOR CARRIER AND TRUCK NUMBER 561L Baggett Trk				
4. DATE RECEIVED 940927		5. INBOUND SEAL NUMBER(S) 485325		
6. DESCRIPTION OF ARTICLES UNLOADED		PACKAGES UNLOADED		
		No.	Kind	No. on Pkgs
Comsec Equip		1	PLT	600
7. TOTAL WEIGHT UNLOADED (In words and figures) (The weight of bulkheads, dunnage, or similar material will not be shown. Any change in net weight of such material used inbound will be reported to final consignee.)				
8. DATE FORWARDED FROM STOP-OFF POINT 940927		9. OUTBOUND SEAL NUMBER(S) 596901		
10. FORWARDING CARRIER 561L Baggett				
11. REMARKS (Indicate if loss or damage is involved)				
12. THE PROPERTY DESCRIBED IN ITEM 6, WAS RECEIVED ON THE DATE INDICATED ABOVE, IN APPARENT GOOD ORDER AND CONDITION EXCEPT AS NOTED IN ITEM 11		SIGNATURE OF CONSIGNEE OR AUTHORIZED AGENT [Signature]		

DD Form 1371, FEB 62

U.S. GOVERNMENT BILL OF LADING CONTINUATION SHEET

ORIGINAL

B/L NO. H-0255606

SHEET NO. 2 OF 5

(This form is to be used as a continuation sheet for SF 1103, U.S. Government Bill of Lading—Original, or SF 1203, U.S. Government Bill of Lading—Privately Owned Personal Property—Original.)

ISSUING OFFICE (Name and complete address)

TRANSPORTATION OFFICE
FORT CAMPBELL, KY 42223-5129

PACKAGES		HM	DESCRIPTION OF ARTICLES (Use carrier's classification or tariff description if possible; otherwise use a clear nontechnical description.)	WEIGHT* (Pounds only)	FOR USE OF BILLING CARRIER ONLY		
NO.	KIND				SERVICES	RATE	CHARGES
1	PT		NMFC 146315 ORDNANCE GROUP LAUNCHERS, ROCKET STOP THIS TRUCK FOR PARTIAL OFFLOADING AT: TRANSPORTATION OFFICE NEW CUMBERLAND ARMY DEPOT NEW CUMBERLAND, PA 17070 NSN: 1055-00-021-3909 NOUN: LAUNCHER RKT M202A1 180 DOC # W34GM7 3177 AAH7 CU: 21 "CARRIER TO NOTIFY TRANSPORTATION OFFICE FORT CAMPBELL, KY, AC 502-798-7154 AFTER DUTY HRS AC 502-798-9793 AND TRANSPORTATION OFFICE, NCAD, NEW CUMBERLAND, PA AC 717-770- 6969 IMMEDIATELY IF SHIPMENT IS DELAYED ENROUTE BECAUSE OF AN ACCIDENT OR INCIDENT. IF NEITHER CAN BE REACHED, CONTACT MIMC EASTERN AREA HOTLINE 800-524-0331. USE HOTLINE NUMBER TO OBTAIN SAFE HAVEN OR REFUGE INSTRUCTIONS IN THE EVENT OF A CIVIL DISORDER, NATURAL DISASTER, CARRIER STRIKE OR OTHER EMERGENCY." "CARRIER TO CALL AC 717-770-6969 24 HRS PRIOR TO DELIVERY FOR AN APPOINTMENT."				

*Show also cubic measurements for shipments via air,
truck or water carrier in cases where required.

NSN7540-00-656-1477
1109-114

STANDARD FORM 1109 (REV. 4-85)
PRESCRIBED BY GSA, FPMR (41 CFR) 101-41.3

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400082349

U.S. GOVERNMENT BILL OF LADING CONTINUATION SHEET

ORIGINAL

B/L NO. H-0255606

SHEET NO.
3 OF 5

(This form is to be used as a continuation sheet for SF 1103, U.S. Government Bill of Lading—Original, or SF 1203, U.S. Government Bill of Lading—Privately Owned Personal Property—Original.)

ISSUING OFFICE (Name and complete address)

TRANSPORTATION OFFICE
FORT CAMPBELL, KY 42223-5129

PACKAGES		HM	DESCRIPTION OF ARTICLES (Use carrier's classification or tariff description if possible; otherwise use a clear nontechnical description.)	WEIGHT* (Pounds only)	FOR USE OF BILLING CARRIER ONLY		
NO.	KIND				SERVICES	RATE	CHARGES
1	PT		NMFC 63035 ELECTRICAL EQUIP GROUP (SETS, RADIO RECEIVING, NOI) STOP THIS TRUCK FOR PARTIAL OFFLOADING AT: TRANSPORTATION OFFICE TOBYHANNA ARMY DEPOT TOBYHANNA, PA 18466-5110 M/F: COMSEC SUPPORT BLDG 73 11 MIDWAY ROAD NSN: 5810-01-026-9624 NOUN: IA-Z-AHQ/TSEC F/KY-58 DOC # W34GM7 4183 ACKR CU: 44 "CARRIER TO NOTIFY TRANSPORTATION OFFICE FORT CAMPBELL, KY, AC 502-798-7154 AFTER DUTY HRS AC 502-798-9793 AND TRANSPORTATION OFFICE, TOBYHANNA AD, PA AC 717-894-7674 AFTER DUTY HRS AC 717-894-7550 IMMEDIATELY IF SHIPMENT IS DELAYED ENROUTE BECAUSE OF AN ACCIDENT OR INCIDENT. IF NEITHER CAN BE REACHED, CONTACT MIMC EASTERN AREA HOTLINE 800-524-0331. USE HOTLINE NUMBER TO OBTAIN SAFE HAVEN OR REFUGE INSTRUCTIONS IN THE EVENT OF A CIVIL DISORDER, NATURAL DISASTER, CARRIER STRIKE OR OTHER EMERGENCY." "CARRIER TO CALL AC 717-894-7354 24 HRS PRIOR TO DELIVERY TO SCHEDULE ABN APPOINTMENT."	600			

*Show also cubic measurements for shipments via air,
truck or water carrier in cases where required.

NSN7540-00-656-1477
1109-114

STANDARD FORM 1109 (REV. 4-85)
PRESCRIBED BY GSA, FPMR (41 CFR) 101-41.3

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400082350

U.S. GOVERNMENT BILL OF LADING CONTINUATION SHEET

ORIGINAL

B/L NO. H-0255606

SHEET NO. 4 OF 5

(This form is to be used as a continuation sheet for SF 1103, U.S. Government Bill of Lading—Original, or SF 1203, U.S. Government Bill of Lading—Privately Owned Personal Property—Original.)

ISSUING OFFICE (Name and complete address)
TRANSPORTATION OFFICE
FORT CAMPBELL, KY 42223-5129

PACKAGES		HM	DESCRIPTION OF ARTICLES (Use carrier's classification or tariff description if possible; otherwise use a clear nontechnical description.)	WEIGHT* (Pounds only)	FOR USE OF BILLING CARRIER ONLY		
NO.	KIND				SERVICES	RATE	CHARGES
1	BX		MMFC 146230 ORDNANCE GROUP, GUNS, MACHINE OR PARTS, NOI STOP THIS TRUCK FOR FINAL OFFLOADING AT: REMINGTON ARMS, CO, INC. FABRICATED PRODUCTS DEP 14 HOEFLEER AVENUE ILION, NY 13357-1826 NSN: 1005-01-240-2136 NOUN: RIFLE 7. DOC # W34GM7 4221 0500 CU: 6 SN: C6225309 "CARRIER TO NOTIFY TRANSPORTATION OFFICE FORT CAMPBELL, KY, AC 502-798-7154 AFTER DUTY HRS AC 502-798-9793 AND TRANSPORTATION XXXXXX, REMINGTON ARMS CO, ILION NY AC 315-894-9961 EST 282 POC: FRED MARTIN IMMEDIATELY IF SHIPMENT IS DELAYED ENROUTE BECAUSE OF AN ACCIDENT OR INCIDENT. IF NEITHER CAN BE REACHED, CONTACT MIMC EASTERN AREA HOTLINE 800-524-0331. USE HOTLINE NUMBER TO OBTAIN SAFE HAVEN OR REFUGE INSTRUCTIONS IN THE EVENT OF A CIVIL DISORDER, NATURAL DISASTER, CARRIER STRIKE OR OTHER EMERGENCY."	63	FOR USE OF SMALL ARMS AMMUNITION, IN BOXES)		

*Show also cubic measurements for shipments via air,
truck or water carrier in cases where required.

NSN7540-00-656-1477
1109-114

STANDARD FORM 1109 (REV. 4-85)
PRESCRIBED BY GSA, FPMR (41 CFR) 101-41.3

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400082351

151

FD-302 (Rev. 11-27-70)

Deployment Kit

2209

Bldg INDIANAT
18th

Federal Express

Logistics Office

AL Perry 2322

DATE: 27-JUL-94

MAINTENANCE REQUEST

2098

DA FORM 5990-E

Nate Andrews

UIC: WFBBT0
UTIL CODE: 0

CUSTOMER DATA
HQ 2/187TH INF. REGT.

PHONE: (502)798-3915

SUP WON: 01653
SUP UIC: WACTC0

ACTIVITY DATA
B CO 626 FSB

PHONE: 798-4696
SHOP SEC:

TYPE MNT REQ: 1

ID: A NSN: 1005012402136

MODEL: M-24

NOUN: SNIPER RIFLE, 7.62MM SER NUM: C6225309

QTY: 00001

ORG WON: FBBT01403917 PRIORITY: 02

FAILURE DETECTED: A

MI/KM: 000000

HOURS: 000000

ROUNDS:

IN WARRANTY: N

LEVEL OF WORK: F

ADMIN NUM:

MALFUNCTION/REMARKS: BORESCOPE & PULLOVER

PD AUTHENTICATING SIGNATURE:

[Signature]

SUBMITTED BY:

[Signature]

ORD DATE:

MIL TIME:

ACCEPTED BY:

[Signature]

STATUS: A

ORD DATE: 94208

MIL TIME:

WORK STARTED BY:

23

STATUS: B

ORD DATE: 94208

MIL TIME:

INSPECTED BY:

21

STATUS: R

ORD DATE: 94208

MIL TIME:

PICKED UP BY:

[Signature]

STATUS: U

ORD DATE: 94208

MIL TIME:

COMPLETION DATA

QTY RPR:

QTY CONDEMNED:

NRTS:

EVAC WON:

EVAC UNIT NAME:

Guidelines - Need To Be Pick-up.
FTR

PHONE
FAX

- Turned -
SSA
Shipping

MAINTENANCE REQUEST				PAGE NO. 1	NO. OF PAGES 5	REQUIREMENTS CONTROL SYMBOL CSGLD - 1047(R1)			
For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG									
SECTION I - EQUIPMENT DATA									
CONTROL NUMBER		WORK ORDER NO.		WESDC		ORG. PD 02		PD AUTHENTICATION <i>[Signature]</i>	
☒ Work Request ☐ MWO ☐ Warranty Claim		1A. ORGANIZATION HHC 2/187 INF		B. LOCATION BLDG # 6783 FT. Campbell Ky		C. UNIT IDENT CODE WFB8 TO			
2. SERIAL NO. C6225309		3. NOUN NOMENCLATURE 7.62mm M24 Sniper Weapon		4. LINE NO.		5. MODEL M24		6. NATIONAL STOCK NUMBER 1605-01-240-2136	
7A. MAINTENANCE ACTIVITY 626 SPT BN		B. LEVEL		8. UTILIZATION CODE		9A. MCSR ITEM		9B. ERC	
14. FAILURE DETECTED DURING (Select one - use ☒ or X)					15. FIRST INDICATION OF TROUBLE (Select one - use ☒ or X)				
☐ A Sch. Main. ☐ C Test ☐ E Storage ☐ G Flight ☐ B Handling ☐ D Normal Op ☒ F Inspection ☐ H Other					☐ 068 Inoperative ☐ 253 Overheating ☐ 790 Out of Adjustment ☐ 008 Noisy ☒ 387 Low Performance ☐ Other				
16A. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs).									
① missing equipment from deployment kit									
② magazine follower cracked									
③ weapon exceeds round count									
B. REMARKS Sgt. SPC Poc: Terry or Ridelle Tel: 5892/3615									
SECTION II - WORK ACCOMPLISHED									
17A. REPAIR ORGANIZATION/ACTIVITY				C. UNIT IDENT. CODE		18. TYPE ORGANIZATION/ACTIVITY ACCOMPLISHING WORK (Select one - use ☒ or X)		19. AMS ACCT. CODE	
B. LOCATION						☐ 1 TOE ☐ 2 TD ☐ 3 Contractor			
20A. ACT. CODE	B. FAILURE CODE	C. COMPONENT/PART NOUN, SVC, OR MWO NO.			D. MANHOURS (Hrs. & tenths)	E. NATIONAL STOCK NUMBER	F. PART SOURCE CODE	G. QTY.	H. PARTS COST
		(1) CB CODE	(2) REF DESIGN.	(3) MFR. CODE					
									\$
									\$
									\$
									\$
									\$
									\$
									\$
									\$
									\$
									\$
									\$
									\$
					I. TOTAL MANHOURS	J. TOTAL MANHOURS COST \$	K. TOTAL PARTS COST \$		
21. DELAY (Select One)					22. Data Transcribed				
☐ 1 Parts ☐ 2 Manpower ☐ 3 Facilities ☐ 4 Funds ☐ 5 Tools									
23. SUBMITTED BY <i>Terry Perry</i>		24. RECEIVED BY		25. WORK STARTED BY		26. INSPECTED BY		27. ACCEPTED BY	
JULIAN DATE 4215		JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE	
					28. DISPOSITION (Select One)				
					☐ A To User ☐ D Evacuated ☐ B To Stock ☐ E Cannibalization ☐ C Salvaged				

DA FORM 2407, AUG 88

EDITION OF MAY 81 MAY BE USED

NMP COPY 2

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400082358

SIGNATURE AND TALLY RECORD

Form Approved
OMB No. 0702-0027
Expires Sep 30, 1992

Public reporting burden for this collection of information is estimated to average 2 minutes per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0702-0027), Washington, DC 20503. Please DO NOT RETURN your form to either of these addresses.

DISTRIBUTION INSTRUCTIONS

- The SHIPPER will prepare copies 1 through 4, retain copy 4 and deliver copies 1 through 3 to the Origin Carrier.
- The CARRIER will deliver copies 1 through 3 to the Destination Carrier.
- The DESTINATION CARRIER will attach copy 1 (reflecting all signatures) and Standard Form 1113 (Public Voucher For Transportation Charges) to the original Government Bill of Lading, and forward for payment. Copy 2 will be delivered to the Consignee. Copy 3 will be retained.
- The CONSIGNEE will ensure Destination Carrier surrenders copy 2.

SECTION A - To be completed by the SHIPPER.

1. SHIPPER		2. PROTECTIVE SERVICE REQUESTED	
a. NAME TRANSPORTATION OFFICE		SATELLITE MOTOR SURVEILLANCE W/DD (SM/DD)	
b. ORIGIN FORT CAMPBELL, KY 42223-5129		3. GBL OR CBL NUMBER H-0255606	
4. CONSIGNEE		5. PERMIT NUMBER (if any)	
a. NAME REMINGTON ARMS CO INC		N/A	
b. DESTINATION 14 HOFELER AVENUE ILION, NY 13357-1826		6. TRANSPORTATION CONTROL NUMBER N/A	
7. ROUTING BAGGETT TRANSPORTATION (BAGT)		8. WEIGHT 63	9. CUBE 6
10. SPECIAL INSTRUCTIONS N/A		11. DATE SHIPMENT TENDERED TO CARRIER 21 SEP 94	12. NAME OF CARRIER BAGT
13. NUMBER OF PIECES A BX	14. TYPE OF PACKAGE(S) (for unsealed loads only) OR CONVEYANCE IDENTIFICATION & SEAL NUMBERS (for sealed loads only) SEAL # 0789729 & 0789727		15. FREIGHT CLASSIFICATION DESCRIPTION RIFLE 7.

SECTION B - To be completed by each person accepting custody of classified or protected material requiring the use of transportation protective service during transit.

16. CUSTODY RECORD				
a. PRINT NAME OF PERSON AND COMPANY REPRESENTED	b. STATION INTERCHANGE POINT DESTINATION	c. SIGNATURE OF PERSON ACCEPTING CUSTODY	d. TIME ACCEPTED	e. DATE ACCEPTED
JAMES L. Cain	FORT CAMPBELL KY	James L. Cain	1345 HRS	21 SEP 94
JAMES MCCARVER	FORT CAMPBELL, KY	James M. Carver	1345 HRS	21 SEP 94
BOB MORNING	Bloomfield in	Bob Morning	2030	9-21-94
Connie Groome	"	Connie Groome	0030	9-22-94
Debbie Strouser	"	Debbie Strouser	0800	9-22-94
BOB MORNING	"	Bob Morning	1700	9-22-94
Marion Harris	"	Marion Harris	0030	9-23-94
Debbie Strouser	"	Debbie Strouser	0800	9-23-94
RITA STEIDEL	"	Rita Steidel	1630	9-23-94
Peggy L. Turner	"	Peggy L. Turner	2400	9-24-94
Connie GROOME	"	Connie Groome	0830	9-24-94

[illegible]

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400082360

Gun #1

Sniper: Spectrenew

WEAPON RECORD DATA							REQUIREMENT CONTROL SYMBOL CSGLD-1051			
For use of this form, see DA PAMs 738-750 and 738-751; the proponent agency is DSCLOG										
1. TUBE SERIAL NO.		2. CANNON TYPE, MODEL OR SERIES			3. ORGANIZATION (UIC)		4. SPECIAL LIFE DATA			
CW225309		M2A SWS			HNC 2/187		Ringscope Service every 5000 rds.			
5. END ITEM IDENTIFICATION					6. RDS/EFC COMPUTATION					
M2A Sniper Weapon System										
7. CANNON SERIAL NO.			8. RETURNINGS		9. REBUSHINGS					
1005-01-240-2130										
10. Date	Projectile Type	Zone or Charge	Rounds Fired	EFC RDS Fired	Cumulative RDS Fired	Cumulative EFC RDS	Remaining Life (EFC RDS)	Remarks: Recoil Exercise (RE), Gauge or Velocity Reading, Safety Inspection (SI)	Signature	
a	b	c	d	e	f	g	h	i	j	
Oct 93	(Previous DA Form 2408-4 final entries)					11850				
5/10/93	M118		140		11990					
6/10/93	M118		120		12110					
14/11/93	M118		100		12210					
7/12/93	M118		130		12340					
8/12/93	M118		100		12440					
15/03/94	M118		300		12740					
11/04/94	M118		120		12860					
12/04/94	M118		40		12900					
13/04/94	M118		30		12930					
19/04/94	M118		50		12980					
20/04/94	M118		20		13000					
21/04/94	M118		60		13060					
22/04/94	M118		70		13130					

CONTINUE ON REVERSE

DA FORM 2408-4
1 JAN 79

EDITION OF 1 DEC 77 WILL BE USED

M2400082361

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. 6225309

DATE 10/11/94

TESTER RW

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.62	2.24	2.41	2.26	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.64	2.31	2.34	2.26	
PULL #3	2.66	2.37	2.24	2.22	
PULL #4	2.40	2.34	2.31	2.34	
PULL #5	2.77	2.34	2.38	2.23	
TOTAL	13.09	11.60	11.68	11.31	
AVG.	2.62	2.32	2.34	2.26	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.21	3.14		
PULL #2	3.28	3.08		
PULL #3	3.19	3.21		
PULL #4	3.18	3.18		
PULL #5	3.13	3.07		
TOTAL	15.99	15.68		
AVG.	3.20	3.14		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.03	4.02		4.03
PULL #2	4.02	4.04		4.17
PULL #3	4.00	4.05		4.30
PULL #4	4.04	4.02		4.20
PULL #5	4.09	4.00		4.15
TOTAL	20.18	20.13		20.95
AVG.	4.04	4.03		4.19

Final Inspection

Sn: C6225309

DATE REC'D: 9/27/94

DATE RET'D:

Auditor: RW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☒ SCOPE☒ SCOPE RINGS☒ MOUNTING SCREWS☒ MOUNTING BASE☒ SCREWS☒ FINISH☒ LOOSENESS☒ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ SCOPE CASE☐ IRON SIGHTS☐ DEPLOYMENT KIT

Trigger

☒ SAFETY OPERATION☒ SET

Comments: _____

M-24

CONTRACT # DAAA21-87-C-0086

New Barrel

GUN SERIAL # C6225309

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock		9/30/94	RW
600	Proof		9/30/94	RW
607	Check Headspace		9/30/94	RW
610	Dis-assemble Gun		9/30/94	RW
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		10/11/94	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		10/11/94	RW
	C) Inspect Ejector Hole for Chamfer		10/11/94	RW
	D) Oil Firing Pin Ass'y		10/11/94	RW
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS	DATE	INIT
625 cont.	F) Safety On Force			
	G) Safety Off Force			
	H) Trigger Pull Test & Retainability			
	I) Firing Pin Indent			
	J) Assemble Stock			
	K) Assemble Swivel Studs			
	L) Attach Front and Rear Sight Assemblies			
	M) Iron Sight Alignment			
	N) Detach Front & Rear Sights & place in numbered container			
	O) Attach Scope to Rifle			
	P) Detach & Attach Scope 20 Times			
640	Gallery Target & Test			
	A) Time			
	B) Malfunctions			
	C) Pierced Primers			
	D) Optical Clarity of Scope			
645	Inspect for Live Ammo			
655	Final Inspection A) Headspace			
	B) Trigger Pull			
	C) Function			
660	Pack			

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225309
13 Oct 1994

CENTROIDAL DISTANCES

0 TO	1	.67255
1 TO	2	.942612
1 TO	3	.842947
1 TO	4	.842435
1 TO	5	1.20554

3
2
1
521 1 <----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0978
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0674
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .119775
THE AMR FOR THIS RIFLE IS: 1.043

13 Oct 1994

FILE:/PATTERNING/CENTERFIRE_PATT/06225309

CENTERFIRE PATTERNS

1

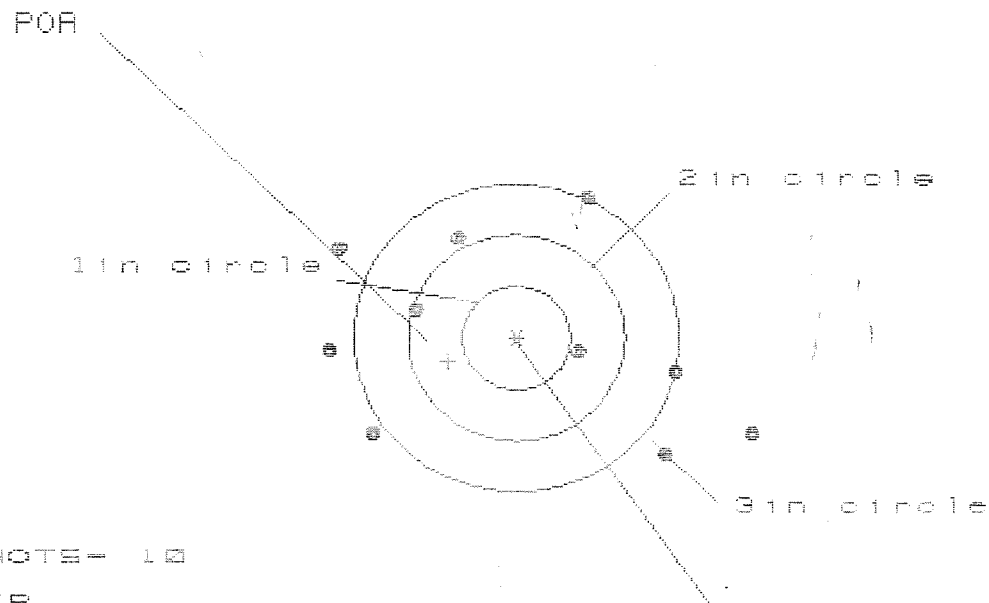

OF SHOTS- 10

IN CIR

1in = 0

2in = 2

3in = 3

IS= 3.926

VS= 2.474

GS= 4.309


CENTROID *

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	2.217	1.720	1.541
MINIMUM X	-1.709	-1.463	-1.642
MAXIMUM Y	1.383	1.275	1.371
MINIMUM Y	-1.091	-1.199	-1.103
CENTROID X	.632	.386	.565
CENTROID Y	.230	.338	.242
POA TO CENTROID in.	.673	.513	.614
MIN RADIUS	.530	.730	.599
MEAN RADIUS	1.505	1.373	1.341
MAX RADIUS	2.420	1.976	1.776
HORIZONTAL SPREAD	3.926	3.183	3.183
VERTICAL SPREAD	2.474	2.474	2.474
EXTREME SPREAD	4.309	3.588	3.194
NUMBER IN ONE INCH CIRCLE	= 0		
NUMBER IN TWO INCH CIRCLE	= 2		
NUMBER IN THREE INCH CIRCLE	= 3		

13 Oct 1994

FILE:/PATTERNING/CENTERFIRE_PATT/06225303

CENTERFIRE PATTERNS # 2

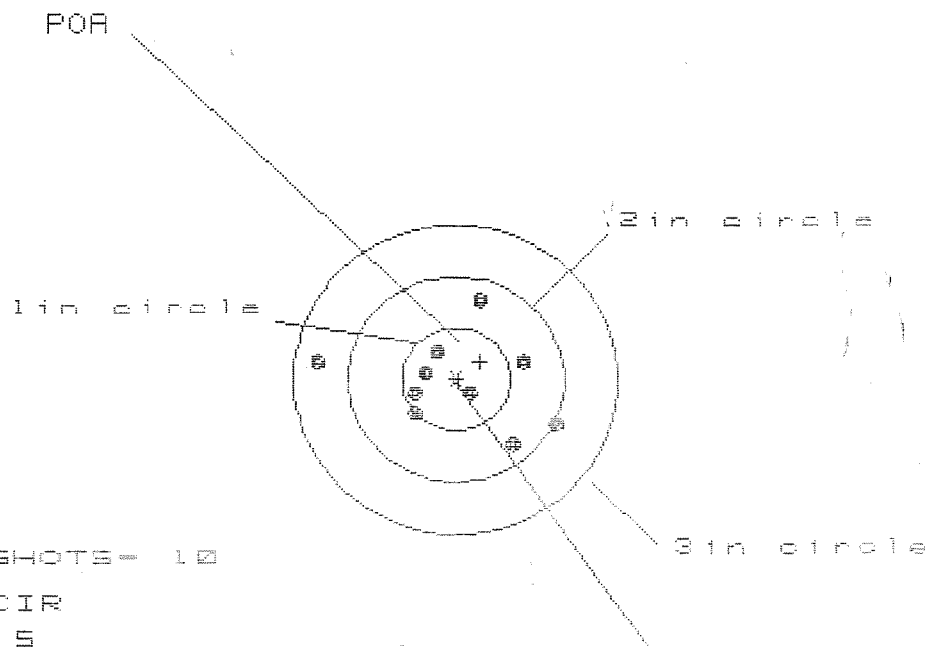

OF SHOTS= 10

IN CIR

1in = 5

2in = 9

3in = 10

HS= 2.157

VS= 1.365

GS= 2.236


CENTROID #

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.877	.735	.618
MINIMUM X	:	-1.280	-.549	-.457
MAXIMUM Y	:	.782	.803	.757
MINIMUM Y	:	-.583	-.562	-.608
CENTROID X	:	-.222	-.080	-.172
CENTROID Y	:	-.169	-.190	-.144
POA TO CENTROID in.	:	.279	.207	.224
MIN RADIUS	:	.155	.062	.135
MEAN RADIUS	:	.618	.543	.494
MAX RADIUS	:	1.294	.825	.780
HORIZONTAL SPREAD	:	2.157	1.284	1.075
VERTICAL SPREAD	:	1.365	1.365	1.365
EXTREME SPREAD	:	2.236	1.390	1.390
NUMBER IN ONE INCH CIRCLE	=		5	
NUMBER IN TWO INCH CIRCLE	=		9	
NUMBER IN THREE INCH CIRCLE	=		10	

13 Oct 1994

FILE:/PATTERNING/CENTERFIRE_PATT/06225309

CENTERFIRE PATTERNS # 3

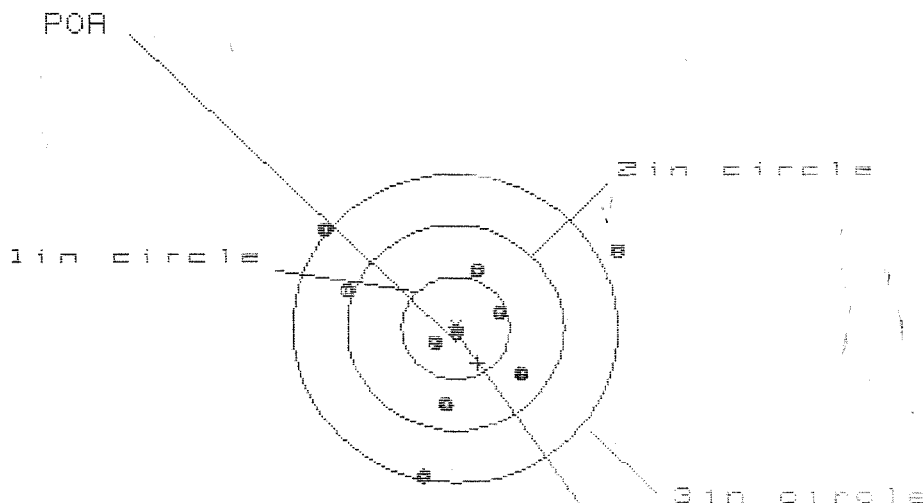

OF SHOTS= 10

IN CIR

1 in = 3

2 in = 6

3 in = 8

HS= 2.761

VS= 2.415

GS= 2.816


CENTROID *

PATTERN #	3	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.530	.752	.620
MINIMUM X	-1.231	-1.061	-.915
MAXIMUM Y	.966	1.046	.814
MINIMUM Y	-1.449	-1.369	-1.238
CENTROID X	-.284	-.374	-.242
CENTROID Y	.338	.258	.127
POA TO CENTROID in.	.395	.454	.273
MIN RADIUS	.024	.069	.139
MEAN RADIUS	.848	.762	.653
MAX RADIUS	1.692	1.490	1.259
HORIZONTAL SPREAD	2.761	1.813	1.535
VERTICAL SPREAD	2.415	2.415	2.052
EXTREME SPREAD	2.816	2.601	2.115
NUMBER IN ONE INCH CIRCLE =	3		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	8		

13 Oct 1994

FILE:/PATTERNING/CENTERFIRE_PATT/C6225303

CENTERFIRE PATTERNS # 4

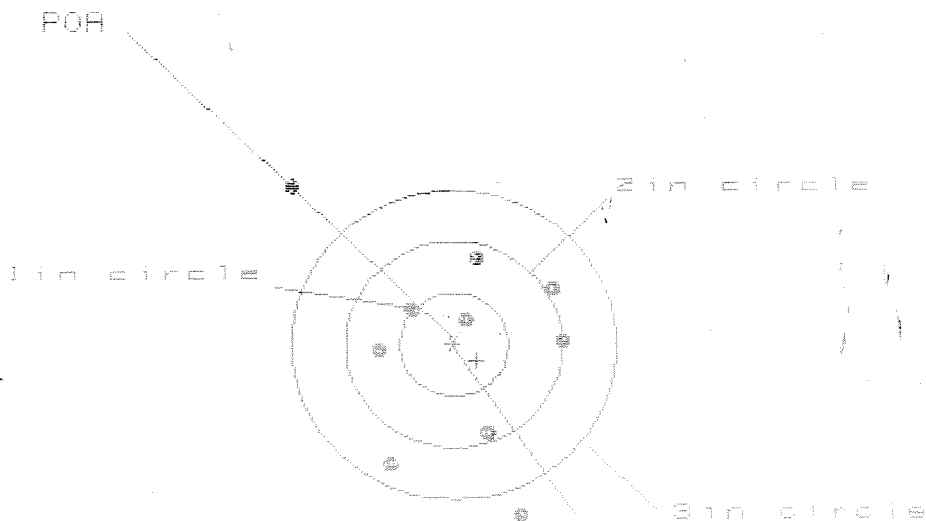

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 5

3 in = 8

HS= 3.506

VS= 3.144

GS= 3.808


CENTROID +

PATTERN #	10	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.004	.837	.897
MINIMUM X	-1.502	-.855	-.795
MAXIMUM Y	1.527	.974	.793
MINIMUM Y	-1.617	-1.447	-1.174
CENTROID X	-.287	-.040	-.100
CENTROID Y	.154	-.016	.165
POA TO CENTROID in.	.258	.043	.133
MIN RADIUS	.303	.446	.264
MEAN RADIUS	1.051	.936	.822
MAX RADIUS	2.142	1.525	1.357
HORIZONTAL SPREAD	2.506	1.692	1.692
VERTICAL SPREAD	3.144	2.421	1.967
EXTREME SPREAD	3.808	2.463	2.280
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	8		

13 Oct 1994

FILE:/PATTERNING/CENTERFIRE_PATT/06225309

CENTERFIRE PATTERNS # 5

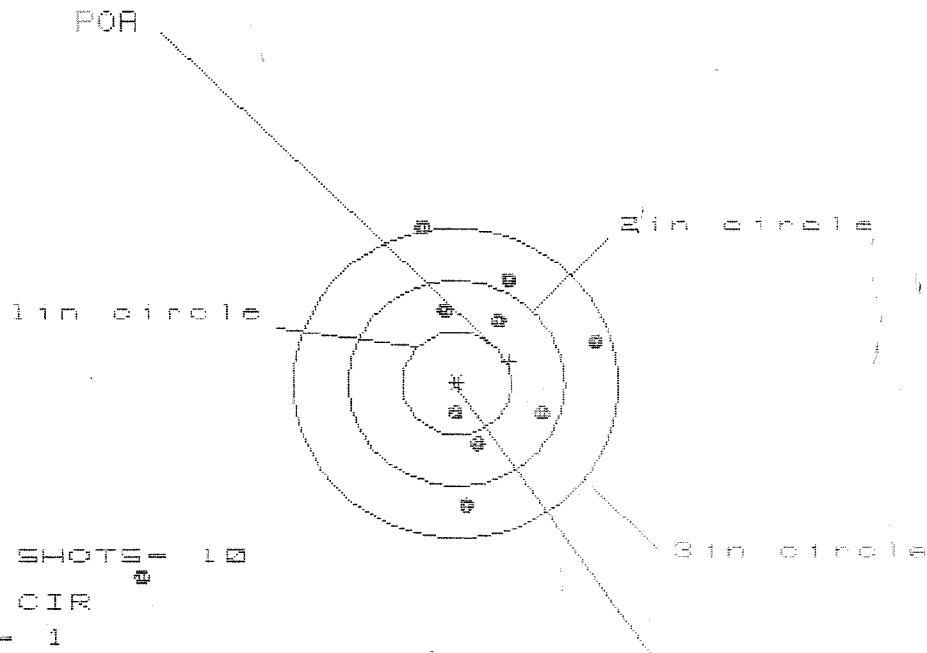

OF SHOTS = 10

IN CIR

1in = 1

2in = 5

3in = 8

HS = 4.209

VS = 3.370

GS = 4.775

PATTERN #	5	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.306	.983	.900
MINIMUM X	-2.903	-.661	-.500
MAXIMUM Y	1.513	1.307	.982
MINIMUM Y	-1.857	-1.398	-1.235
CENTROID X	-.488	-.165	-.083
CENTROID Y	-.216	-.010	-.173
POA TO CENTROID in.	.533	.165	.192
MIN RADIUS	.319	.436	.510
MEAN RADIUS	1.192	.874	.789
MAX RADIUS	3.446	1.464	1.265
HORIZONTAL SPREAD	4.209	1.644	1.401
VERTICAL SPREAD	3.370	2.705	2.217
EXTREME SPREAD	4.775	2.745	2.241
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	8		

Remington®



VERY IMPORTANT!
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700™ H24

SERIAL NO.
C6225309

ORDER NO.
5716

Q1

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.



5716 C6225309

LPC



0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225309

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	3 17	89	RW
600	Proof	3 17	89	RW
607	Check Headspace	3 17	89	RW
610	Dis-assemble Gun	3 17	89	RW
612	Magnaflux Barrel Action		3/21	KCR
	Magnaflux Bolt		3/21	KCR
615	Rollmark Caliber		3/21	GL
617	Drill and Tap Sight Holes	3 22	89	FB
618	Polish Barrel	3 22	89	BT.
620	Apply Coatings (Barrel Action)		3/21/89	THA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		4/4/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		4/4/89	RW
	C) Inspect Ejector Hole for Chamfer		4/4/89	RW
	D) Oil Firing Pin Ass'y		4/4/89	RW
	E) Adjust Trigger Pull to Min Setting and Stake		4-6-89	JS

op. #	OP. NAME	READINGS			DATE	INIT
625 cont.	F) Safety On Force	3	3	3	4-5-89	JU
	G) Safety Off Force	5.5	5	6	4-5-89	JU
	H) Trigger Pull Test & Retainability				4-5-89	ES.
	I) Firing Pin Indent	.021	.020	.021	4-5-89	JU
	J) Assemble Stock				4/13/89	RW
	K) Assemble Swivel Studs				18 April 89	JS
	L) Attach Front and Rear Sight Assemblies				4/13/89	RW
	M) Iron Sight Alignment				4/13/89	RW
	N) Detach Front & Rear Sights & place in numbered container				4/13/89	RW
	O) Attach Scope to Rifle				4/13/89	JU
	P) Detach & Attach Scope 20 Times				4/14/89	JU
640	Gallery Target & Test	77 R	79 L		4/17/89	AC
	A) Time				4/17/89	AC
	B) Malfunctions				4/17/89	AC
	C) Pierced Primers				4/17/89	AC
	D) Optical Clarity of Scope				4/17/89	AC
645	Inspect for Live Ammo				4/17/89	AC
655	Final Inspection					
	A) Headspace				18 April 89	JS
	B) Trigger Pull	2.41	2.22	2.22	18 April 89	JS
	C) Function				18 April 89	JS
660	Pack				21 June 89	JS

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C1225309

DATE 4-11-90

TESTER 24

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.51	2.20		2.38	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.51	2.36		2.42	
PULL #3	2.52	2.32		2.42	
PULL #4	2.50	2.33		2.33	
PULL #5	2.54	2.32		2.33	
TOTAL	12.58	11.53		11.88	
AVG.	2.516	2.306		2.376	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.18	3.39		
PULL #2	3.20	3.44		
PULL #3	3.16	3.42		
PULL #4	3.18	3.40		
PULL #5	3.13	3.38		
TOTAL	15.85	17.01		
AVG.	3.17	3.402		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.27	4.23		
PULL #2	4.23	4.27		
PULL #3	4.22	4.24		
PULL #4	4.27	4.27		
PULL #5	4.26	4.24		
TOTAL	21.25	21.25		
AVG.	4.25	4.25		

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06225309
18 Apr 1989

CENTROIDAL DISTANCES

0 TO	1	.428805
1 TO	2	.510484
1 TO	3	.23904
1 TO	4	.665081
1 TO	5	.60839

$\frac{4}{2}$ $\frac{1}{2}$ <----POB

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .1466
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0254
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .148784
THE AMR FOR THIS RIFLE IS: .8644

18 Apr 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C8225389

CENTERFIRE PATTERNS

1

POA

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS= 10

IN CIR

1in = 4

2in = 6

3in = 7

HS= 2.512

VS= 2.918


GS= 3.512

PATTERN #	:	1	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.755	.548	.560
MINIMUM X	:	-1.857	-.788	-.776
MAXIMUM Y	:	1.170	1.279	1.074
MINIMUM Y	:	-1.748	-1.639	-1.459
CENTROID X	:	.407	.614	.602
CENTROID Y	:	-.135	-.244	-.039
POA TO CENTROID in.	:	.429	.660	.603
MIN RADIUS	:	.201	.079	.250
MEAN RADIUS	:	.944	.793	.654
MAX RADIUS	:	2.102	1.642	1.563
HORIZONTAL SPREAD	:	2.612	1.336	1.336
VERTICAL SPREAD	:	2.918	2.918	2.533
EXTREME SPREAD	:	3.512	3.043	2.864
NUMBER IN ONE INCH CIRCLE	=		4	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		7	

18 Apr 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6225309

CENTERFIRE PATTERNS # 2

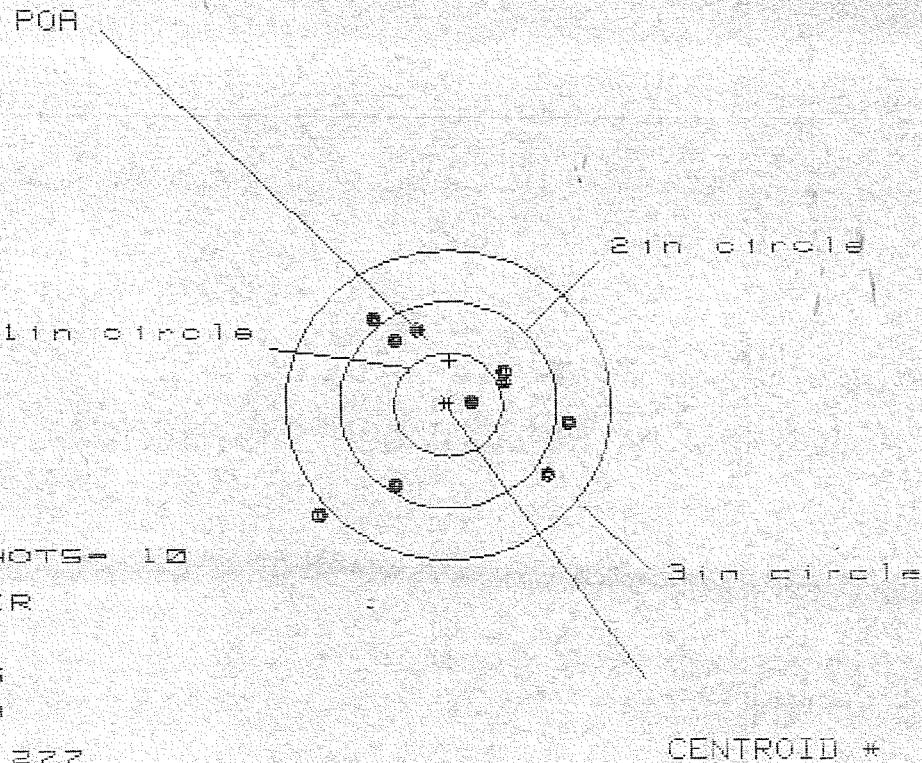

OF SHOTS= 10

IN CIR

1in = 1

2in = 6

3in = 9

HS= 2.277

VS= 1.911

GS= 2.436


CENTROID *

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.070	.936	1.028
MINIMUM X	:	-1.207	-.818	-.726
MAXIMUM Y	:	.832	.712	.607
MINIMUM Y	:	-1.079	-.918	-1.023
CENTROID X	:	-.011	.123	.031
CENTROID Y	:	-.428	-.308	-.203
POA TO CENTROID in.	:	.428	.332	.205
MIN RADIUS	:	.218	.130	.270
MEAN RADIUS	:	.885	.759	.716
MAX RADIUS	:	1.619	1.119	1.145
HORIZONTAL SPREAD	:	2.277	1.754	1.754
VERTICAL SPREAD	:	1.911	1.630	1.630
EXTREME SPREAD	:	2.436	2.199	2.042
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

18 Apr 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C8225303

CENTERFIRE PATTERNS # 3

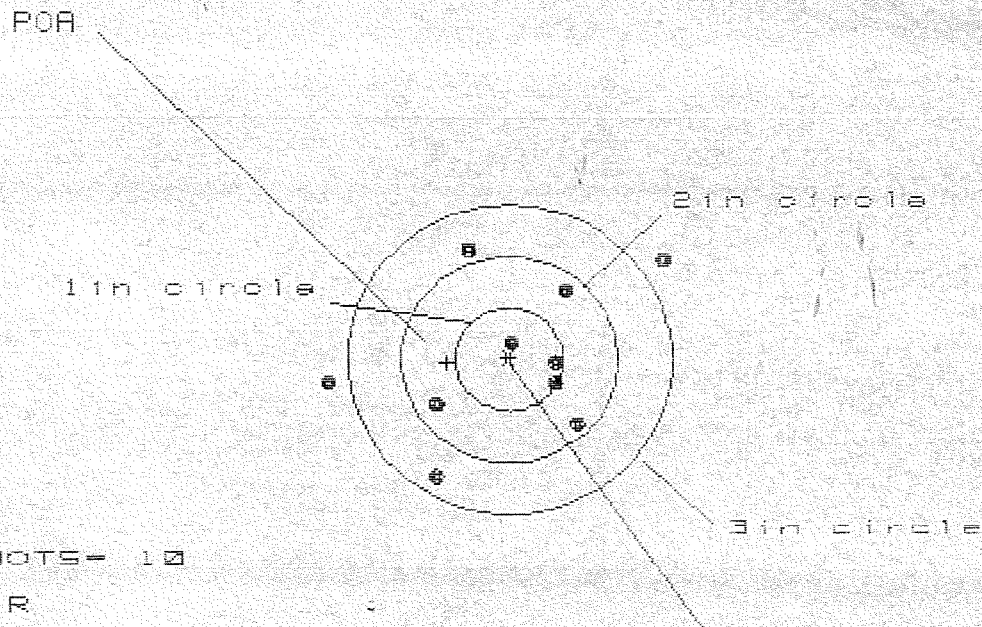

OF SHOTS= 10

IN CIR

1in = 3

2in = 6

3in = 8

HS= 3.112

VS= 2.235


GS= 3.334

PATTERN #	3
SHOTS (BEST OF)	10
MAXIMUM X	1.417
MINIMUM X	-1.695
MAXIMUM Y	1.077
MINIMUM Y	-1.158
CENTROID X	.579
CENTROID Y	.031
POA TO CENTROID in.	.579
MIN RADIUS	.191
MEAN RADIUS	.950
MAX RADIUS	1.715
HORIZONTAL SPREAD	3.112
VERTICAL SPREAD	2.235
EXTREME SPREAD	3.334
NUMBER IN ONE INCH CIRCLE =	3
NUMBER IN TWO INCH CIRCLE =	6
NUMBER IN THREE INCH CIRCLE =	8

18 Apr 1989

FILE:/PATTERNING/CENTERFIRE_PATT/CS225389

CENTERFIRE PATTERNS # 4

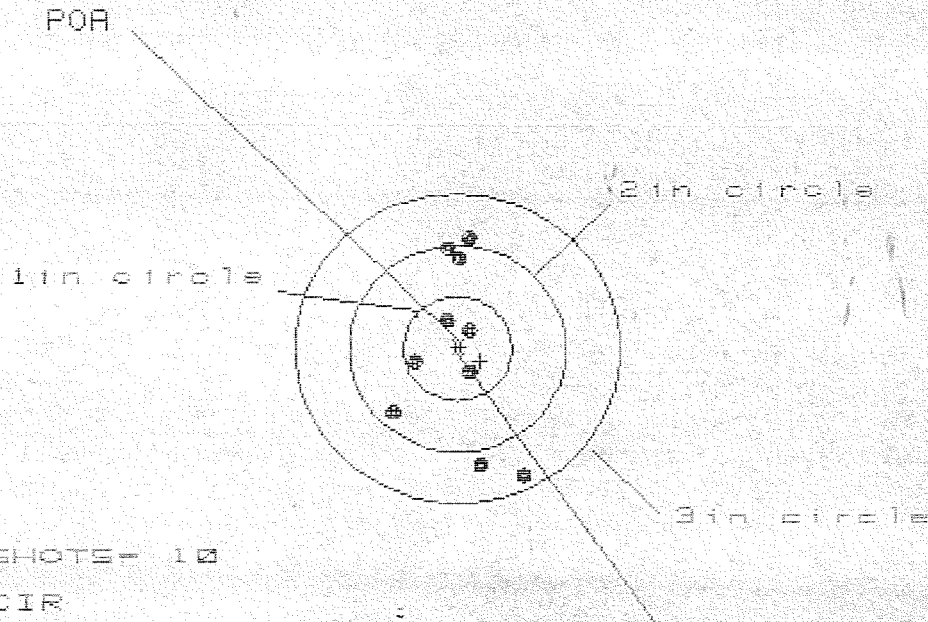

OF SHOTS= 10

IN CIR

1in = 4

2in = 6

3in = 10

HS= 1.174

VS= 2.209

GS= 2.305

CENTROID *


PATTERN #	4	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.627	.229	.204
MINIMUM X	-.547	-.477	-.449
MAXIMUM Y	1.027	.896	.740
MINIMUM Y	-1.182	-1.246	-.942
CENTROID X	-.206	-.276	-.304
CENTROID Y	.123	.254	.410
POA TO CENTROID in.	.240	.375	.511
MIN RADIUS	.220	.123	.007
MEAN RADIUS	.734	.645	.551
MAX RADIUS	1.338	1.267	1.043
HORIZONTAL SPREAD	1.174	.706	.653
VERTICAL SPREAD	2.209	2.142	1.682
EXTREME SPREAD	2.305	2.143	1.802
NUMBER IN ONE INCH CIRCLE =	4		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	10		

18 Apr 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C8225309

CENTERFIRE PATTERNS # 5

POA

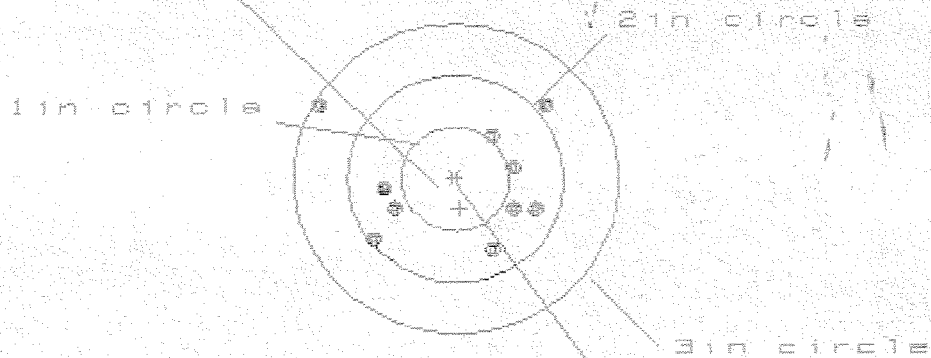

OF SHOTS= 10

IN CIR

1 in = 0

2 in = 8

3 in = 10

HS= 2.139

VS= 1.397

GS= 2.237

CENTROID #

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.842	.698	.666
MINIMUM X	:	-1.297	-.924	-.837
MAXIMUM Y	:	.754	.832	.616
MINIMUM Y	:	-.643	-.565	-.461
CENTROID X	:	-.036	.108	.021
CENTROID Y	:	.282	.204	.100
POA TO CENTROID in.	:	.284	.231	.102
MIN RADIUS	:	.533	.431	.484
MEAN RADIUS	:	.809	.704	.659
MAX RADIUS	:	1.475	1.086	.927
HORIZONTAL SPREAD	:	2.139	1.622	1.503
VERTICAL SPREAD	:	1.397	1.397	1.077
EXTREME SPREAD	:	2.237	2.099	1.538
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		10	

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 97-10039

INITIAL

CUSTOMER ORDER NO.

WOG 2 OF 3

M-24

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

05/22/97

05/22/97

C6225309

700 7.62

NATO

ACCESSORIES

W/STUDS

SCOPE BASE

FROM:

SHIP TO:

U.S. ARMY
HHC 2/187 INF.
BLDG # 6783
FT CAMPBELL

KY 42223

U.S. ARMY
HHC 2/187 INF.
BLDG # 6783
FT CAMPBELLKY
42223

CUST NO: 104576 C.D.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

FROM DATE

ESTIMATED

VIA

UPS

GUN CONDITION

☐ NEW☐ LIGHTLY WORN☐ WORN☐ VERY WORN☐ UNREPAIRABLE☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

PARTS

COMMENTS

Barrel
Stock-
-96001
96018Repowder Coat Trigger Guard
Assy, Front & Rear Sight Bases
ReZinc Scope Base + Swivel
Studs

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

RW

✓

✓

✓

✓

KT

5-22-97

7-15-97

7-22-97

7-22-97

OFFICE COPY

RD5925 REV. 11/95

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400082382

MAINTENANCE REQUEST For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG				PAGE NO	NO OF PAGES	REQUIREMENT CONTROL SYMBOL CSGLD-1047(R1)
SECTION I - CUSTOMER DATA				SECTION II - MAINTENANCE ACTIVITY DATA		
1a. UIC CUSTOMER	1b. CUSTOMER UNIT NAME	1c. PHONE NO	3a. WORK ORDER NUMBER (WON)		3b. SHOP	3c. PHONE NO
	HHC 4/18/7	1-3615				
2a. SAMS-2 UIC/SAMS-I/TDA	2b. UTILIZATION CODE	2c. MCSR	4a. UIC SUPPORT UNIT		4b. SUPPORT UNIT NAME	
	WFBTGO					
SECTION III - EQUIPMENT DATA						
5. TYPE MNT REQ CODE	6. ID	7. NSN	15a. FAILURE DETECTED DURING/WHEN DISCOVERED CODE (Enter code) See DA Pamphlets 738-750 and 738-751			
		1095 01 240 2136				
8. MODEL	M124		15b. FIRST INDICATION OF TROUBLE/HOW RECOGNIZED CODE (Enter Code) See DA Pamphlets 738-750 and 738-751		M	K
9. NOUN	7.62 SNIPER				H	R
10a. ORG WON/DOC NO	10b. EIC					
11. SERIAL NUMBER	12. QTY	13. PD	17. PROJECT CODE (if assigned)	18. ACCOUNT PROCESSING CODE	19. IN WARRANTY? (enter Y or N)	20. ADMIN NO
06225309						
14. MALFUNCTION DESCRIPTION (for DSU, GSU/AVIM, DEPOT use)			21. REIMBURSABLE CUSTOMER (if Intransit customer enter Y or N)			
			22. LEVEL OF WORK		23. SIGNATURE	
24. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURES IN EQUIPMENT TM (Do not prescribe repairs)						
Weapons exceeds \$500 count						
25. REMARKS						
see Attached 2404						
PREPARATION INSTRUCTIONS FOR THIS PAGE						
SECTION I Block 1a. Enter UIC of submitting organization. Block 1b. Enter name of submitting organization. Block 1c. Enter number to be called when maint. is completed. Block 2a. Enter UIC of supporting SAMS-2/SAMS-I/TDA if work is requested while intransit and away from your support maintenance unit. Block 2b. Enter utilization code. See DA Pamphlets 738-750 and 738-751. Block 2c. Enter "Y" if reportable under AR 700-138. If not, leave blank. SECTION II Leave blank. To be completed by the support maintenance DSU/GSU/AVIM/DEPOT. SECTION III Block 5. Enter the Type Maintenance Request Code. See DA Pamphlets 738-750 and 738-751. Block 6. Enter ID associated with block 7. See DA Pamphlets 738-750 and 738-751. Block 7. Enter the NSN or stock number of the item being submitted. Block 8. Enter model of item being submitted. Block 9. Enter noun/nomenclature of item being submitted. Block 10a. Enter Work Order Number (WON)/DOC NO assigned when item is submitted. Otherwise, leave blank. Block 10b. Enter End Item Code. See AMDF. Block 11. Enter serial number of item being submitted.			SECTION III (Cont'd) Block 12. Enter the quantity of items being submitted. Block 13. Enter the maintenance priority designator determined from DA PAM 710-2-1. Block 14. For DSU, GSU/AVIM, DEPOT use. Block 15a. Enter the code that most accurately describes when the fault or deficiency was detected. See DA Pamphlets 738-750 and 738-751. Block 15b. Select one. Enter the code. See DA Pamphlets 738-750 and 738-751. Block 16. Enter the accumulated usage data in blocks, when equipment is subject to usage reporting. Block 17. Enter the project code if one has been assigned. If not, leave blank. Block 18. See DA Pamphlets 738-750 and 738-751. Block 19. Enter "Y" or "N" to indicate whether equipment is still under manufacturer's warranty. Block 20. Enter the admin number assigned for property control purposes for the equipment being submitted. Block 21. For DSU/GSU/AVIM/Depot use. Block 22. Enter level of work performed "O" for UNIT LEVEL/AVUM, "F" for DSU/AVIM, "H" for GSU, "D" for DEPOT, "K" for contractor or "L" for Spc Rpr Act. Block 23. Enter the signature of the CO or the CO's designated representative when the priority designator is 01-10. For priority designators 11-15, leave blank. Block 24. Enter a brief description of the deficiencies or symptoms that you feel require attention at this level of maint. Block 25. Self-explanatory.			
34a. SUBMITTED BY			35a. ACCEPTED BY		35c. DATE	
34b. DATE	35b. STATUS	35d. TIME				

Block 34a. Enter first initial and last name of submitter.
 Block 34b. Enter ordinal date submitted (YYDDD).
 Block 35a. Enter first initial and last name of person accepting maint. request.
 Block 35b. Enter the initial status. See DA Pamphlets 738-750 and 738-751.
 Block 35c. Enter ordinal date accepted (YYDDD).
 Block 35d. Enter military time.

DA FORM 2407, JUL 94

PREVIOUS EDITIONS OF DA FORM 2407 AND DA FORM 5504 ARE OBSOLETE

RECEIPT COPY 1

NMP COPY 2

For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG

DA FORM 2404
1 APR 79

Replaces edition of 1 Jan 64, which will be used

21 DAY TURN - AROUND

*New
Barrel
&
Stock*

M-24
CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO.

C6225309

LOG IN DATE: / /		DATE	INIT.
INSPECT & VERIFY:			
OP. #	OP. NAME		
550	DIS-ASSEMBLE GUN		
560 A	RE-BARREL AT CUSTOM SHOP		
B	DRILL & TAP		
C	POLISH		
575	ASSEMBLE		
600	PROOF	<i>5-27-97</i>	<i>A</i>
605	CHECK HEADSPACE	<i>5-27-97</i>	<i>PA</i>
610	DIS-ASSEMBLE		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY	<i>7-15-97</i>	<i>RW</i>
B	TRIGGER PULL TEST		
C	SAFETY ON FORCE		
D	SAFETY OFF FORCE		
E	FIRING PIN INDENT		
640	TARGET	<i>7-22-97</i> <i>7-27-97</i>	<i>KT</i> <i>GW</i>
655	FINAL INSPECT		
660	PACK		

QAR INSPECTION

SHIP DATE

Final Inspection

Sn: C6225309

DATE REC'D: 5-22-97

DATE RET'D:

Auditor: RW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☐ Scope☐ Scope Rings☒ Mounting Screws☒ Mounting Base☐ SCREWS☐ FINISH☐ Looseness☐ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ Scope Case☐ IRON SIGHTS☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments:

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6225309
21 Jul 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: $-.1972$
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: $-.0192$
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: $.198132$

THE AMR FOR THIS RIFLE IS: 1.376

CENTROIDAL DISTANCES

0 TO	1	.423978
1 TO	2	.618813
1 TO	3	.698249
1 TO	4	.377689
1 TO	5	.479226

3
2 5 <----POA
1


PATTERN #: 1

POA TO CENTROID: .424
 MIN RADIUS : .643
 MEAN RADIUS : 1.462
 MAX RADIUS : 3.454
 CENTROID X : -.186
 CENTROID Y : -.381

21 Jul 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225309

CENTERFIRE PATTERN # 1

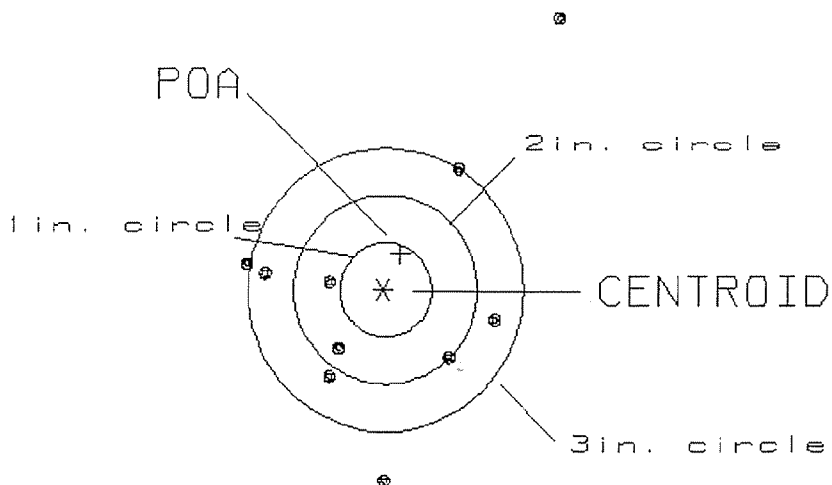

OF SHOTS= 10

IN CIRCLE

HS= 3.39

0

VS= 4.96

2

GS= 5.30


7

PATTERN #: 2
 POA TO CENTROID: .659
 MIN RADIUS : .669
 MEAN RADIUS : 1.686
 MAX RADIUS : 3.272
 CENTROID X : -.659
 CENTROID Y : .018

21 Jul 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225309

CENTERFIRE PATTERN # 2

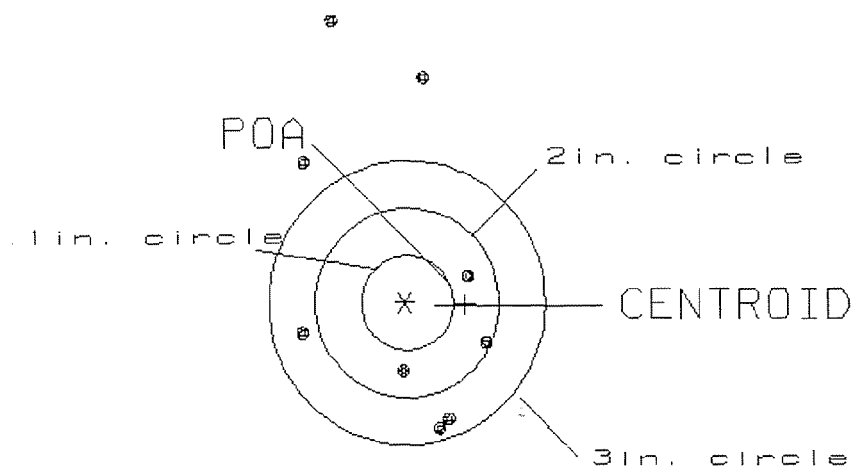

# OF SHOTS= 10	# IN CIRCLE
HS= 2.08	0
VS= 6.21	3
GS= 6.37	6


PATTERN #: 3

POA TO CENTROID: .398
 MIN RADIUS : .176
 MEAN RADIUS : 1.370
 MAX RADIUS : 2.421
 CENTROID X : -.242
 CENTROID Y : .315

21 Jul 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225389

CENTERFIRE PATTERN # 3

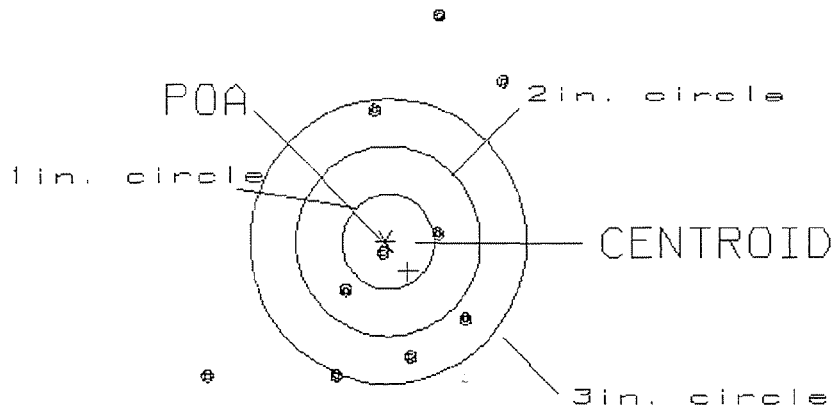

OF SHOTS= 10

IN CIRCLE

HS= 3.17
 VS= 3.61
 GS= 4.48

1
 3
 6


PATTERN #: 4

POA TO CENTROID: .081
 MIN RADIUS : .478
 MEAN RADIUS : 1.379
 MAX RADIUS : 2.361
 CENTROID X : .034
 CENTROID Y : -.074

21 Jul 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225389

CENTERFIRE PATTERN # 4

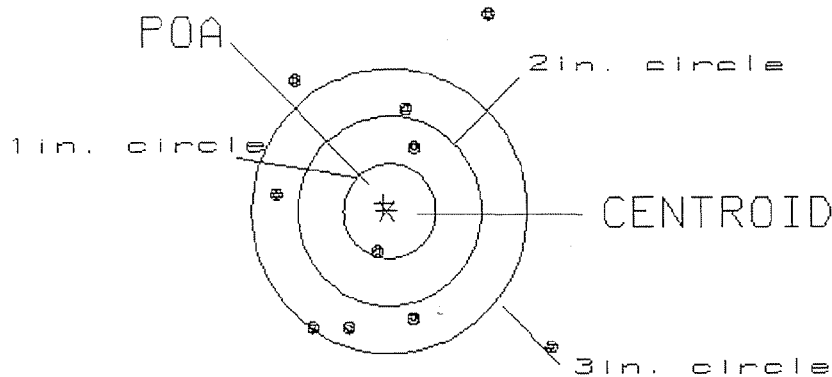

OF SHOTS= 10

IN CIRCLE

HS= 3.00
 VS= 3.48
 GS= 3.94

1
 2
 7

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 5
 POA TO CENTROID: .072
 MIN RADIUS : .143
 MEAN RADIUS : .984
 MAX RADIUS : 3.026
 CENTROID X : .067
 CENTROID Y : .026

21 Jul 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225389

CENTERFIRE PATTERN # 5

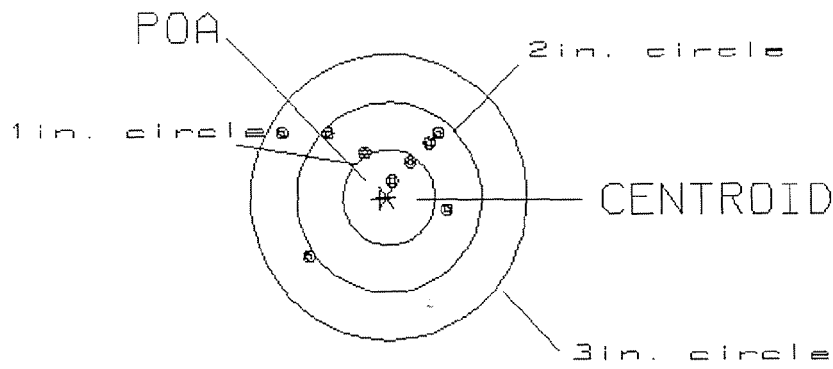

OF SHOTS= 10

IN CIRCLE

HS= 2.17
 US= 3.56
 GS= 4.15

2
 7
 9

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6225309
22 Jul 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.17
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .1204
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .208317

THE AMR FOR THIS RIFLE IS: 1.102

CENTROIDAL DISTANCES

Ø TO	1	.828304
1 TO	2	.375089
1 TO	3	.982799
1 TO	4	1.2275
1 TO	5	.866859

2 5
1 +3 <----POA
4


REMINGTON CENTERFIRE ACCURACY TEST REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 1
 POA TO CENTROID: .828
 MIN RADIUS : .396
 MEAN RADIUS : 1.196
 MAX RADIUS : 1.757
 CENTROID X : -.822
 CENTROID Y : .102

22 Jul 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225309.1

CENTERFIRE PATTERN # 1

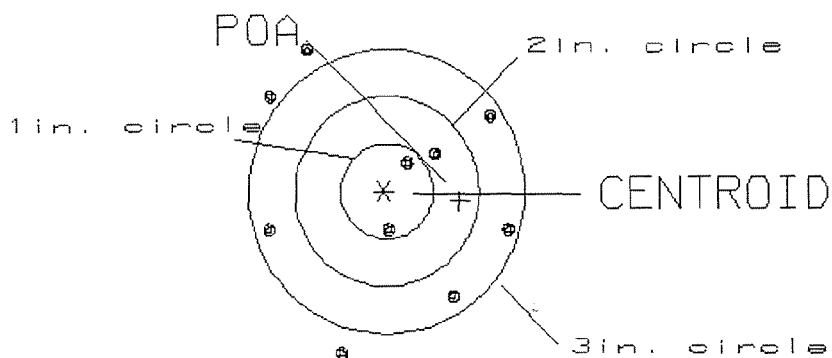

OF SHOTS= 10

IN CIRCLE

HS= 2.59

2

VS= 3.21

3

GS= 3.24

7


REMINGTON CENTERFIRE ACCURACY TEST - REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 2
 POA TO CENTROID: .682
 MIN RADIUS : .358
 MEAN RADIUS : 1.065
 MAX RADIUS : 1.878
 CENTROID X : -.568
 CENTROID Y : .378

22 Jul 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225309.1

CENTERFIRE PATTERN # 2

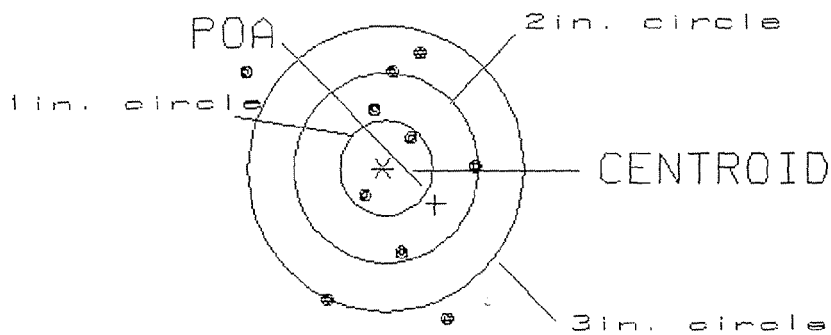

OF SHOTS= 10

IN CIRCLE

HS= 2.54

2

VS= 2.70

5

GS= 3.46

8


REMINGTON CENTERFIRE ACCURACY TEST - REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 3
 POA TO CENTROID: .156
 MIN RADIUS : .262
 MEAN RADIUS : 1.134
 MAX RADIUS : 2.094
 CENTROID X : .156
 CENTROID Y : .005

22 Jul 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225309.1

CENTERFIRE PATTERN # 3

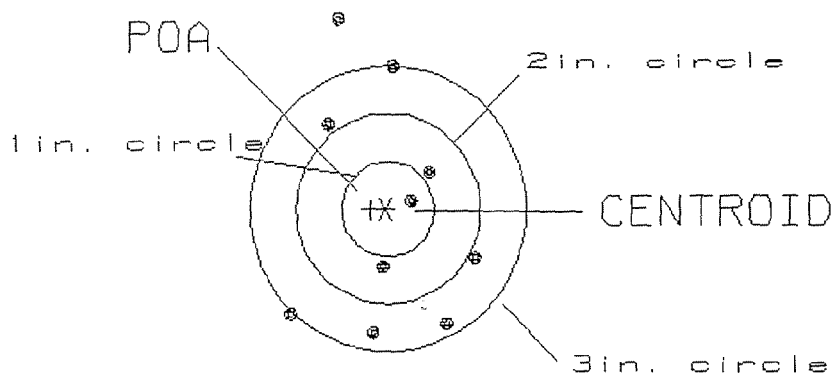

OF SHOTS= 10

IN CIRCLE

HS= 1.94

1

VS= 3.36

3

GS= 3.42

8


REMINGTON CENTERFIRE ACCURACY TEST - REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 4
 POA TO CENTROID: .420
 MIN RADIUS : .414
 MEAN RADIUS : 1.198
 MAX RADIUS : 2.894
 CENTROID X : .367
 CENTROID Y : -.203

22 Jul 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225389.1

CENTERFIRE PATTERN # 4

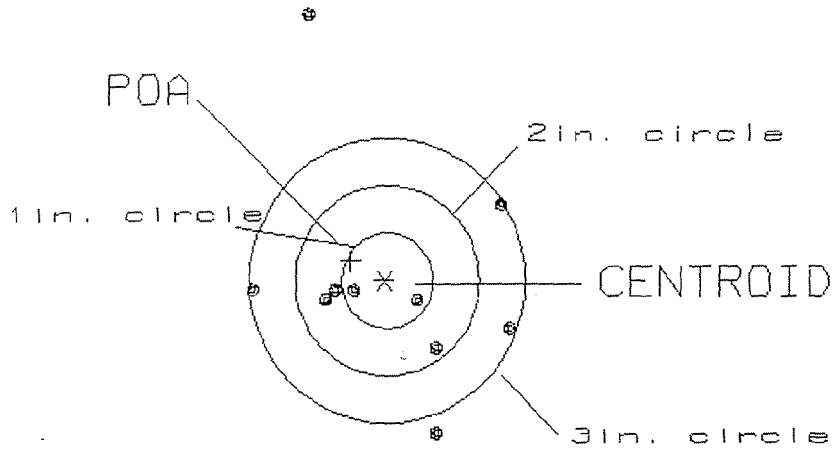

OF SHOTS= 10

IN CIRCLE

HS= 2.80

2

VS= 4.37

5

GS= 4.60

8


REMINGTON CENTERFIRE ACCURACY TEST - REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 5
 POA TO CENTROID: .321
 MIN RADIUS : .410
 MEAN RADIUS : .918
 MAX RADIUS : 2.254
 CENTROID X : .017
 CENTROID Y : .320

22 Jul 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225389.1

CENTERFIRE PATTERN # 5

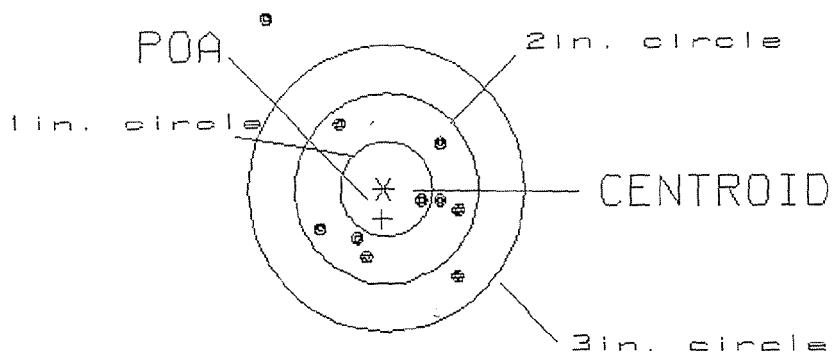

OF SHOTS= 10

IN CIRCLE

HS= 2.20

1

VS= 2.74

6

GS= 3.51

9