

G 657 7126  
Replaced  
E 641 3551

**Arms Services Repair & Estimate System**

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

**Repair Inquiry**

Repair Number: **RE00042305** Serial: C6522277 Model: 700 Center Fire Caliber: 7.62 NATO M-24 (SWS) Repairman: Status: Closed 2/26/02 7:12:40 AM

Verify Repair

**Address Information**

Customer: Received From: Return To: Received From:

Name: C CO SPT BN C CO SPT BN

Address 1: 1ST SWTG(A) 1ST SWTG(A)

Address 2: PD Box: PD Box:

City: FORT BRAGG FORT BRAGG

State: NC Zip Code: 28310 Country: US State: NC Zip Code: 28310 Country: US

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

**Contact / Condition** Problems Estimate History / Status Shipping / Billing

**Contact Information**

Phone: Fax: Email: Comments:

**Received Condition**

Pool: Condition Notes: CSR Notes:

**Accessories Received**

| Code | Desc       | Qty |
|------|------------|-----|
| A007 | With Stud  | 3   |
| A017 | Scope Base | 1   |
| A026 | Scope      | 1   |

Repair Search Refresh Close

radell 2/26/02 9:09 AM CAPS NUM INS SCFL

Start S F S C S C S E A 9:09 AM

Serial Number:

<sup>old</sup>  
**C6522277**

Model: **700**



**RE00042305**

New #  
↓  
**E6413551**

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: E6413551.\_\_0  
FILE DATE AND TIME: 03/12/2002 17:37

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

|                                                             |       |
|-------------------------------------------------------------|-------|
| The Average X Centroid of the Five Target Set:              | 0.013 |
| The Average Y Centroid of the Five Target Set:              | 0.068 |
| The Average Point of Impact of the Five Target Set:         | 0.069 |
| The Average Mean Radius of the Five Target Set:             | 0.808 |
| The Distance from POA to Centroid Target #1:                | 0.170 |
| The Distance from Centroid Target #2 to Centroid Target #1: | 0.330 |
| The Distance from Centroid Target #3 to Centroid Target #1: | 0.325 |
| The Distance from Centroid Target #4 to Centroid Target #1: | 0.154 |
| The Distance from Centroid Target #5 to Centroid Target #1: | 0.352 |

SERIAL NUMBER: E6413551. 0

TARGET NUMBER: 1

FILE DATE: 03/12/2002

FILE TIME: 17:37

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.655  | 0.896  |
| 2:     | 0.306  | 0.674  |
| 3:     | -1.691 | 1.131  |
| 4:     | -1.351 | 0.167  |
| 5:     | -0.817 | -0.105 |
| 6:     | -0.394 | 0.027  |
| 7:     | 0.103  | -0.683 |
| 8:     | 0.543  | -0.972 |
| 9:     | 0.398  | 0.036  |
| 10:    | 1.018  | -0.002 |

X CENTROID: -0.123

Y CENTROID: 0.117

POA TO CENTROID: 0.170

HORZ SPREAD: 2.709

VERT SPREAD: 2.103

GROUP SPREAD: 3.068

MIN RADIUS: 0.286


MAX RADIUS: 1.867

MEAN RADIUS: 0.970

# IN 1 IN DIAMETER: 1

# IN 2 IN DIAMETER: 5

# in 3 IN DIAMETER: 9

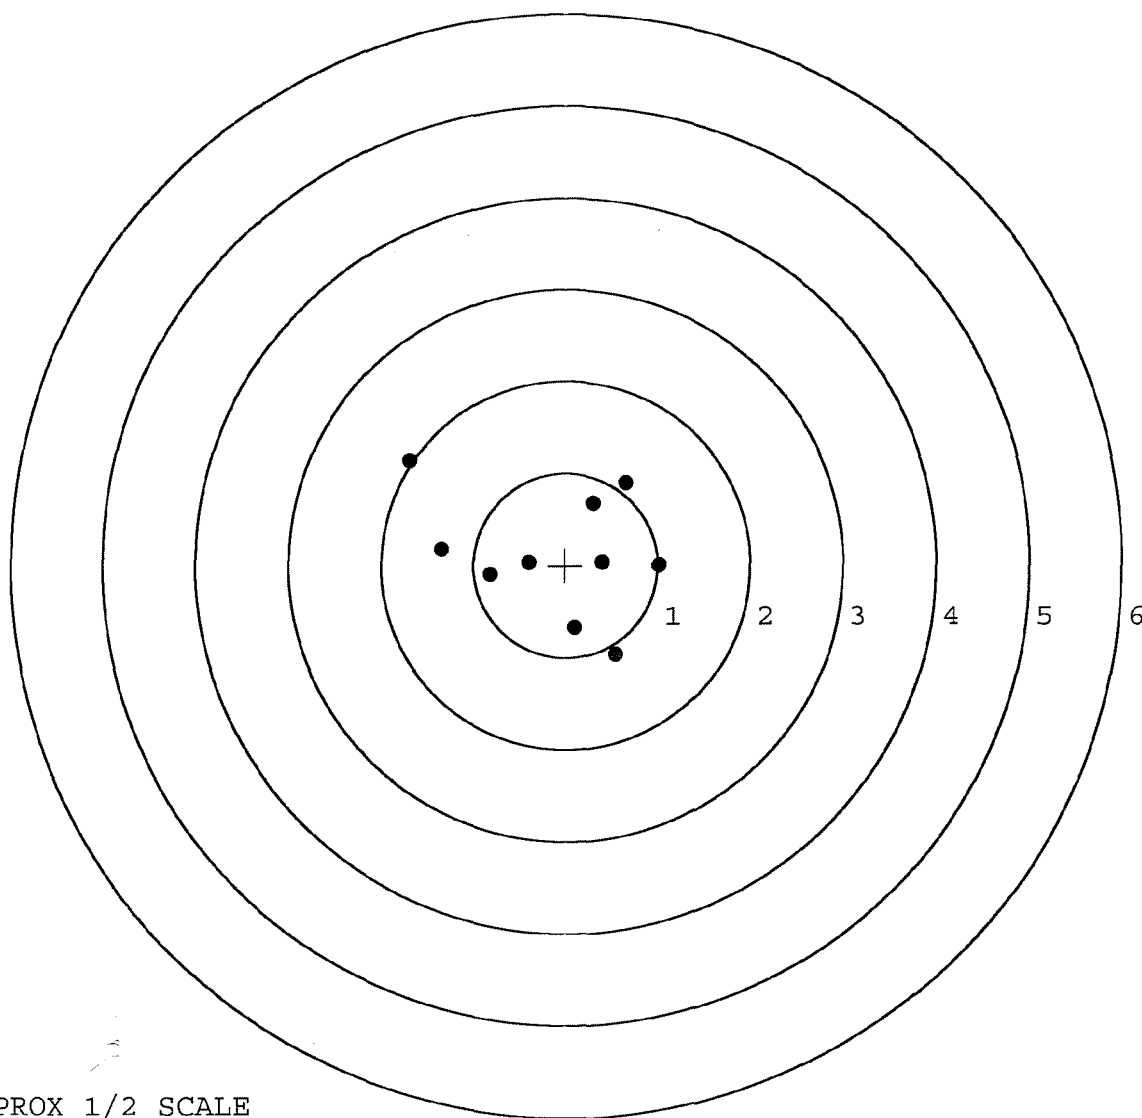

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413551. \_\_0

TARGET NUMBER: 2

FILE DATE: 03/12/2002

FILE TIME: 17:37

| POINT# | X | Y |
|--------|---|---|
|--------|---|---|

|    |        |       |
|----|--------|-------|
| 1: | -0.495 | 1.031 |
|----|--------|-------|

|    |       |        |
|----|-------|--------|
| 2: | 1.062 | -0.193 |
|----|-------|--------|

|    |       |       |
|----|-------|-------|
| 3: | 1.624 | 0.124 |
|----|-------|-------|

|    |        |       |
|----|--------|-------|
| 4: | -0.362 | 0.107 |
|----|--------|-------|

|    |        |        |
|----|--------|--------|
| 5: | -0.338 | -0.257 |
|----|--------|--------|

|    |        |        |
|----|--------|--------|
| 6: | -0.189 | -0.461 |
|----|--------|--------|

|    |       |        |
|----|-------|--------|
| 7: | 0.089 | -0.337 |
|----|-------|--------|

|    |       |        |
|----|-------|--------|
| 8: | 0.282 | -0.129 |
|----|-------|--------|

|    |       |       |
|----|-------|-------|
| 9: | 0.294 | 0.059 |
|----|-------|-------|

|     |        |       |
|-----|--------|-------|
| 10: | -0.092 | 0.113 |
|-----|--------|-------|

X CENTROID: 0.188

Y CENTROID: 0.006

POA TO CENTROID: 0.188

HORZ SPREAD: 2.119

VERT SPREAD: 1.492

GROUP SPREAD: 2.305

MIN RADIUS: 0.119


MAX RADIUS: 1.441

MEAN RADIUS: 0.626

# IN 1 IN DIAMETER: 4

# IN 2 IN DIAMETER: 8

# in 3 IN DIAMETER: 10

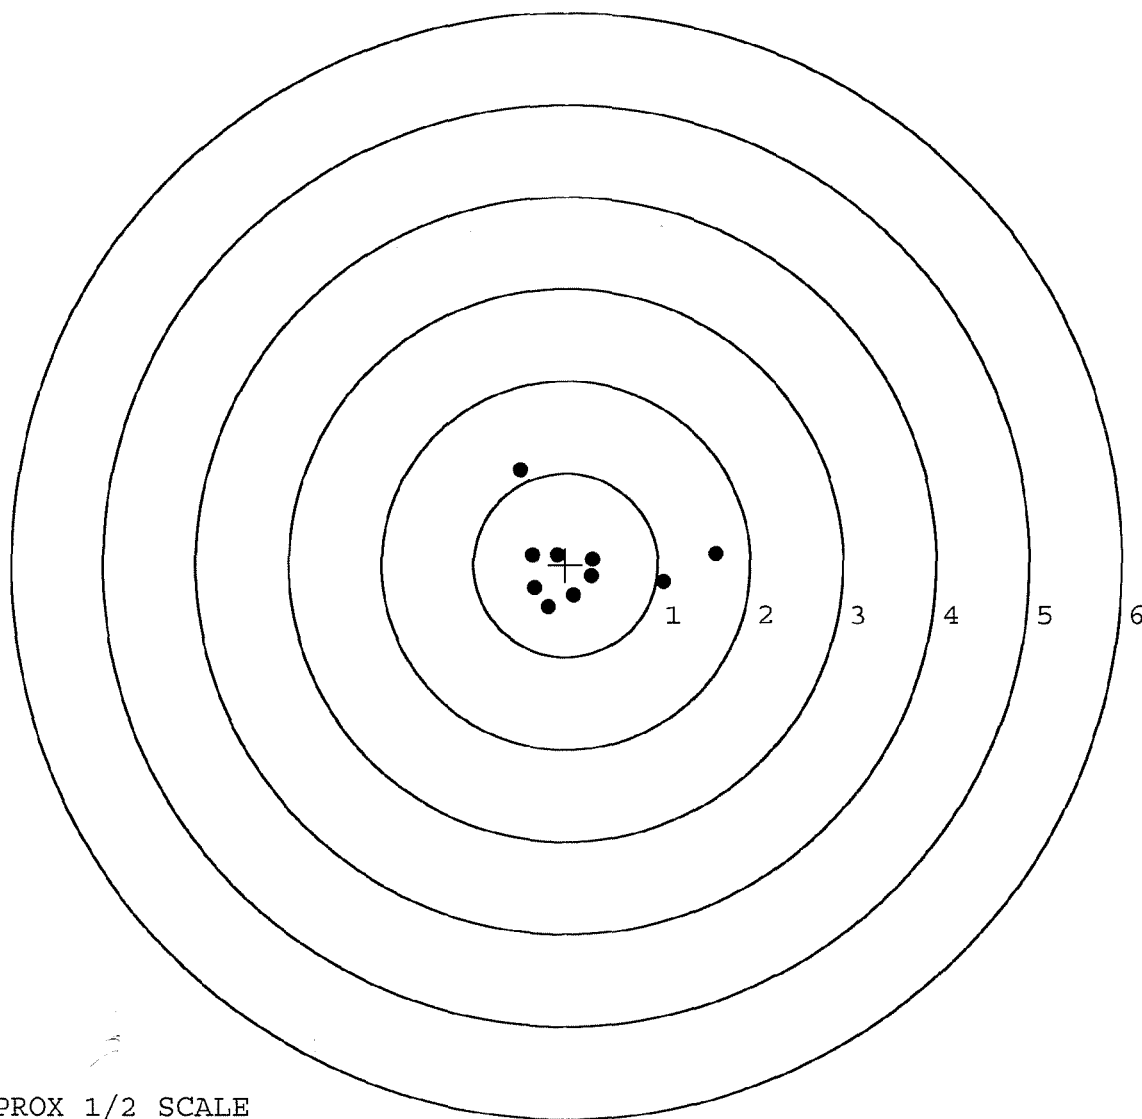

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413551. 0

TARGET NUMBER: 3

FILE DATE: 03/12/2002

FILE TIME: 17:37

| POINT# | X | Y |
|--------|---|---|
|--------|---|---|

|    |       |       |
|----|-------|-------|
| 1: | 1.097 | 1.604 |
|----|-------|-------|

|    |        |       |
|----|--------|-------|
| 2: | -0.631 | 1.351 |
|----|--------|-------|

|    |        |       |
|----|--------|-------|
| 3: | -0.538 | 0.765 |
|----|--------|-------|

|    |        |       |
|----|--------|-------|
| 4: | -0.446 | 0.369 |
|----|--------|-------|

|    |        |        |
|----|--------|--------|
| 5: | -0.954 | -0.085 |
|----|--------|--------|

|    |        |        |
|----|--------|--------|
| 6: | -0.117 | -0.325 |
|----|--------|--------|

|    |       |        |
|----|-------|--------|
| 7: | 0.617 | -0.143 |
|----|-------|--------|

|    |       |        |
|----|-------|--------|
| 8: | 0.743 | -0.054 |
|----|-------|--------|

|    |       |        |
|----|-------|--------|
| 9: | 0.791 | -0.004 |
|----|-------|--------|

|     |       |        |
|-----|-------|--------|
| 10: | 0.993 | -0.636 |
|-----|-------|--------|

X CENTROID: 0.155

Y CENTROID: 0.284

POA TO CENTROID: 0.324

HORZ SPREAD: 2.051

VERT SPREAD: 2.240

GROUP SPREAD: 2.657

MIN RADIUS: 0.607


MAX RADIUS: 1.621

MEAN RADIUS: 0.948

# IN 1 IN DIAMETER: 0

# IN 2 IN DIAMETER: 6

# in 3 IN DIAMETER: 9

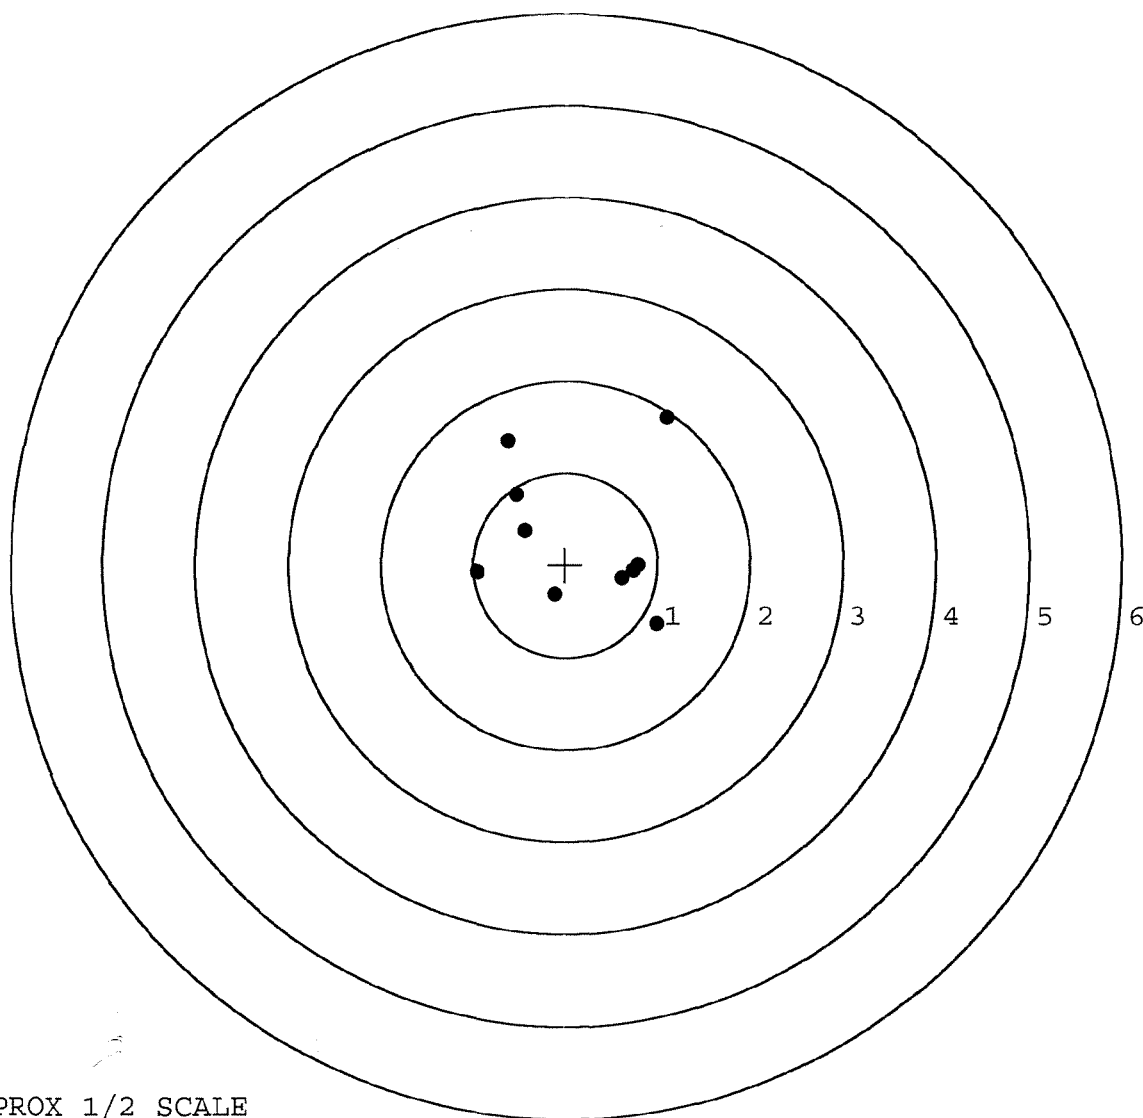


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413551. 0  
TARGET NUMBER: 4  
FILE DATE: 03/12/2002  
FILE TIME: 17:37

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -1.337 | 0.159  |
| 2:     | -0.744 | 0.399  |
| 3:     | -0.508 | 0.459  |
| 4:     | -0.380 | -0.724 |
| 5:     | 0.739  | -0.195 |
| 6:     | 0.813  | -0.642 |
| 7:     | 0.674  | 0.452  |
| 8:     | 0.364  | 0.338  |
| 9:     | 0.318  | 0.550  |
| 10:    | 0.304  | 0.838  |

X CENTROID: 0.024  
Y CENTROID: 0.163  
POA TO CENTROID: 0.165  
HORZ SPREAD: 2.150  
VERT SPREAD: 1.562  
GROUP SPREAD: 2.294  
MIN RADIUS: 0.382  
MAX RADIUS: 1.361  
MEAN RADIUS: 0.798  
# IN 1 IN DIAMETER: 2  
# IN 2 IN DIAMETER: 8  
# in 3 IN DIAMETER: 10

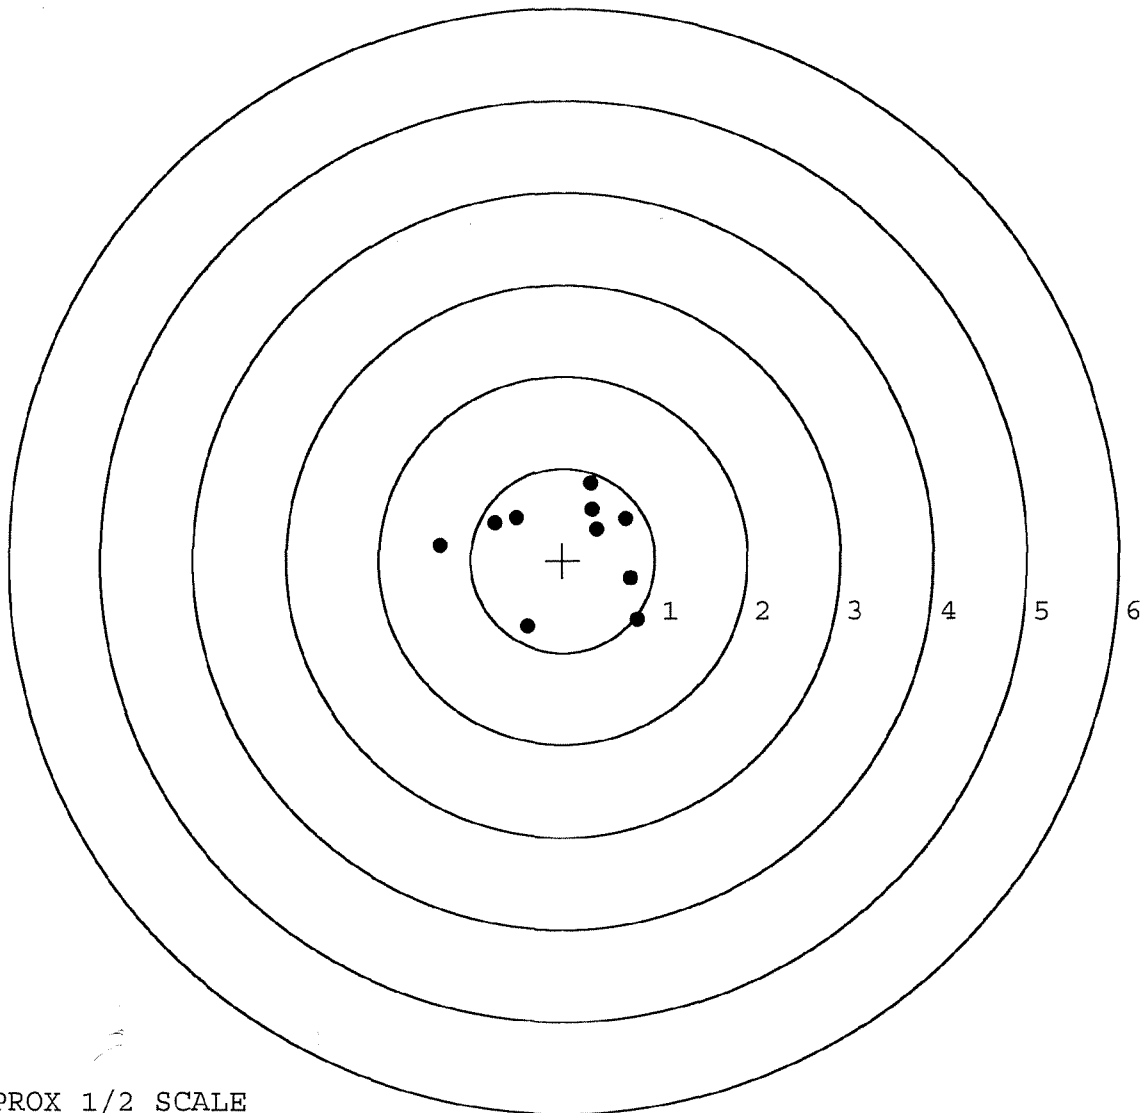

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413551. 0

TARGET NUMBER: 5

FILE DATE: 03/12/2002

FILE TIME: 17:37

| POINT# | X | Y |
|--------|---|---|
|--------|---|---|

|    |        |       |
|----|--------|-------|
| 1: | -0.530 | 0.748 |
|----|--------|-------|

|    |        |       |
|----|--------|-------|
| 2: | -0.534 | 0.108 |
|----|--------|-------|

|    |        |       |
|----|--------|-------|
| 3: | -0.343 | 0.159 |
|----|--------|-------|

|    |        |        |
|----|--------|--------|
| 4: | -0.279 | -0.057 |
|----|--------|--------|

|    |        |        |
|----|--------|--------|
| 5: | -0.087 | -0.287 |
|----|--------|--------|

|    |        |        |
|----|--------|--------|
| 6: | -0.325 | -1.021 |
|----|--------|--------|

|    |        |        |
|----|--------|--------|
| 7: | -0.332 | -1.233 |
|----|--------|--------|

|    |        |        |
|----|--------|--------|
| 8: | -0.276 | -1.409 |
|----|--------|--------|

|    |       |       |
|----|-------|-------|
| 9: | 0.407 | 0.121 |
|----|-------|-------|

|     |       |       |
|-----|-------|-------|
| 10: | 0.516 | 0.565 |
|-----|-------|-------|

X CENTROID: -0.178

Y CENTROID: -0.231

POA TO CENTROID: 0.291

HORZ SPREAD: 1.050

VERT SPREAD: 2.157

GROUP SPREAD: 2.172

MIN RADIUS: 0.107


MAX RADIUS: 1.182

MEAN RADIUS: 0.700

# IN 1 IN DIAMETER: 4

# IN 2 IN DIAMETER: 6

# in 3 IN DIAMETER: 10

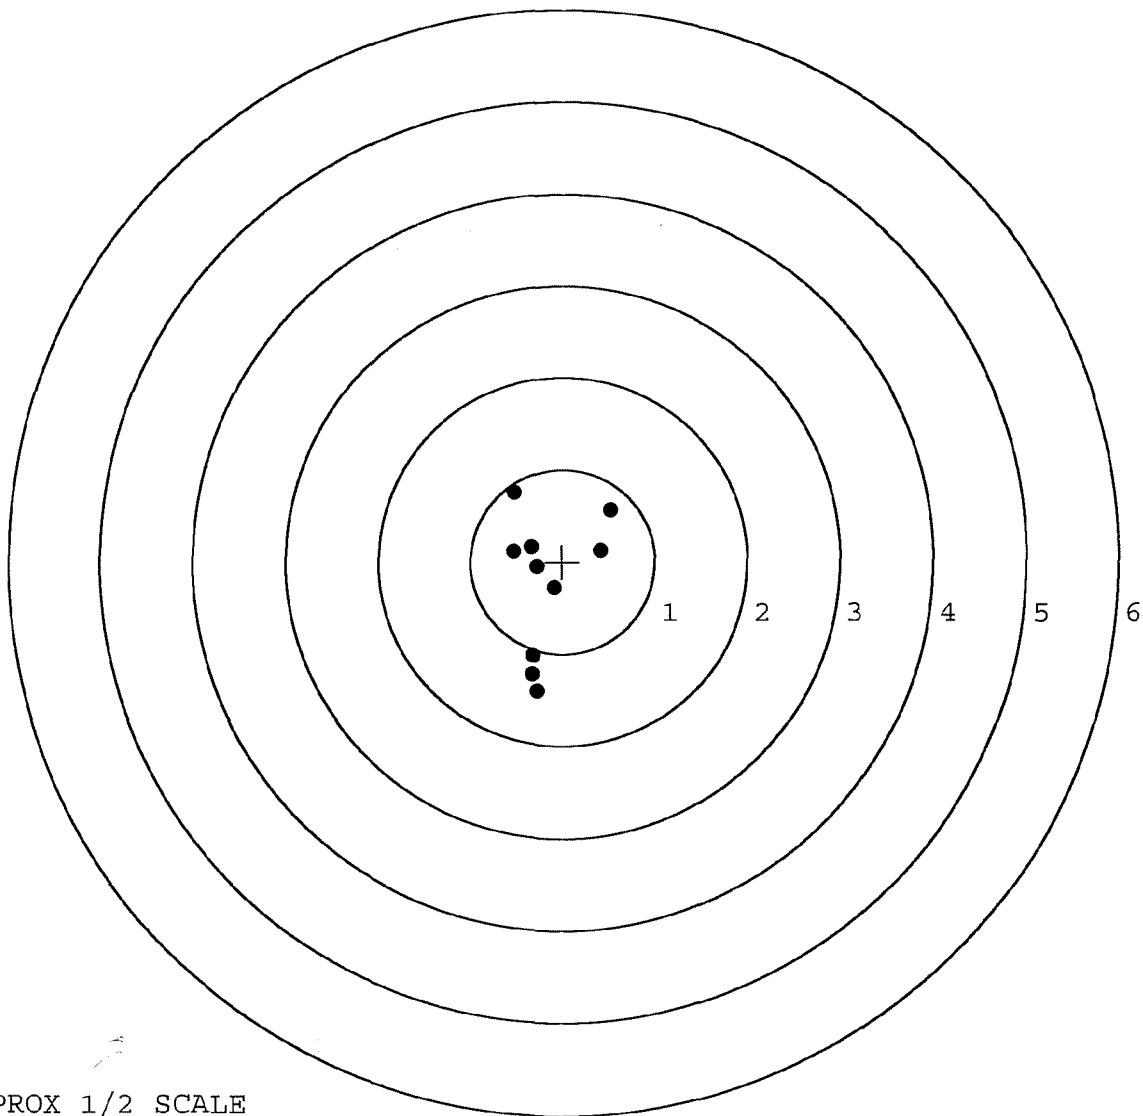

TARGET APPROX 1/2 SCALE



M-24 INSPECTION CHECKLIST  
CONTRACT #: DAAE-20-97-C-242

|                        |                          |                     |            |
|------------------------|--------------------------|---------------------|------------|
| R & E NUMBER 42305     |                          |                     |            |
| SERIAL NUMBER C6522277 |                          | New # FLA413551     |            |
| LOG-IN DATE 2/26/02    |                          |                     |            |
| INSPECT AND VERIFY:    |                          |                     |            |
| OPERATION #            | OPERATION NAME           | DATE                | INITIAL    |
| 550                    | DIS-ASSEMBLE GUN         | 2/27/02             | RJR        |
| 560 A                  | RE-BARREL AT CUSTOM SHOP | 3/5/02              | RJR        |
| B                      | DRILL AND TAP            | 3/5/02              | RJR        |
| C                      | POLISH                   |                     |            |
| 575                    | ASSEMBLE                 | 3/6/02              | RJR        |
| 600                    | PROOF                    | 3-6-02              | RJR        |
| 605                    | CHECK HEADSPACE          | 3-6-02              | MAGNA-FLUX |
| 610                    | DIS-ASSEMBLE GUN         | 3/6/02              | INSPECTED  |
| 612                    | MAGNAFLUX                |                     | MAR 7 2002 |
| 615                    | ROLLMARK CALIBER         | 3/7/02              | OPERATOR   |
| 618                    | ROTO-BLAST               | 3/8                 | JW         |
| 620                    | APPLY COATINGS           | 3-8                 | TJR        |
| 625 A                  | FINAL ASSEMBLY           | 3/12/02             | RJR        |
| B                      | TRIGGER PULL TEST        |                     |            |
| C                      | SAFETY "ON" FORCE        |                     |            |
| D                      | SAFETY "OFF" FORCE       |                     |            |
| E                      | FIRING PIN INDENT        |                     |            |
| 640                    | TARGET                   | 3-12-02             | AC         |
| 655                    | FINAL INSPECT            | 3-14-02             | RJR        |
| 660                    | PACK                     | 3-15-02             | RJR        |
|                        |                          | 3-15-02             | DA         |
|                        |                          | SHIP DATE           |            |
|                        |                          | QAR INSPECTION DATE |            |

# Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

## Repair Inquiry

Repair Number: **RE00112963**

Serial: E6413551 Model: M24 SWS Center Fire  
Caliber: 7.62 NATO

Repairman:

Status:

New 5/30/2006 10:47:03 AM

Verify Repair

### Address Information

Customer:

Received From:

Return To:

Received From:

Name: C CO SPT BN SWTG (A) POC JERRY SCREEN

C CO SPT BN SWTG (A) POC JERRY SCREEN

Address 1: ARMAMENT FACILITY BLDG D-1307

ARMAMENT FACILITY BLDG D-1307

Address 2: GRUBER ROAD

PO Box:

GRUBER ROAD

PO Box:

City: FORT BRAGG

FORT BRAGG

State: NC

Zip Code: 28310

Country: US

State: NC

Zip Code: 28310

Country: US

EFL:

### Contact / Condition

### Problems

### Estimate

### History / Status

### Shipping / Billing

#### Contact Information

Phone: NA

Fax:

Email:

Comments:

#### Received Condition

Fair

Condition Notes:

CSR Notes:

#### Accessories Received

| Code | Desc                  | Qty |
|------|-----------------------|-----|
| A007 | With Stud             | 3   |
| A010 | Hard Case             | 1   |
| A017 | Scope Base            | 1   |
| A057 | Fit and Rear Sgt Base | 1   |

Repair Search

Refresh

Close

maglet

5/31/2006

10:28 AM

CAPS

NUM

INS

SCRL

start

2 Micros...

2 Micros...

3 Intern...

Arms Ser...

Part Sear...

10:28 AM

G6577126 (vnu)

Serial Number: **E6413551**

Model: M24 SWS



RE00112963

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6577126.\_\_\_0

FILE DATE AND TIME: 06/30/2006 05:05


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

|                                                             |        |
|-------------------------------------------------------------|--------|
| The Average X Centroid of the Five Target Set:              | -0.154 |
| The Average Y Centroid of the Five Target Set:              | 0.017  |
| The Average Point of Impact of the Five Target Set:         | 0.155  |
| The Average Mean Radius of the Five Target Set:             | 0.601  |
| The Distance from POA to Centroid Target #1:                | 0.158  |
| The Distance from Centroid Target #2 to Centroid Target #1: | 0.142  |
| The Distance from Centroid Target #3 to Centroid Target #1: | 0.153  |
| The Distance from Centroid Target #4 to Centroid Target #1: | 0.083  |
| The Distance from Centroid Target #5 to Centroid Target #1: | 0.170  |

SERIAL NUMBER: G6577126. \_\_0  
TARGET NUMBER: 1  
FILE DATE: 06/30/2006  
FILE TIME: 05:05

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -0.264 | -0.721 |
| 2:     | 0.208  | 0.590  |
| 3:     | -0.550 | 0.766  |
| 4:     | -0.466 | 0.454  |
| 5:     | -0.860 | 0.413  |
| 6:     | -0.076 | 0.083  |
| 7:     | 0.264  | -0.027 |
| 8:     | 0.256  | -0.373 |
| 9:     | -0.085 | -0.229 |
| 10:    | 0.149  | -0.266 |

X CENTROID: -0.142  
Y CENTROID: 0.069  
POA TO CENTROID: 0.158  
HORZ SPREAD: 1.124  
VERT SPREAD: 1.487  
GROUP SPREAD: 1.514  
MIN RADIUS: 0.068  
MAX RADIUS: 0.807  
MEAN RADIUS: 0.536  
# IN 1 IN DIAMETER: 4  
# IN 2 IN DIAMETER: 10  
# in 3 IN DIAMETER: 10

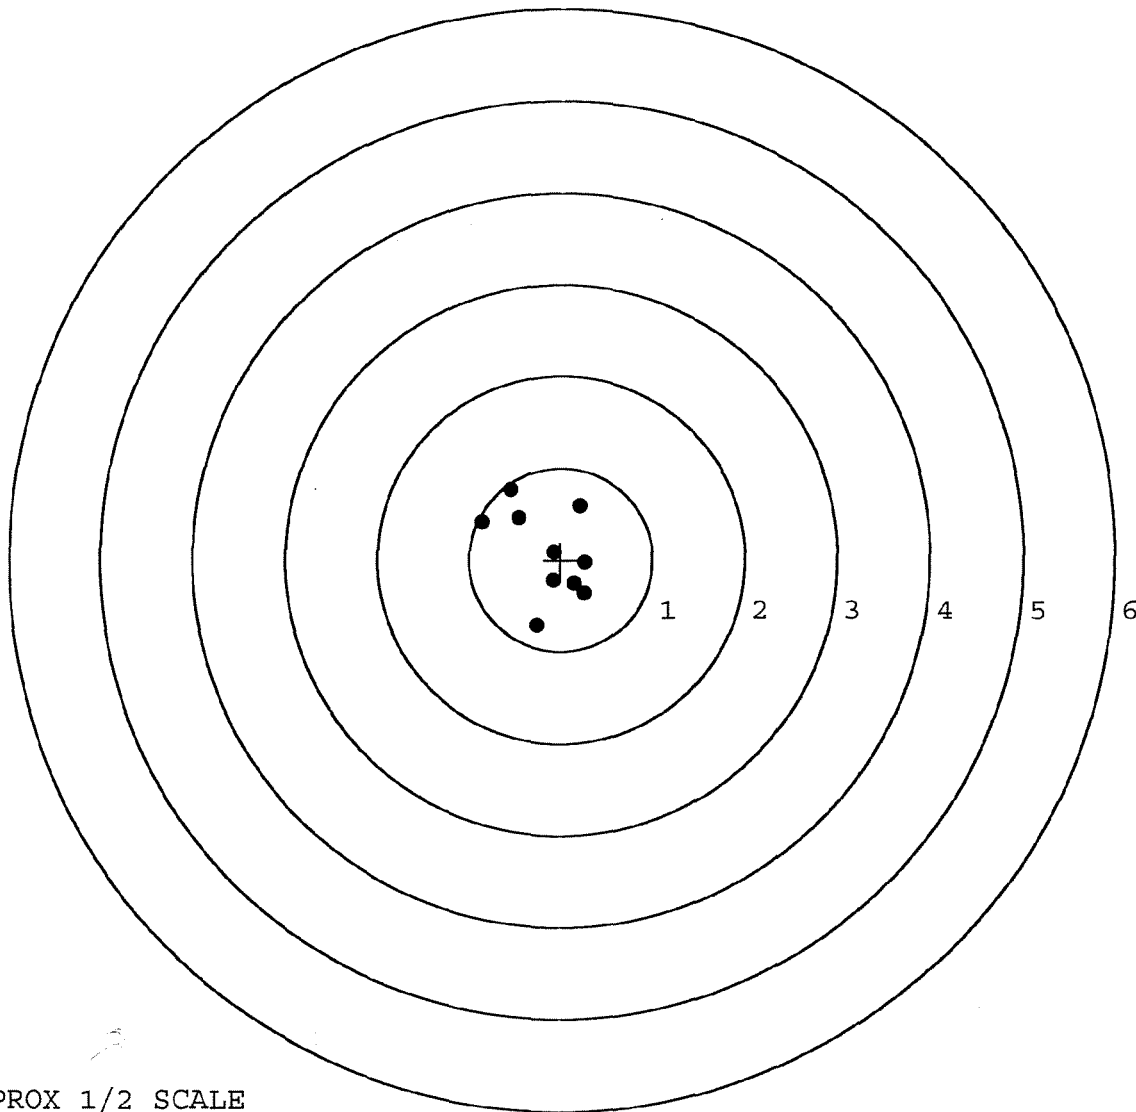

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6577126. \_\_0

TARGET NUMBER: 2

FILE DATE: 06/30/2006

FILE TIME: 05:05

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -0.219 | 0.720  |
| 2:     | -0.507 | -0.044 |
| 3:     | -0.571 | -0.301 |
| 4:     | -0.406 | -0.228 |
| 5:     | -0.111 | -0.281 |
| 6:     | 0.146  | -0.034 |
| 7:     | 0.220  | -0.253 |
| 8:     | 0.468  | 0.067  |
| 9:     | 0.500  | -0.094 |
| 10:    | -0.476 | -0.203 |

X CENTROID: -0.096

Y CENTROID: -0.065

POA TO CENTROID: 0.116

HORZ SPREAD: 1.071

VERT SPREAD: 1.021

GROUP SPREAD: 1.086

MIN RADIUS: 0.216


MAX RADIUS: 0.795

MEAN RADIUS: 0.450

# IN 1 IN DIAMETER: 6

# IN 2 IN DIAMETER: 10

# in 3 IN DIAMETER: 10

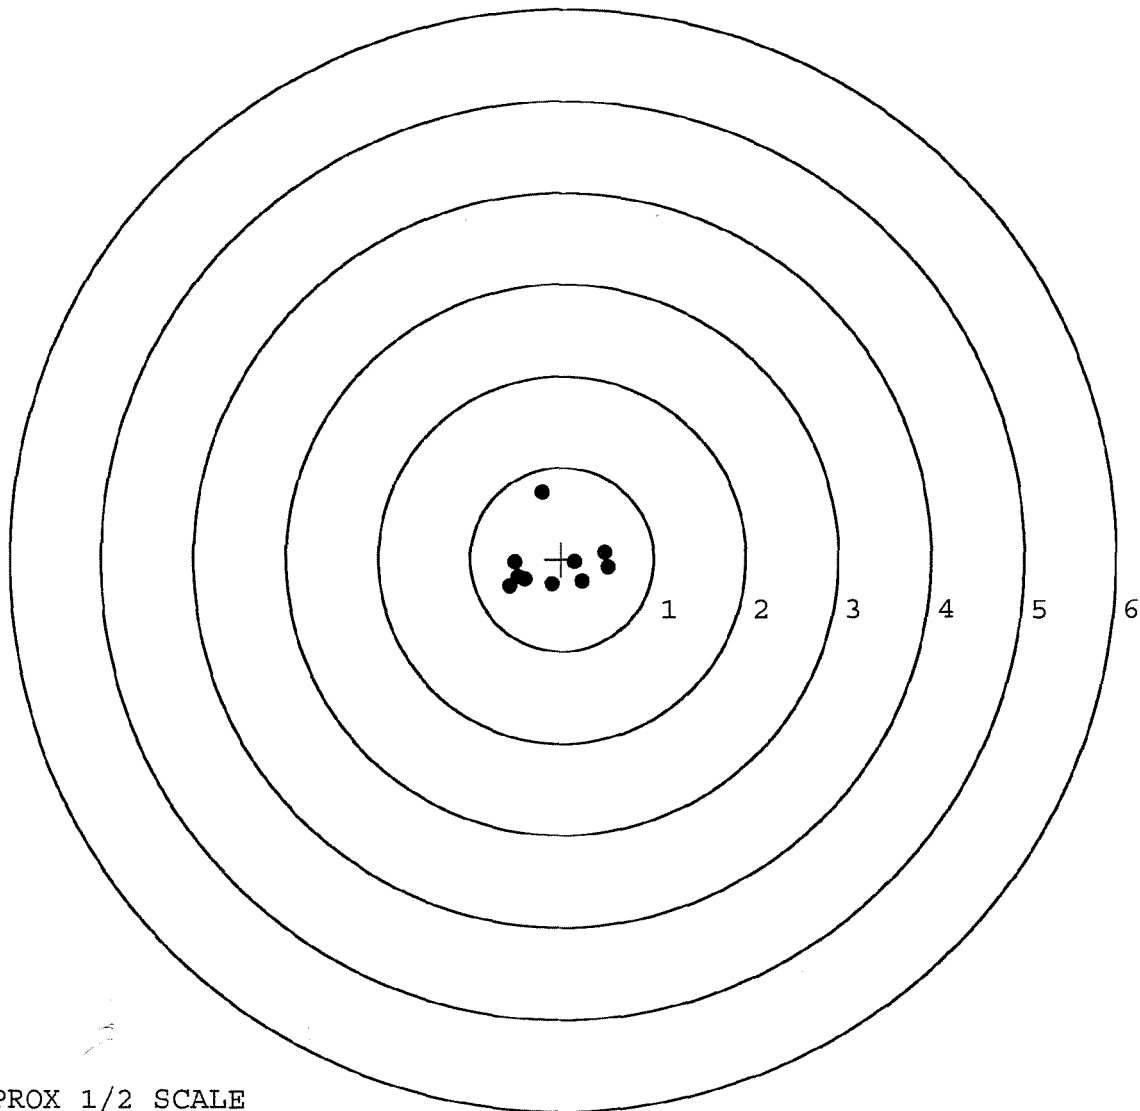


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6577126. 0  
TARGET NUMBER: 3  
FILE DATE: 06/30/2006  
FILE TIME: 05:05

X CENTROID: -0.144  
Y CENTROID: -0.084  
POA TO CENTROID: 0.167  
HORZ SPREAD: 2.336  
VERT SPREAD: 1.822  
GROUP SPREAD: 2.907  
MIN RADIUS: 0.158  
MAX RADIUS: 1.606  
MEAN RADIUS: 0.764  
# IN 1 IN DIAMETER: 5  
# IN 2 IN DIAMETER: 6  
# in 3 IN DIAMETER: 9

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.904  | -0.854 |
| 2:     | 0.866  | 0.311  |
| 3:     | -0.331 | 0.841  |
| 4:     | -1.432 | 0.876  |
| 5:     | -0.711 | -0.946 |
| 6:     | -0.244 | -0.470 |
| 7:     | -0.028 | -0.475 |
| 8:     | 0.012  | -0.059 |
| 9:     | -0.392 | 0.281  |
| 10:    | -0.086 | -0.341 |

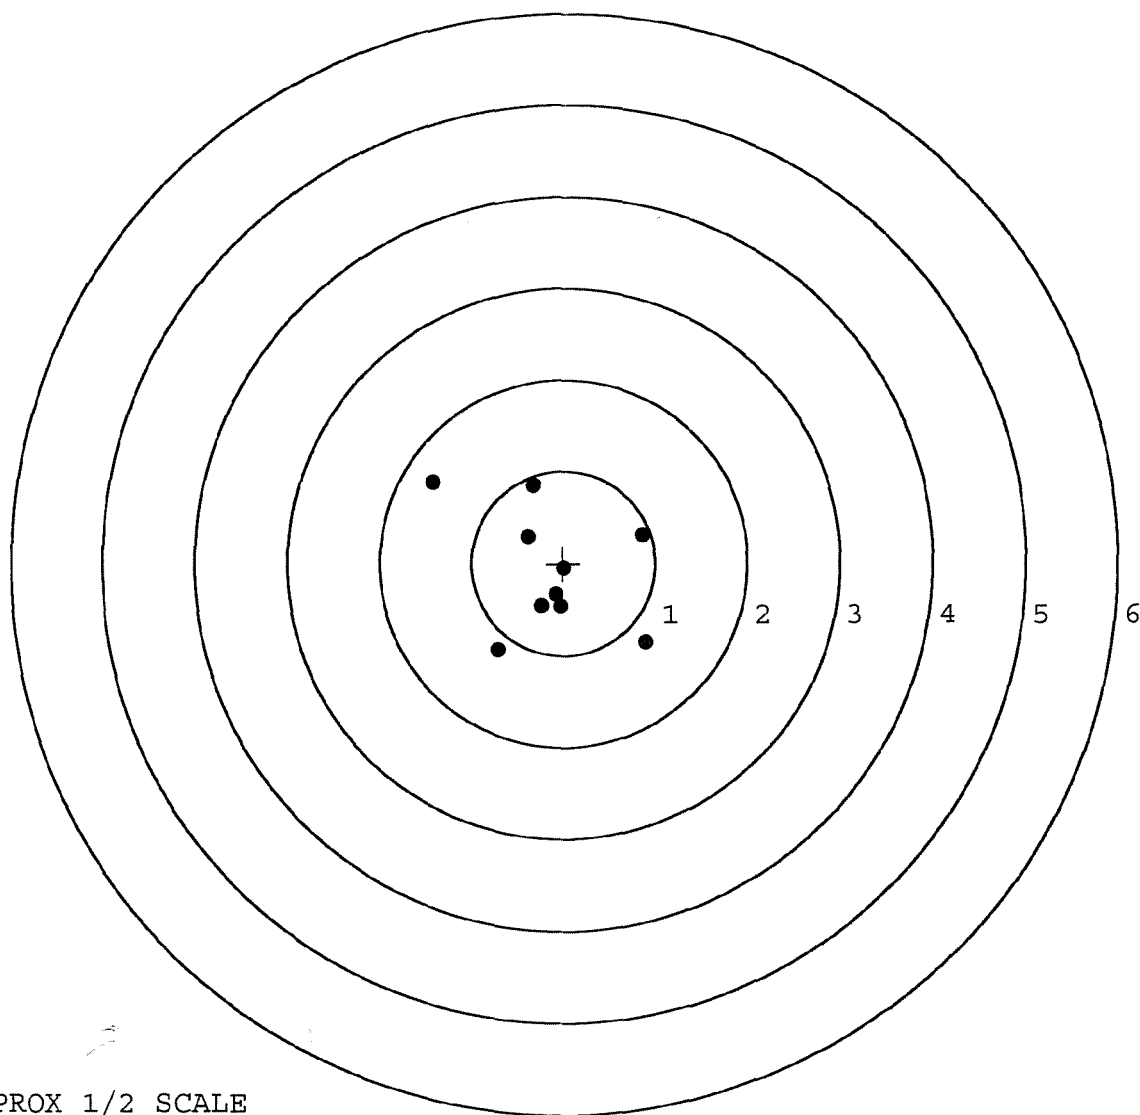


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6577126. 0  
TARGET NUMBER: 4  
FILE DATE: 06/30/2006  
FILE TIME: 05:05

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.978  | -0.578 |
| 2:     | 0.539  | 0.405  |
| 3:     | -0.760 | 0.765  |
| 4:     | -0.616 | -0.290 |
| 5:     | -0.291 | -0.563 |
| 6:     | 0.192  | -0.174 |
| 7:     | -0.164 | -0.125 |
| 8:     | -0.111 | 0.018  |
| 9:     | -0.275 | 0.116  |
| 10:    | -0.609 | 0.345  |

X CENTROID: -0.112  
Y CENTROID: -0.008  
POA TO CENTROID: 0.112  
HORZ SPREAD: 1.738  
VERT SPREAD: 1.343  
GROUP SPREAD: 2.196  
MIN RADIUS: 0.026  
MAX RADIUS: 1.230  
MEAN RADIUS: 0.549  
# IN 1 IN DIAMETER: 4  
# IN 2 IN DIAMETER: 8  
# in 3 IN DIAMETER: 10

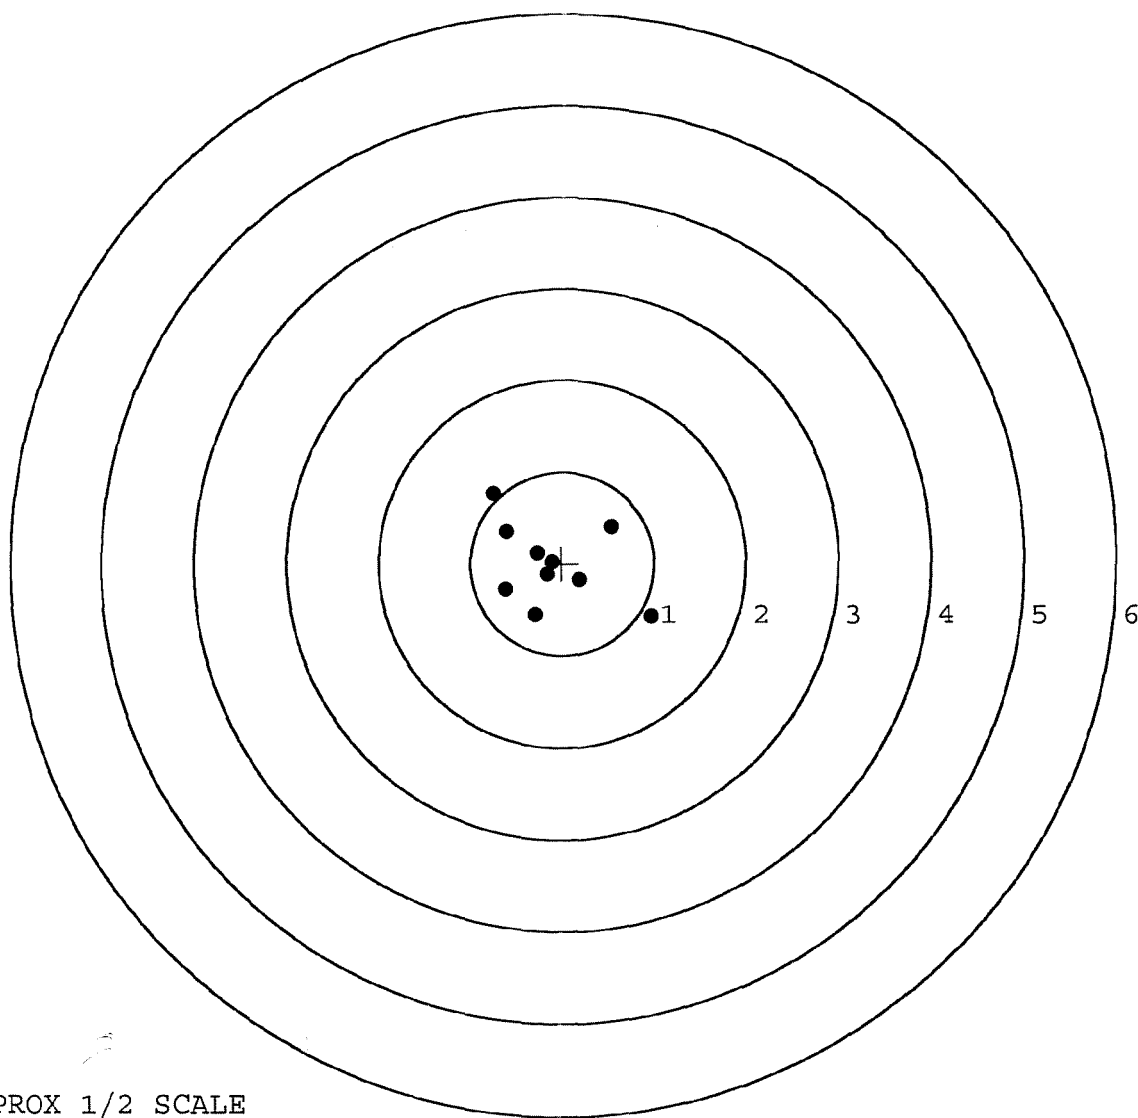


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6577126. 0  
TARGET NUMBER: 5  
FILE DATE: 06/30/2006  
FILE TIME: 05:05

X CENTROID: -0.276  
Y CENTROID: 0.174  
POA TO CENTROID: 0.326  
HORZ SPREAD: 1.527  
VERT SPREAD: 1.802  
GROUP SPREAD: 2.089  
MIN RADIUS: 0.200  
MAX RADIUS: 1.243  
MEAN RADIUS: 0.706  
# IN 1 IN DIAMETER: 3  
# IN 2 IN DIAMETER: 9  
# in 3 IN DIAMETER: 10

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.193  | -0.977 |
| 2:     | 0.439  | -0.439 |
| 3:     | 0.504  | 0.405  |
| 4:     | -0.008 | 0.386  |
| 5:     | -0.141 | 0.323  |
| 6:     | -0.301 | -0.232 |
| 7:     | -0.739 | -0.029 |
| 8:     | -1.023 | 0.721  |
| 9:     | -0.776 | 0.825  |
| 10:    | -0.905 | 0.762  |

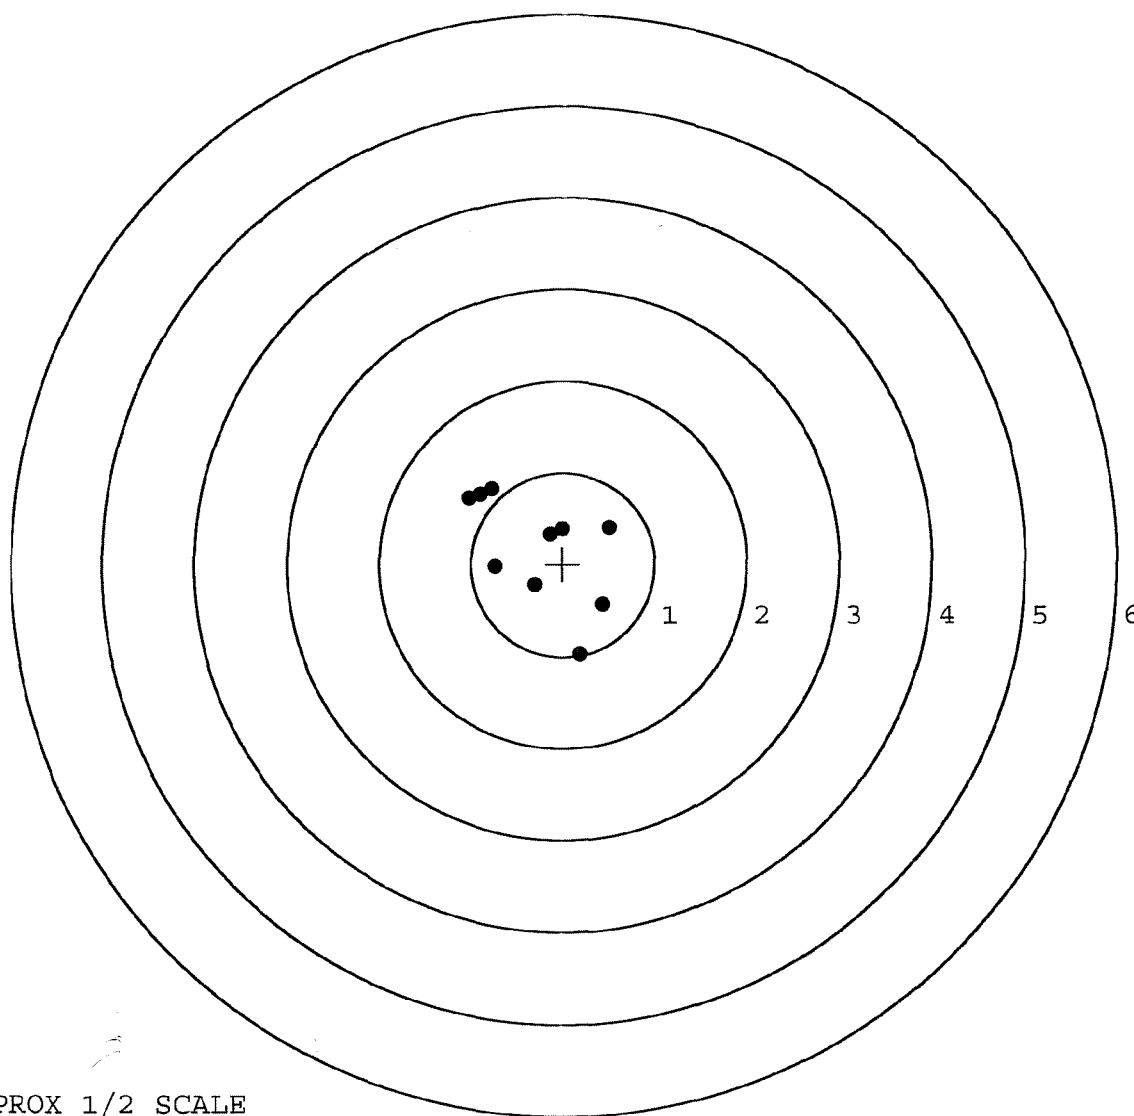

TARGET APPROX 1/2 SCALE



M-24  
INSPECTION CHECKLIST - REPAIRS  
CONTRACT #: DAAE-20-02-C-0149

| R & E NUMBER  | 112963                       |                                                                                                                                                  |                                              |
|---------------|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------|
| SERIAL NUMBER | E6413551      G6577126 (New) |                                                                                                                                                  |                                              |
| LOG-IN DATE   |                              |                                                                                                                                                  |                                              |
| OPERATION #   | OPERATION NAME               | DATE                                                                                                                                             | INITIAL                                      |
| 500           | DIS-ASSEMBLE GUN             | 6-15-06                                                                                                                                          | RTZ                                          |
| 505           | RE-BARREL                    | 6-20-06                                                                                                                                          | RTZ                                          |
| 420           | ASSEMBLE                     | 6-20-06                                                                                                                                          | RTZ                                          |
| 440           | PROOF                        | MAGNA-FLUX<br>INSPECTED<br>JUN 20 2006<br>6-20-06                                                                                                | TRW                                          |
| 460           | CHECK HEADSPACE              | 6-20-06                                                                                                                                          | TRW                                          |
| 470           | DIS-ASSEMBLE GUN             | 6-21-06                                                                                                                                          | RTZ                                          |
| 480           | MAGNAFLUX                    | OPERATOR <i>unnf</i> 6/23/06                                                                                                                     | <i>unnf</i>                                  |
| 510           | DRILL AND TAP                | 6-22-06                                                                                                                                          | TRW                                          |
| 500           | ROLLMARK CALIBER             | 6-22-06                                                                                                                                          | CW                                           |
| 520           | GOFF BLAST BBL / REC         | 6-23-06                                                                                                                                          | LB                                           |
| 530 & 540     | APPLY COATINGS               | 6/28/06                                                                                                                                          | TRW                                          |
| 560           | FINAL ASSEMBLY               |                                                                                                                                                  |                                              |
| 640           | FUNCTION TEST AND            | (PASS) FAIL                                                                                                                                      | 6-30-06 TRW                                  |
| 650           | TARGET                       | (PASS) FAIL                                                                                                                                      | 6-30-06 TRW                                  |
|               | MALFUNCTION                  | CORRECTION                                                                                                                                       |                                              |
|               | MALFUNCTION                  | CORRECTION                                                                                                                                       |                                              |
|               | MALFUNCTION                  | CORRECTION                                                                                                                                       |                                              |
|               | MALFUNCTION                  | CORRECTION                                                                                                                                       | 6-30-06 R.P.                                 |
| 670           | FINAL INSPECTION             |                                                                                                                                                  | 7-5-06 <i>nmh</i>                            |
|               | A) HEADSPACE                 | (PASS) FAIL                                                                                                                                      | 7-5-06 <i>nmh</i>                            |
|               | B) TRIGGER PULL              | <div style="border: 1px solid black; padding: 2px; display: inline-block;">           +/- .5 LBS<br/>MIN 2.50 LBS<br/>MAX 4.0 LBS         </div> | N/A                                          |
| 680           | F) SAFETY ON FORCE           | <div style="border: 1px solid black; padding: 2px; display: inline-block;">           2 LBS MIN<br/>10 LBS MAX         </div>                    | 6 lbs    6 lbs    6 lbs    7-5-06 <i>nmh</i> |
|               | G) SAFETY OFF FORCE          | <div style="border: 1px solid black; padding: 2px; display: inline-block;">           2 LBS<br/>MIN         </div>                               | 4 lbs    4 lbs    4 lbs    7-5-06 <i>nmh</i> |
|               | I) FIRING PIN INDENT         | .020                                                                                                                                             | .021    .021    .022    7-5-06 <i>nmh</i>    |
| 690           | PACK                         |                                                                                                                                                  | 8-7-05 <i>BA</i>                             |

F006 REV 5/2006