

G 6577232  
Replaced  
E 671 3408

Repair Inquiry

Repair Number: RE00113230

Serial: E6703408 Model M24 SWS Center Fire  
Caliber: 7.62 NATO Produced: 08/21/2001

Repairman:

Status: Closed 6/5/2006 1:20:09 PM

Verify Repair

Address Information

Customer:

Received From

Return To:

Received From

Name: NATIONAL GUARD MARKSMANSHIP TNG UNIT

NATIONAL GUARD MARKSMANSHIP TNG UNIT

Address 1: BLDG 4900 CAMP J T ROBINSON

BLDG 4900 CAMP J T ROBINSON

Address 2: ATTN TSGT SEAN WALLACE

PO Box:

ATTN TSGT SEAN WALLACE

PO Box:

City: NORTH LITTLE ROCK

NORTH LITTLE ROCK

State: AR

Zip Code: 72199

Country: US

State: AR

Zip Code: 72199

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NA

Fax:

Email:

Comments:

Received Condition

Fair

Condition Notes:

CSR Notes:

Accessories Received

| Code | Desc                  | Qty |
|------|-----------------------|-----|
| A007 | With Stud             | 3   |
| A017 | Scope Base            | 1   |
| A057 | Fit and Rear Sgt Base | 1   |

Repair Search

Refresh

Close

nagleij

6/6/2006

7:54 AM

CAPS

NUM

INS

SCRL



Arms Services Repair ...

Part Search by Materi...

2 Microsoft Office O...



7:54 AM

66577232

Serial Number: **E6703408**

Model: M24 SWS



RE00113230

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6577232.\_\_\_0

FILE DATE AND TIME: 07/12/2006 17:39


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

|                                                             |        |
|-------------------------------------------------------------|--------|
| The Average X Centroid of the Five Target Set:              | -0.117 |
| The Average Y Centroid of the Five Target Set:              | 0.030  |
| The Average Point of Impact of the Five Target Set:         | 0.121  |
| The Average Mean Radius of the Five Target Set:             | 0.751  |
| The Distance from POA to Centroid Target #1:                | 0.223  |
| The Distance from Centroid Target #2 to Centroid Target #1: | 0.729  |
| The Distance from Centroid Target #3 to Centroid Target #1: | 0.326  |
| The Distance from Centroid Target #4 to Centroid Target #1: | 0.414  |
| The Distance from Centroid Target #5 to Centroid Target #1: | 0.135  |

SERIAL NUMBER: G6577232. 0  
TARGET NUMBER: 1  
FILE DATE: 07/12/2006  
FILE TIME: 17:39

X CENTROID: 0.114  
Y CENTROID: 0.191  
POA TO CENTROID: 0.223  
HORZ SPREAD: 1.840  
VERT SPREAD: 2.225  
GROUP SPREAD: 2.294  
MIN RADIUS: 0.282  
MAX RADIUS: 1.361  
MEAN RADIUS: 0.842  
# IN 1 IN DIAMETER: 2  
# IN 2 IN DIAMETER: 7  
# in 3 IN DIAMETER: 10

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 1.050  | 1.147  |
| 2:     | -0.564 | 0.895  |
| 3:     | -0.159 | 0.432  |
| 4:     | 0.379  | 0.288  |
| 5:     | 0.668  | -0.172 |
| 6:     | -0.790 | 0.161  |
| 7:     | 0.120  | -0.865 |
| 8:     | 0.606  | -1.078 |
| 9:     | -0.714 | 0.517  |
| 10:    | 0.547  | 0.590  |

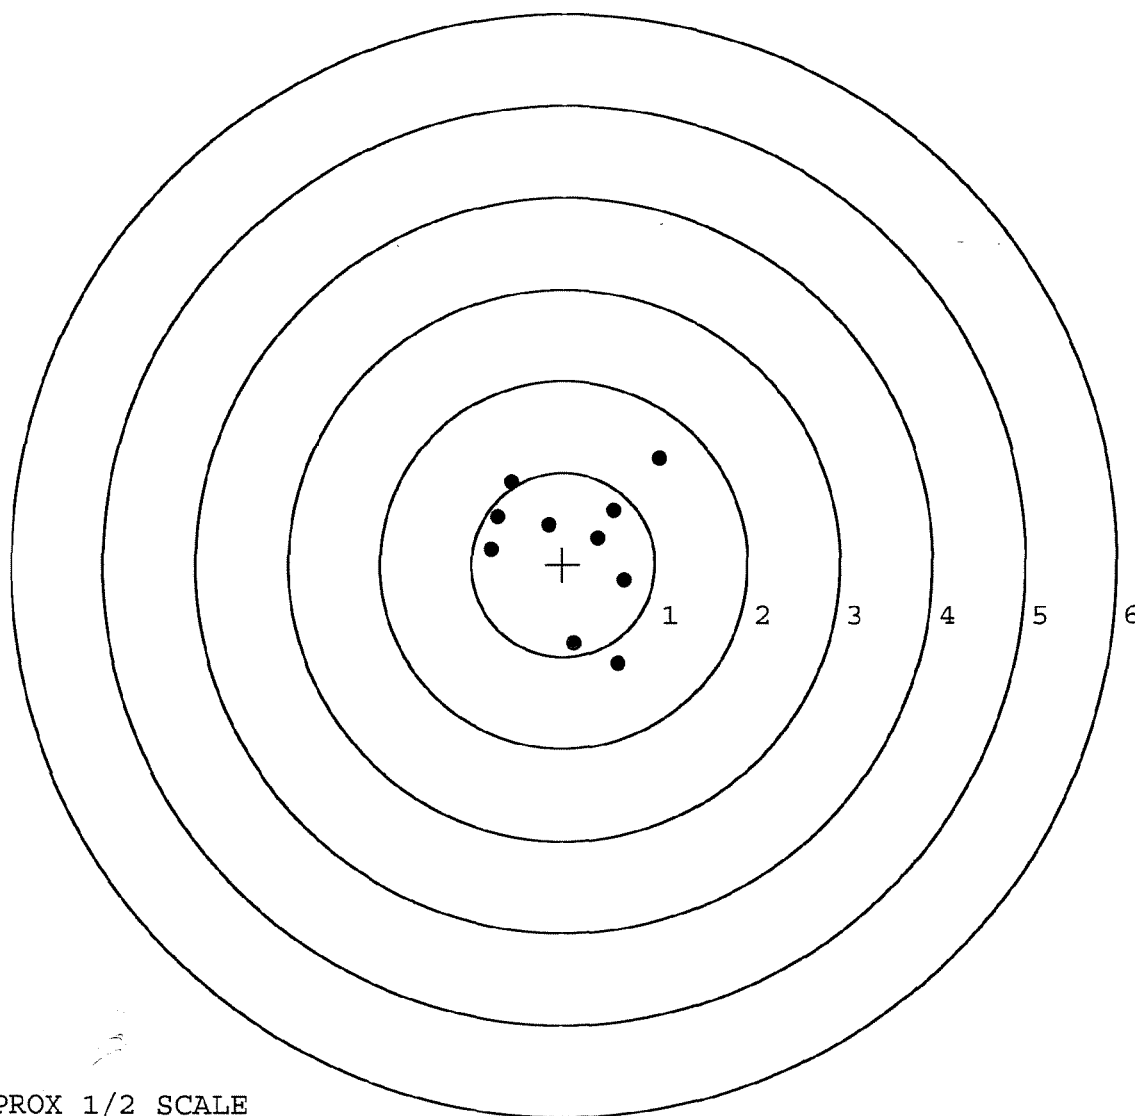

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6577232. 0

TARGET NUMBER: 2

FILE DATE: 07/12/2006

FILE TIME: 17:39

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -0.615 | -0.823 |
| 2:     | -0.230 | -0.115 |
| 3:     | -1.498 | -0.336 |
| 4:     | -1.148 | 0.633  |
| 5:     | -0.427 | 0.534  |
| 6:     | -0.339 | 0.405  |
| 7:     | -0.054 | 0.312  |
| 8:     | -1.039 | 0.063  |
| 9:     | 0.114  | -0.084 |
| 10:    | -0.680 | -0.475 |

X CENTROID: -0.592

Y CENTROID: 0.011

POA TO CENTROID: 0.592

HORZ SPREAD: 1.612

VERT SPREAD: 1.456

GROUP SPREAD: 1.632

MIN RADIUS: 0.383


MAX RADIUS: 0.971

MEAN RADIUS: 0.631

# IN 1 IN DIAMETER: 4

# IN 2 IN DIAMETER: 10

# in 3 IN DIAMETER: 10

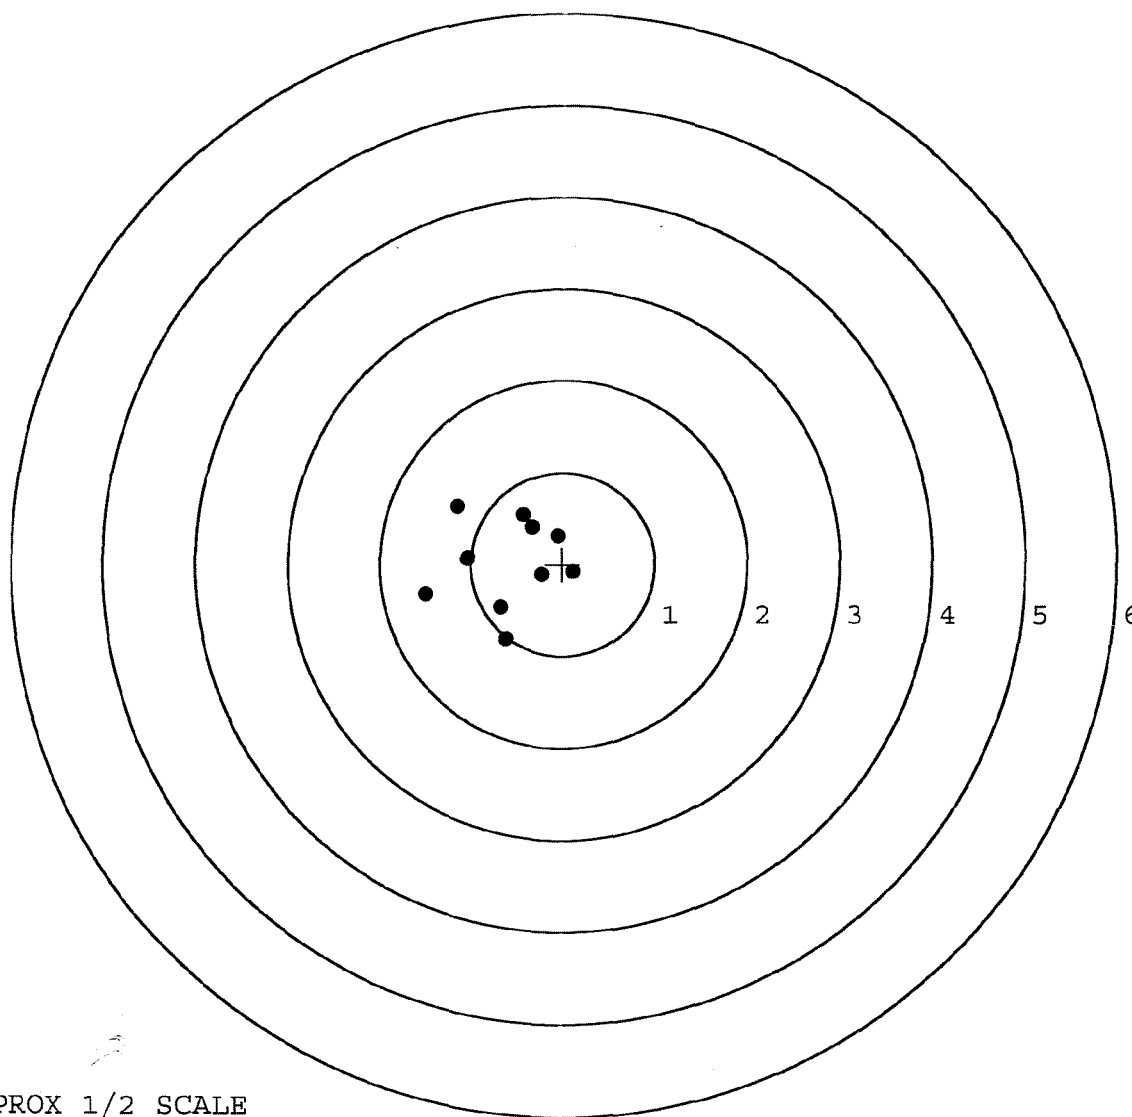


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6577232.\_0  
TARGET NUMBER: 3  
FILE DATE: 07/12/2006  
FILE TIME: 17:39

X CENTROID: -0.075  
Y CENTROID: -0.073  
POA TO CENTROID: 0.105  
HORZ SPREAD: 2.163  
VERT SPREAD: 2.403  
GROUP SPREAD: 2.701  
MIN RADIUS: 0.495  
MAX RADIUS: 1.464  
MEAN RADIUS: 0.956  
# IN 1 IN DIAMETER: 1  
# IN 2 IN DIAMETER: 6  
# in 3 IN DIAMETER: 10

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -0.444 | -1.256 |
| 2:     | -0.492 | -0.943 |
| 3:     | -0.593 | -0.519 |
| 4:     | -0.912 | 0.317  |
| 5:     | -0.884 | 1.147  |
| 6:     | -0.011 | 0.946  |
| 7:     | 0.593  | 0.415  |
| 8:     | 0.449  | 0.072  |
| 9:     | 1.251  | -0.507 |
| 10:    | 0.293  | -0.405 |

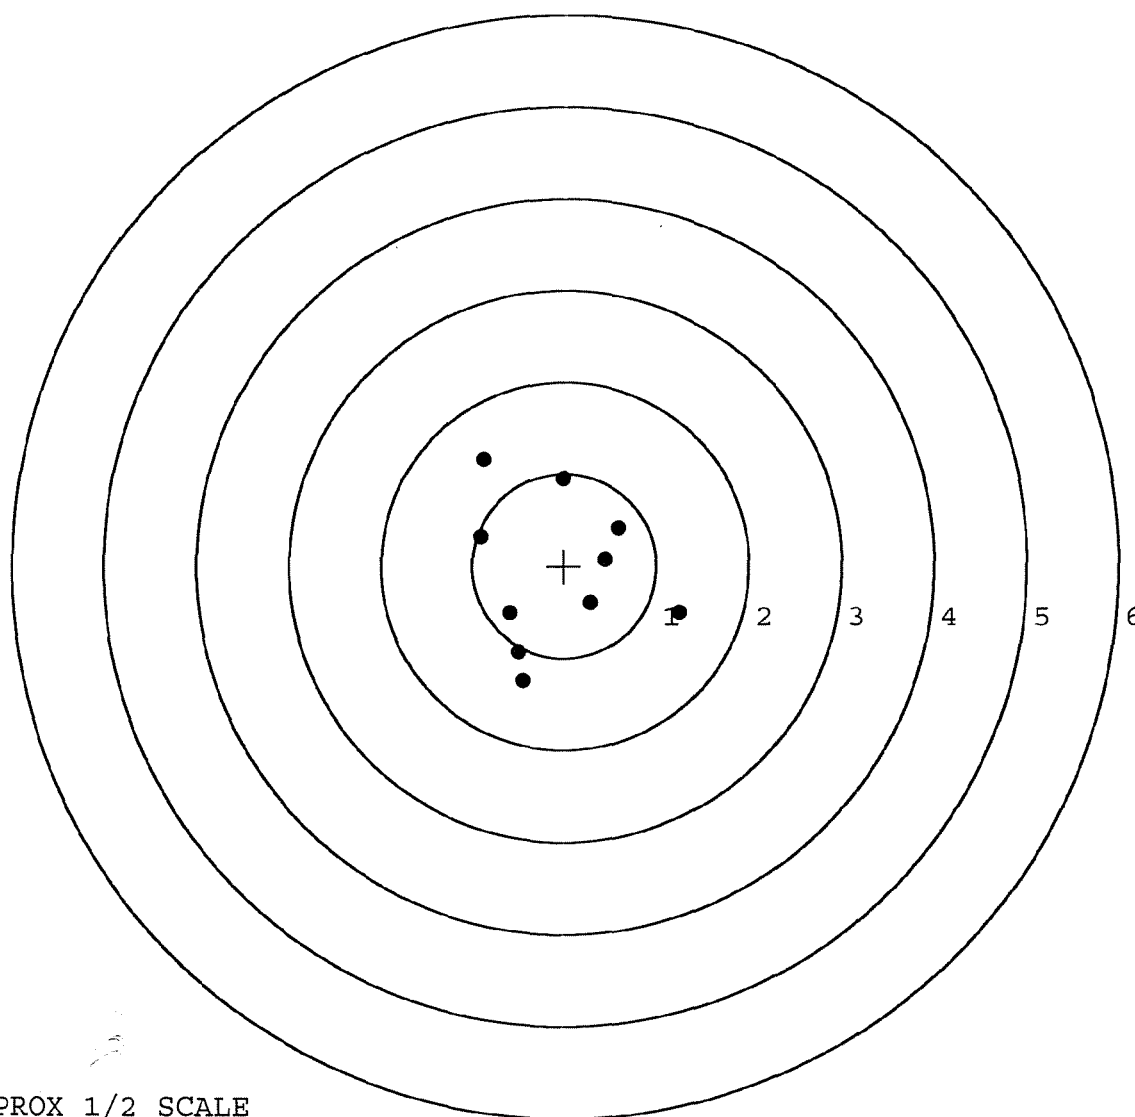


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6577232.\_0  
TARGET NUMBER: 4  
FILE DATE: 07/12/2006  
FILE TIME: 17:39

X CENTROID: -0.015  
Y CENTROID: -0.202  
POA TO CENTROID: 0.202  
HORZ SPREAD: 1.308  
VERT SPREAD: 1.616  
GROUP SPREAD: 1.737  
MIN RADIUS: 0.144  
MAX RADIUS: 0.917  
MEAN RADIUS: 0.591  
# IN 1 IN DIAMETER: 3  
# IN 2 IN DIAMETER: 10  
# in 3 IN DIAMETER: 10

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.367  | -0.949 |
| 2:     | 0.508  | -0.491 |
| 3:     | 0.505  | -0.327 |
| 4:     | 0.128  | -0.184 |
| 5:     | -0.271 | -0.307 |
| 6:     | -0.343 | -0.954 |
| 7:     | -0.800 | 0.271  |
| 8:     | -0.280 | 0.302  |
| 9:     | 0.293  | 0.662  |
| 10:    | -0.255 | -0.040 |

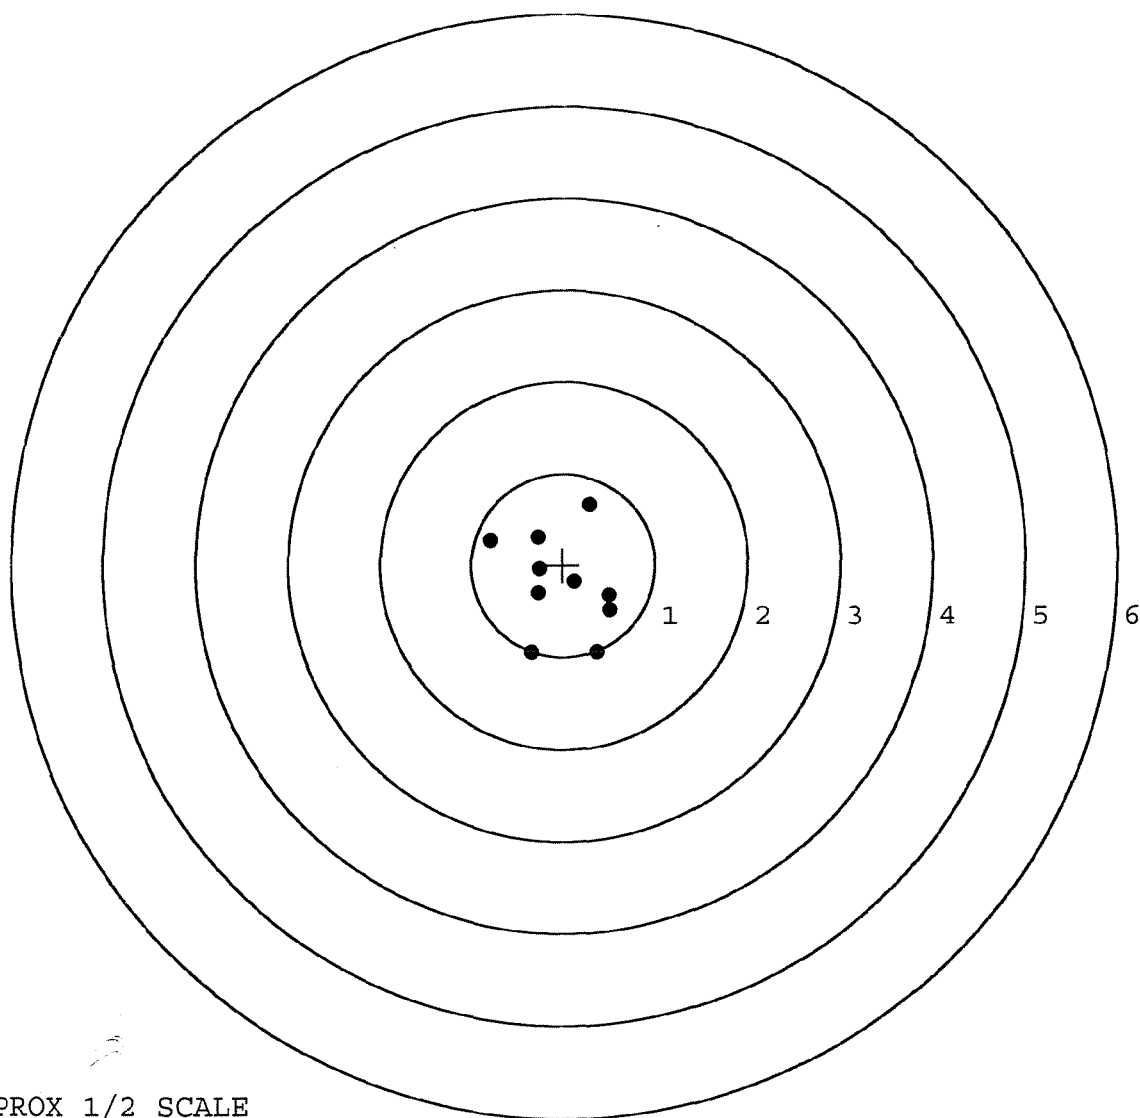

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6577232. 0

TARGET NUMBER: 5

FILE DATE: 07/12/2006

FILE TIME: 17:39

| POINT# | X | Y |
|--------|---|---|
|--------|---|---|

|    |        |       |
|----|--------|-------|
| 1: | -0.012 | 0.849 |
|----|--------|-------|

|    |       |       |
|----|-------|-------|
| 2: | 0.224 | 0.618 |
|----|-------|-------|

|    |       |       |
|----|-------|-------|
| 3: | 0.411 | 1.104 |
|----|-------|-------|

|    |       |       |
|----|-------|-------|
| 4: | 0.982 | 0.630 |
|----|-------|-------|

|    |       |        |
|----|-------|--------|
| 5: | 0.167 | -0.190 |
|----|-------|--------|

|    |        |        |
|----|--------|--------|
| 6: | -0.368 | -0.103 |
|----|--------|--------|

|    |        |        |
|----|--------|--------|
| 7: | -0.754 | -0.969 |
|----|--------|--------|

|    |        |        |
|----|--------|--------|
| 8: | -0.697 | -0.426 |
|----|--------|--------|

|    |        |       |
|----|--------|-------|
| 9: | -0.488 | 0.546 |
|----|--------|-------|

|     |       |       |
|-----|-------|-------|
| 10: | 0.367 | 0.185 |
|-----|-------|-------|

X CENTROID: -0.017

Y CENTROID: 0.224

POA TO CENTROID: 0.225

HORZ SPREAD: 1.736

VERT SPREAD: 2.073

GROUP SPREAD: 2.378

MIN RADIUS: 0.386


MAX RADIUS: 1.403

MEAN RADIUS: 0.738

# IN 1 IN DIAMETER: 4

# IN 2 IN DIAMETER: 8

# in 3 IN DIAMETER: 10

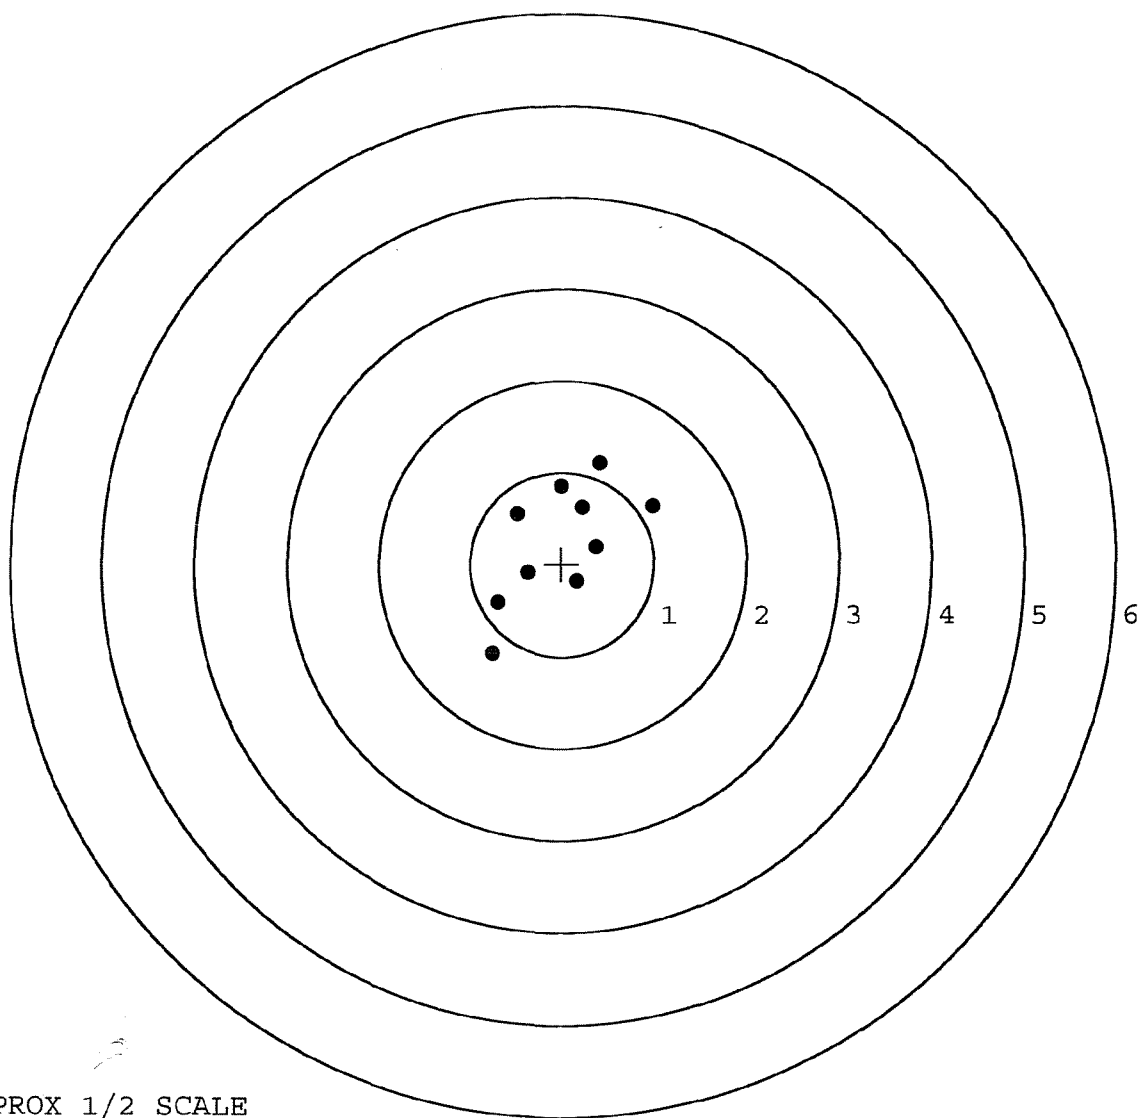

TARGET APPROX 1/2 SCALE



**M-24 INSPECTION CHECKLIST**  
**CONTRACT #: DAAE-20-02-C-0149**

|               |                      |                                                                                                                                                                        |          |               |
|---------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------------|
| R & E NUMBER  | 113230               |                                                                                                                                                                        |          |               |
| SERIAL NUMBER | <del>66703468</del>  |                                                                                                                                                                        | 66577232 |               |
| LOG-IN DATE   | 6-5-06               |                                                                                                                                                                        |          |               |
| OPERATION #   | OPERATION NAME       |                                                                                                                                                                        | DATE     | INITIAL       |
| 500           | DIS-ASSEMBLE GUN     |                                                                                                                                                                        | 7-5-06   | RJR           |
| 505           | RE-BARREL            |                                                                                                                                                                        | 7-5-06   | BLC           |
| 560           | ASSEMBLE             |                                                                                                                                                                        | 7-5-06   | BLC           |
| 600           | PROOF                | MAGNA-FLUX INSPECTED                                                                                                                                                   | 7-5-06   | MTM           |
| 605           | CHECK HEADSPACE      |                                                                                                                                                                        | 7-5-06   | MTM           |
| 610           | DIS-ASSEMBLE GUN     | JUL 06 2006                                                                                                                                                            | 7-6-06   | BLC           |
| 612           | MAGNAFLUX            | OPERATOR <i>unns</i>                                                                                                                                                   | 7/6/06   | <i>unns</i>   |
| 510           | DRILL AND TAP        |                                                                                                                                                                        | 7-6-06   | TRW           |
| 615           | ROLLMARK CALIBER     |                                                                                                                                                                        | 7-7-06   | CW            |
| 618           | ROTO-BLAST           |                                                                                                                                                                        | 7-7-06   | LB            |
| 620           | APPLY COATINGS       |                                                                                                                                                                        | 7/7      | HP            |
| 625           | FINAL ASSEMBLY       |                                                                                                                                                                        | 7-11-06  | RTZ           |
| 640           | FUNCTION TEST AND    | (PASS) FAIL                                                                                                                                                            | 7-12-06  | <i>L.P.D.</i> |
| 650           | TARGET               | (PASS) FAIL                                                                                                                                                            | 7-12-06  | <i>L.P.D.</i> |
|               | MALFUNCTION          | CORRECTION                                                                                                                                                             |          |               |
|               | MALFUNCTION          | CORRECTION                                                                                                                                                             |          |               |
|               | MALFUNCTION          | CORRECTION                                                                                                                                                             |          |               |
|               | MALFUNCTION          | CORRECTION                                                                                                                                                             |          |               |
| 670           | FINAL INSPECTION     |                                                                                                                                                                        | 7-13-06  | <i>mjm</i>    |
|               | A) HEADSPACE         | (PASS) FAIL                                                                                                                                                            | 7-13-06  | <i>mjm</i>    |
|               | B) TRIGGER PULL      | <div style="border: 1px solid black; padding: 2px; display: inline-block;">           +/- .5 LBS<br/>           MIN 2.50 LBS<br/>           MAX 4.0 LBS         </div> | 7-13-06  | RA            |
|               |                      | 2.45 2.36 2.42 2.44 2.4                                                                                                                                                |          |               |
| 680           | F) SAFETY ON FORCE   | <div style="border: 1px solid black; padding: 2px; display: inline-block;">           2 LBS MIN<br/>           10 LBS MAX         </div>                               | 7-13-06  | RA            |
|               |                      | 50 50 50                                                                                                                                                               |          |               |
|               | G) SAFETY OFF FORCE  | <div style="border: 1px solid black; padding: 2px; display: inline-block;">           2 LBS<br/>           MIN         </div>                                          | 7-13-06  | RA            |
|               |                      | 2.9 2.9 2.9                                                                                                                                                            |          |               |
|               | I) FIRING PIN INDENT | <div style="border: 1px solid black; padding: 2px; display: inline-block;">           .020         </div>                                                              | 7-13-06  | RA            |
|               |                      | .021 .021 .021                                                                                                                                                         |          |               |
| 690           | PACK                 |                                                                                                                                                                        | 8-1-06   | RA            |

VERY IMPORTANT: Instruction Book enclosed to assure safe use of this firearm.

**Remington®**

**MODEL 700™ M24**  
BOLT ACTION CENTERFIRE RIFLE  
24" BARREL 7.62 NATO

Made in Union, NY Reg. U.S. Pat. & Tar. Off. Marca Registrada. Marque Deposee.

SERIAL NO. **E6703408**

ORDER NO. **25716**

**46**

**21WV**

**5716 E6703408**

**ORDER 25716**

MODEL 700™ M24

**UPC**



**ORDER 25716**

MODEL 700™ M24

**UPC**



SERIAL NO.




**MODEL 700, M24**  
**BOLT ACTION CENTERFIRE RIFLE**  
**24" BARREL 7.62 NATO**

DOCUMENT ENVELOPE ASSEMBLY:


- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- SAFETY BOOKLET

46 FORM 1444



|               |              |
|---------------|--------------|
| ORDER NO.     | <b>25716</b> |
| BARREL LENGTH | 24"          |
| CAPACITY      | 6            |

**E6703408**



CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER  
KINZER V. REMINGTON

M2400087223

GUN SERIAL # L6703408

| OP #         | OPERATION NAME                                                 | READINGS | DATE                          | INITIAL               |
|--------------|----------------------------------------------------------------|----------|-------------------------------|-----------------------|
| 575 &<br>580 | ASSEMBLE ACTION<br>AND STOCK                                   |          | 4/23/01                       | CK.                   |
| 600          | PROOF                                                          |          | 4/23/01                       | CK                    |
| 607          | CHECK HEADSPACE                                                |          | 4/23/01                       | CLC                   |
| 610          | DIS-ASSEMBLE GUN                                               |          | 4/23/01                       | CK                    |
| 612          | MAGNAFLUX BBL ACTION<br>MAGNAFLUX BOLT                         |          | 4/23/01                       | AC                    |
| 615          | ROLLMARK CALIBER                                               |          | 4/25/01                       | DA                    |
| 617          | DRILL AND TAP<br>SIGHT HOLES                                   |          | 4/27/01                       | DA                    |
| 618          | POLISH BARREL                                                  |          | 4/27/01                       | GD                    |
| 620          | APPLY COATINGS<br>(BARREL ACTION)                              |          | 4/27/01                       | TA                    |
|              | (BOLT)                                                         |          |                               |                       |
| 625          | FINAL ASSEMBLY<br>A) CLEAN INSIDE OF<br>BOLT ASSEMBLY          |          | 8/15/01<br><del>8/20/01</del> | B.L.<br><del>BL</del> |
|              | B) INSPECT REAR FIRING<br>PIN HOLE FOR CHAMFER<br>IN BOLT HEAD |          | 8/15/01                       | BL.                   |
|              | C) INSPECT EJECTOR<br>HOLE FOR CHAMFER                         |          | 8/15/01                       | BL.                   |
|              | D) OIL FIRING PIN ASSEMBLY                                     |          | 8/15/01                       | BL                    |
|              | E) ADJUST TRIGGER PULL<br>TO MIN. SETTING AND<br>STAKE         |          | 8/15/01                       | BL                    |

| OP #  | OPERATION NAME                                                        | READINGS                                                         | DATE    | INITIAL |
|-------|-----------------------------------------------------------------------|------------------------------------------------------------------|---------|---------|
| 625   | F) SAFETY ON FORCE                                                    | <u>7<sup>25</sup></u> <u>6<sup>0</sup></u> <u>6<sup>0</sup></u>  | 5/1/01  | RH      |
| CONT. |                                                                       |                                                                  |         |         |
|       | G) SAFETY OFF FORCE                                                   | <u>3<sup>25</sup></u> <u>3<sup>0</sup></u> <u>3<sup>25</sup></u> | 5/1/01  | RH      |
|       | H) TRIGGER PULL TEST<br>AND RETAINABILITY                             |                                                                  |         |         |
|       | I) FIRING PIN INDENT                                                  | <u>.024</u> <u>.022</u> <u>.023</u>                              | 5/1/01  | RH      |
|       | J) ASSEMBLE STOCK                                                     |                                                                  | 5/1/01  | R.L.    |
|       | K) ASSEMBLE SWIVEL<br>STUDS                                           |                                                                  | 8/15/01 | BL      |
|       | L) ATTACH FRONT AND<br>REAR SIGHT ASSY'S                              |                                                                  | 8/15/01 | BL      |
|       | M) IRON SIGHT<br>ALIGNMENT                                            |                                                                  | 8/15/01 | BL.     |
|       | N) DETACH FRONT AND<br>REAR SIGHTS AND PLACE<br>IN NUMBERED CONTAINER |                                                                  | 8/15/01 | BL      |
| 640   | GALLERY TEST AND<br>TARGET                                            |                                                                  | 4/24/01 | RH      |
|       | A) MALFUNCTIONS                                                       |                                                                  | 4/24/01 | RH      |
|       | B) PIERCED PRIMERS                                                    |                                                                  | 4/24/01 | RH      |
| 645   | INSPECT FOR LIVE AMMO                                                 |                                                                  | 4/24/01 | RH      |
| 655   | FINAL INSPECTION<br>A) HEADSPACE                                      |                                                                  | 8/12/01 | RH      |
|       | B) TRIGGER PULL                                                       | <u>227</u> <u>226</u> <u>237</u> <u>237</u> <u>229</u>           | 8/1/01  | RH      |
|       | C) FUNCTION                                                           |                                                                  | 5/1/01  | R.L.    |
| 660   | PACK                                                                  |                                                                  | 2/17/01 | RA      |

AVERAGE PULL FORCE BETWEEN  
INITIAL & CYCLE TESTS

2.50# + .50#  
3.00# + .75#  
4.00# + 1.00#

SERIAL NO. E6703408

DATE 3/31/01

TESTER SF

|         | 2.50#<br>INITIAL | 2.50# AFTER<br>50 CYCLES | FINAL TEST &<br>TO RESET 2.50# | COMMENTS                                                               |
|---------|------------------|--------------------------|--------------------------------|------------------------------------------------------------------------|
| PULL #1 | 2.44             | 2.15                     | 2.00                           | MIN. SETTING,<br>NO AVG. OF 5<br>READINGS ACCEPT-<br>ABLE LESS THAN 2# |
| PULL #2 | 2.41             | 2.28                     | 2.05                           |                                                                        |
| PULL #3 | 2.39             | 2.34                     | 2.10                           |                                                                        |
| PULL #4 | 2.38             | 2.35                     | 2.10                           |                                                                        |
| PULL #5 | 2.43             | 2.28                     | 2.14                           |                                                                        |
| TOTAL   | 12.05            | 11.4                     | 10.39                          |                                                                        |
| AVG.    | 2.41             | 2.28                     | 2.08                           |                                                                        |

|         | 3.00#<br>INITIAL | 3.00# AFTER<br>20 CYCLES | COMMENTS |
|---------|------------------|--------------------------|----------|
| PULL #1 | 3.54             | 3.36                     |          |
| PULL #2 | 3.56             | 3.42                     |          |
| PULL #3 | 3.59             | 3.36                     |          |
| PULL #4 | 3.44             | 3.33                     |          |
| PULL #5 | 3.50             | 3.35                     |          |
| TOTAL   | 17.63            | 16.82                    |          |
| AVG.    | 3.53             | 3.36                     |          |

|         | 4.00#<br>INITIAL | 4.00# AFTER<br>20 CYCLES | MAX SETTING<br>GREATER THAN 4# | RESET TO 4# FOR<br>TARGET & ACCURACY |
|---------|------------------|--------------------------|--------------------------------|--------------------------------------|
| PULL #1 | 4.25             | 4.10                     |                                | 4.05                                 |
| PULL #2 | 4.14             | 4.03                     |                                | 4.05                                 |
| PULL #3 | 4.24             | 3.99                     |                                | 4.01                                 |
| PULL #4 | 4.13             | 4.08                     |                                | 3.99                                 |
| PULL #5 | 4.41             | 4.06                     |                                | 4.03                                 |
| TOTAL   | 21.17            | 20.26                    |                                | 20.13                                |
| AVG.    | 4.23             | 4.05                     |                                | 4.03                                 |

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # e6703408  
24 Apr 2001

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.1636  
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.1194  
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .202537

THE AMR FOR THIS RIFLE IS: .918

### CENTROIDAL DISTANCES

|        |         |
|--------|---------|
| 0 TO 1 | .250018 |
| 1 TO 2 | .150416 |
| 1 TO 3 | .16421  |
| 1 TO 4 | .430019 |
| 1 TO 5 | .437824 |

$3 \frac{1}{2} + 4$  <----POA  
5

PATTERN #: ☐ 1 ☐

POA TO CENTROID: .250

MIN RADIUS : .226

MEAN RADIUS : 1.034

MAX RADIUS : 1.571


CENTROID X : -.250

CENTROID Y : .003

24 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/e6703400

# CENTERFIRE PATTERN # 1

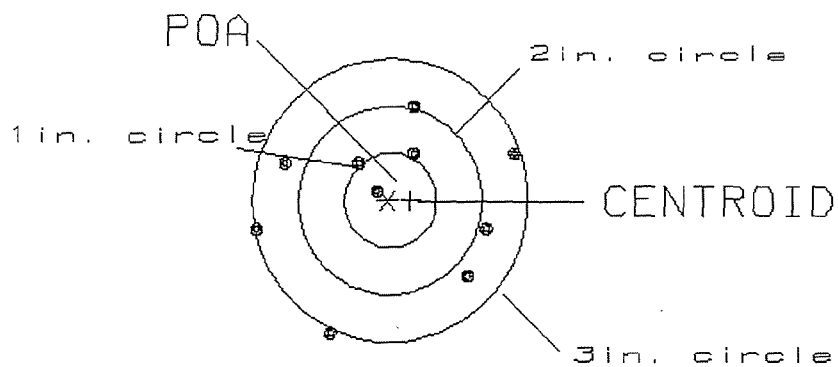

# OF SHOTS= 10

# IN CIRCLE

HS= 2.83

1

VS= 2.40

4

GS= 2.96

8




PATTERN #: 2

POA TO CENTROID: .212  
 MIN RADIUS : .403  
 MEAN RADIUS : 1.015  
 MAX RADIUS : 1.937  
 CENTROID X : -.171  
 CENTROID Y : -.125

24 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/e6703408

# CENTERFIRE PATTERN # 2

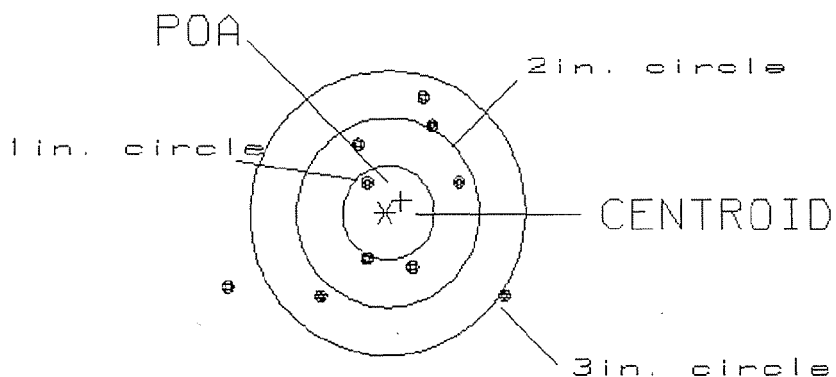

# OF SHOTS= 10

# IN CIRCLE

HS= 3.07

2

VS= 2.16

5

GS= 3.07

8


PATTERN #: 3

POA TO CENTROID: .407  
 MIN RADIUS : .152  
 MEAN RADIUS : .879  
 MAX RADIUS : 1.801  
 CENTROID X : -.404  
 CENTROID Y : -.054

24 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/e6703408

# CENTERFIRE PATTERN # 3

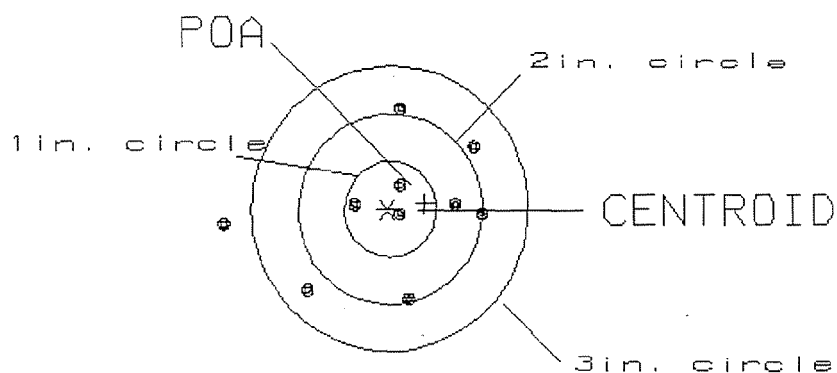

# OF SHOTS= 10

# IN CIRCLE

HS= 2.77

3

VS= 2.04

5

GS= 2.83


9

PATTERN #: 4  
 POA TO CENTROID: .180  
 MIN RADIUS : .212  
 MEAN RADIUS : .733  
 MAX RADIUS : 1.615  
 CENTROID X : .180  
 CENTROID Y : .007

24 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/e6703408

# CENTERFIRE PATTERN # 4

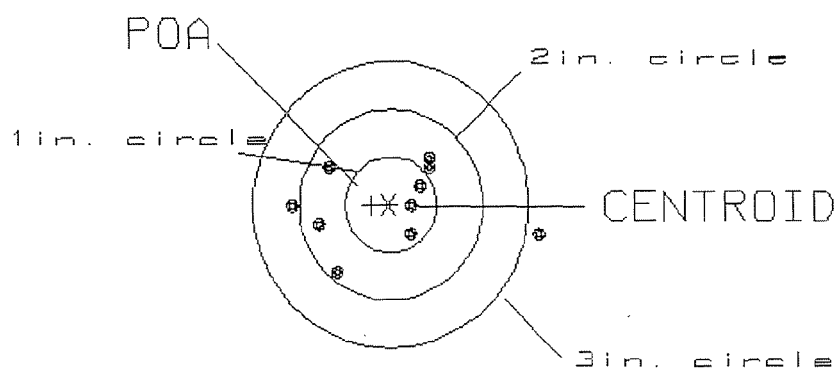

# OF SHOTS= 10

# IN CIRCLE

HS= 2.69

3

VS= 1.27

6

GS= 2.70


9

PATTERN #: ☐ 5 ☐  
 POA TO CENTROID: .462  
 MIN RADIUS : .289  
 MEAN RADIUS : .929  
 MAX RADIUS : 1.749  
 CENTROID X : -.173  
 CENTROID Y : -.428

24 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/e6703408

# CENTERFIRE PATTERN # 5

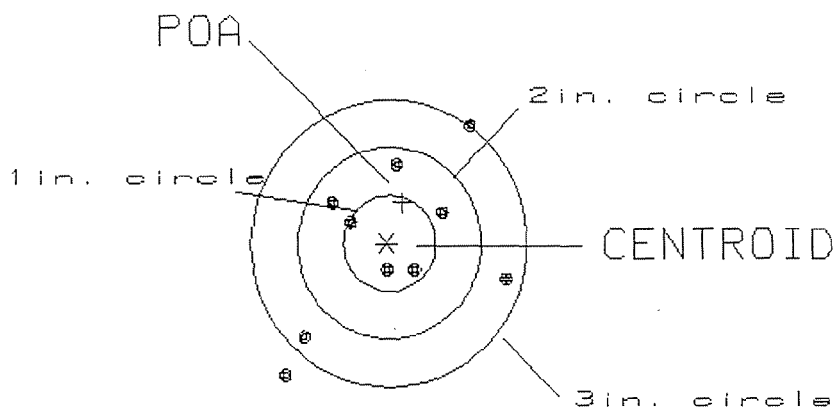

# OF SHOTS= 10

# IN CIRCLE

HS= 2.41

3

VS= 2.54

6

GS= 3.22

9