

G 652 1382
Replaced
E 6413452

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00111256**

Serial: G6521382 Model: M24 SWS Center Fire
Caliber: 7.62 NATO

Repairman:

Status:

Closed 4/19/2006 12:04:03 PM

Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: **TRANSPORTATION DIVISION DFEL**

TRANSPORTATION DIVISION DFEL

Address 1: **6759 MITCHELL AVENUE**

6759 MITCHELL AVENUE

Address 2: **BLDG 1836**

PO Box:

BLDG 1836

PO Box:

City: **FORT BENNING**

FORT BENNING

State: **GA**

Zip Code: **31905**

Country: **US**

State: **GA**

Zip Code: **31905**

Country: **US**

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: **NA**

Fax:

Email:

Comments:

Received Condition

Fair

Condition Notes:

CSR Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A010	Hard Case	1
A017	Scope Base	1
A026	Scope	1
A045	Bi Pod	1
B000	FRONT AND REAR E	2

Repair Search

Refresh

Close

nagletj

4/20/2006

7:31 AM

CAPS

NUM

INS

SCRL



Arms Services Repair ...



7:31 AM

Serial Number: **G6521382**

Model: **M24 SWS**



RE00111256

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-C-0149

R & E NUMBER	111254			
SERIAL NUMBER	G6521382			
LOG-IN DATE	4-19-06			
OPERATION #	OPERATION NAME		DATE	INITIAL
500	DIS-ASSEMBLE GUN			
505	RE-BARREL			
560	ASSEMBLE			
600	PROOF			
605	CHECK HEADSPACE		5-1-06	RTL
610	DIS-ASSEMBLE GUN			
612	MAGNAFLUX			
510	DRILL AND TAP			
615	ROLLMARK CALIBER			
618	ROTO-BLAST			
620	APPLY COATINGS			
625	FINAL ASSEMBLY			
640	FUNCTION TEST AND	PASS	FAIL	5-4-06 TRW
650	TARGET	PASS	FAIL	
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
670	FINAL INSPECTION			525-06 RFL
	A) HEADSPACE	PASS	FAIL	525-06 RTL
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS		2.48 2.62 2.74 2.76 2.77 RFL
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX		7.9 7.9 6.25 RTL
	G) SAFETY OFF FORCE	2 LBS MIN		3.0 3.2 3.9 RFL
	I) FIRING PIN INDENT	.020		623 622 623 RFL
690	PACK			525-06 RFL

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00104576** Serial: E6413452 Model M24 SWS Center Fire Caliber 7.62 NATO Repairman: Status: Closed 12/5/2005 10:55:57 AM

Verify Repair

Address Information

Customer: ☒ Received From Return To ☐ Received From

Name: **TRANSPORTATION DIV DFEL** **TRANSPORTATION DIV DFEL**

Address 1: **5759 MITCHELL AVENUE** **5759 MITCHELL AVENUE**

Address 2: **BLDG 1836** **BLDG 1836** PO Box: **PO Box**

City: **FORT BENNING** **FORT BENNING**

State: **GA** Zip Code: **31905** Country: **US** State: **GA** Zip Code: **31905** Country: **US**

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition **Problems** **Estimate** **History / Status** **Shipping / Billing**

Contact Information:

Phone: **NA**

Fax:

Email:

Comments:

Received Condition:

Condition: **Fair**

Condition Notes:

CSR Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A010	Hard Case	1
A015	Scope Rings	2
A017	Scope Base	1
A026	Scope	1
A057	Frt and Rear Sgt Base	1

Repair Search **Refresh** **Close**

start 2 2 3 2 2

66521382

Serial Number: **E6413452**

Model: **M24 SWS**



RE00104576

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50 LBS (plus or minus 0.50 LBS)
3.00 LBS (plus or minus 0.75 LBS)
4.00 LBS (plus or minus 1.00 LBS)

SERIAL NO. _____

DATE

10-11-05

TESTER

SE

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS	COMMENTS
PULL #1	2.57	2.47	2.55	
PULL #2	2.54	2.59	2.52	
PULL #3	2.60	2.59	2.57	
PULL #4	2.50	2.42	2.61	
PULL #5	2.63	2.64	2.65	
TOTAL	12.84	12.71	12.90	
AVERAGE	2.57	2.54	2.58	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES	COMMENTS
PULL #1	3.15	3.20	
PULL #2	3.13	3.27	
PULL #3	3.01	3.09	
PULL #4	3.16	3.13	
PULL #5	3.20	3.01	
TOTAL	15.65	15.70	
AVERAGE	3.13	3.14	

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.25	3.91		3.96
PULL #2	4.23	4.10		4.07
PULL #3	4.15	4.10		4.25
PULL #4	4.13	4.19		4.26
PULL #5	4.13	4.19		4.25
TOTAL	20.89	20.49		20.79
AVERAGE	4.18	4.10		4.16

[illegible]

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6521382.___0
FILE DATE AND TIME: 12/14/2005 13:01


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.001
The Average Y Centroid of the Five Target Set:	0.115
The Average Point of Impact of the Five Target Set:	0.116
The Average Mean Radius of the Five Target Set:	0.776
The Distance from POA to Centroid Target #1:	0.375
The Distance from Centroid Target #2 to Centroid Target #1:	0.234
The Distance from Centroid Target #3 to Centroid Target #1:	0.338
The Distance from Centroid Target #4 to Centroid Target #1:	0.502
The Distance from Centroid Target #5 to Centroid Target #1:	0.517

SERIAL NUMBER: G6521382. 0
TARGET NUMBER: 1
FILE DATE: 12/14/2005
FILE TIME: 13:01

X CENTROID: -0.295
Y CENTROID: 0.232
POA TO CENTROID: 0.375
HORZ SPREAD: 2.521
VERT SPREAD: 2.090
GROUP SPREAD: 2.993
MIN RADIUS: 0.060
MAX RADIUS: 1.690
MEAN RADIUS: 0.780
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 6
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	1.029	-0.818
2:	0.204	-0.749
3:	0.361	0.407
4:	-0.101	0.621
5:	-0.011	0.234
6:	-0.315	0.289
7:	-0.587	0.167
8:	-0.922	0.605
9:	-1.492	0.294
10:	-1.114	1.272

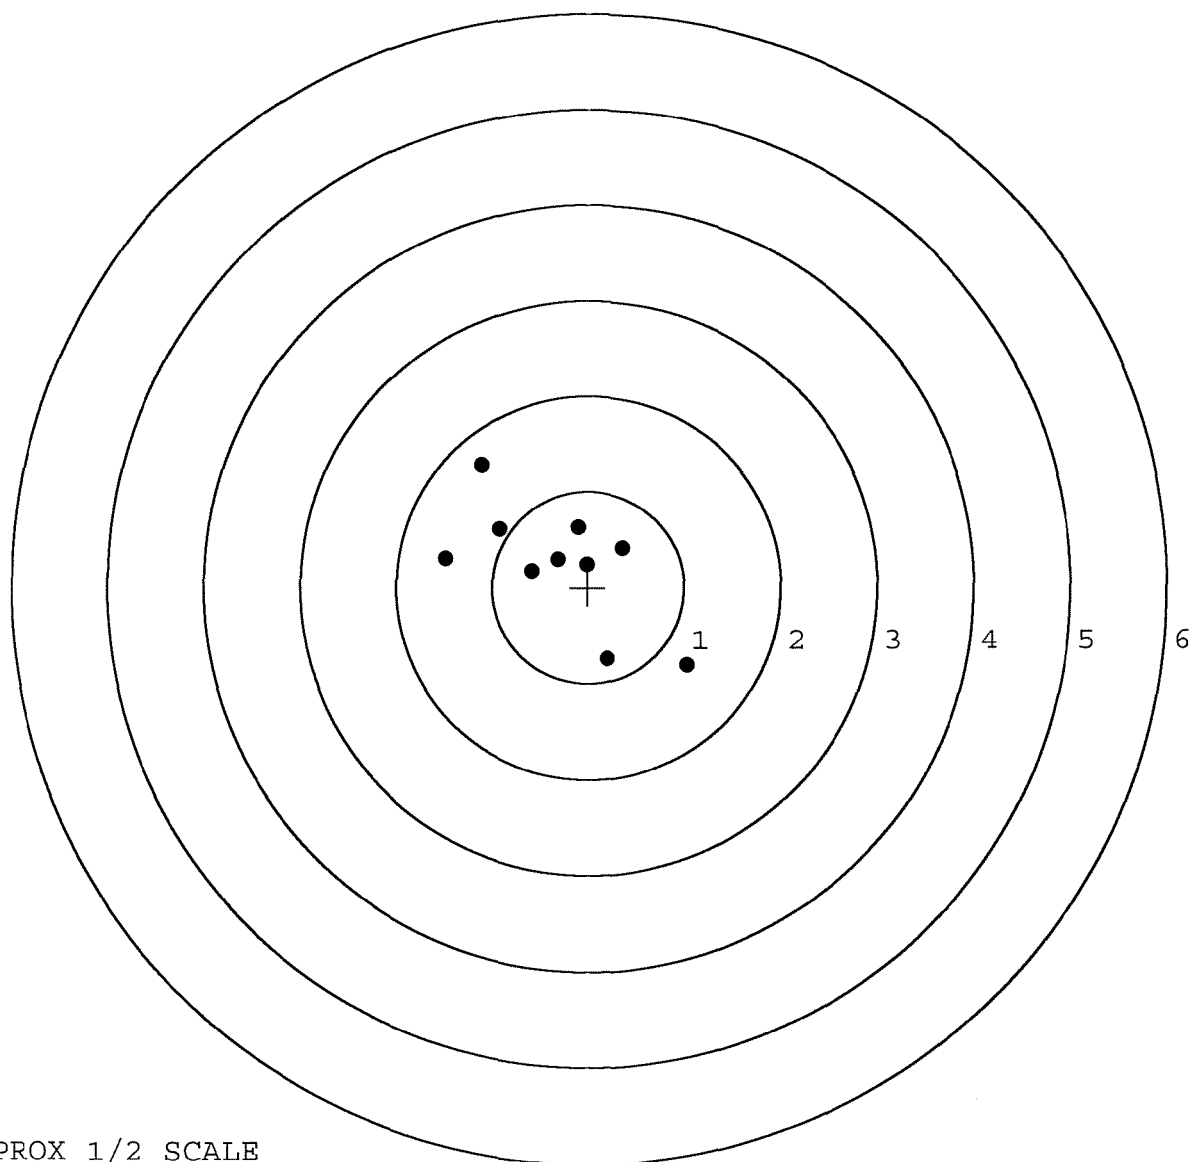


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6521382. __0
TARGET NUMBER: 2
FILE DATE: 12/14/2005
FILE TIME: 13:01

X CENTROID: -0.093
Y CENTROID: 0.114
POA TO CENTROID: 0.147
HORZ SPREAD: 1.831
VERT SPREAD: 3.266
GROUP SPREAD: 3.308
MIN RADIUS: 0.433
MAX RADIUS: 1.882
MEAN RADIUS: 1.040
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 4
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.986	-0.557
2:	0.722	-0.029
3:	-0.201	-1.316
4:	-0.394	-0.954
5:	-0.224	-0.613
6:	-0.515	0.019
7:	-0.258	0.589
8:	-0.521	1.095
9:	-0.845	0.956
10:	0.323	1.950

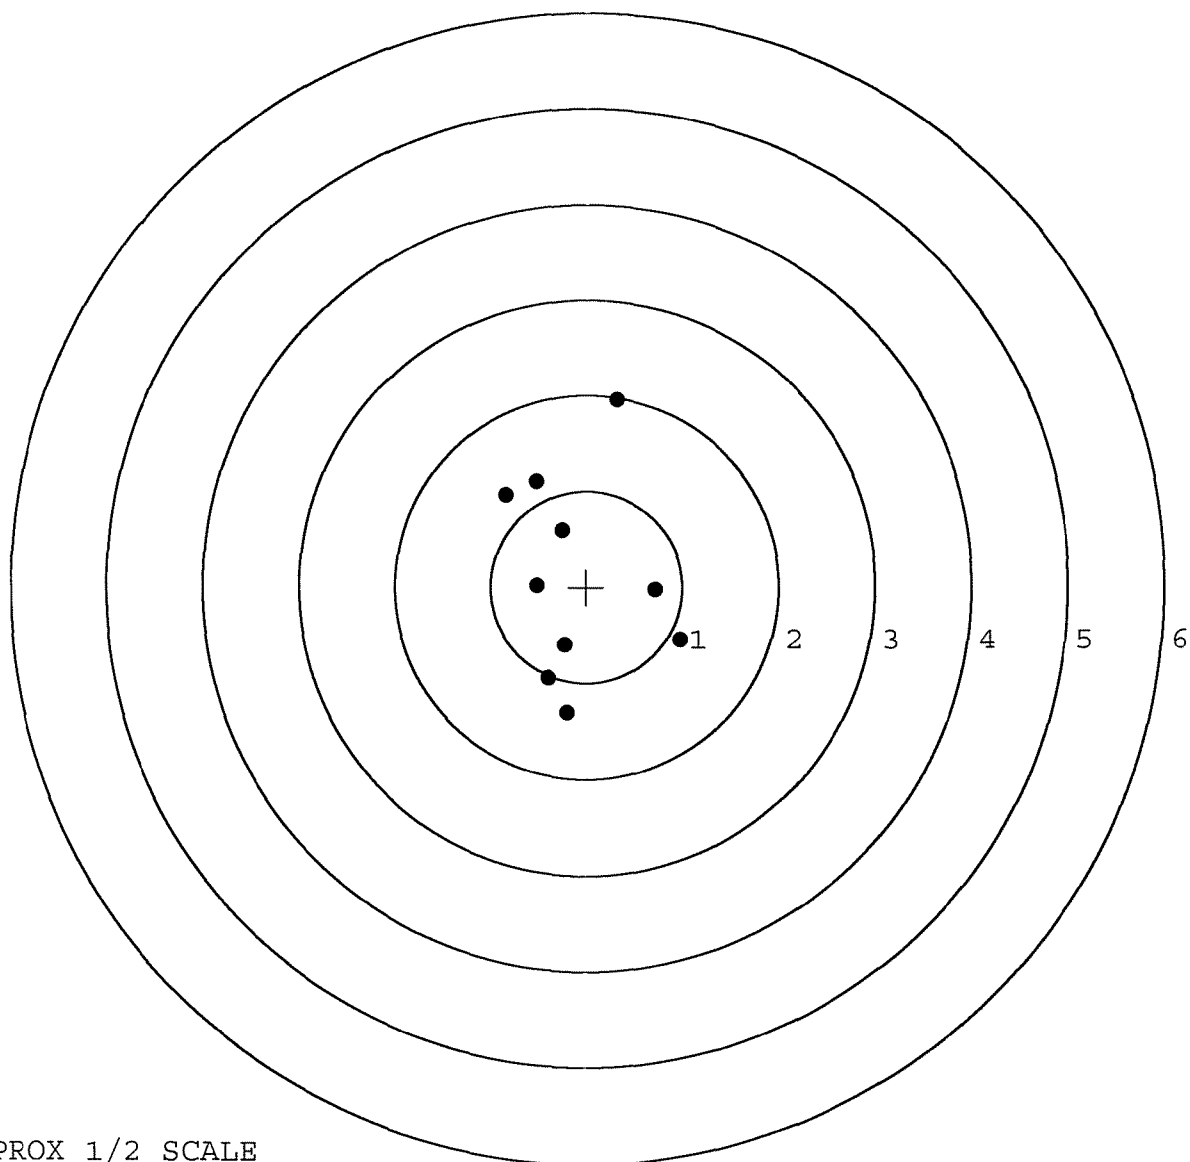


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6521382. __0
TARGET NUMBER: 3
FILE DATE: 12/14/2005
FILE TIME: 13:01

X CENTROID: 0.011
Y CENTROID: 0.089
POA TO CENTROID: 0.090
HORZ SPREAD: 1.199
VERT SPREAD: 0.986
GROUP SPREAD: 1.205
MIN RADIUS: 0.179
MAX RADIUS: 0.683
MEAN RADIUS: 0.429
IN 1 IN DIAMETER: 7
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.678	-0.061
2:	-0.029	-0.399
3:	0.177	-0.198
4:	-0.521	-0.178
5:	-0.463	-0.041
6:	0.362	0.341
7:	0.186	0.128
8:	-0.025	0.283
9:	-0.188	0.587
10:	-0.063	0.430

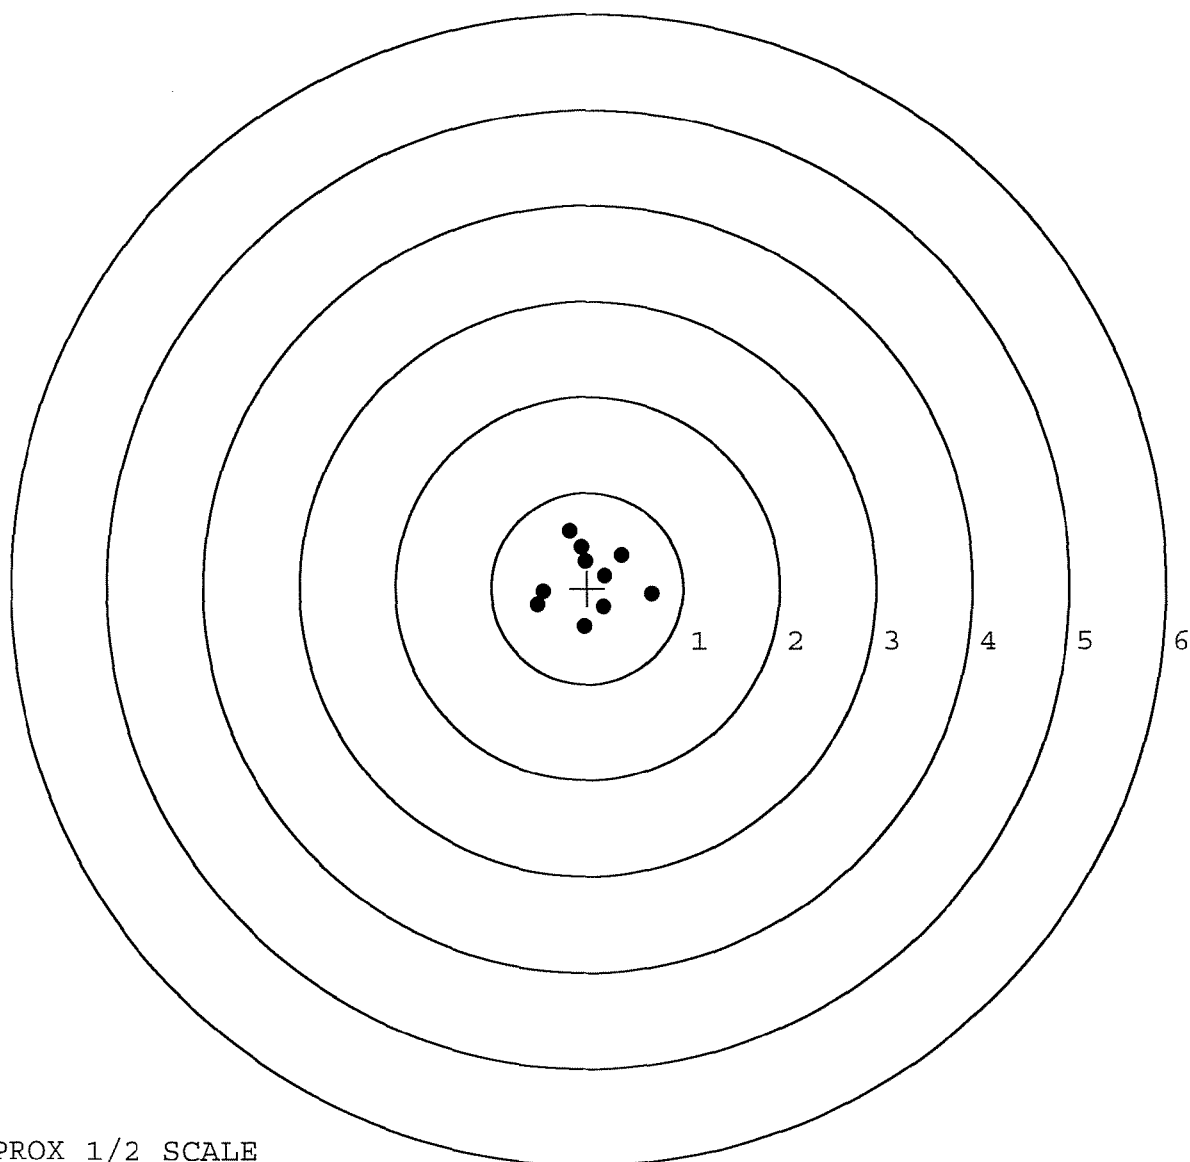


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6521382. 0
TARGET NUMBER: 4
FILE DATE: 12/14/2005
FILE TIME: 13:01

X CENTROID: 0.163
Y CENTROID: 0.025
POA TO CENTROID: 0.165
HORZ SPREAD: 1.586
VERT SPREAD: 1.829
GROUP SPREAD: 1.944
MIN RADIUS: 0.366
MAX RADIUS: 1.015
MEAN RADIUS: 0.769
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.990	0.139
2:	0.756	-0.791
3:	0.460	-0.258
4:	0.015	-0.739
5:	0.421	0.284
6:	0.381	0.955
7:	0.096	1.038
8:	-0.377	0.370
9:	-0.596	-0.194
10:	-0.518	-0.556

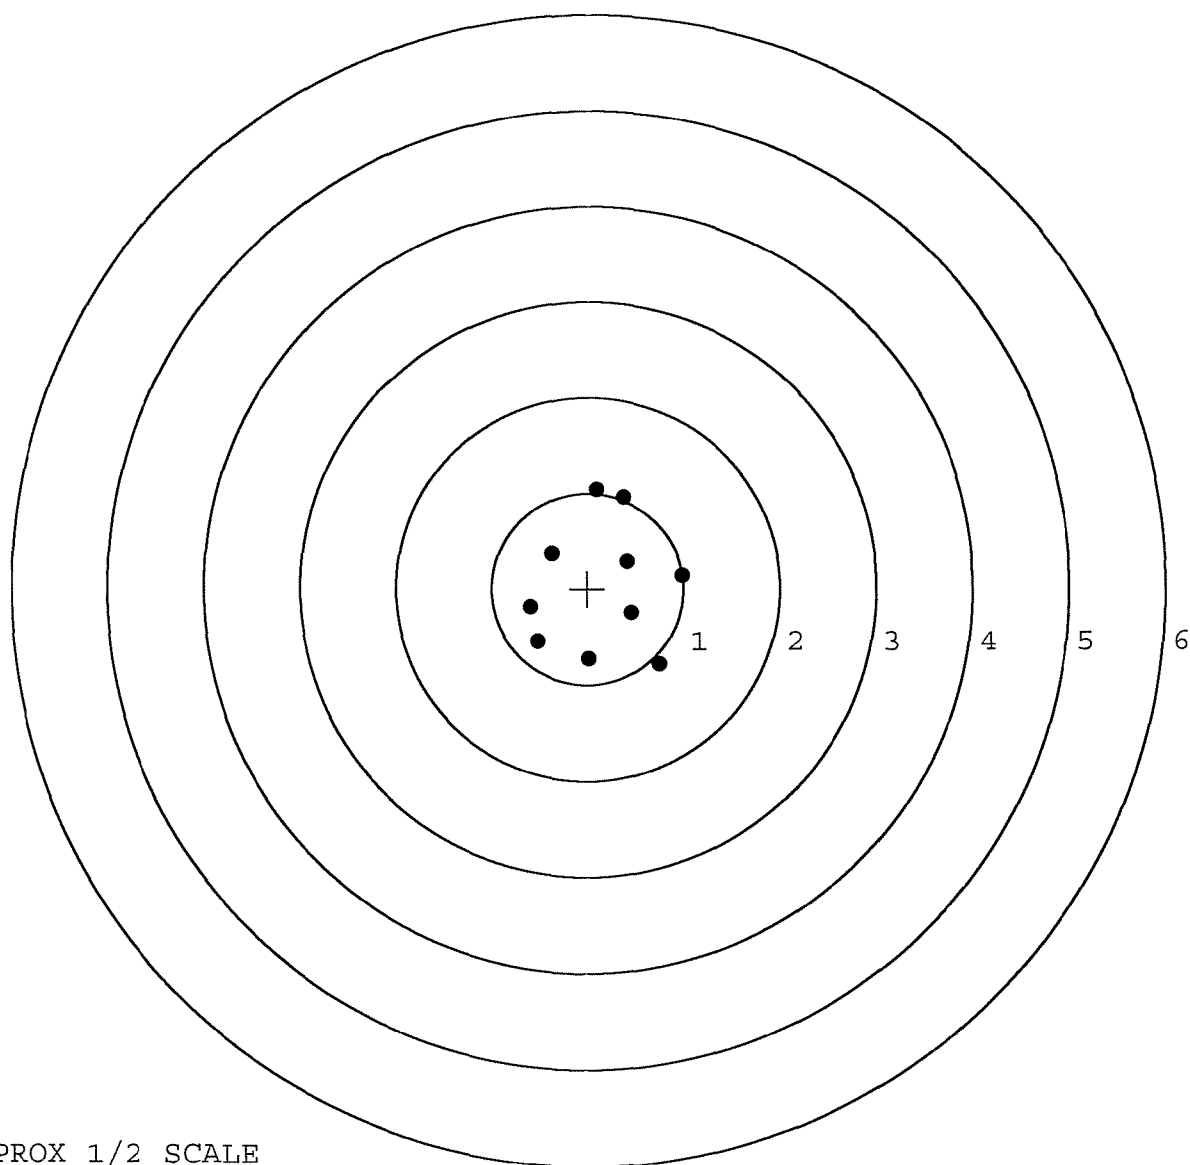


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6521382.___0
TARGET NUMBER: 5
FILE DATE: 12/14/2005
FILE TIME: 13:01

X CENTROID: 0.209
Y CENTROID: 0.117
POA TO CENTROID: 0.240
HORZ SPREAD: 1.802
VERT SPREAD: 2.419
GROUP SPREAD: 2.768
MIN RADIUS: 0.133
MAX RADIUS: 1.458
MEAN RADIUS: 0.861
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.845	-1.195
2:	0.957	0.231
3:	0.927	-0.029
4:	0.763	0.009
5:	0.339	0.148
6:	-0.463	-0.411
7:	-0.522	-0.099
8:	-0.551	0.298
9:	-0.845	0.997
10:	0.642	1.224

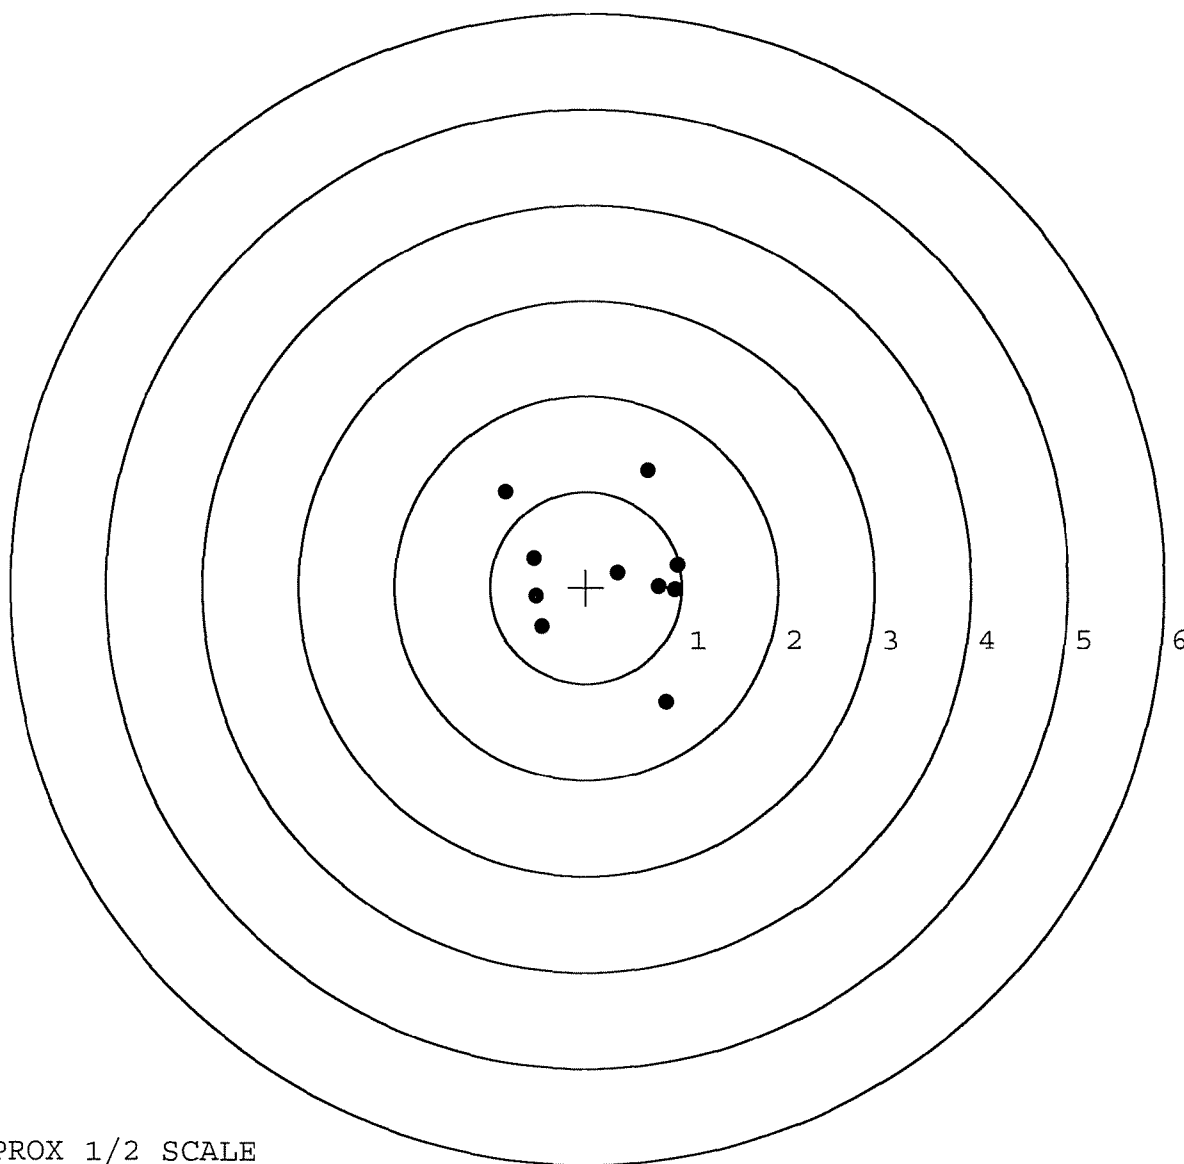

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-C-0149

R & E NUMBER	104576		Fort Benning	
SERIAL NUMBER	56413452		66521382	
LOG-IN DATE	12-5-05			
OPERATION #	OPERATION NAME		DATE	INITIAL
500	DIS-ASSEMBLE GUN		12-6-05	AC
505	RE-BARREL		12-6-05	AC
560	ASSEMBLE		12-7-05	CD
600	PROOF	MAGNA-FLUX	12-7-05	CD
605	CHECK HEADSPACE	INDICATED	12-7-05	CD
610	DIS-ASSEMBLE GUN	12-7-05	12-7-05	CD
612	MAGNAFLUX	CORRECTION	12/12/05	WMS
510	DRILL AND TAP		12-9-05	BR
615	ROLLMARK CALIBER		12-10-05	CW
618	ROTO-BLAST		12-12-05	LB
620	APPLY COATINGS		12/13/05	FB
625	FINAL ASSEMBLY		12-13-05	AC
640	FUNCTION TEST AND	PASS FAIL	12-14-05	TRLW
650	TARGET	PASS FAIL	12-14-05	TRLW
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION	12-14-05	TRLW
670	FINAL INSPECTION		12-14-05	AC
	A) HEADSPACE	PASS FAIL	12-14-05	AC
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	204 2.02 2.25 2.37 2.45	AC
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS	6 lbs 6 lbs 6 lbs	AC
	G) SAFETY OFF FORCE	2 LBS	3 lbs 3 lbs 3 lbs	AC
	I) FIRING PIN INDENT	.020	.021 .021 .021	AC
690	PACK		12/16/05	DA

Remington Arms Company, Inc.

870 Remington Dr. P.O. Box 700

Madison, NC 27025-0700

Parts/Repairs
Fax

800-243-9700
336-548-7801

www.remington.com info@remington.com

REPAIR DOCUMENT

REPAIR DOCUMENT

Repair Order Number RE00057377	Description/Serial Number C6225111	Date Received - 12/12/2002
Account # - R-	Model 700 Center Fire Caliber: 7.62	Estimate Date -
	NATO M-24 (SWS)	Current Date - 12/13/2002
Customer USAIC DFEL SUPPLY DIV BLDG 490 FORT BENNING, GA 31905 US		Return To USAIC DFEL SUPPLY DIV BLDG 490 FORT BENNING, GA 31905 US
Phone (H) Phone (W)		Fax Email

Reported		Problems	Found
M993	REFURBISH		

Technician's Comments	
Condition	REC'D IN HARD CASE W/ OTHER GUN.
New E6413452	

Material #	Material D	Serial Number: C6225111	Model: 700	ity (Y/N)
Total:		 RE00057377		

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: E6413452.___0

FILE DATE AND TIME: 01/16/2003 14:42


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.084
The Average Y Centroid of the Five Target Set:	0.014
The Average Point of Impact of the Five Target Set:	0.085
The Average Mean Radius of the Five Target Set:	0.772
The Distance from POA to Centroid Target #1:	0.185
The Distance from Centroid Target #2 to Centroid Target #1:	0.229
The Distance from Centroid Target #3 to Centroid Target #1:	0.430
The Distance from Centroid Target #4 to Centroid Target #1:	0.172
The Distance from Centroid Target #5 to Centroid Target #1:	0.142

SERIAL NUMBER: E6413452. __0
TARGET NUMBER: 1
FILE DATE: 01/16/2003
FILE TIME: 14:42

X CENTROID: -0.023
Y CENTROID: 0.184
POA TO CENTROID: 0.185
HORZ SPREAD: 1.634
VERT SPREAD: 2.752
GROUP SPREAD: 2.814
MIN RADIUS: 0.243
MAX RADIUS: 1.594
MEAN RADIUS: 0.881
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 6
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.434	-1.343
2:	-0.461	-0.936
3:	-0.671	-0.247
4:	-0.240	0.294
5:	0.248	0.042
6:	0.744	0.455
7:	0.963	0.671
8:	-0.485	0.653
9:	-0.613	0.839
10:	-0.153	1.409

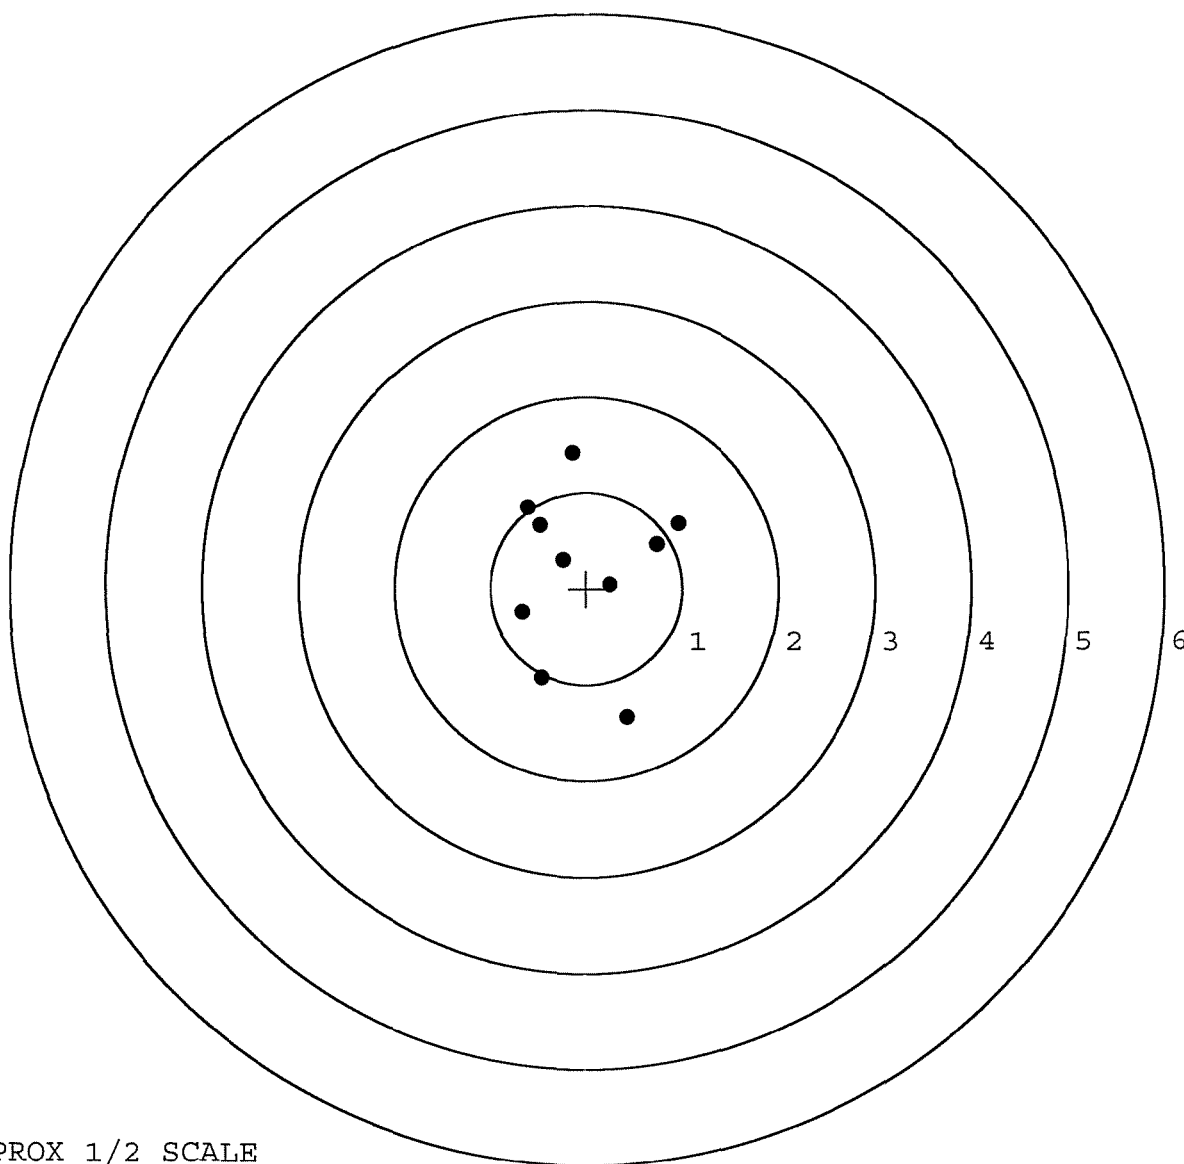


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413452. __0
TARGET NUMBER: 2
FILE DATE: 01/16/2003
FILE TIME: 14:42

X CENTROID: -0.068
Y CENTROID: -0.041
POA TO CENTROID: 0.080
HORZ SPREAD: 2.079
VERT SPREAD: 1.783
GROUP SPREAD: 2.098
MIN RADIUS: 0.289
MAX RADIUS: 1.269
MEAN RADIUS: 0.741
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.202	-0.723
2:	0.120	-0.545
3:	-0.348	-0.459
4:	0.743	-0.260
5:	0.574	0.131
6:	0.503	0.390
7:	-0.671	0.305
8:	-1.336	0.025
9:	-0.425	1.060
10:	-0.047	-0.329

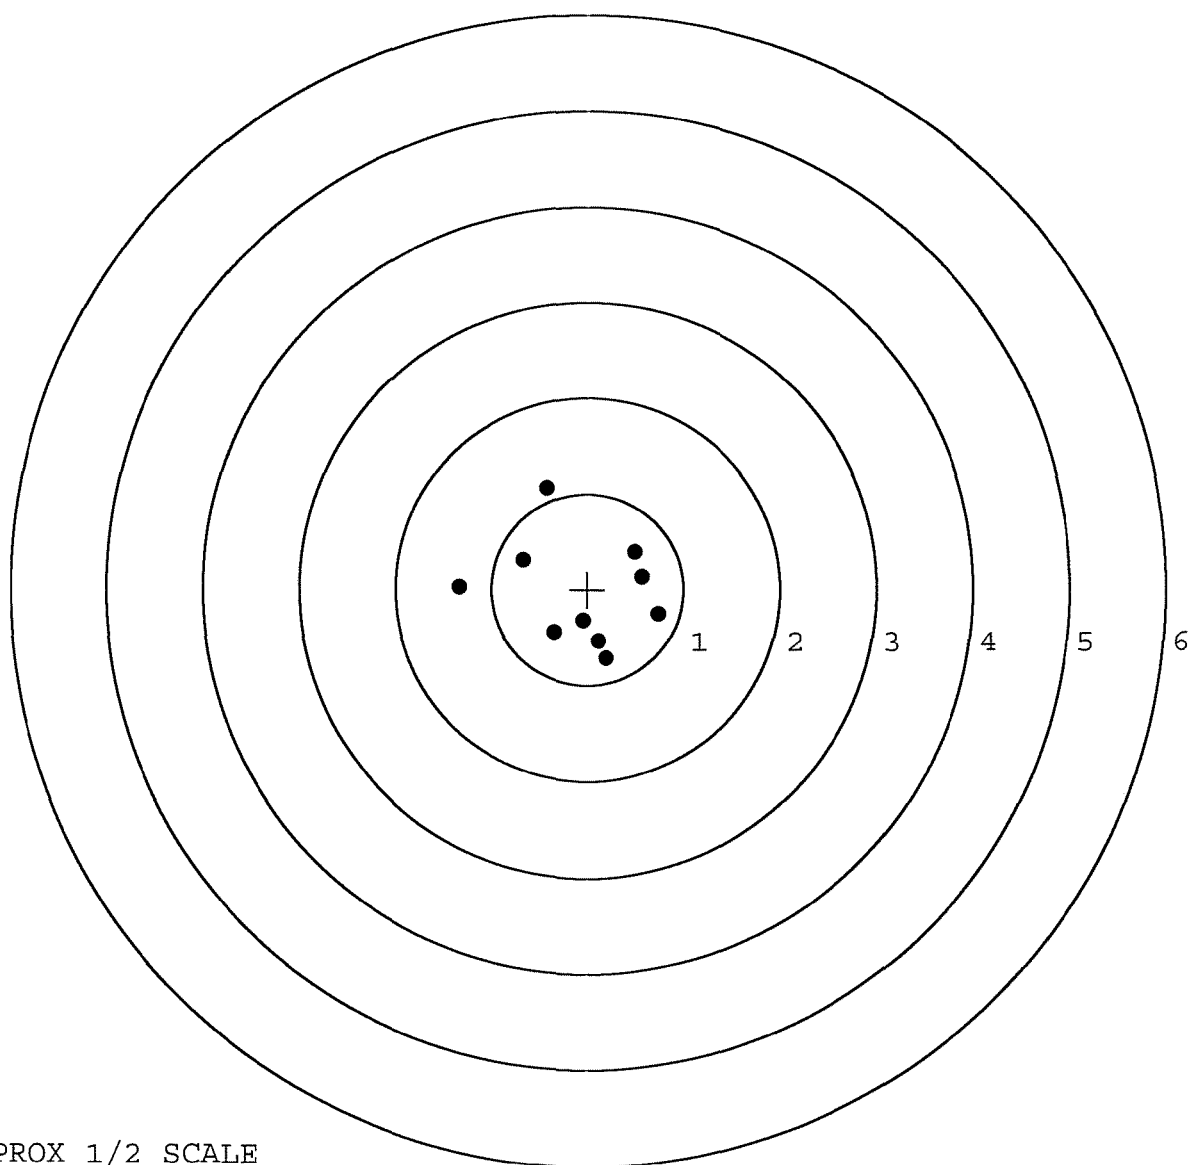


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413452. __0
TARGET NUMBER: 3
FILE DATE: 01/16/2003
FILE TIME: 14:42

X CENTROID: -0.058
Y CENTROID: -0.245
POA TO CENTROID: 0.252
HORZ SPREAD: 2.268
VERT SPREAD: 2.788
GROUP SPREAD: 2.790
MIN RADIUS: 0.213
MAX RADIUS: 1.543
MEAN RADIUS: 0.889
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 6
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	1.296	-0.183
2:	0.447	-1.428
3:	0.190	-1.497
4:	0.091	1.291
5:	-0.258	0.411
6:	-0.090	0.242
7:	-0.812	-0.117
8:	-0.972	-0.321
9:	-0.269	-0.270
10:	-0.202	-0.580

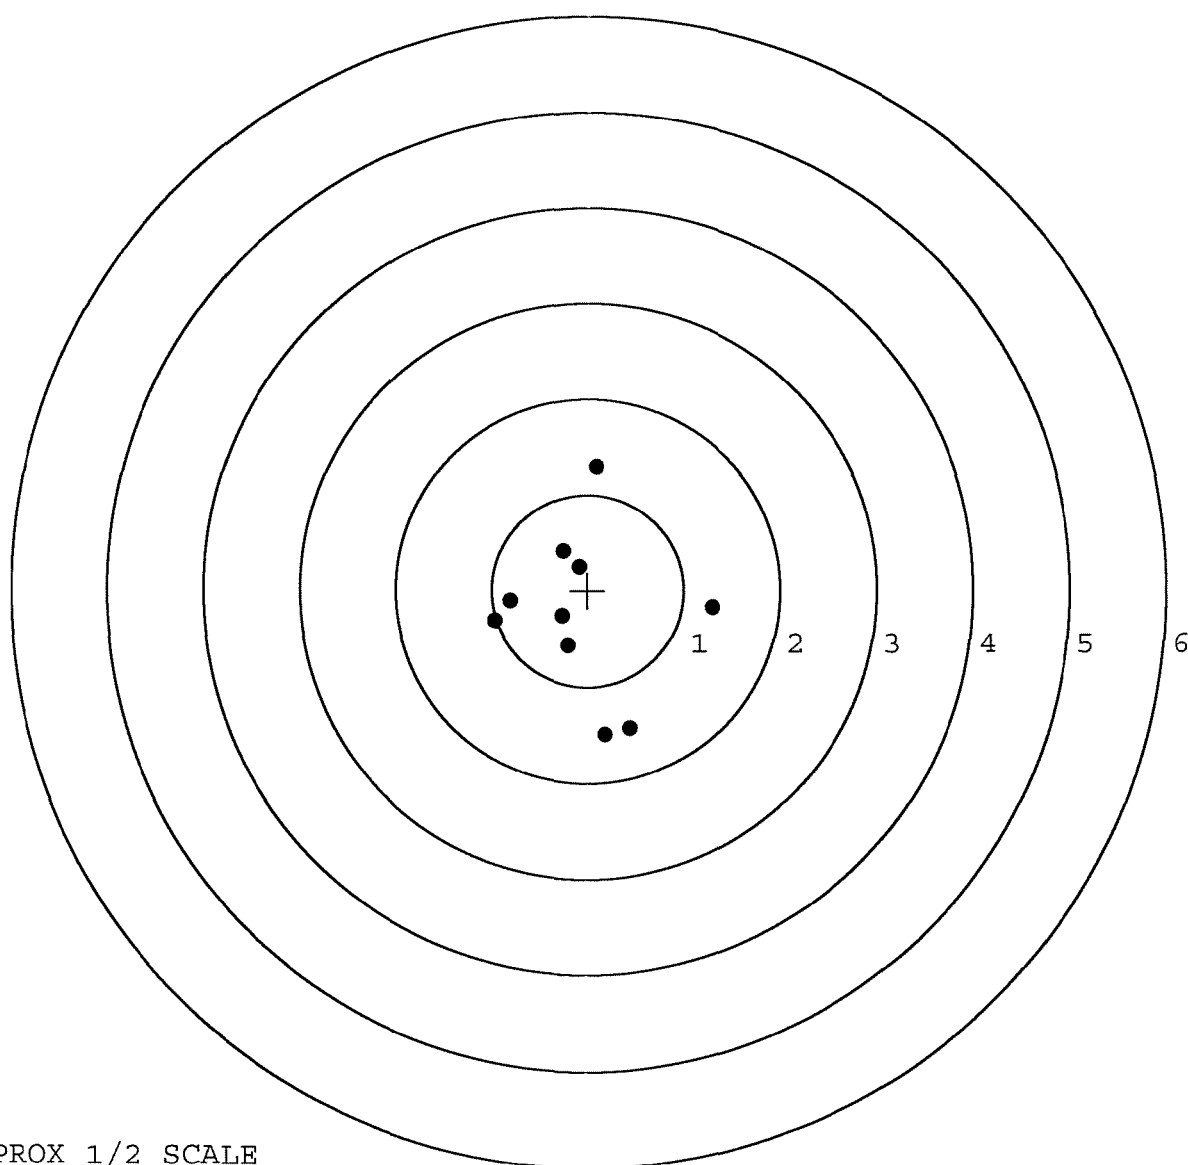


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413452. __0
TARGET NUMBER: 4
FILE DATE: 01/16/2003
FILE TIME: 14:42

X CENTROID: -0.114
Y CENTROID: 0.038
POA TO CENTROID: 0.120
HORZ SPREAD: 1.448
VERT SPREAD: 1.787
GROUP SPREAD: 1.918
MIN RADIUS: 0.116
MAX RADIUS: 0.996
MEAN RADIUS: 0.712
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.595	-0.529
2:	-0.166	-0.594
3:	-0.368	-0.857
4:	0.664	0.295
5:	-0.073	0.147
6:	0.329	0.930
7:	0.097	0.683
8:	-0.653	0.429
9:	-0.779	0.049
10:	-0.784	-0.174

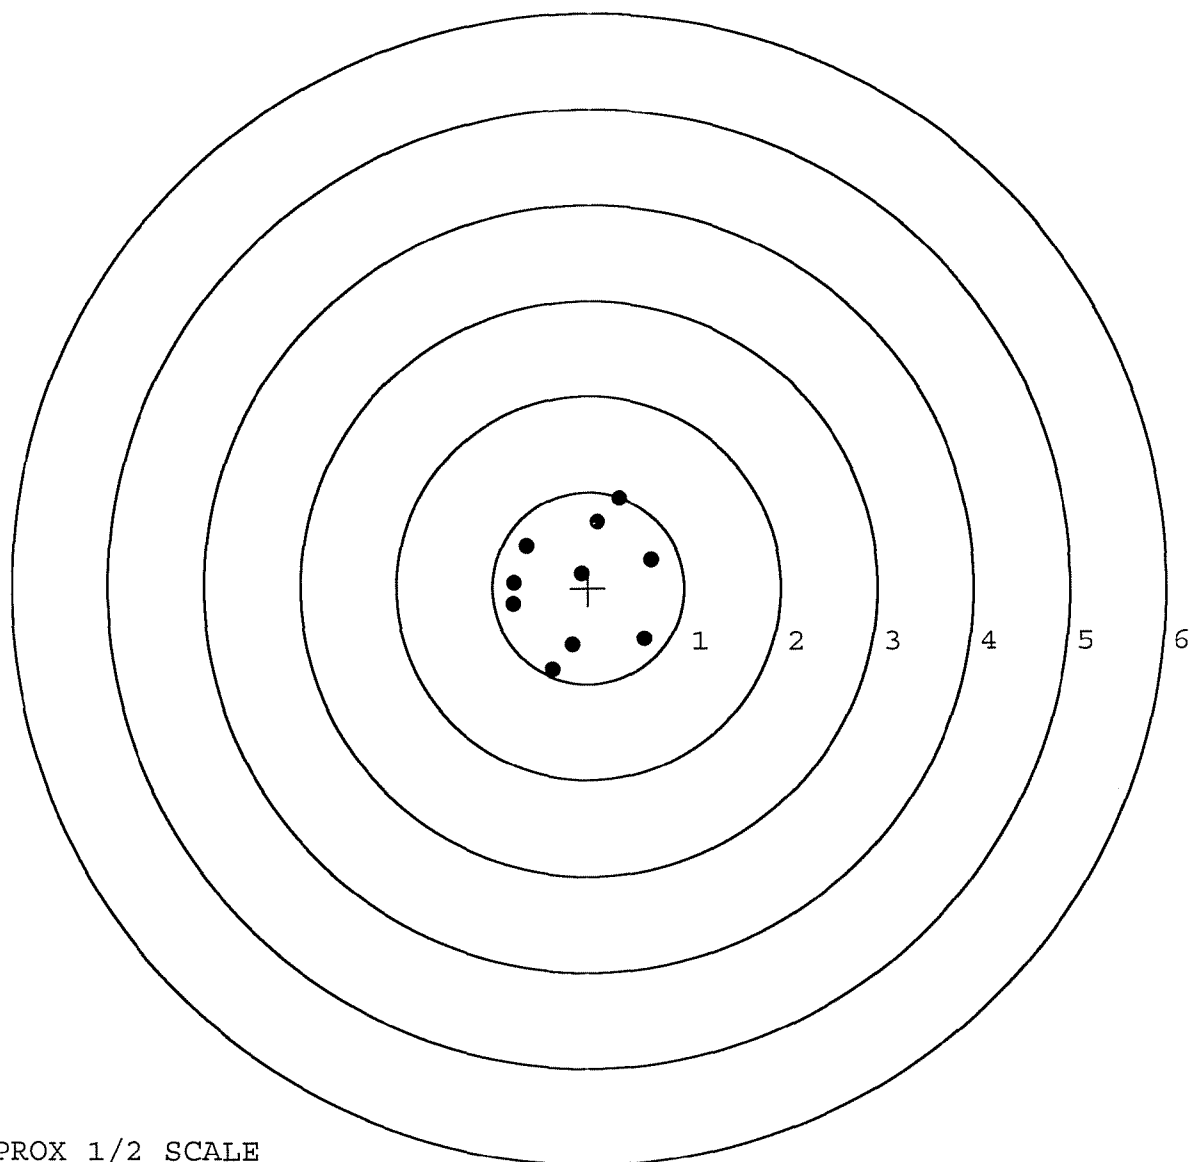


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413452. 0
TARGET NUMBER: 5
FILE DATE: 01/16/2003
FILE TIME: 14:42

X CENTROID: -0.156
Y CENTROID: 0.133
POA TO CENTROID: 0.205
HORZ SPREAD: 2.170
VERT SPREAD: 1.571
GROUP SPREAD: 2.315
MIN RADIUS: 0.036
MAX RADIUS: 1.501
MEAN RADIUS: 0.638

IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.449	-0.424
2:	-1.496	-0.545
3:	0.674	0.262
4:	0.458	0.488
5:	0.014	0.448
6:	-0.332	0.407
7:	-0.418	1.026
8:	-0.185	-0.091
9:	-0.535	-0.370
10:	-0.192	0.126

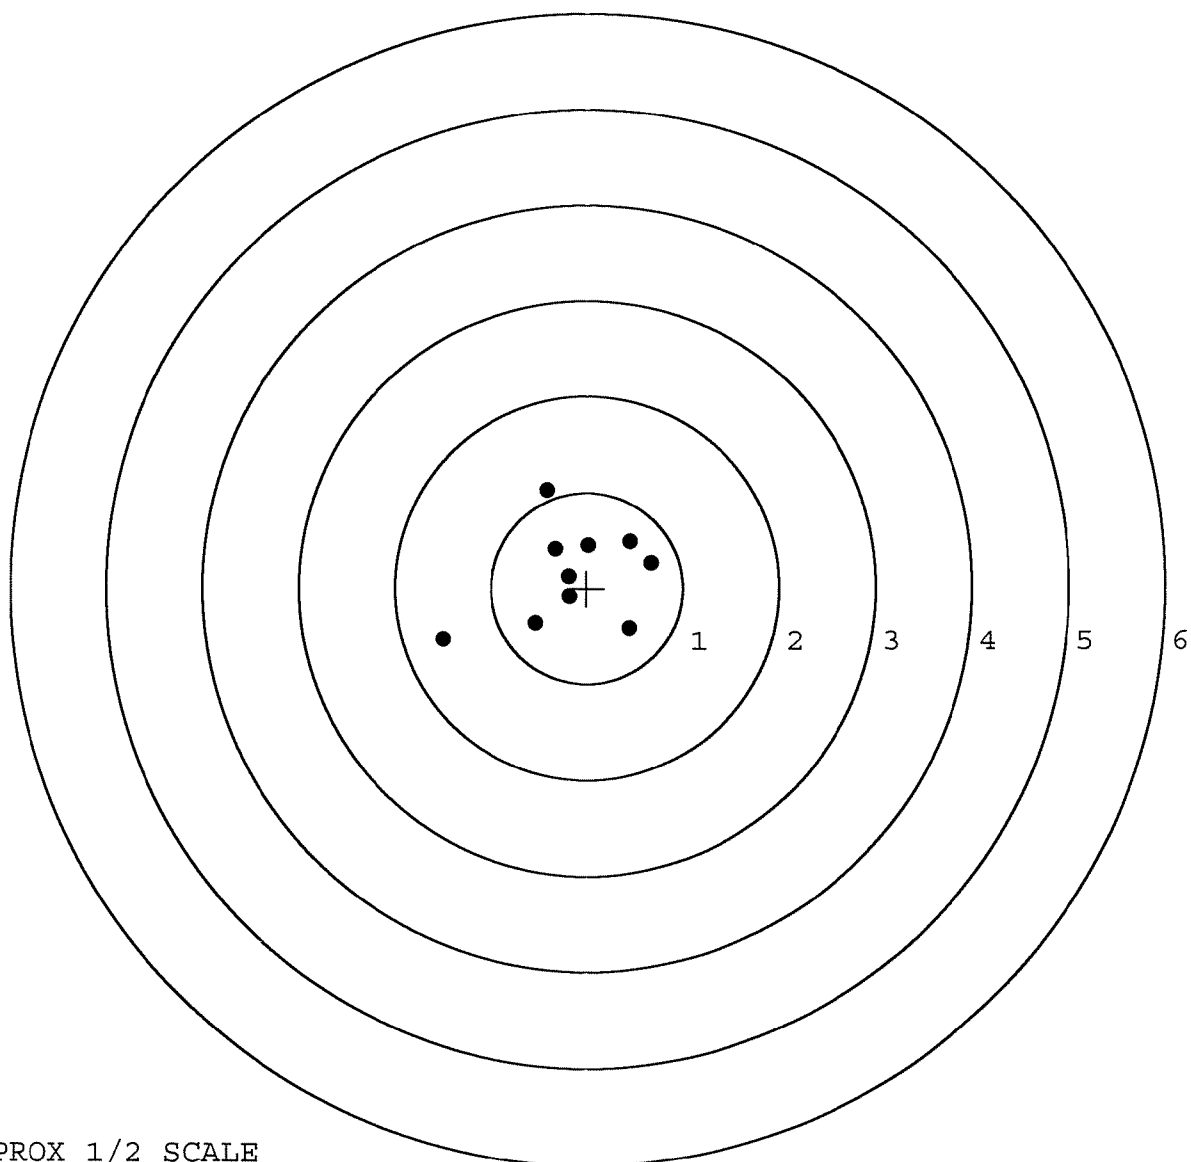

TARGET APPROX 1/2 SCALE

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. _____

DATE 1-02-03

TESTER TRW

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.24	2.20		2.19	MIN. SETTING
PULL #2	2.53	2.38		2.18	NO AVG. OF 5
PULL #3	2.57	2.43		2.11	READINGS ACCEPT
PULL #4	2.51	2.23		2.12	ABLE LESS THAN
PULL #5	2.47	2.22		2.13	
TOTAL	12.32	11.46		10.73	
AVG.	2.46	2.29		2.14	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.42	3.31		
PULL #2	3.22	3.18		
PULL #3	3.21	3.12		
PULL #4	3.44	3.17		
PULL #5	3.24	3.18		
TOTAL	16.53	15.96		
AVG.	3.30	3.19		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# & TARGET & ACCU
PULL #1	4.35	4.17		4.01
PULL #2	4.41	4.06		4.06
PULL #3	4.30	4.16		4.10
PULL #4	4.29	4.10		4.13
PULL #5	4.27	4.05		4.15
TOTAL	21.62	20.54		20.45
AVG.	4.32	4.10		4.09

FINAL INSPECTION CHECKLIST M-24 REPAIRS
CONTRACT #: DAAE-20-02-D-0127

SERIAL # E60413452 INSPECTED BY: RTL

DATE REC'D: 12-12-02 DATE RET'D: 1-16-03

ITEM

BARREL ASSEMBLY

☒ BARREL
☒ RECEIVER
☒ FRONT SIGHT BASE
☒ REAR SIGHT BASE
☒ SCREWS
☒ FINISH

SCOPE ASSEMBLY

☒ SCOPE
☒ SCOPE RINGS
☒ MOUNTING SCREWS
☒ MOUNTING BASE
☒ SCREWS
☒ FINISH
☒ CLARITY

ITEM

STOCK ASSEMBLY

☒ STOCK
☒ SLING AWIVEL STUDS
☒ ADJUSTABLE
☒ BUTT PLATE
☒ LOCK NUTS
☒ BARREL CLEARANCE
☒ COLOR / FINISH

SYSTEMS CASE

☒ SCOPE CASE
☒ IRON SIGHTS
☒ DEPLOYMENT KIT

TRIGGER ASSEMBLY

☒ SAFETY OPERATION
☒ RE-SET TO FACTORY SPECS

COMMENTS:

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-97-C-242

R & E NUMBER	12-12-02		
SERIAL NUMBER	C6225H1 E16413452		
LOG-IN DATE	12-12-02		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	1-2-03	RTL
560 A	RE-BARREL	1-7-03	DA
B	DRILL AND TAP	1-7-03	TRW
575	ASSEMBLE	1-7-03	RL
600	PROOF	1-7-03	RW
605	CHECK HEADSPACE	1-7-03	RW
610	DIS-ASSEMBLE GUN	1-7-03	RW
612	MAGNAFLUX	1-8-03	JP
615	ROLLMARK CALIBER	1-7-03	RW
618	ROTO-BLAST	1-8-03	RL
620	APPLY COATINGS	1-10	TA
625 A	FINAL ASSEMBLY	1-14-03	RTL
B	TRIGGER PULL TEST	1-16-03	TRW
C	SAFETY "ON" FORCE	1-16-03	TRW
D	SAFETY "OFF" FORCE	1-16-03	TRW
E	FIRING PIN INDENT		
640	TARGET	1-15-03	TRW
655	FINAL INSPECT	1-16-03	RTL
660	PACK	1-16-03	DA
		SHIP DATE	
	QAR INSPECTION DATE		