


E 6790614


MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

GREEN ENVELOPE CONTAINING:
- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- SAFETY BOOKLET

46 FORM



ORDER NO.	25705
BARREL LENGTH	24"
CAPACITY	6
E6790614	



Remington.[®]

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

SERIAL NO. J
E6790614

ORDER NO.
25705

46


Made in Ilion, NY Reg. U.S. Pat & tm. Off. Marca Registrada Marque Deposee.



5705 E6790614

31KW

UPC
ORDER
MODEL 700™ M24
25705



VERY IMPORTANT: Instruction Book enclosed to assure safe use of this firearm.

Remington®

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

SERIAL NO. **E6790614**

ORDER NO. **25705**

46

Made in Ilion, NY Reg. U.S. Pat. & tm. Off. Marca Registrada Parque Deposee.

31KW

5705 E6790614

ORDER 25705
MODEL 700™ M24
UPC



ORDER 25705
MODEL 700™ M24
UPC



SERIAL NO.



CONTRACT #
DAAE20-01-P-0489
170 RIFLES

GUN SERIAL # E6790614

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		1-30-02	RJR
600	PROOF		1-30-02	AC
607	CHECK HEADSPACE		1-30-02	AC
610	DIS-ASSEMBLE GUN		1-30-02	RJR
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT		1B 2 2002	AC
615	ROLLMARK CALIBER	OPERATOR	2/4/02	LB
617	DRILL AND TAP SIGHT HOLES		2/14/02	BWT
620	APPLY COATINGS (BARREL ACTION)		2-12	TA
	(BOLT)		2-12	TA
625	FINAL ASSEMBLY		2/14/02	DK
	A) CLEAN INSIDE OF BOLT ASSEMBLY			
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		2/14/02	DK
	C) INSPECT EJECTOR HOLE FOR CHAMFER		2/14/02	DK
	D) OIL FIRING PIN ASSEMBLY		2/14/02	DK
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE	2.50 LBS +/- .5 LBS	4/9/02	RL

OP #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE 2 LBS MIN 10 LBS MAX	<u>7.2</u> <u>7.0</u> <u>6.9</u>	4-9-02	DA
CONT.				
	G) SAFETY OFF FORCE 2 LBS MIN	<u>4.9</u> <u>4.5</u> <u>4.5</u>	4-9-02	DA
	H) TRIGGER PULL TEST AND RETAINABILITY		4/9/02	RL
	I) FIRING PIN INDENT .020 MIN	<u>.023</u> <u>.024</u> <u>.024</u>	4-9-02	DA
	J) ASSEMBLE STOCK		3/8/02	RL
	K) ASSEMBLE SWIVEL STUDS		4/23/02	RL
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		4/23/02	RL
	M) IRON SIGHT ALIGNMENT		4/23/02	RL
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		4/23/02	RL
640	GALLERY TEST AND TARGET	PASS FAIL	4/4/02	RW
	MALFUNCTION	CORRECTION	4/4/02	RW
	MALFUNCTION	CORRECTION	4/4/02	RW
	MALFUNCTION	CORRECTION	4/4/02	RW
	MALFUNCTION	CORRECTION	4/4/02	RW
645	INSPECT FOR LIVE AMMO		4/4/02	RW
655	FINAL INSPECTION A) HEADSPACE		4/23/02	RL
	B) TRIGGER PULL +/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	<u>2.64</u> <u>2.60</u> <u>2.52</u> <u>2.43</u> <u>2.44</u>	4-9-02	DA
	C) FUNCTION		4/23/02	RL
660	PACK		4/25/02	DA

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. E6790614

DATE 2/20/02

TESTER D.M.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.79	2.10		2.62	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.66	2.56		2.77	
PULL #3	2.88	2.67		2.67	
PULL #4	2.72	2.56		2.72	
PULL #5	2.78	2.58		2.80	
TOTAL	13.83	12.47		13.58	
AVG.	2.77	2.49		2.72	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.35	3.29		
PULL #2	3.34	3.46		
PULL #3	3.04	3.30		
PULL #4	3.34	3.21		
PULL #5	3.21	3.34		
TOTAL	16.28	16.60		
AVG.	3.26	3.32		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURAC
PULL #1	4.17	4.26		4.25
PULL #2	4.06	4.40		4.30
PULL #3	4.08	4.29		4.20
PULL #4	4.20	4.05		4.17
PULL #5	4.15	4.18		4.34
TOTAL	20.66	21.18		21.26
AVG.	4.13	4.24		4.25

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: E6790614.___0
FILE DATE AND TIME: 04/05/2002 23:34


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.060
The Average Y Centroid of the Five Target Set:	-0.035
The Average Point of Impact of the Five Target Set:	0.070
The Average Mean Radius of the Five Target Set:	0.810
The Distance from POA to Centroid Target #1:	0.264
The Distance from Centroid Target #2 to Centroid Target #1:	0.324
The Distance from Centroid Target #3 to Centroid Target #1:	0.400
The Distance from Centroid Target #4 to Centroid Target #1:	0.350
The Distance from Centroid Target #5 to Centroid Target #1:	0.303

SERIAL NUMBER: E6790614. __ 0
TARGET NUMBER: 1
FILE DATE: 04/05/2002
FILE TIME: 23:34

POINT#	X	Y
1:	0.657	-1.298
2:	-0.302	-0.497
3:	0.299	-0.298
4:	0.624	0.353
5:	0.280	0.213
6:	-0.201	0.138
7:	-0.448	0.066
8:	-0.839	-0.205
9:	-0.372	1.489
10:	-1.390	2.072

X CENTROID: -0.169
Y CENTROID: 0.203
POA TO CENTROID: 0.264
HORZ SPREAD: 2.047
VERT SPREAD: 3.370
GROUP SPREAD: 3.943
MIN RADIUS: 0.073
MAX RADIUS: 2.232
MEAN RADIUS: 0.907
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 8

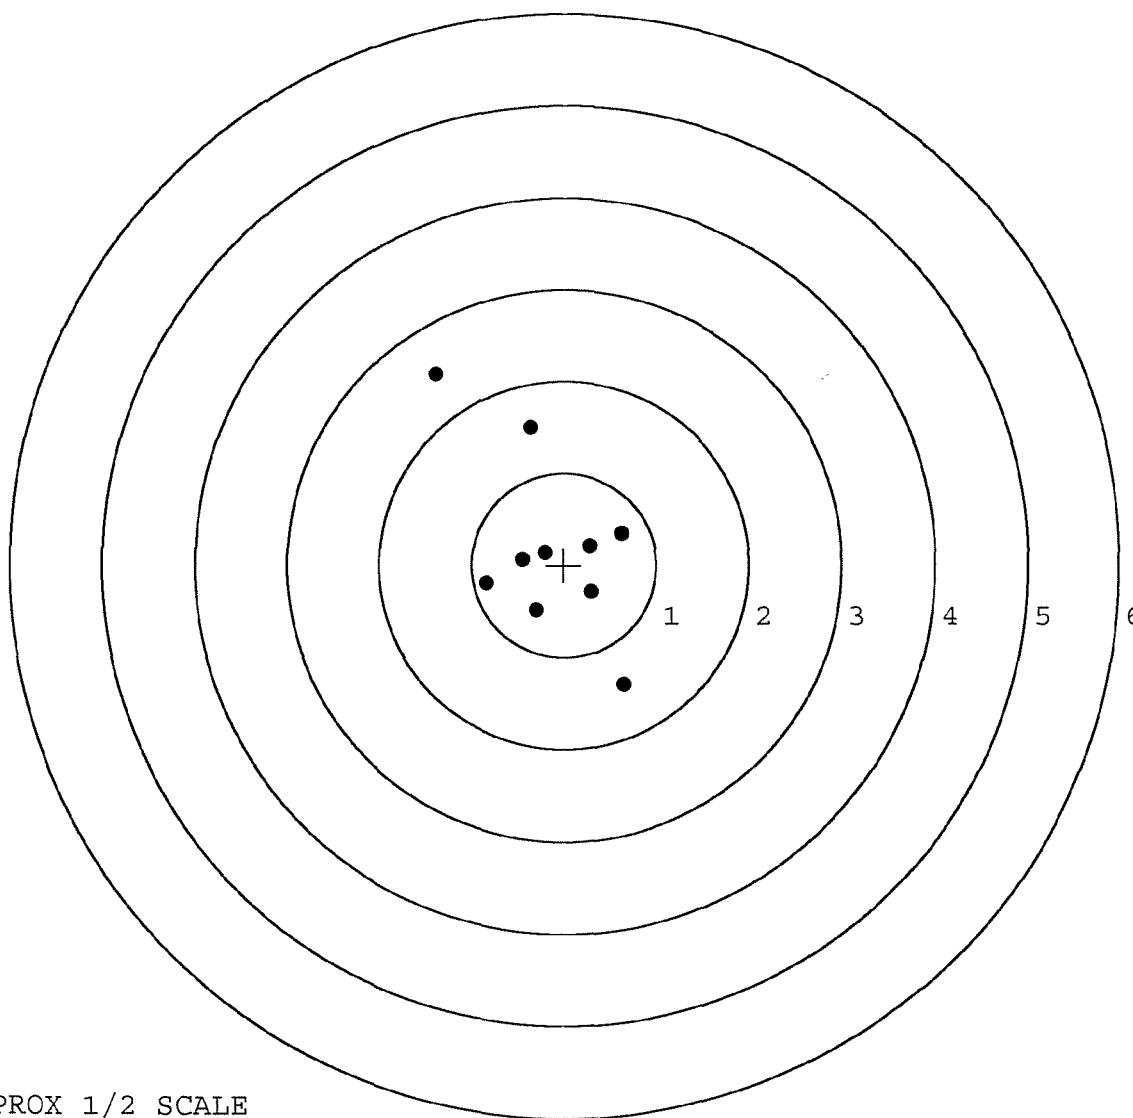

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6790614. __0

TARGET NUMBER: 2

FILE DATE: 04/05/2002

FILE TIME: 23:34

POINT#	X	Y
1:	0.444	-0.696
2:	-0.192	-1.036
3:	-0.498	-0.484
4:	-0.895	-0.640
5:	0.302	-0.100
6:	1.042	0.525
7:	0.227	0.548
8:	0.591	0.971
9:	0.099	0.906
10:	-0.268	0.025

X CENTROID: 0.085

Y CENTROID: 0.002

POA TO CENTROID: 0.085

HORZ SPREAD: 1.937

VERT SPREAD: 2.007

GROUP SPREAD: 2.260

MIN RADIUS: 0.240


MAX RADIUS: 1.172

MEAN RADIUS: 0.804

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 10

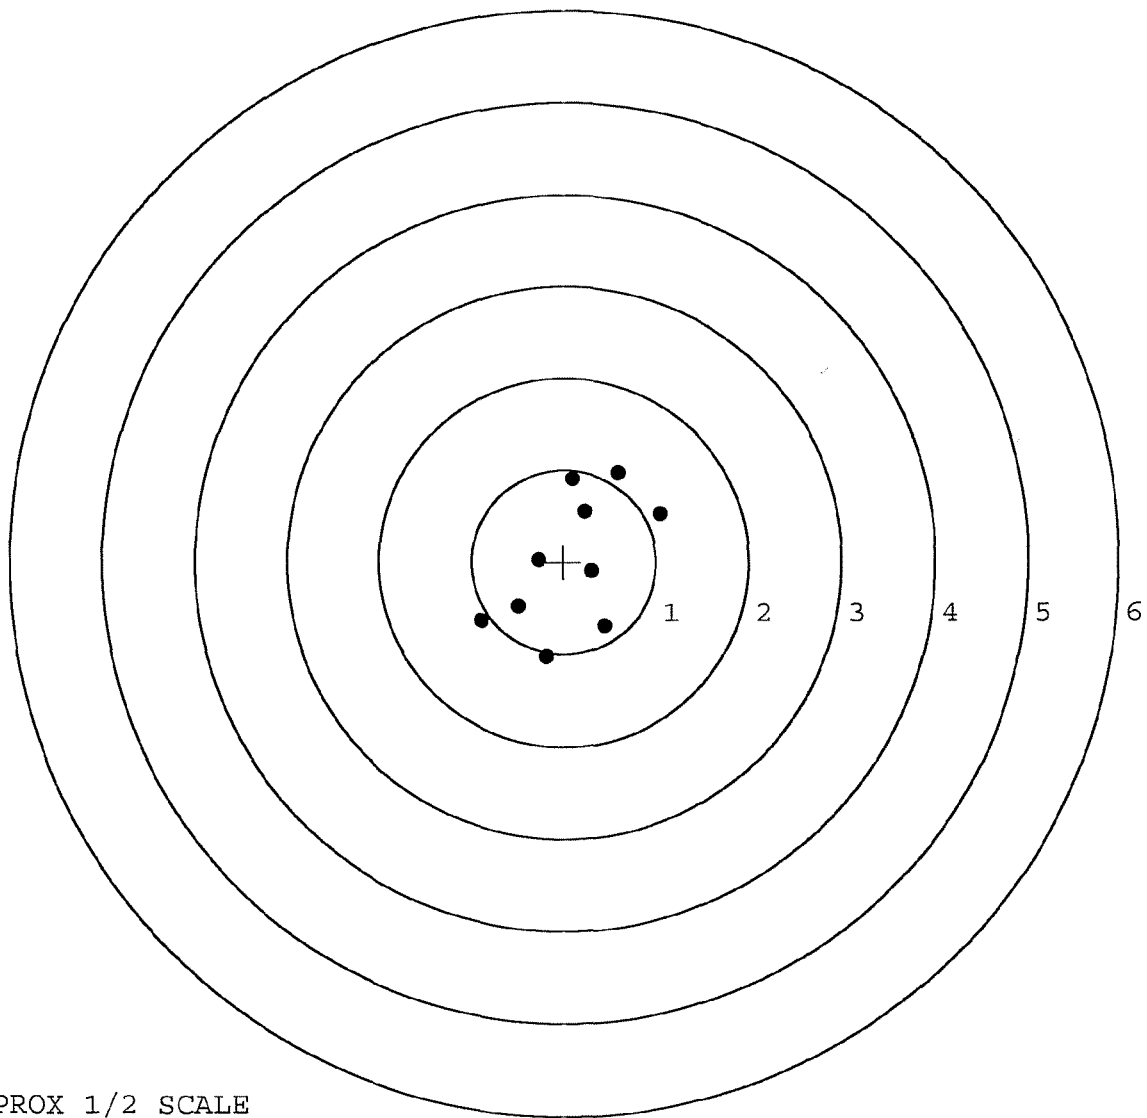


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6790614. __0
TARGET NUMBER: 3
FILE DATE: 04/05/2002
FILE TIME: 23:34

POINT#	X	Y
1:	0.116	-1.695
2:	0.444	-0.975
3:	-0.275	-1.085
4:	-0.164	-0.520
5:	-0.270	-0.197
6:	-0.588	0.222
7:	0.243	0.685
8:	-0.045	0.668
9:	0.998	0.449
10:	-0.508	0.829

X CENTROID: -0.005
Y CENTROID: -0.162
POA TO CENTROID: 0.162
HORZ SPREAD: 1.586
VERT SPREAD: 2.524
GROUP SPREAD: 2.600
MIN RADIUS: 0.267
MAX RADIUS: 1.538
MEAN RADIUS: 0.878
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 9

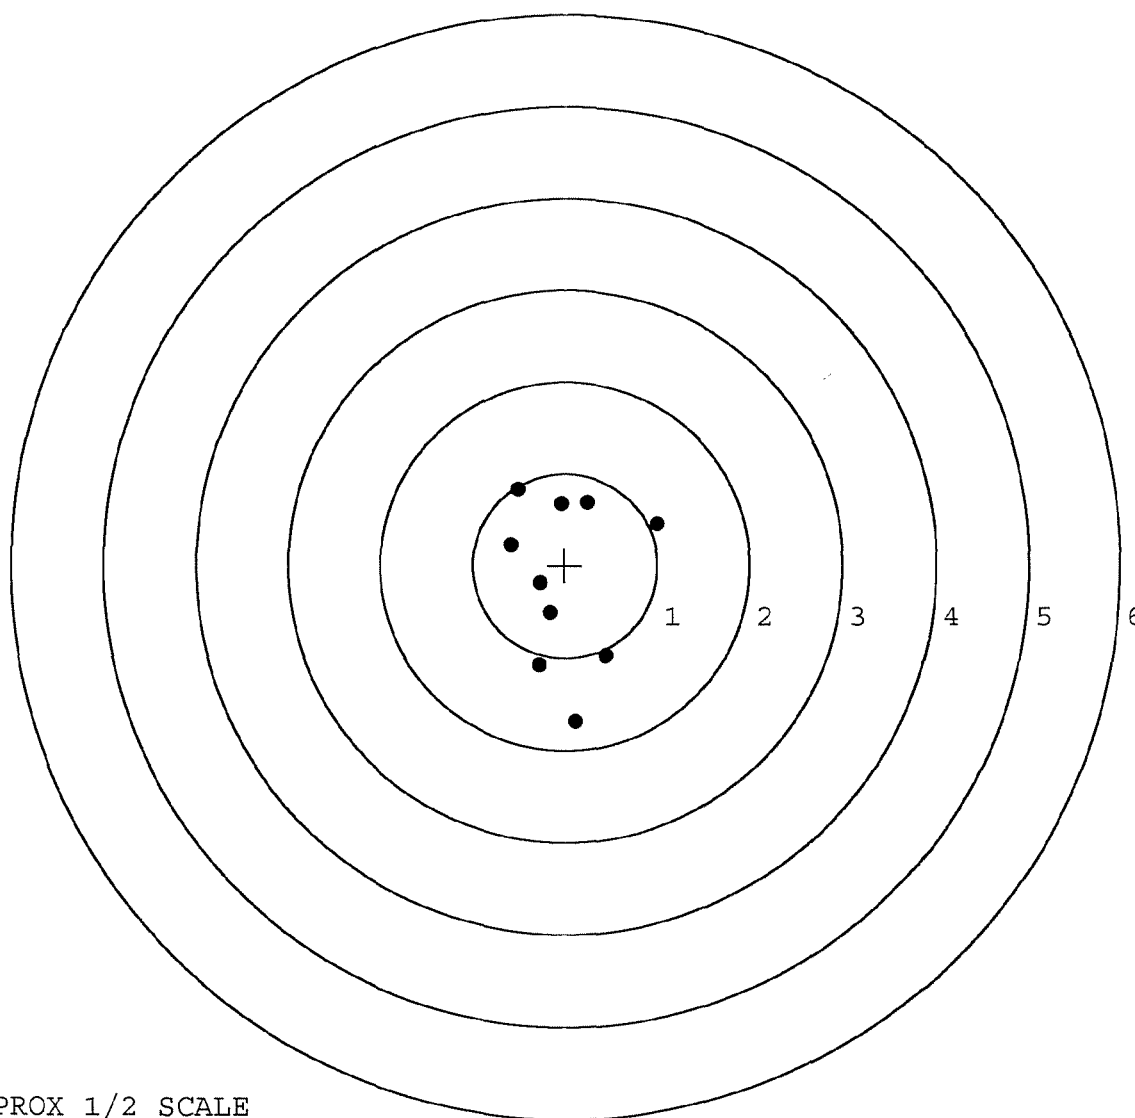

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6790614. __ 0

TARGET NUMBER: 4

FILE DATE: 04/05/2002

FILE TIME: 23:34

POINT#	X	Y
1:	0.228	-0.750
2:	-0.709	-1.265
3:	-0.755	-0.706
4:	-0.857	-0.546
5:	0.089	-0.090
6:	0.223	0.048
7:	0.331	0.138
8:	-0.256	0.294
9:	-0.092	0.471
10:	0.117	0.941

X CENTROID: -0.168

Y CENTROID: -0.147

POA TO CENTROID: 0.223

HORZ SPREAD: 1.188

VERT SPREAD: 2.206

GROUP SPREAD: 2.356

MIN RADIUS: 0.263


MAX RADIUS: 1.242

MEAN RADIUS: 0.704

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

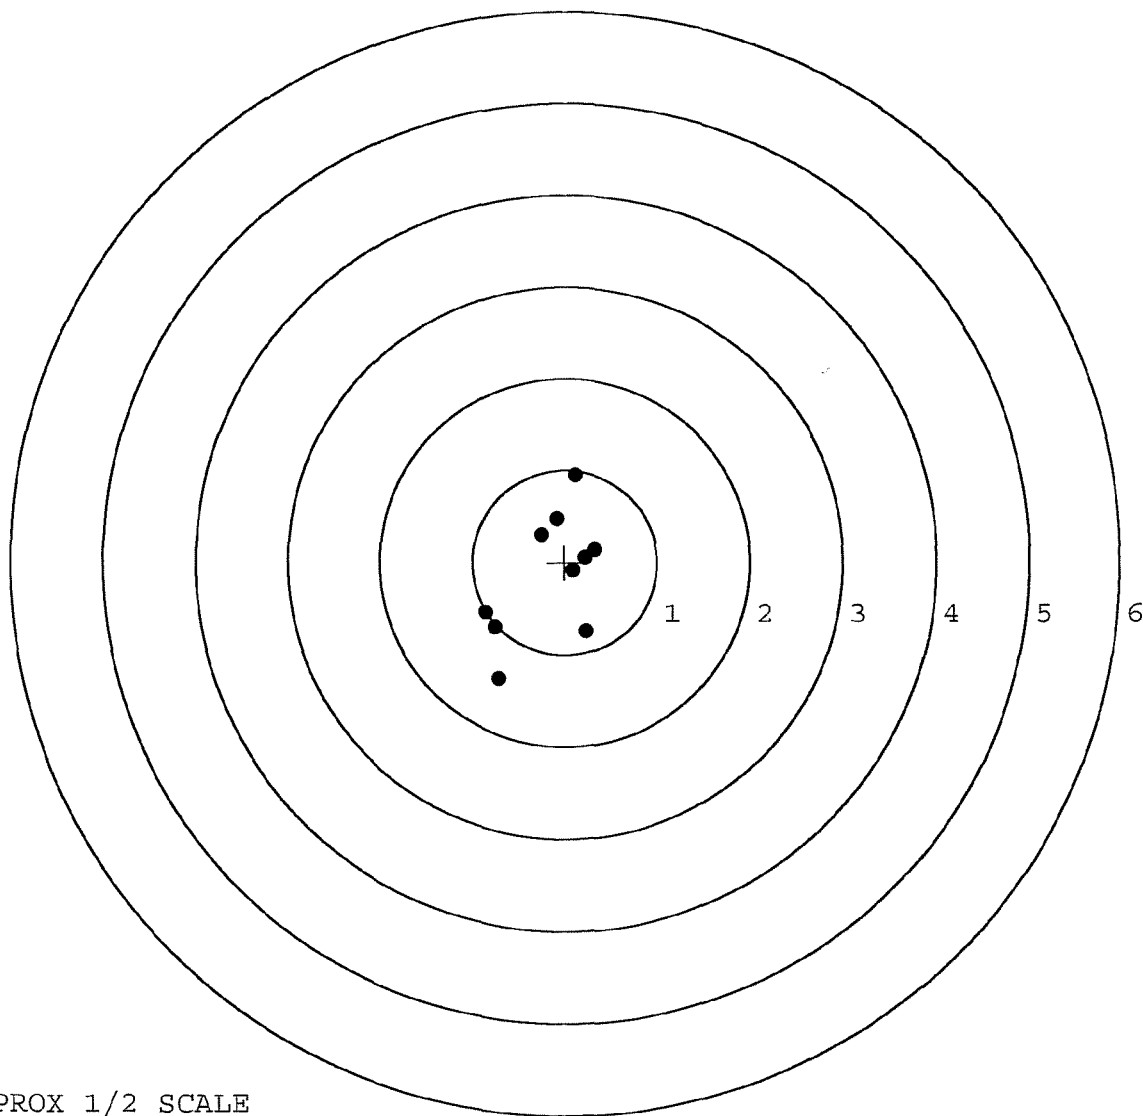


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6790614. __0
TARGET NUMBER: 5
FILE DATE: 04/05/2002
FILE TIME: 23:34

X CENTROID: -0.043
Y CENTROID: -0.072
POA TO CENTROID: 0.084
HORZ SPREAD: 1.480
VERT SPREAD: 1.859
GROUP SPREAD: 2.064
MIN RADIUS: 0.217
MAX RADIUS: 1.148
MEAN RADIUS: 0.759
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.700	-0.902
2:	0.479	-0.614
3:	0.070	-0.257
4:	-0.123	-0.593
5:	-0.733	-0.990
6:	-0.780	0.118
7:	-0.388	0.256
8:	-0.089	0.657
9:	0.034	0.869
10:	0.398	0.736

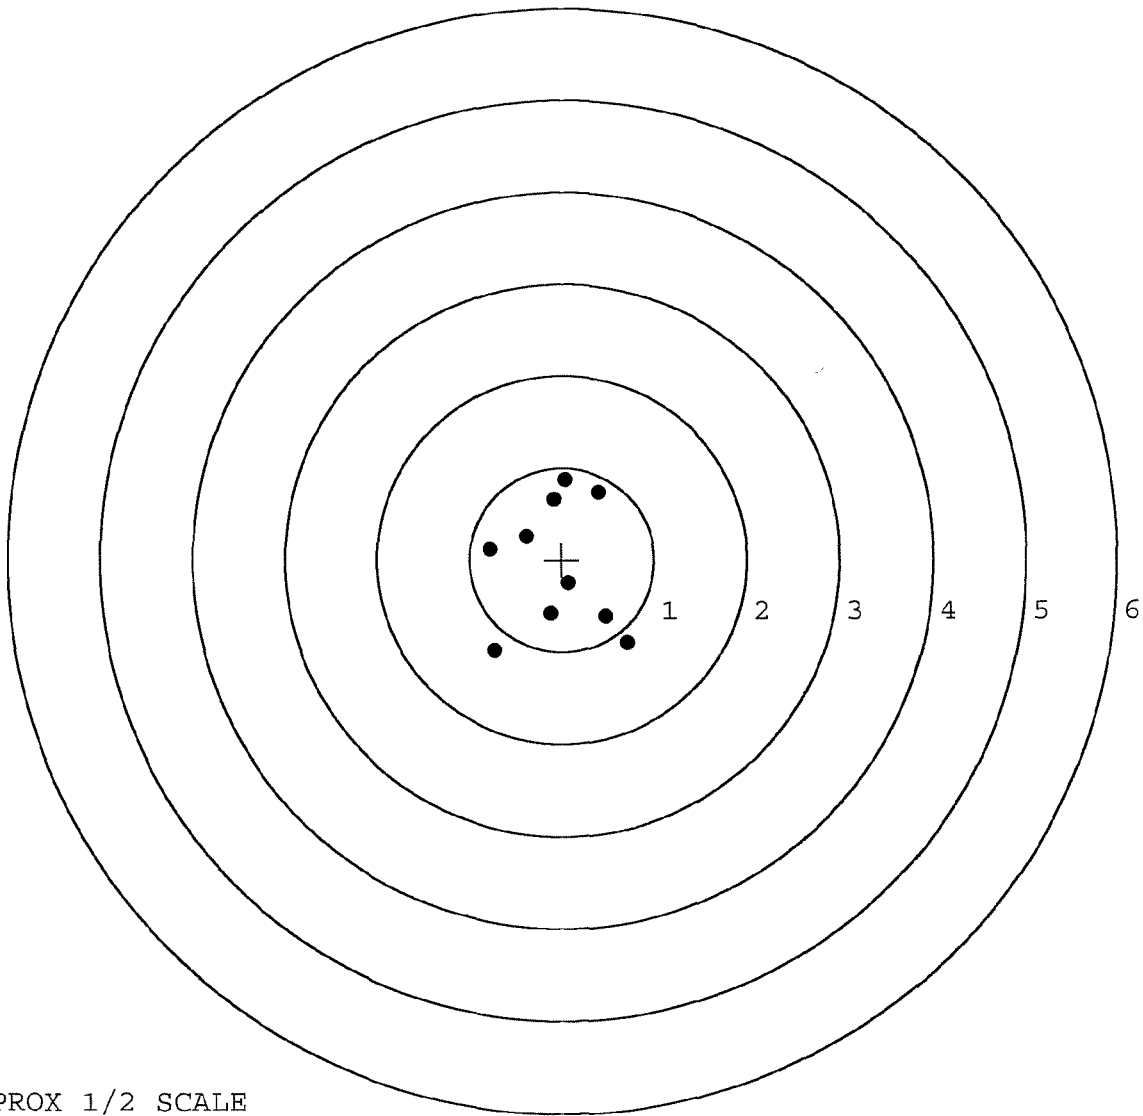

TARGET APPROX 1/2 SCALE