

E 6790153

Remington®

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

SERIAL NO. **J**
E6790153

ORDER NO.
25716

46

Made in Ilion, NY Reg. U.S. Pat & tm. Off. Marca Registrada Marque Deposee.



5716 E6790153

31XV

ORDER 25716

MODEL 700TM M24

UPC



ORDER 25716

MODEL 700TM M24

UPC



SERIAL NO.



MODEL 700TH M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

DOCUMENT ENVELOPE ASSEMBLY:

- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- SAFETY BOOKLET

46 FORM 1444




ORDER NO. 25716

BARREL LENGTH 24"

CAPACITY 6

E6790153

UPC



CONTRACT #

GUN SERIAL # E 679 0153

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		11-8-01	REP
600	PROOF		11-8-01	REP
607	CHECK HEADSPACE		11-8-01	REP
610	DIS-ASSEMBLE GUN	MAGNA-FLUX INSPECTED	11-8-01	REP
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT	NOV 10 2001 OPERATOR <u>NRD</u>		
615	ROLLMARK CALIBER		11/12	PA
617	DRILL AND TAP SIGHT HOLES		11/14	BWT
620	APPLY COATINGS (BARREL ACTION)		11/15	HP
	(BOLT)		11/15	HP
625	FINAL ASSEMBLY		12/9/01	DK
	A) CLEAN INSIDE OF BOLT ASSEMBLY			
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		12/9/01	DK
	C) INSPECT EJECTOR HOLE FOR CHAMFER		12/9/01	DK
	D) OIL FIRING PIN ASSEMBLY		12/9/01	DK
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE	2.50 LBS +/- .5 LBS	12/17/01	WA

OP #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE 2 LBS MIN 10 LBS MAX	<u>6.75</u> <u>6.5</u> <u>6.75</u>	12-13-01	EK
CONT.				
	G) SAFETY OFF FORCE 2 LBS MIN	<u>3.0</u> <u>3.0</u> <u>3.5</u>	12-13-01	EK
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT .020 MIN	<u>.024</u> <u>.022</u> <u>.022</u>	12-13-01	EK
	J) ASSEMBLE STOCK		12/12	BWT
	K) ASSEMBLE SWIVEL STUDS		12/17/01	REP
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		12/17/01	REP
	M) IRON SIGHT ALIGNMENT		12/17/01	REP
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		12/17/01	REP
640	GALLERY TEST AND TARGET	PASS FAIL	12-12-01	RW
	A) MALFUNCTIONS	PASS FAIL	12-01	RA
	B) PIERCED PRIMERS	PASS FAIL	12-12-01	RW
645	INSPECT FOR LIVE AMMO		12-12-01	RW
655	FINAL INSPECTION A) HEADSPACE		12/17/01	REP
	B) TRIGGER PULL +/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	<u>2.62</u> <u>2.78</u> <u>2.53</u> <u>2.57</u> <u>2.66</u>	12/14/01	D.M.
	C) FUNCTION		12/17/01	REP
660	PACK		12/2/01	RA

SERIAL NUMBER: E6790153. __0

TARGET NUMBER: 1

FILE DATE: 12/12/2001

FILE TIME: 11:28

POINT#	X	Y
1:	1.042	-0.296
2:	-0.303	-0.560
3:	0.147	0.066
4:	-0.132	0.593
5:	-0.028	0.951

X CENTROID: 0.145

Y CENTROID: 0.151

POA TO CENTROID: 0.209

HORZ SPREAD: 1.345

VERT SPREAD: 1.511

GROUP SPREAD: 1.643

MIN RADIUS: 0.085


MAX RADIUS: 1.002

MEAN RADIUS: 0.654

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 4

in 3 IN DIAMETER: 5

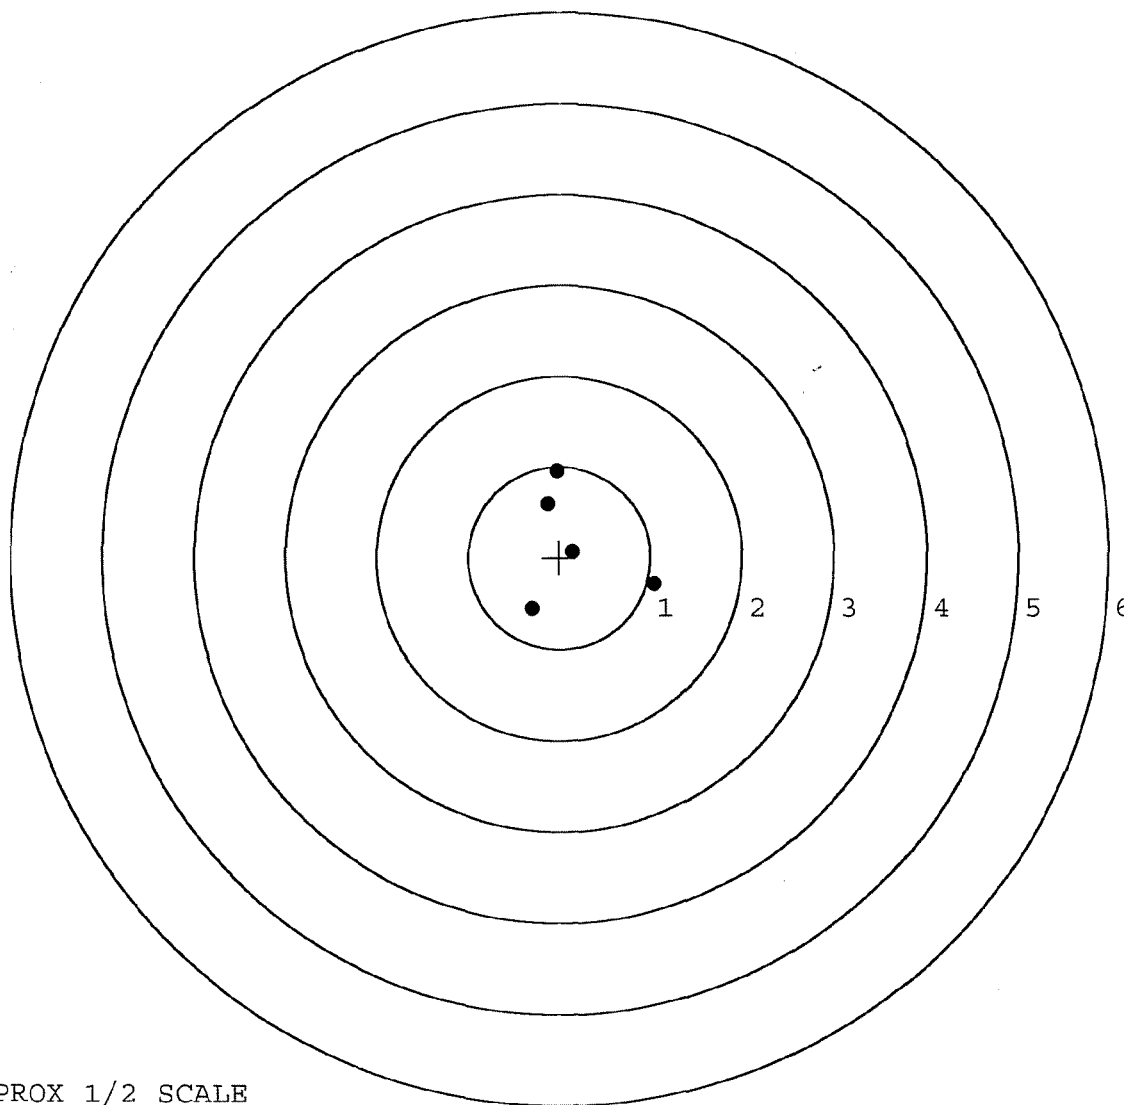

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6790153. 0

TARGET NUMBER: 2

FILE DATE: 12/12/2001

FILE TIME: 11:28

POINT#	X	Y
1:	0.445	-0.170
2:	-0.787	-0.708
3:	-0.089	0.052
4:	0.423	0.234
5:	-0.234	0.644

X CENTROID: -0.048

Y CENTROID: 0.010

POA TO CENTROID: 0.050

HORZ SPREAD: 1.232

VERT SPREAD: 1.352

GROUP SPREAD: 1.533

MIN RADIUS: 0.058


MAX RADIUS: 1.030

MEAN RADIUS: 0.559

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 4

in 3 IN DIAMETER: 5

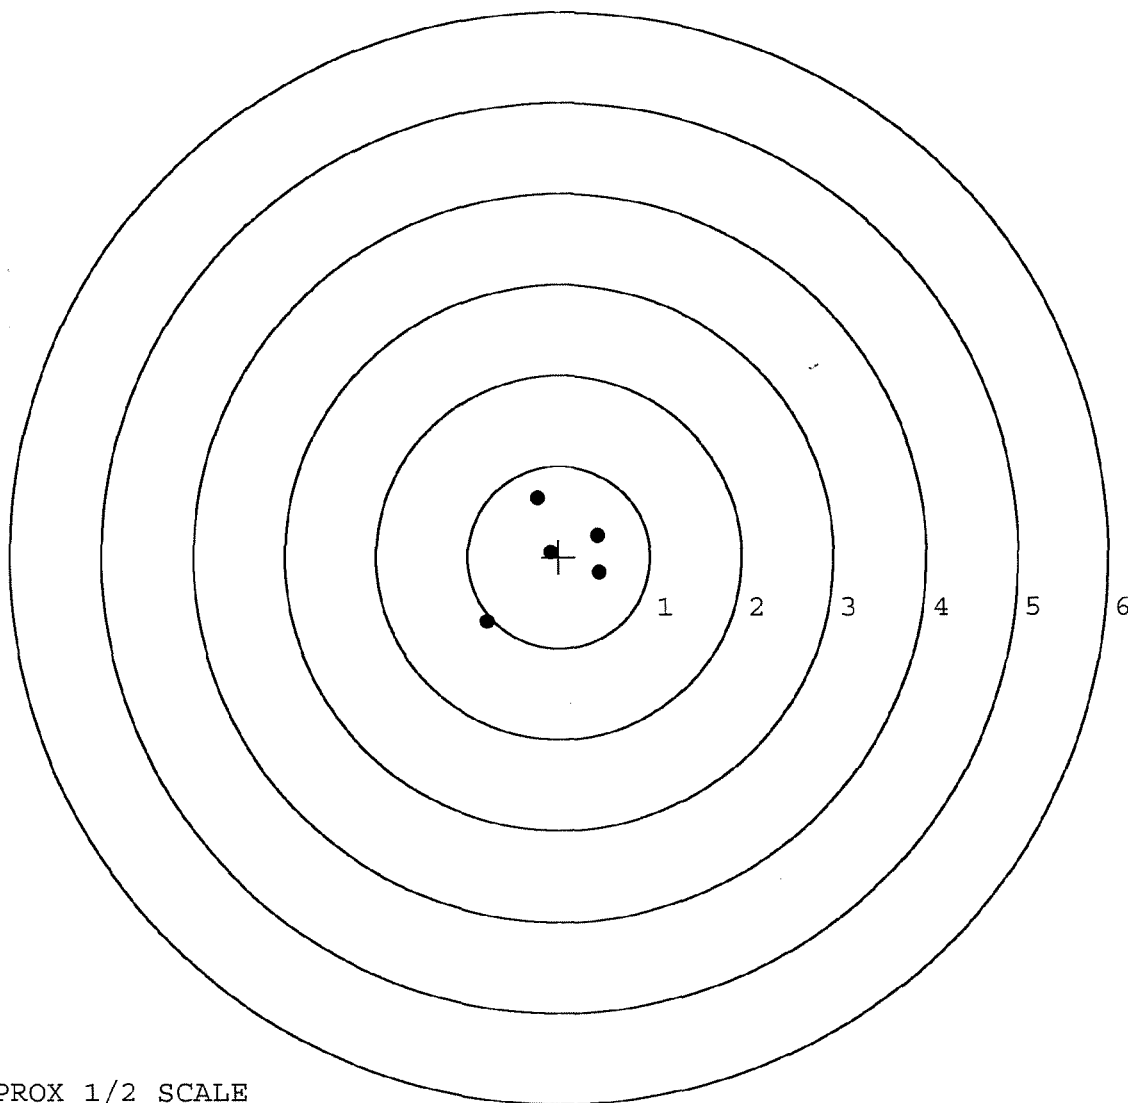

TARGET APPROX 1/2 SCALE

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. E6790153

DATE 10/31/01

TESTER BK.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.53	2.50		2.32	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.49	2.52		2.27	
PULL #3	2.27	2.46		2.25	
PULL #4	2.25	2.49		2.37	
PULL #5	2.45	2.54		2.39	
TOTAL	1199	1257		1160	
AVG.	2.39	2.50		2.32	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.16	3.19		
PULL #2	3.38	3.29		
PULL #3	3.12	3.15		
PULL #4	3.32	3.02		
PULL #5	3.26	3.16		
TOTAL	1624	1581		
AVG.	3.24	3.16		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.16	4.25		4.26
PULL #2	4.23	4.37		4.24
PULL #3	4.26	4.30		4.32
PULL #4	4.31	4.33		4.28
PULL #5	4.26	4.18		4.37
TOTAL	2122	2143		2147
AVG.	4.24	4.28		4.29