

E 6750157

Remington®

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

SERIAL NO. **J**
E6790157

ORDER NO.
25716

46

Made in Ilion, NY Reg. U.S. Pat & tm. Off. Marca Registrada Marque Deposee.



5716 E6790157

31XV

ORDER 25716

MODEL 700TH M24

UPC



ORDER 25716

MODEL 700TH M24

UPC



SERIAL NO.



E6790157

0 47700 25716 7

MODEL 700TH M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

DOCUMENT ENVELOPE ASSEMBLY:


- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- SAFETY BOOKLET

46 FORM 1444



ORDER NO.	25716
BARREL LENGTH	24"
CAPACITY	6

E6790157



GUN SERIAL # EC6790157

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		11/15/01	RH
600	PROOF		11/15/01	RH
607	CHECK HEADSPACE		11/15/01	RH
610	DIS-ASSEMBLE GUN		11/15/01	RH
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT		11/15/01	RH
615	ROLLMARK CALIBER		11/30	NB
617	DRILL AND TAP SIGHT HOLES		12/3	BWT
620	APPLY COATINGS (BARREL ACTION)		12-5	TA
	(BOLT)		12-5	TA
625	FINAL ASSEMBLY		12/11/01	D.M.
	A) CLEAN INSIDE OF BOLT ASSEMBLY		12/11/01	D.M.
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		12/11/01	D.M.
	C) INSPECT EJECTOR HOLE FOR CHAMFER		12/11/01	D.M.
	D) OIL FIRING PIN ASSEMBLY		12/11/01	D.M.
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE 2.50 LBS +/- .5 LBS		12/11/01	DA

OP #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE 2 LBS MIN 10 LBS MAX	<u>4.25</u> <u>3.75</u> <u>3.75</u>	12/15/01	A.M.
CONT.				
	G) SAFETY OFF FORCE 2 LBS MIN	<u>2.25</u> <u>2.0</u> <u>2.0</u>	12/15/01	A.M.
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT .020 MIN	<u>.024</u> <u>.026</u> <u>.025</u>	12/15/01	A.M.
	J) ASSEMBLE STOCK		12-13-01	REP
	K) ASSEMBLE SWIVEL STUDS		12/15/01	REP
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		12/15/01	REP
	M) IRON SIGHT ALIGNMENT		12/15/01	REP
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		12/15/01	REP
640	GALLERY TEST AND TARGET	PASS FAIL	12-13-01	A
	A) MALFUNCTIONS	PASS FAIL	12-13-01	A
	B) PIERCED PRIMERS	PASS FAIL	12-13-01	A
645	INSPECT FOR LIVE AMMO		12-13-01	A
655	FINAL INSPECTION A) HEADSPACE		12/15/01	REP
	B) TRIGGER PULL +/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	<u>2.72</u> <u>2.49</u> <u>2.38</u> <u>2.74</u> <u>2.59</u>	12/15/01	A.M.
	C) FUNCTION		12/15/01	REP
660	PACK		12/16/01	OA

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. E6790157

DATE 10/30/01

TESTER A. N.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.75	2.34		2.44	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.64	2.38		2.42	
PULL #3	2.72	2.45		2.53	
PULL #4	2.70	2.40		2.45	
PULL #5	2.74	2.45		2.39	
TOTAL	13.55	12.02		12.23	
AVG.	2.71	2.40		2.45	


	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.21	2.79		
PULL #2	3.28	3.01		
PULL #3	3.24	2.81		
PULL #4	3.19	3.07		
PULL #5	3.10	2.97		
TOTAL	16.02	14.65		
AVG.	3.20	2.93		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.25	4.27		4.45
PULL #2	4.25	4.39		4.19
PULL #3	4.45	4.24		3.90
PULL #4	4.28	3.99		4.21
PULL #5	4.33	4.36		4.13
TOTAL	21.56	21.25		20.88
AVG.	4.31	4.25		4.18

SERIAL NUMBER: E6790157. __0
TARGET NUMBER: 1
FILE DATE: 12/13/2001
FILE TIME: 04:00

POINT#	X	Y
1:	0.013	0.945
2:	0.480	0.848
3:	0.379	0.315
4:	-0.628	-0.278
5:	-0.293	-0.931

X CENTROID: -0.010
Y CENTROID: 0.180
POA TO CENTROID: 0.180
HORZ SPREAD: 1.108
VERT SPREAD: 1.876
GROUP SPREAD: 1.940
MIN RADIUS: 0.412
MAX RADIUS: 1.146
MEAN RADIUS: 0.784
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 4
in 3 IN DIAMETER: 5

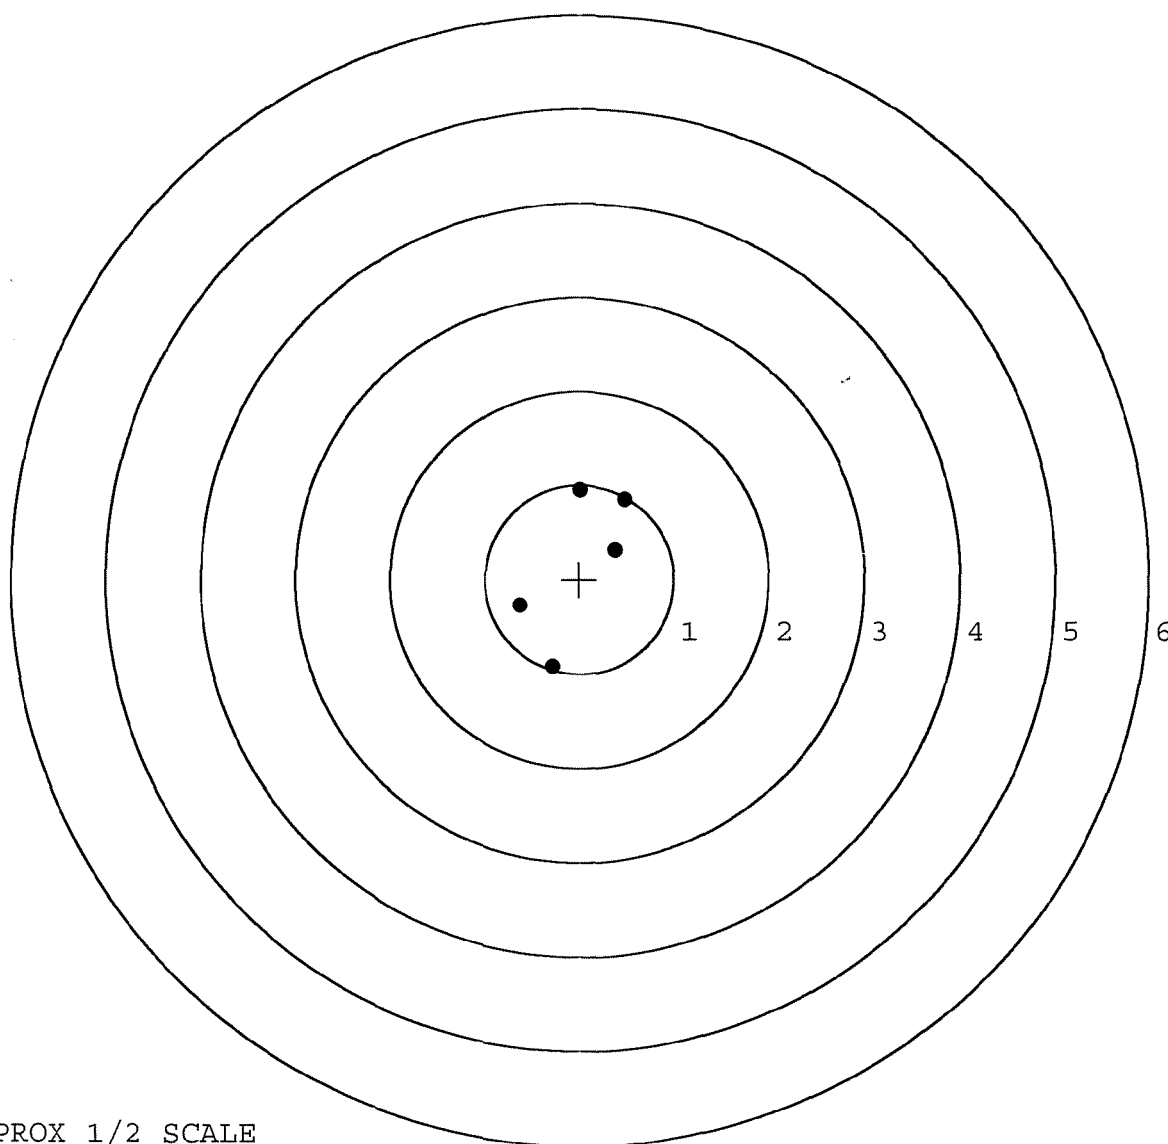


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6790157. __0
TARGET NUMBER: 2
FILE DATE: 12/13/2001
FILE TIME: 04:00

POINT#	X	Y
1:	-0.514	-0.371
2:	1.169	-0.569
3:	-0.270	0.692
4:	0.148	0.935
5:	-0.525	0.993

X CENTROID: 0.002
Y CENTROID: 0.336
POA TO CENTROID: 0.336
HORZ SPREAD: 1.694
VERT SPREAD: 1.562
GROUP SPREAD: 2.304
MIN RADIUS: 0.448
MAX RADIUS: 1.477
MEAN RADIUS: 0.852
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 4
in 3 IN DIAMETER: 5

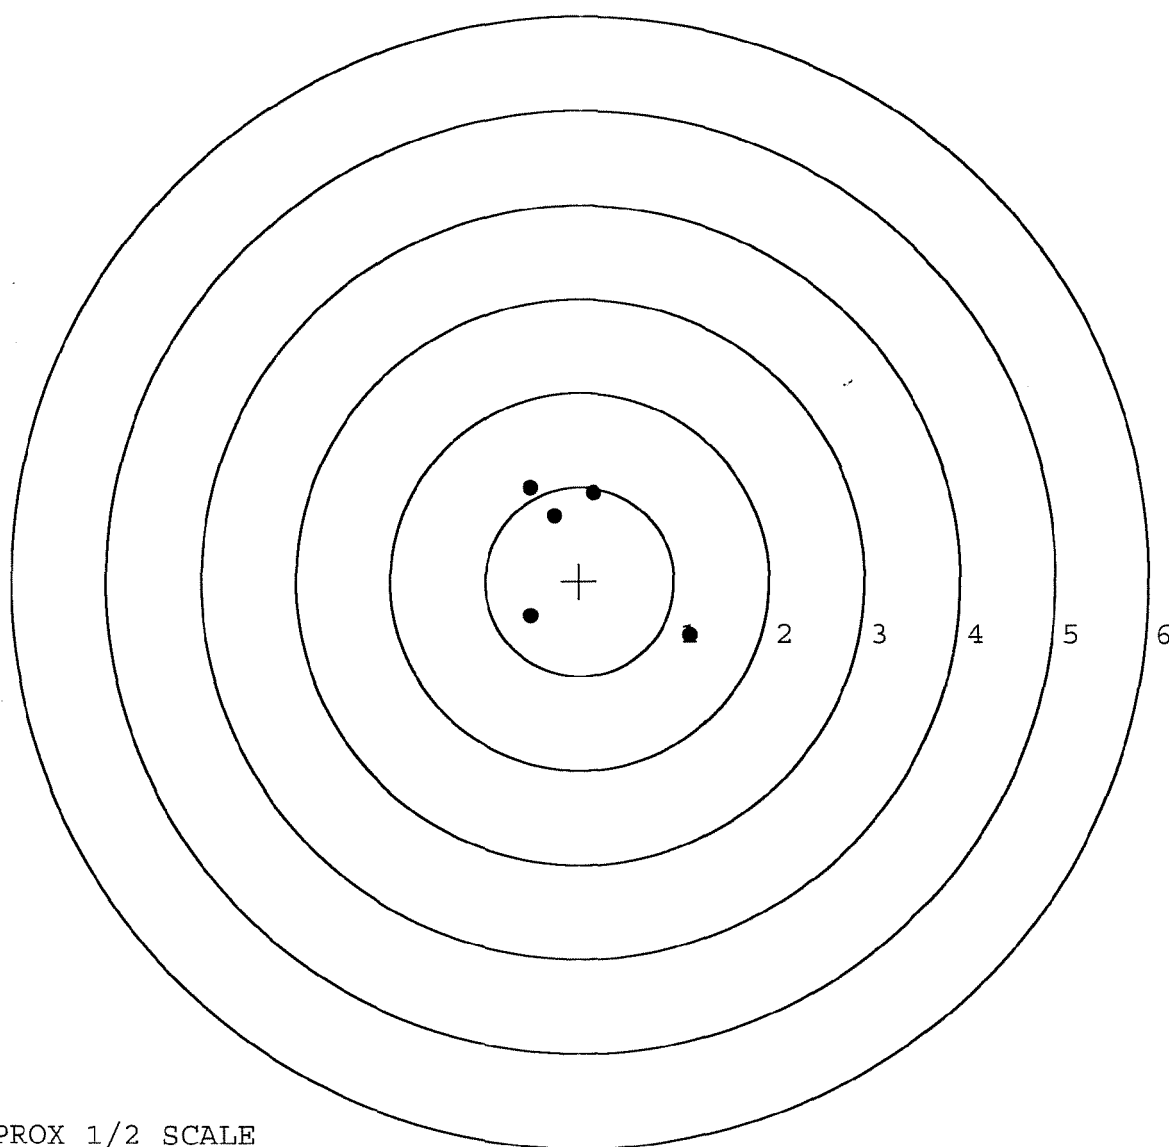

TARGET APPROX 1/2 SCALE