

E 6790186

VERY IMPORTANT: Instruction Book enclosed to assure safe use of this firearm.

Remington®

MODEL 700TH M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

Made in Union, NY Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

SERIAL NO. J
E6790186

ORDER NO.
25716

46

31XV

5716 E6790186

ORDER 25716

MODEL 700TH M24

UPC



ORDER 25716

MODEL 700TH M24

UPC



SERIAL NO.



MODEL 700TM M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

DOCUMENT ENVELOPE ASSEMBLY:

- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- SAFETY BOOKLET

46 FORM 1444




ORDER NO. 25716

BARREL LENGTH 24"

CAPACITY 6

E6790186



CONTRACT #

GUN SERIAL # E6790186

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		11/5/01	REP
600	PROOF		11/5/01	REP
607	CHECK HEADSPACE	MAGNA FLUX	11/5/01	REP
610	DIS-ASSEMBLE GUN	INSPECTED	11/5/01	REP
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT	10/7 2001 OPERATOR BRD		
615	ROLLMARK CALIBER		11/6	(D)
617	DRILL AND TAP SIGHT HOLES		11/7	BWT
620	APPLY COATINGS (BARREL ACTION)		11/14	HP
	(BOLT)		11/14	HP
625	FINAL ASSEMBLY		12-7	DR
	A) CLEAN INSIDE OF BOLT ASSEMBLY			
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		12-7	DR
	C) INSPECT EJECTOR HOLE FOR CHAMFER		12-7	DR
	D) OIL FIRING PIN ASSEMBLY		12-7	Dφ
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE 2.50 LBS +/- .5 LBS		12-7	Dφ

OP #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE 2 LBS MIN 10 LBS MAX	<u>6.5</u> <u>6.5</u> <u>6.25</u>	12-14-01	EK
CONT.	G) SAFETY OFF FORCE 2 LBS MIN	<u>3.5</u> <u>3.5</u> <u>3.5</u>	12-14-01	EK
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT .020 MIN	<u>.0235</u> <u>.0245</u> <u>.0255</u>	12-14-01	EK
	J) ASSEMBLE STOCK		12-10-01	ER
	K) ASSEMBLE SWIVEL STUDS		12/20/01	REP
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		12/20/01	REP
	M) IRON SIGHT ALIGNMENT		12/20/01	REP
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		12/20/01	REP
640	GALLERY TEST AND TARGET	PASS FAIL	12/20/01	EP
	A) MALFUNCTIONS	PASS FAIL	12/20/01	EP
	B) PIERCED PRIMERS	PASS FAIL	12/20/01	EP
645	INSPECT FOR LIVE AMMO		12/20/01	EP
655	FINAL INSPECTION A) HEADSPACE		12/20/01	REP
	B) TRIGGER PULL +/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	<u>2.62</u> <u>2.56</u> <u>2.61</u> <u>2.37</u> <u>2.41</u>	12/17/01	DA
	C) FUNCTION		12/20/01	REP
660	PACK		12/20/01	DA

SERIAL NUMBER: E6790186. 0

TARGET NUMBER: 1

FILE DATE: 12/11/2001

FILE TIME: 11:16

POINT#	X	Y
1:	0.108	-1.575
2:	-0.956	-0.153
3:	-0.071	0.401
4:	0.344	0.806
5:	0.031	-0.013

X CENTROID: -0.109

Y CENTROID: -0.107

POA TO CENTROID: 0.152

HORZ SPREAD: 1.300

VERT SPREAD: 2.381

GROUP SPREAD: 2.393

MIN RADIUS: 0.168


MAX RADIUS: 1.484

MEAN RADIUS: 0.806

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 3

in 3 IN DIAMETER: 5

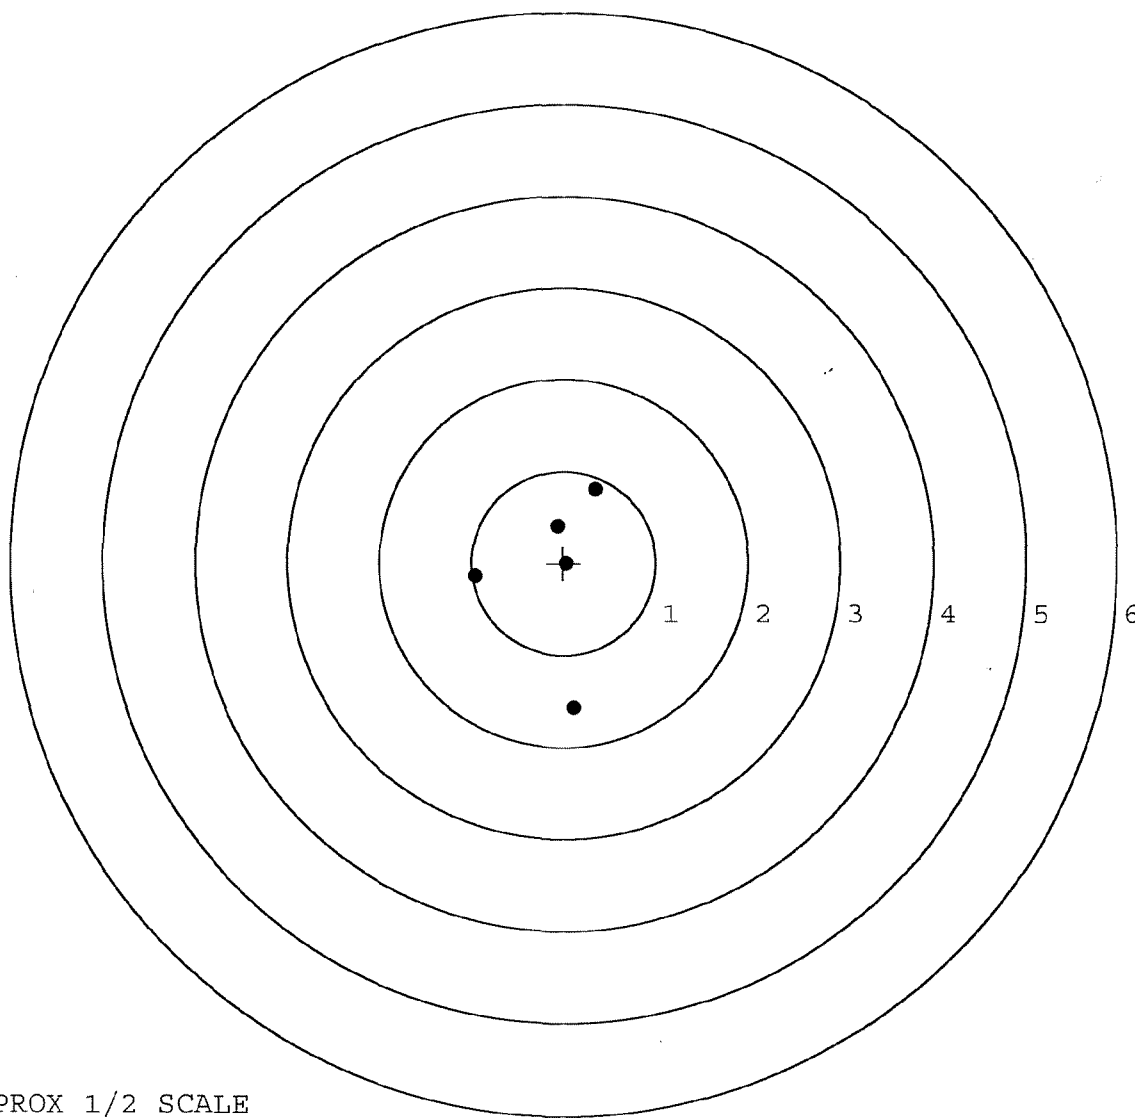


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6790186.___0
TARGET NUMBER: 2
FILE DATE: 12/11/2001
FILE TIME: 11:16

POINT#	X	Y
1:	0.515	-0.251
2:	0.289	-0.708
3:	-0.128	-0.933
4:	-0.477	-0.611
5:	0.493	0.823

X CENTROID: 0.138
Y CENTROID: -0.336
POA TO CENTROID: 0.363
HORZ SPREAD: 0.992
VERT SPREAD: 1.756
GROUP SPREAD: 1.863
MIN RADIUS: 0.386
MAX RADIUS: 1.212
MEAN RADIUS: 0.665
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 4
in 3 IN DIAMETER: 5

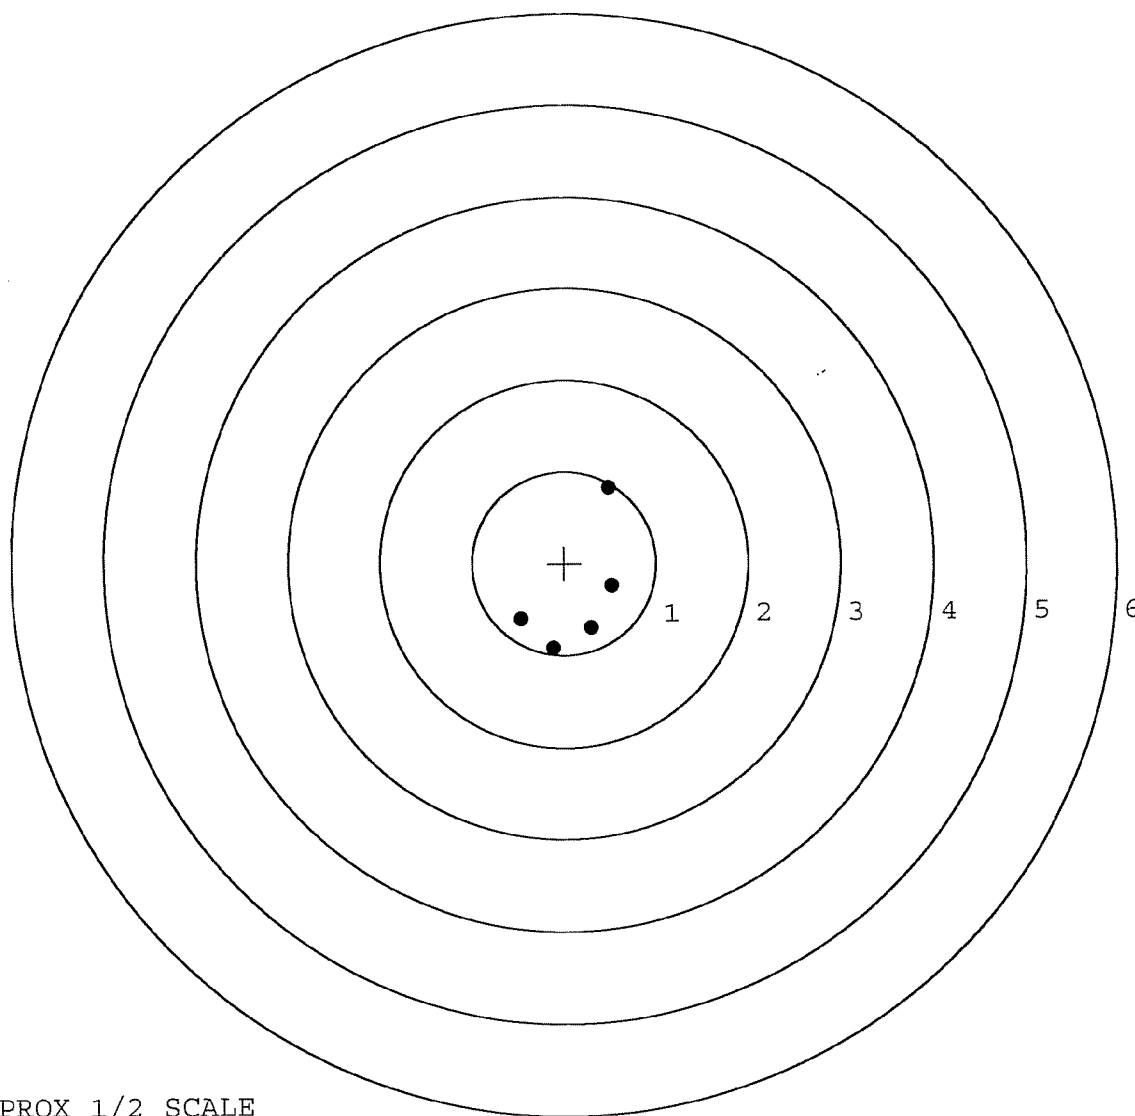

TARGET APPROX 1/2 SCALE

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. E6790186

DATE 11/15/01

TESTER D.M.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.54	2.45		2.44	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.62	2.61		2.46	
PULL #3	2.56	2.62		2.31	
PULL #4	2.54	2.73		2.38	
PULL #5	2.46	2.53		2.22	
TOTAL	12.72	12.94		11.81	
AVG.	2.54	2.59		2.36	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.38	3.30		
PULL #2	3.31	3.17		
PULL #3	3.17	3.17		
PULL #4	3.27	3.24		
PULL #5	3.27	3.27		
TOTAL	16.40	16.15		
AVG.	3.28	3.23		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.33	4.55		4.55
PULL #2	4.19	4.62		3.98
PULL #3	3.90	3.88		4.11
PULL #4	4.33	4.34		4.07
PULL #5	4.45	4.31		4.11
TOTAL	21.40	21.10		20.82
AVG.	4.28	4.22		4.16