

E679 0353

VERY IMPORTANT: Instruction Book enclosed to assure safe use of this firearm.

Remington®

MODEL 700TH M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

Made in Illinois, NY Reg. U.S. Pat. & Tar. Off. Marca Registrada. Marque Deposee.

SERIAL NO. E6790353	J
ORDER NO. 25716	46
22BW	

5716 E6790353

ORDER 25716
MODEL 700TH M24
UPC



ORDER 25716
MODEL 700TH M24
UPC



MODEL 700TM M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

DOCUMENT ENVELOPE ASSEMBLY:

- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- SAFETY BOOKLET

46 FORM 1444




ORDER NO. 25716

BARREL LENGTH 24"

CAPACITY 6

E6790353



CONTRACT #

GUN SERIAL # 56790353


OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		11/5/01	Rep
600	PROOF		11/5/01	Rep
607	CHECK HEADSPACE	MAGNA - FLUX	11/5/01	Rep
610	DIS-ASSEMBLE GUN	INSPECTED	11/5/01	Rep
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT	NOV 7 2001 OPERATOR DRB	11/6/01	DRB
615	ROLLMARK CALIBER		11/6/01	DRB
617	DRILL AND TAP SIGHT HOLES		11/7	BWT
620	APPLY COATINGS (BARREL ACTION)		11/14	HP
	(BOLT)		11/14	HP
625	FINAL ASSEMBLY		12-6	DK
	A) CLEAN INSIDE OF BOLT ASSEMBLY			
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		12-6	DK
	C) INSPECT EJECTOR HOLE FOR CHAMFER		12-6	DK
	D) OIL FIRING PIN ASSEMBLY		12-6	DK
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE	2.50 LBS +/- .5 LBS	1-9-02	DRB

OP #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE 2 LBS MIN 10 LBS MAX	<u>4.5</u> <u>4.75</u> <u>4.75</u>	12-14-01	EK
CONT.	G) SAFETY OFF FORCE 2 LBS MIN	<u>3.25</u> <u>3.0</u> <u>2.75</u>	12-14-01	EK
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT .020 MIN	<u>.0245</u> <u>.0255</u> <u>.0255</u>	12-14-01	EK
	J) ASSEMBLE STOCK		12-10-01	eth
	K) ASSEMBLE SWIVEL STUDS		12/19/01	REP
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		12/19/01	REP
	M) IRON SIGHT ALIGNMENT		12/19/01	REP
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		12/19/01	REP
640	GALLERY TEST AND TARGET	PASS FAIL	12-11-01	EJ
	A) MALFUNCTIONS	PASS FAIL	12-11-01	EP
	B) PIERCED PRIMERS	PASS FAIL	12-11-01	EP
645	INSPECT FOR LIVE AMMO		12-11-01	EP
655	FINAL INSPECTION A) HEADSPACE		12/18/01	REP
	B) TRIGGER PULL +/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	2.74 <u>2.72</u> <u>2.62</u> <u>2.72</u> <u>2.66</u>	12/17/01	B.M.
	C) FUNCTION		12/19/01	REP
660	PACK		1-9-02	OP

SERIAL NUMBER: E6790353. __0
TARGET NUMBER: 1
FILE DATE: 12/11/2001
FILE TIME: 11:31

POINT#	X	Y
1:	0.744	-0.068
2:	0.017	-0.379
3:	0.040	-0.011
4:	-0.150	-0.030
5:	-0.631	0.784

X CENTROID: 0.004
Y CENTROID: 0.059
POA TO CENTROID: 0.059
HORZ SPREAD: 1.375
VERT SPREAD: 1.163
GROUP SPREAD: 1.618
MIN RADIUS: 0.079
MAX RADIUS: 0.964
MEAN RADIUS: 0.482
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 5
in 3 IN DIAMETER: 5

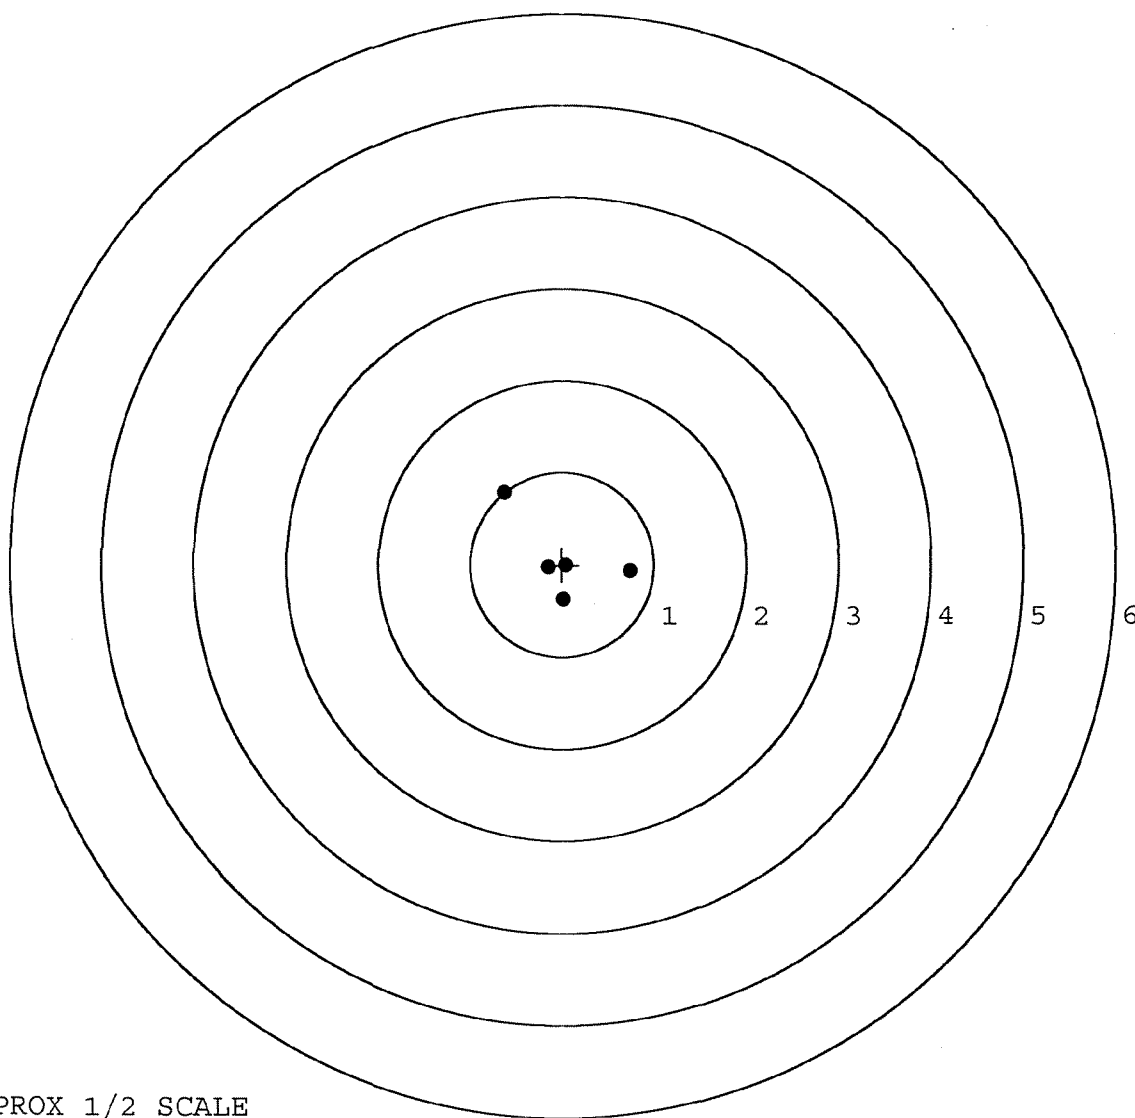


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6790353. __0
TARGET NUMBER: 2
FILE DATE: 12/11/2001
FILE TIME: 11:31

POINT#	X	Y
1:	0.434	0.332
2:	0.249	-0.348
3:	0.076	-0.006
4:	-0.511	-0.190
5:	-0.342	0.918

X CENTROID: -0.019
Y CENTROID: 0.141
POA TO CENTROID: 0.142
HORZ SPREAD: 0.945
VERT SPREAD: 1.266
GROUP SPREAD: 1.397
MIN RADIUS: 0.175
MAX RADIUS: 0.841
MEAN RADIUS: 0.532
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 5
in 3 IN DIAMETER: 5

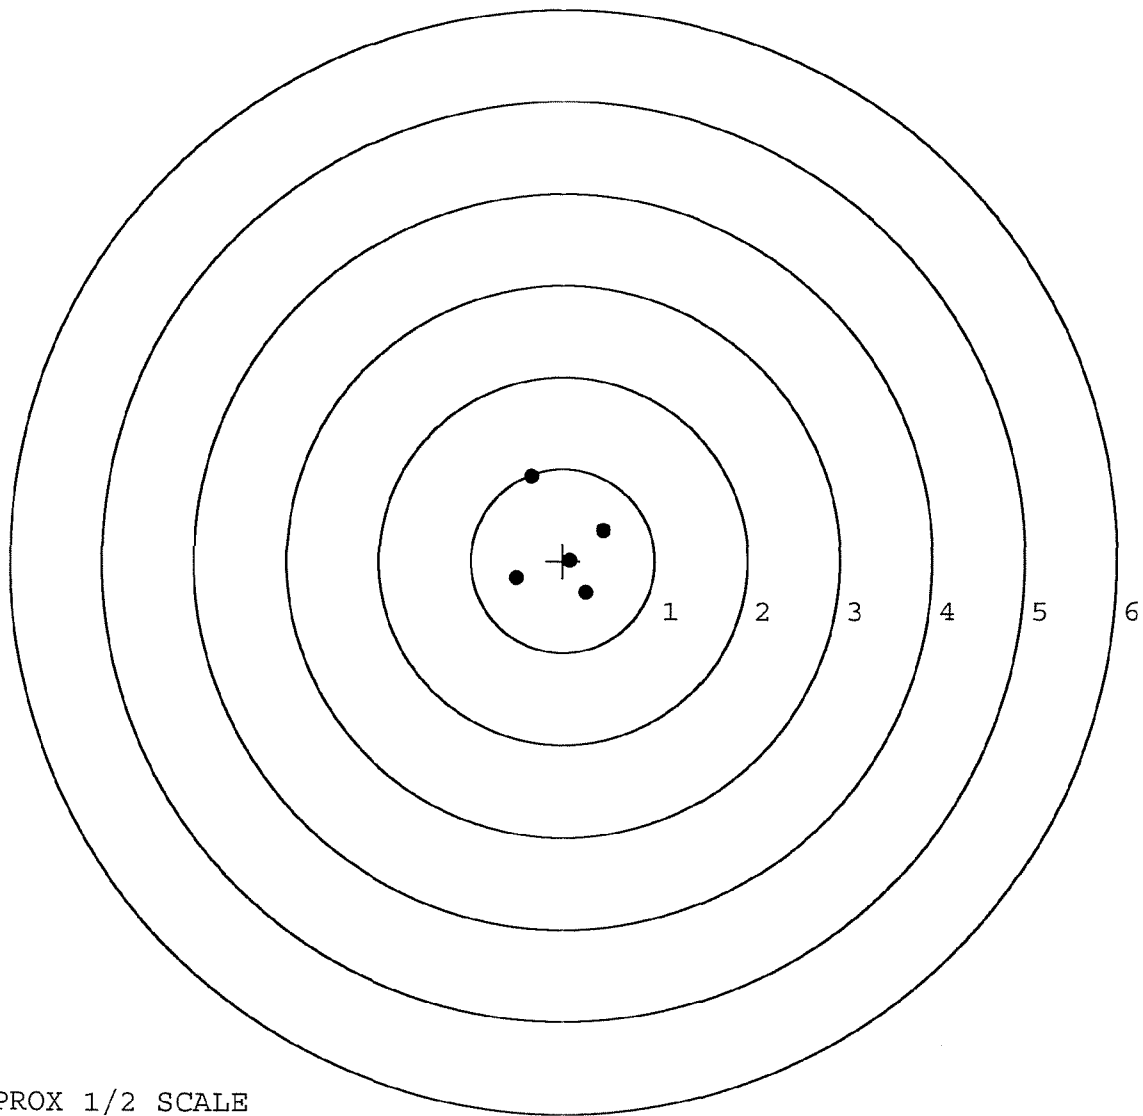

TARGET APPROX 1/2 SCALE

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. E6790353

DATE 12/8/01

TESTER D.M.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.58	2.85		2.53	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.39	2.88		2.72	
PULL #3	2.65	2.91		2.80	
PULL #4	2.52	2.97		2.72	
PULL #5	2.55	2.88		2.66	
TOTAL	12.69	14.49		13.43	
AVG.	2.54	2.90		2.69	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.37	3.17		
PULL #2	3.40	2.78		
PULL #3	3.32	3.24		
PULL #4	3.08	3.19		
PULL #5	3.52	3.25		
TOTAL	16.69	15.63		
AVG.	3.34	3.13		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.21	4.13		4.20
PULL #2	4.29	4.20 4.24		4.10
PULL #3	3.85	4.42		4.22
PULL #4	4.21	3.80		4.10
PULL #5	4.20	4.44		4.18
TOTAL	20.76	21.03		20.80
AVG.	4.15	4.21		4.16