

E 637 4564 New
C 622 5341 Old

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER

R 98-05078

INITIAL CUSTOMER ORDER NO.

WOG 20 OF 23

JLM

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

02/24/98

02/24/98

~~C6225341~~

E6374564

700 7.62

NATO

ACCESSORIES

W/STUDS

SCOPE BASE

FROM:

SHIP TO:

SUPPLY & SERVICES DIV
D O L WAREHOUSE J 2535 A1
KNOX ST
FT BRAGG NC 28307

SUPPLY & SERVICES DIV
D O L WAREHOUSE J 2535 A1
KNOX ST
FT BRAGG NC 28307

CUST NO: 113830 C.O.D.

ACCOUNT NUMBER

ACCOUNT NUMBER NC

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

B1

TRIGGER GROUP

B2

BOLT ASSY.

B3

BARREL ASSY.

B4

REC. ASSY.

B5

WOOD

C1

METAL

C2

MAIN FAULT

PARTS

COMMENTS

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD5925 REV. 7/97

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400118240

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6374564
14 May 1998

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .3724
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .3722
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .526512

THE AMR FOR THIS RIFLE IS: 1.222

CENTROIDAL DISTANCES

0	TO	1	.669517
1	TO	2	.393326
1	TO	3	.0813019
1	TO	4	.373636
1	TO	5	.376342

2
9
1
3
+ <----POA


PATTERN #: ☐ 1 ☐

POA TO CENTROID: .670
 MIN RADIUS : .228
 MEAN RADIUS : 1.260
 MAX RADIUS : 2.896
 CENTROID X : .587
 CENTROID Y : .322

14 May 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374564

CENTERFIRE PATTERN # 1

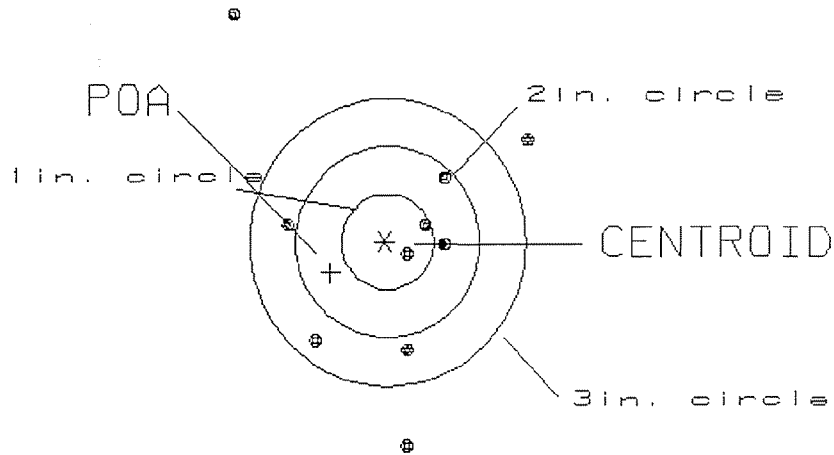

OF SHOTS= 10

IN CIRCLE

HS= 3.20

2

VS= 4.43

4

GS= 4.81


7

PATTERN #: ☐ 2 ☐
 POA TO CENTROID: .605
 MIN RADIUS : .335
 MEAN RADIUS : 1.260
 MAX RADIUS : 2.516
 CENTROID X : .263
 CENTROID Y : .545

14 May 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374564

CENTERFIRE PATTERN # 2

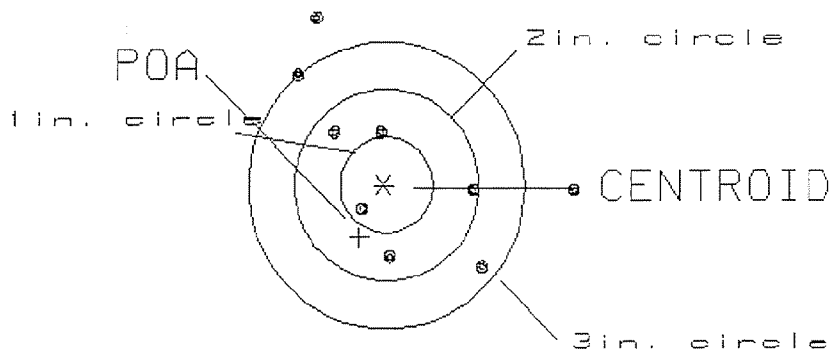

OF SHOTS= 10

IN CIRCLE

HS= 3.52
 VS= 3.82
 GS= 4.07

1
 5
 6


PATTERN #: 030

POA TO CENTROID: .628
 MIN RADIUS : .464
 MEAN RADIUS : 1.035
 MAX RADIUS : 2.760
 CENTROID X : .580
 CENTROID Y : .241

14 May 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374564

CENTERFIRE PATTERN # 3

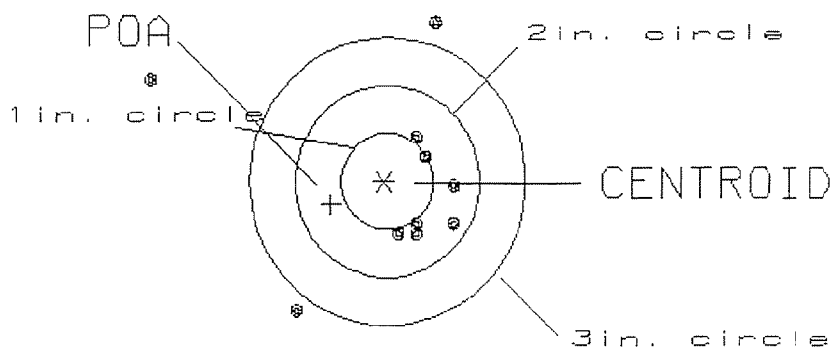

OF SHOTS= 10

IN CIRCLE

HS= 3.29
 VS= 2.93
 GS= 3.59

1
 7
 7


PATTERN #: ☐ 4 ☐

POA TO CENTROID: .432
 MIN RADIUS : .677
 MEAN RADIUS : 1.423
 MAX RADIUS : ~~2.242~~
 CENTROID X : .217
 CENTROID Y : .374

14 May 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374564

CENTERFIRE PATTERN # 4

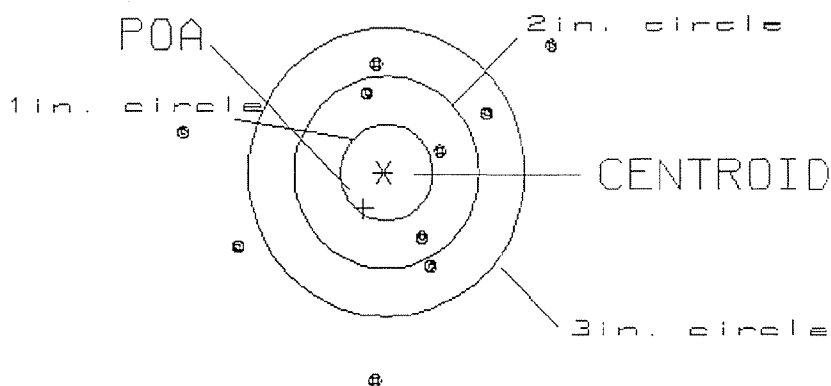

OF SHOTS= 10

IN CIRCLE

HS= 3.96
 VS= 3.55
 GS= 4.07


0
 3
 6

PATTERN #: 15
 POA TO CENTROID: .435
 MIN RADIUS : .436
 MEAN RADIUS : 1.130
 MAX RADIUS : 2.247
 CENTROID X : .215
 CENTROID Y : .379

14 May 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374564

CENTERFIRE PATTERN # 5

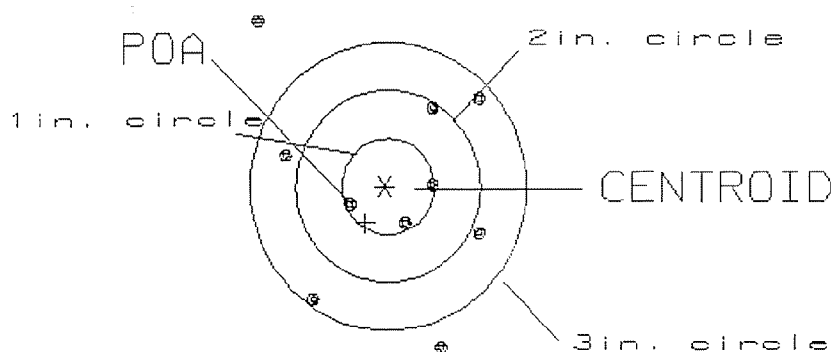

OF SHOTS= 10

IN CIRCLE

HS= 2.41
 VS= 3.40
 GS= 3.95

3
 4
 8