

UPC



E6374581

ORDER NO. 25705

BARREL LENGTH 24"

CAPACITY * 6

*INCLUDES 1 IN CHAMBER

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # ~~E637481~~
24 Oct 1997 ~~E637481~~ E6374581

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.317333
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.00833333
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .317443

THE AMR FOR THIS RIFLE IS: 1.161

CENTROIDAL DISTANCES

0	TO	1	.595778
1	TO	2	.487742
1	TO	3	.365318

1 3² + <----POA

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: ☐ 1 ☐

POA TO CENTROID: .596
 MIN RADIUS : .264
 EAN RADIUS : 1.216
 MAX RADIUS : 1.783
 CENTROID X : -.594
 CENTROID Y : -.046

24 Oct 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E637481

CENTERFIRE PATTERN # 1

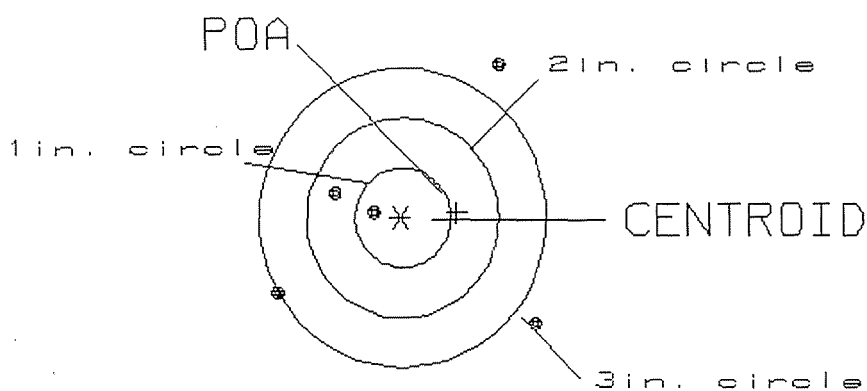

OF SHOTS= 5

IN CIRCLE

HS= 2.69

1

VS= 2.61

2

GS= 3.20

2

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: ☐ 2 ☐

POA TO CENTROID: .161
 MIN RADIUS : .649
 MEAN RADIUS : .874
 MAX RADIUS : 1.177
 CENTROID X : -.128
 CENTROID Y : .098

24 Oct 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E637481

CENTERFIRE PATTERN # 2

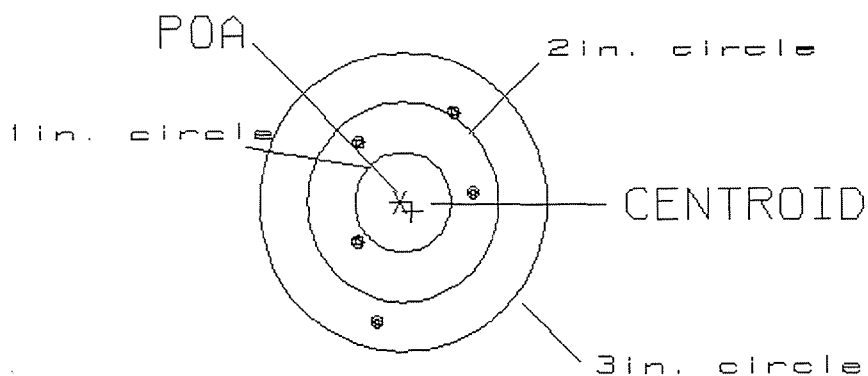

OF SHOTS= 5

IN CIRCLE

HS= 1.21
 VS= 2.03
 GS= 2.17

0
 3
 5

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: ☐ 3 ☐

POA TO CENTROID: .243
 IN RADIUS : .696
 MEAN RADIUS : 1.393
 MAX RADIUS : 2.221
 CENTROID X : -.230
 CENTROID Y : -.077

24 Oct 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E637481

CENTERFIRE PATTERN # 3

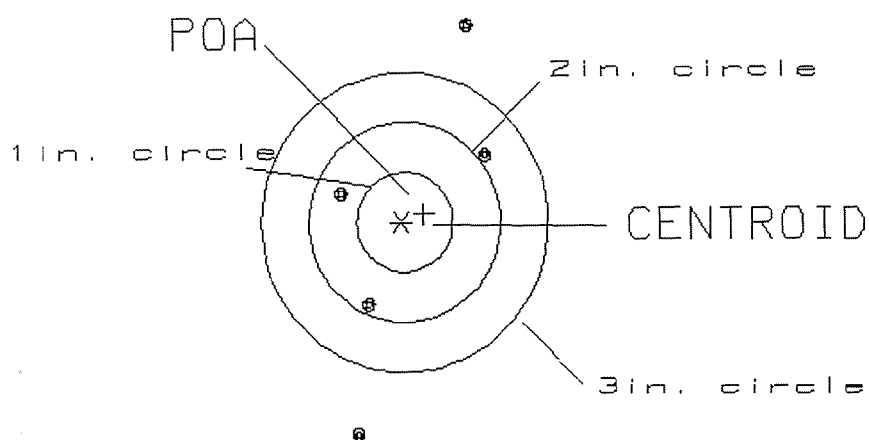

OF SHOTS= 5

IN CIRCLE

HS= 1.50

0

VS= 4.10

2

GS= 4.25

3

ISRAELI GUNS

CONTRACT # DAAE20-97-C-0182

GUN SERIAL # E6374581

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK			
600	PROOF			
607	CHECK HEADSPACE			
610	DIS-ASSEMBLE GUN			
612	MAGNAFLUX BARREL ACTION			
	MAGNAFLUX BOLT			
615	ROLLMARK CALIBER			
617	DRILL AND TAP SIGHT HOLES			
618	POLISH BARREL			
620	APPLY COATINGS (BARREL ACTION)			
	(BOLT)			
625	FINAL ASSEMBLY A) CLEAN INSIDE OF BOLT ASSEMBLY			
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD			
	C) INSPECT EJECTOR HOLE FOR CHAMFER			
	D) OIL FIRING PIN ASSEMBLY			
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE			

P. #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE	<u>5</u> <u>4</u> <u>4</u>	10-23-97	CK
CONT.	G) SAFETY OFF FORCE	<u>2</u> <u>2</u> <u>2</u>	10-23-97	CK
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT	<u>.021</u> <u>.022</u> <u>.022</u>	10-20-97	CK
	J) ASSEMBLE STOCK		10-17-97	RW
	K) ASSEMBLE SWIVEL STUDS		11/7/97	TRP
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		10-17-97	RW
	M) IRON SIGHT ALIGNMENT		10-17-97	RW
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		10-17-97	RW
640	GALLERY TEST AND TARGET	L 59 R 91	10/24/97	P.B.
	A) MALFUNCTIONS		10/24/97	P.B.
	B) PIERCED PRIMERS		10/24/97	P.B.
645	INSPECT FOR LIVE AMMO		10/24/97	KA
655	FINAL INSPECTION A) HEADSPACE		11/7/97	RP
	B) TRIGGER PULL	<u>2.37</u> <u>2.35</u> <u>2.29</u> <u>2.36</u> <u>2.43</u>	10-31-97	CK
	C) FUNCTION		11/7/97	RP
660	PACK			

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. E6374581
DATE 10-17-97
TESTER TM

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.61	2.47	2.61	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.58	2.57	2.64	
PULL #3	2.62	2.50	2.54	
PULL #4	2.62	2.59	2.63	
PULL #5	2.58	2.40	2.60	
TOTAL	13.01	12.53	13.02	
AVG.	2.60	2.50	2.60	


	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.01	3.15	
PULL #2	3.06	3.10	
PULL #3	3.09	3.12	
PULL #4	3.14	3.10	
PULL #5	3.15	3.17	
TOTAL	15.45	15.64	
AVG.	3.09	3.12	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.10	3.97		4.12
PULL #2	4.13	4.07		4.10
PULL #3	4.20	4.01		4.15
PULL #4	4.15	3.99		4.13
PULL #5	4.18	4.09		4.18
TOTAL	20.75	20.08		20.68
AVG.	4.15	4.01		4.13

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

GREEN ENVELOPE CONTAINING:
- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- MUSEUM/COUNTRY STORE FLIER
- REMINGTON AUTHORIZED GUNSMITHS

46 FORM

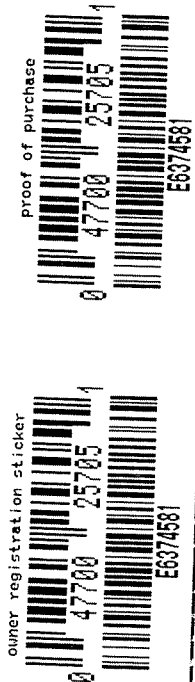

Do Not Use

Do Not Use

SERIAL NO.



E6374581

ORDER 25705
MODEL 700™ M24
UPC



ORDER 25705
MODEL 700™ M24
UPC



VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

Remington®

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

Reg. U.S. Pat. & Tm. Off. Marca Registrada. Marque Deposee.

SERIAL NO. E6374581	46	ORDER NO. 25705	01XR
------------------------	----	--------------------	------

5705 E6374581