

UPC



E6374658

ORDER NO. 25705

BARREL LENGTH 24"

CAPACITY * 6

*INCLUDES 1 IN CHAMBER

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6374658
15 Nov 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0223333
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .109667
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .111918

THE AMR FOR THIS RIFLE IS: .9177

CENTROIDAL DISTANCES

0 TO 1	.246676
1 TO 2	.21285
1 TO 3	.195387


1
2 <----POA

PATTERN #: 1
 POA TO CENTROID: .246
 MIN RADIUS : .712
 MEAN RADIUS : 1.104
 MAX RADIUS : 1.465
 CENTROID X : .057
 CENTROID Y : .240

15 Nov 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374658

CENTERFIRE PATTERN # 1

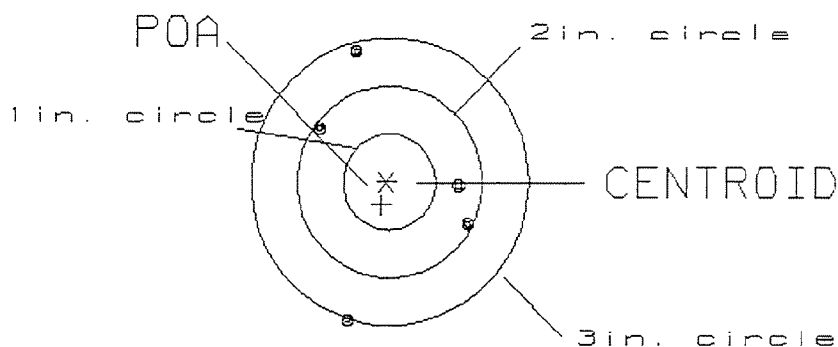

OF SHOTS= 5

IN CIRCLE

HS= 1.62

0

US= 2.77

3

GS= 2.77

5


PATTERN #: 2

POA TO CENTROID: .041
 MIN RADIUS : .753
 MEAN RADIUS : 1.065
 MAX RADIUS : 1.594
 CENTROID X : .029
 CENTROID Y : .029

15 Nov 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374658

CENTERFIRE PATTERN # 2

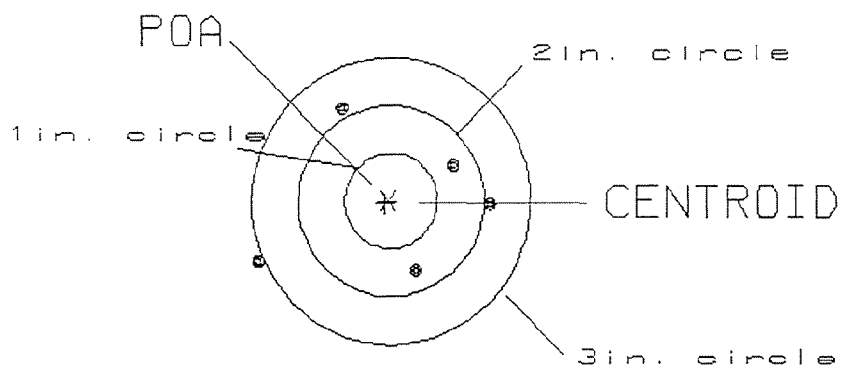

OF SHOTS= 5

IN CIRCLE

HS= 2.49

0

VS= 1.67

2

GS= 2.56


4

PATTERN #: 3
 POA TO CENTROID: .063
 MIN RADIUS : .329
 MEAN RADIUS : .584
 MAX RADIUS : .824
 CENTROID X : -.019
 CENTROID Y : .060

15 Nov 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374658

CENTERFIRE PATTERN # 3

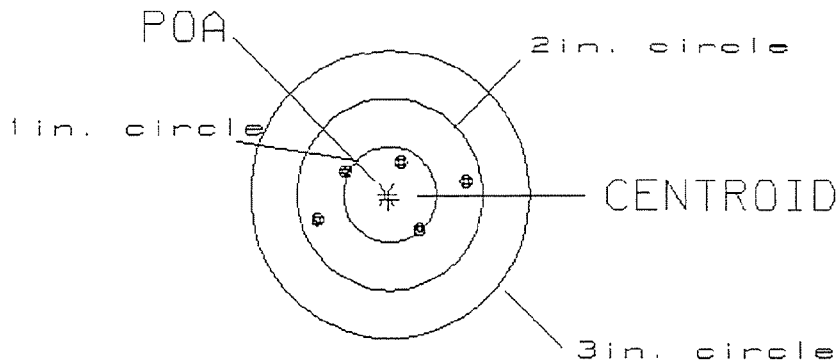

OF SHOTS= 5

IN CIRCLE

HS= 1.58
 VS= .67
 GS= 1.64

3
 5
 5

ISRAELI GUNS

CONTRACT # DAAE20-97-C-0182

GUN SERIAL # E637 4658

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK			
600	PROOF			
607	CHECK HEADSPACE			
610	DIS-ASSEMBLE GUN			
612	MAGNAFLUX BARREL ACTION			
	MAGNAFLUX BOLT			
615	ROLLMARK CALIBER			
617	DRILL AND TAP SIGHT HOLES			
618	POLISH BARREL			
620	APPLY COATINGS (BARREL ACTION)			
	(BOLT)			
625	FINAL ASSEMBLY A) CLEAN INSIDE OF BOLT ASSEMBLY			
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD			
	C) INSPECT EJECTOR HOLE FOR CHAMFER			
	D) OIL FIRING PIN ASSEMBLY			
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE			

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE	<u>6</u> <u>6</u> <u>6</u>	11-14-97	CR
CONT.	G) SAFETY OFF FORCE	<u>3</u> <u>3</u> <u>3</u>	11-14-97	CR
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT	<u>.021</u> <u>.022</u> <u>.021</u>	11-14-97	CR
	J) ASSEMBLE STOCK		11-11-97	CR
	K) ASSEMBLE SWIVEL STUDS			
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		11-11-97	CR
	M) IRON SIGHT ALIGNMENT		11-11-97	CR
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		11-11-97	CR
640	GALLERY TEST AND TARGET	L 98 1' R 52	11/15/97	WB
	A) MALFUNCTIONS		11/15/97	WB
	B) PIERCED PRIMERS		11/15/97	WB
645	INSPECT FOR LIVE AMMO		11/15/97	PB
655	FINAL INSPECTION A) HEADSPACE		12/9/97	RLW
	B) TRIGGER PULL	<u>2.30</u> <u>2.37</u> <u>2.31</u> <u>2.33</u> <u>2.31</u>	11/19/97	TRM
	C) FUNCTION			
660	PACK			

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. E6374658

DATE 11-7-97

TESTER JM

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.36	2.55	2.45	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.31	2.42	2.60	
PULL #3	2.38	2.50	2.58	
PULL #4	2.32	2.47	2.49	
PULL #5	2.35	2.64	2.63	
TOTAL	11.72	12.58	12.75	
AVG.	2.34	2.51	2.55	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	2.90	3.12	
PULL #2	3.10	2.99	
PULL #3	3.08	3.09	
PULL #4	3.12	3.18	
PULL #5	3.10	3.06	
TOTAL	15.30	15.44	
AVG.	3.06	3.08	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.09	4.13		4.08
PULL #2	4.02	4.10		3.98
PULL #3	4.11	4.08		4.10
PULL #4	4.01	4.17		4.13
PULL #5	3.99	4.12		3.97
TOTAL	20.22	20.60		20.26
AVG.	4.04	4.12		4.05

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

GREEN ENVELOPE CONTAINING:

- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- MUSEUM/COUNTRY STORE FLIER
- REMINGTON AUTHORIZED GUNSMITHS

46 FORM

proof of purchase



E6374658

owner registration sticker



E6374658

Do Not Use

VERY IMPORTANT!
INSTRUCTION BOOK
INCLUDED TO ASSURE
SAFE USE OF THIS
FIREARM.

SERIAL NO
E6374658

46 ORDER NO
25705

22XR

Remington®

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

Reg. U.S. Pat. & Tm. Off. Marca Registrada. Marque Déposée.



5705 E6374658

ORDER 25705

MODEL 700™ M24

UPC



0 47700 25705 1

ORDER 25705

MODEL 700™ M24

UPC



0 47700 25705 1

SERIAL NO



E6374658

Do Not Use