

E6413624

E6413624

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 97-04016INITIAL
JJM

CUSTOMER ORDER NO.

WOG 3 OF 8 W/10X SCOPE

Scope # 88 - 0463

DATE RECEIVED
02/13/97DATE OPENED
02/13/97

DATE CODE

SERIAL NUMBER
C6225581

NEW SERIAL NUMBER

MODEL AND GRADE
700 7.62

NATO

ACCESSORIES

W/STUDS

W/SWIVELS

FROM:

SHIP TO:

DEPT OF THE ARMY
COMMANDER ATTN SFC BARTON
2ND BN 10TH SFG (A)
FT CARSON

CO 80913

DEPT OF THE ARMY
COMMANDER ATTN SFC BARTON
2ND BN 10TH SFG (A)
FT CARSON

CO

80913

CUST NO: 162097 C.O.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER W/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

W55H097077H240

PARTS

COMMENTS

Barrel

96003

Republinter Coat Trigger
Guard, Front & Rear Sight Bases
Re-zinc Scope Base, Rings &
Swivel StudsScope Sent Back TO Factory
for Inspect.

REPAIRMAN	PROOF	CLEAN	TEST	TARGET	PATTERN
<i>RW</i>	<i>L</i>	<i>L</i>	<i>L</i>	<i>L</i>	

GALLERY TESTER	DATE	DATE	DATE	DATE	DATE
	2/12/97	3/13/97	3/13/97	3/13/97	

OFFICE COPY

RD6925 REV. 11/92

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 99-08873

INITIAL CUSTOMER ORDER NO.

SWS 360

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

04/05/99

04/05/99

E6225443

E6413624

700 7.62

M/24

ACCESSORIES

FROM:

US ARMY
C CO 3RD BN 7TH SFG (A)
FT CLAYTON PAN AM

34004

SHIP TO:

US ARMY
C CO 3RD BN 7TH SFG (A)
ATTN: ROBERT HOBART
FT CLAYTON PAN AM

34004

CUST NO: 132573 C.O.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

DOOR

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

BOLT ASSY.

B3

BARREL ASSY.

B4

REC. ASSY.

B5

WOOD

C1

D1

METAL

C2

D2

E1

D3

E2

E3

E4

E5

F1

F2

F3

F4

F5

MAIN FAULT

PARTS

COMMENTS

Barrel Assy Complete 96001
Bolt Assy 96005

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 7/97

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400120834

Receipt Of Firearm(s) Delivered to the Plant for Repair

Firearm Checked For Live Ammunition ☒

File # 00360

Delivery Date 4 / 5 / 99

Customer Name (Print)

ROBERT HOBART (U.S. ARMY)
Address 3rd BN 7th SF SFG State FORT CLAYTON Zip PANAMA
Phone Number (011) - 507-288-4287

Firearm Description Model M124 Cal./Ga. 7.62

Serial Number C6225113

Stock/ Fore-end Condition circle the description

(Excellent; Good ; Fair; Poor; Fancy; Plain, Synthetic, Wood)

Comments on Stock/ Fore-end condition _____

Metal Condition circle the description

(Excellent; Good ; Fair; Poor; Fancy; Plain Stainless Steel)

Comments on Metal condition _____

Barrel Type (VT. Rib; Plain; Deer; Stainless Steel) Barrel length _____

List additional accessories IE Scope, Sling, Gun case and description; _____

Customer request: Recondition per Bill Brelinisky (SWS)

Return Process Return to Clark St. Ent. ☐ Return via UPS ☐

By signing this receipt the person delivering the firearm understands to be the only person to receive the firearm upon completion of repairs.

Signature [Signature] Date 4/5/99
person delivering firearm.

Signature [Signature] Date 4/5/99
security officer

Signature [Signature] Date 4/5/99
arms service / CSR

Customer Pick Up Verification

I certify, I am the same person whom delivered the above described firearm to the Remington Ilion plant for repair and may lawfully possess a firearm in New York State

Signature _____ Date ____/____/____
person receiving firearm must be the same whom delivered

Signature _____ Date ____/____/____
security officer or other witness returning the firearm

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # e6413624
27 May 1999

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .102
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0132
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .102851

THE AMR FOR THIS RIFLE IS: 1.044

CENTROIDAL DISTANCES

Ø TO	1	.488567
1 TO	2	.57034
1 TO	3	.890565
1 TO	4	.411326
1 TO	5	.410859


1
4 5 <----POA
2
3

PATTERN #: ☐ 1 ☐
 POA TO CENTROID: .286
 MIN RADIUS : .093
 MEAN RADIUS : 1.077
 MAX RADIUS : 1.994
 CENTROID X : .281
 CENTROID Y : .054

27 May 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/e6413624

CENTERFIRE PATTERN # 1

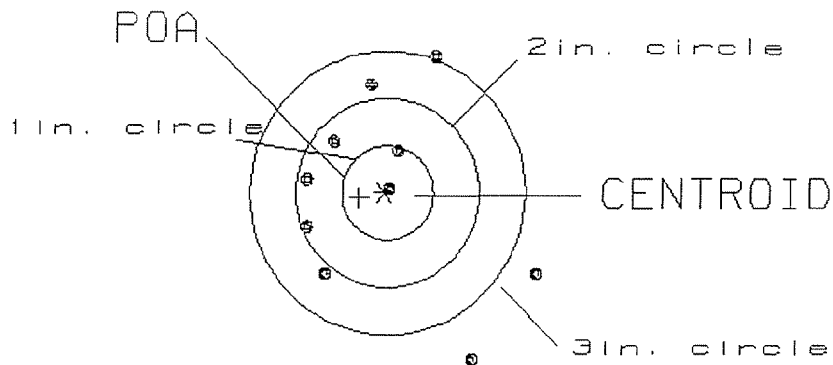

OF SHOTS= 10

IN CIRCLE

HS= 2.53

2

VS= 3.23

5

GS= 3.25


7

PATTERN #: ☐ 2 ☐
 POA TO CENTROID: .077
 MIN RADIUS : .304
 MEAN RADIUS : .868
 MAX RADIUS : 1.484
 CENTROID X : .033
 CENTROID Y : .070

27 May 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/e6413624

CENTERFIRE PATTERN # 2

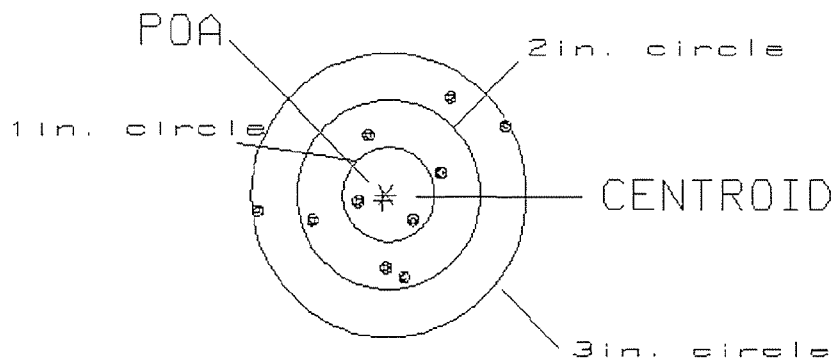

OF SHOTS= 10

IN CIRCLE

HS= 2.77

2

VS= 1.91

7

GS= 2.91


10

PATTERN #: ☐ 3 ☐
 POA TO CENTROID: .409
 MIN RADIUS : .479
 MEAN RADIUS : .909
 MAX RADIUS : 1.567
 CENTROID X : -.052
 CENTROID Y : -.406

27 May 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/e6413624

CENTERFIRE PATTERN # 3

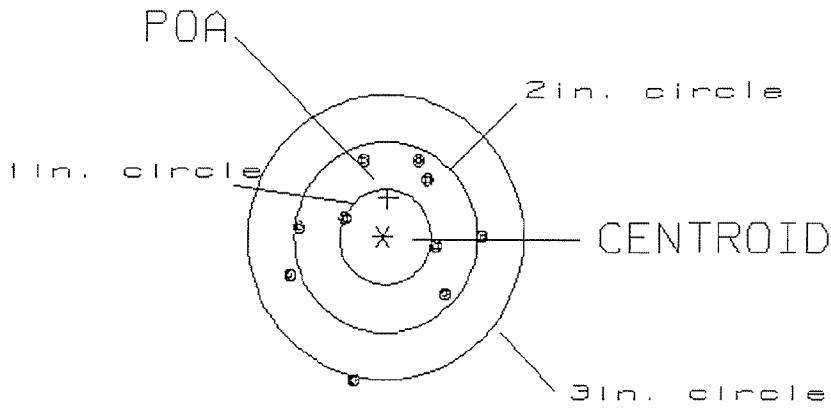

OF SHOTS= 10

IN CIRCLE

HS= 2.10
 VS= 2.36
 GS= 2.45


1
 7
 9

PATTERN #: ☐ 4 ☐
 POA TO CENTROID: .123
 MIN RADIUS : .463
 MEAN RADIUS : 1.412
 MAX RADIUS : 2.496
 CENTROID X : .065
 CENTROID Y : -.105

27 May 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/e5413624

CENTERFIRE PATTERN # 4

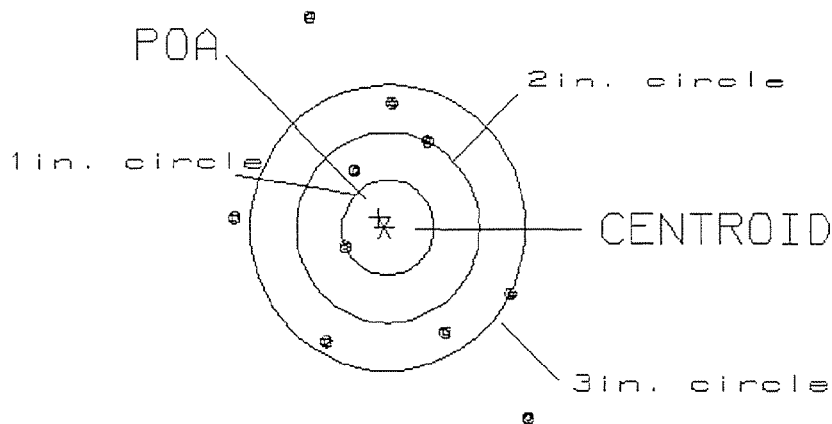

OF SHOTS= 10

IN CIRCLE

HS= 3.18
 VS= 4.17
 GS= 4.78


1
 3
 6

PATTERN #: 5
 POA TO CENTROID: .489
 MIN RADIUS : .064
 MEAN RADIUS : .955
 MAX RADIUS : 2.497
 CENTROID X : .183
 CENTROID Y : .453

27 May 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/e6413624

CENTERFIRE PATTERN # 5

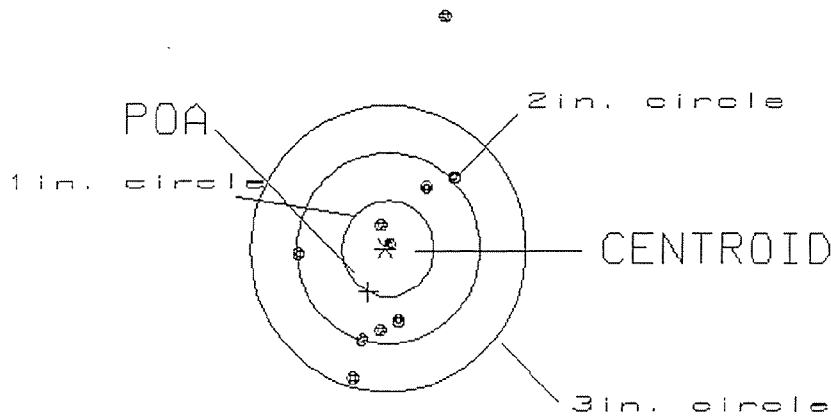

# OF SHOTS= 10	# IN CIRCLE
HS= 1.70	2
VS= 3.76	7
GS= 3.89	9