

E6703442

VERY IMPORTANT: Instruction Book enclosed to assure safe use of this firearm.

Remington®

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

Made in Union, NY Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

SERIAL NO. **E6703442**

ORDER NO. **25716**

46

27AV

5716 E6703442

ORDER 25716

MODEL 700™ M24

UPC



ORDER 25716

MODEL 700™ M24

UPC



SERIAL NO.



MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

DOCUMENT ENVELOPE ASSEMBLY:


- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- SAFETY BOOKLET

46 FORM 1444



ORDER NO.	25716
BARREL LENGTH	24"
CAPACITY	6

E6703442



GUN SERIAL # E670 3440

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		3/01	CK
600	PROOF		"	CK
607	CHECK HEADSPACE		"	CK
610	DIS-ASSEMBLE GUN		"	CK
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT			
615	ROLLMARK CALIBER			
617	DRILL AND TAP SIGHT HOLES		2/12/01	DA
618	POLISH BARREL			
620	APPLY COATINGS (BARREL ACTION)			
	(BOLT)			
625	FINAL ASSEMBLY			
	A) CLEAN INSIDE OF BOLT ASSEMBLY		3/01	DA
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		"	DA
	C) INSPECT EJECTOR HOLE FOR CHAMFER		B1	DA
	D) OIL FIRING PIN ASSEMBLY		3/01	CK
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE		3/01	CK

OP #	OPERATION NAME	READINGS			DATE	INITIAL
625	F) SAFETY ON FORCE	<u>7.0</u>	<u>7.0</u>	<u>7.0</u>	3/22/01	DA
CONT.						
	G) SAFETY OFF FORCE	<u>4.0</u>	<u>3.5</u>	<u>4.0</u>	3/22/01	DA
	H) TRIGGER PULL TEST AND RETAINABILITY				3/22/01	DA
	I) FIRING PIN INDENT	<u>.021</u>	<u>.022</u>	<u>.022</u>	3/22/01	DA
	J) ASSEMBLE STOCK					
	K) ASSEMBLE SWIVEL STUDS				3/23/01	REP
	L) ATTACH FRONT AND REAR SIGHT ASSY'S					
	M) IRON SIGHT ALIGNMENT					
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER					
640	GALLERY TEST AND TARGET				3-20-01	RW
	A) MALFUNCTIONS				3-20-01	RW
	B) PIERCED PRIMERS				3-20-01	RW
645	INSPECT FOR LIVE AMMO				3-20-01	RW
655	FINAL INSPECTION A) HEADSPACE				3/23/01	REP
	B) TRIGGER PULL	<u>2.66</u>	<u>2.66</u>	<u>2.39</u> <u>2.40</u> <u>2.42</u>	3/22/01	DA
	C) FUNCTION				3/23/01	REP
660	PACK				3/23/01	REP

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. E6703442

DATE 2-12-01

TESTER DA

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.56	2.53		2.44	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.55	2.56		2.39	
PULL #3	2.55	2.45		2.42	
PULL #4	2.50	2.45		2.32	
PULL #5	2.58	2.52		2.43	
TOTAL	1274	1251		1200	
AVG.	2.54	2.50		2.40	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.03	3.00		
PULL #2	3.02	3.00		
PULL #3	3.08	3.04		
PULL #4	3.07	3.04		
PULL #5	3.02	3.00		
TOTAL	1522	1505		
AVG.	3.04	3.01		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.19	4.19		4.01
PULL #2	4.14	4.12		4.00
PULL #3	4.21	4.09		3.94
PULL #4	4.22	4.17		4.02
PULL #5	4.30	4.11		3.95
TOTAL	2106	2068		1992
AVG.	4.21	4.13		3.98

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # e6703442
22 Mar 2001

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0544
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0884
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .103798

THE AMR FOR THIS RIFLE IS: 1.247

CENTROIDAL DISTANCES

Ø TO	1	.285002
1 TO	2	.422015
1 TO	3	.169198
1 TO	4	1.03402
1 TO	5	.331282

4

5
+₃1 <----POA


2

PATTERN #: ☐ 1 ☐
 POA TO CENTROID: .285
 MIN RADIUS : .588
 MEAN RADIUS : 1.397
 MAX RADIUS : 2.329
 CENTROID X : .285
 CENTROID Y : -.001

22 Mar 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/e6703442

CENTERFIRE PATTERN # 1

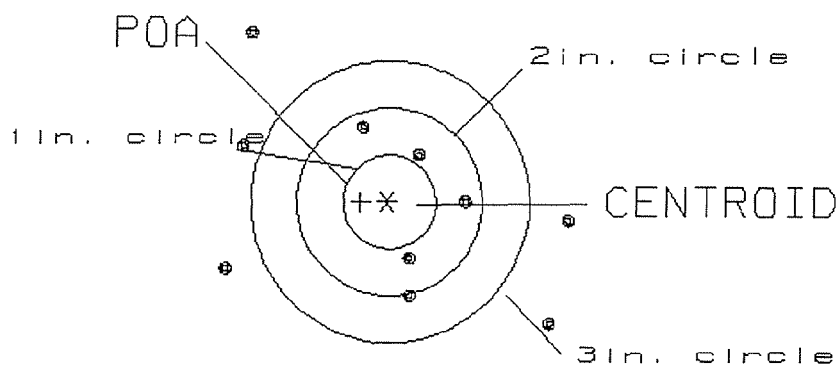

OF SHOTS= 10

IN CIRCLE

HS= 3.67

0

VS= 3.05

4

GS= 4.44


5

PATTERN #: ☐ 2 ☐
 POA TO CENTROID: .469
 MIN RADIUS : .139
 MEAN RADIUS : .957
 MAX RADIUS : 1.929
 CENTROID X : .214
 CENTROID Y : -.417

22 Mar 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/e6703442

CENTERFIRE PATTERN # 2

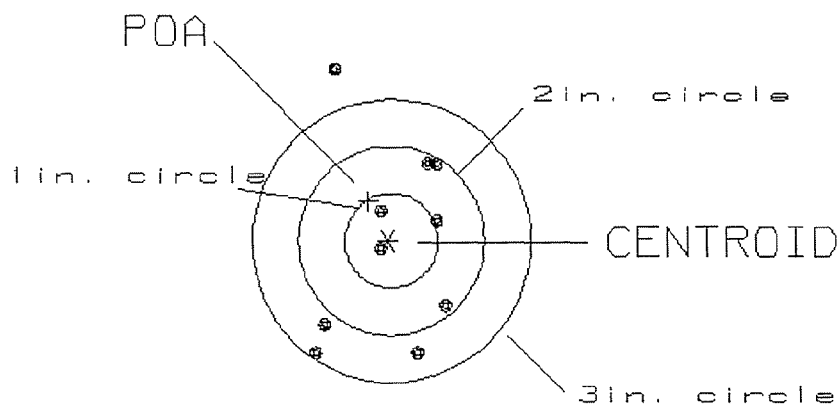

OF SHOTS= 10

IN CIRCLE

HS= 1.46

2

VS= 3.02

6

GS= 3.14


9

PATTERN #: ☐ 3 ☐
 POA TO CENTROID: .160
 MIN RADIUS : .386
 MEAN RADIUS : 1.197
 MAX RADIUS : 3.220
 CENTROID X : .137
 CENTROID Y : -.083

22 Mar 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/e6703442

CENTERFIRE PATTERN # 3

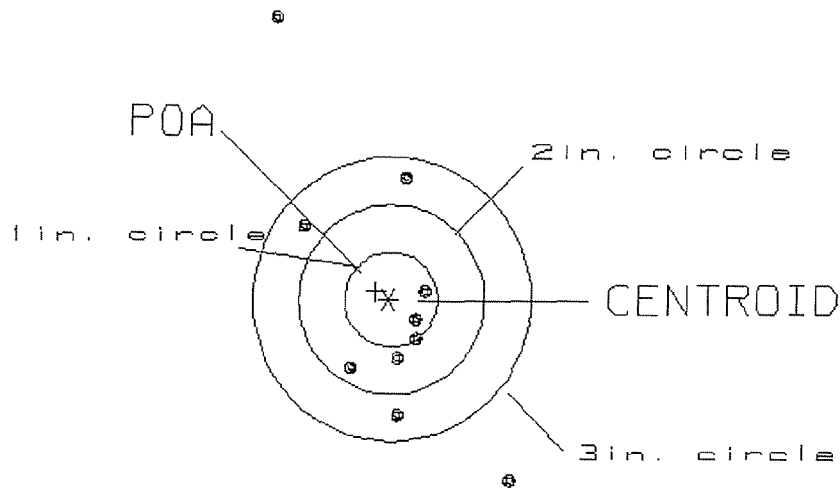

OF SHOTS= 10

IN CIRCLE

HS= 2.55

3

VS= 4.89

5

GS= 5.51


8

PATTERN #: C 4 C
 POA TO CENTROID: .890
 MIN RADIUS : .786
 MEAN RADIUS : 1.476
 MAX RADIUS : 3.362
 CENTROID X : -.341
 CENTROID Y : .822

22 Mar 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/e6703442

CENTERFIRE PATTERN # 4

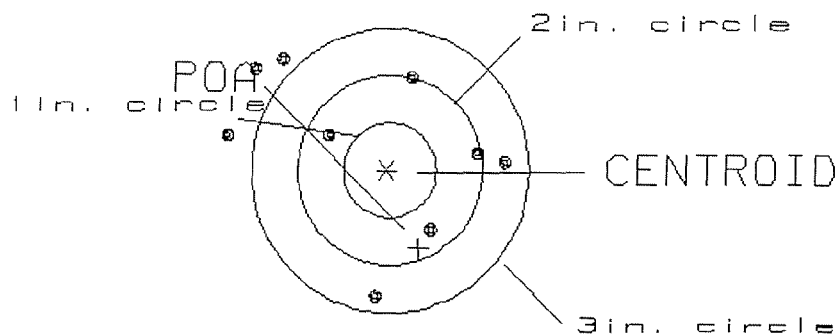

OF SHOTS= 10

IN CIRCLE

HS= 4.11
 VS= 3.63
 GS= 5.19

0
 3
 6

PATTERN #: ☐ 5 ☐

POA TO CENTROID: .123

MIN RADIUS : .427

MEAN RADIUS : 1.207

MAX RADIUS : 2.037


CENTROID X : -.023

CENTROID Y : .121

22 Mar 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/e6703442

CENTERFIRE PATTERN # 5

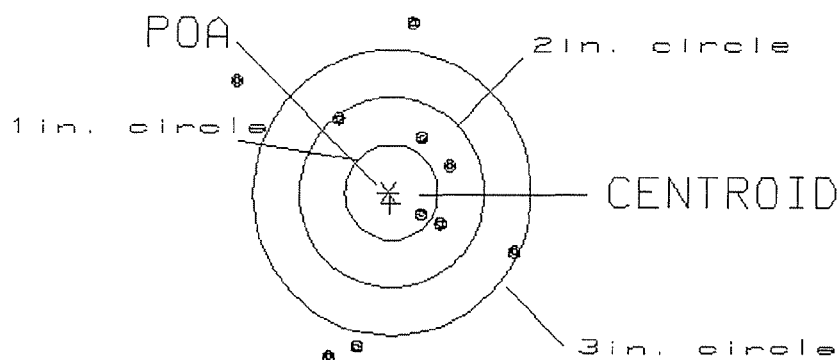

OF SHOTS= 10

IN CIRCLE

HS= 2.99

1

VS= 3.44

5

GS= 3.56

6