

UPC



E6351302

ORDER NO. 25705

BARREL LENGTH 24"

CAPACITY * 6

*INCLUDES 1 IN CHAMBER

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6351302
12 Aug 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: $-.174333$

THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: $.028$

THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: $.176568$

THE AMR FOR THIS RIFLE IS: $.8143$

CENTROIDAL DISTANCES

0 TO 1	.262667
1 TO 2	.0838153
1 TO 3	.315017


2¹ +3 <----POA

PATTERN #: 1
 POA TO CENTROID: .262
 MIN RADIUS : .344
 MEAN RADIUS : .782
 MAX RADIUS : 1.299
 CENTROID X : -.255
 CENTROID Y : .063

12 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6351302

CENTERFIRE PATTERN # 1

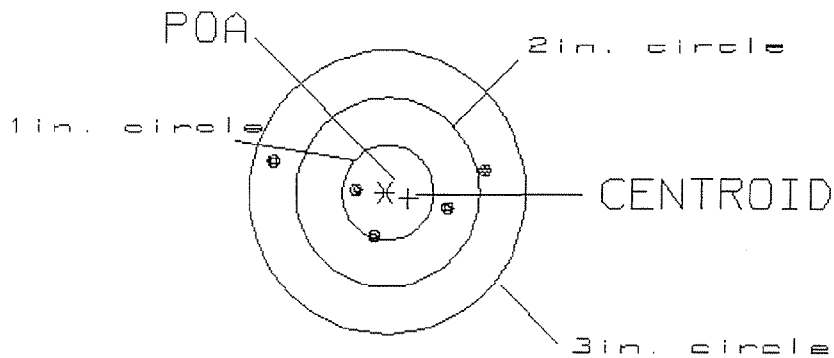

OF SHOTS= 5

IN CIRCLE

HS= 2.31
 VS= .64
 GS= 2.32


2
 3
 5

PATTERN #: 2
 POA TO CENTROID: .323
 MIN RADIUS : .022
 MEAN RADIUS : .999
 MAX RADIUS : 1.670
 CENTROID X : -.323
 CENTROID Y : .014

12 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6351302

CENTERFIRE PATTERN # 2

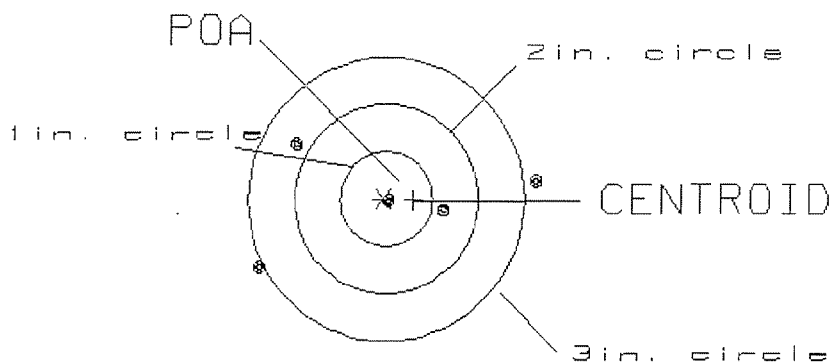

OF SHOTS= 5

IN CIRCLE

HS= 3.06
 VS= 1.22
 GS= 3.18


1
 2
 3

PATTERN #: 3
 POA TO CENTROID: .055
 MIN RADIUS : .323
 MEAN RADIUS : .662
 MAX RADIUS : 1.013
 CENTROID X : .055
 CENTROID Y : .007

12 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/EG351382

CENTERFIRE PATTERN # 3

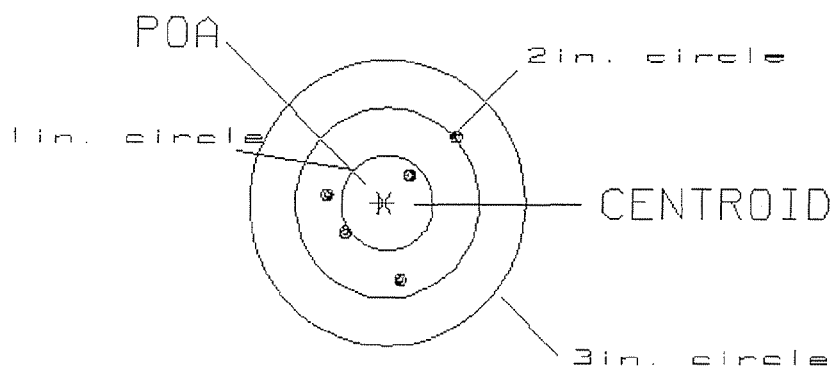

OF SHOTS= 5

IN CIRCLE

HS= 1.33
 VS= 1.54
 GS= 1.65

1
 4
 5

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. E6351302

DATE 7/8/97

TESTER J.W

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.50	2.43	2.27	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.54	2.36	2.28	
PULL #3	2.51	2.35	2.30	
PULL #4	2.48	2.40	2.30	
PULL #5	2.41	2.46	2.36	
TOTAL	12.44	12.00	11.51	
AVG.	2.488	2.40	2.302	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.07	2.97	
PULL #2	3.09	2.99	
PULL #3	3.09	3.09	
PULL #4	3.13	2.96	
PULL #5	3.02	2.91	
TOTAL	15.4	14.92	
AVG.	3.08	2.984	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.11	4.09		4.03
PULL #2	4.02	4.01		4.08
PULL #3	4.01	4.05		4.03
PULL #4	4.12	4.02		4.04
PULL #5	4.05	4.01		4.08
TOTAL	20.31	20.18		20.26
AVG.	4.062	4.036		4.052

ISRAELI GUNS

CONTRACT # DAAE20-97-C-0182

GUN SERIAL #

E635 1002

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK			
600	PROOF			
607	CHECK HEADSPACE			
610	DIS-ASSEMBLE GUN			
612	MAGNAFLUX BARREL ACTION			
	MAGNAFLUX BOLT			
615	ROLLMARK CALIBER			
617	DRILL AND TAP SIGHT HOLES			
618	POLISH BARREL			
620	APPLY COATINGS (BARREL ACTION)			
	(BOLT)			
625	FINAL ASSEMBLY A) CLEAN INSIDE OF BOLT ASSEMBLY			
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD			
	C) INSPECT EJECTOR HOLE FOR CHAMFER			
	D) OIL FIRING PIN ASSEMBLY			
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE			

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE	<u>4</u> <u>4</u> <u>4</u>	7/16/97	CK
CONT.	G) SAFETY OFF FORCE	<u>4</u> <u>4</u> <u>3</u>	7/16/97	CK
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT	<u>.0215</u> <u>.023</u> <u>.0215</u>	7/16/97	CK
	J) ASSEMBLE STOCK		7/14/97	CK
	K) ASSEMBLE SWIVEL STUDS		8-18-97	CK
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		7-14-97	CK
	M) IRON SIGHT ALIGNMENT		7-14-97	CK
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		7-14-97	CK
640	GALLERY TEST AND TARGET	R 71 L 79	8/12/97	JW
	A) MALFUNCTIONS		8-12-97	JW
	B) PIERCED PRIMERS		8-12-97	JW
645	INSPECT FOR LIVE AMMO		8-12-97	JW
655	FINAL INSPECTION A) HEADSPACE		8-18-97	CK
	B) TRIGGER PULL	<u>2.52</u> <u>2.53</u> <u>2.58</u> <u>2.60</u> <u>2.63</u>	8-18-97	CK
	C) FUNCTION		8-18-97	CK
660	PACK			

Do Not Use

VERY IMPORTANT: Instruction Book enclosed to assure safe use of this firearm.

Remington®

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

SERIAL NO. E6351302

46 ORDER NO. 25705

26WR

5705 E6351302

Reg. U.S. Pat. & Tm. Off. Marca Registrada. Marque Déposée.

ORDER 25705

MODEL 700™ M24

UPC



ORDER 25705

MODEL 700™ M24

UPC



SERIAL NO.



E6351302

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

GREEN ENVELOPE CONTAINS:

- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- MUSEUM/COUNTRY STORE FLIER
- REMINGTON AUTHORIZED GUNSMITHS

46 FORM

proof of purchase



owner registration sticker

