

6623 6241

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

— INSTRUCTION BOOK 3518

proof of purchase



owner registration sticker




ORDER NO. **25716**

BARREL LENGTH **24"**

CAPACITY **6**

G6236261

UPC



46 FORM

VERY IMPORTANT: Instruction Book enclosed to assure safe use of this firearm.

Remington®

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

Made in Illinois, NY Reg. U.S. Pat. & Tar. Off. Marks Registered Trademarks

SERIAL NO. G6236261	J
ORDER NO. 25716	46

06XW

5716 G6236261

ORDER 25716
M/24 7.62 NATO S.W.S. (COMPLETE SYST

UPC



ORDER 25716
M/24 7.62 NATO S.W.S. (COMPLETE SYST

UPC



SERIAL NO.



M-24
INSPECTION CHECKLIST-NEW GUNS

8

GUN SERIAL # G6236261

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		9/5/02	RL
600	PROOF			
607	CHECK HEADSPACE		9/9/02	RL
610	DIS-ASSEMBLE GUN		9/9/02	RL
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT	SEP 10 2002 OPERATOR <i>RL</i>		
615	ROLLMARK CALIBER		9/10	BS
617	DRILL AND TAP SIGHT HOLES		9-11-02	<i>A</i>
620	APPLY COATINGS (BARREL ACTION)		9-18	TA
	(BOLT)		9-18	TA
625	FINAL ASSEMBLY			
	A) CLEAN INSIDE OF BOLT ASSEMBLY		9-20-02	<i>RW</i>
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		9-20-02	<i>RW</i>
	C) INSPECT EJECTOR HOLE FOR CHAMFER		9-20-02	<i>RW</i>
	D) OIL FIRING PIN ASSEMBLY		9-20-02	<i>RW</i>
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE 2.50 LBS +/- .5 LBS		11-18-02	RL

OP #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE 2 LBS MIN 10 LBS MAX	<u>6.5</u> <u>6.5</u> <u>6.9</u>	10-11-02	DA
CONT.				
	G) SAFETY OFF FORCE 2 LBS MIN	<u>3.0</u> <u>3.0</u> <u>3.9</u>	10-11-02	DA
	H) TRIGGER PULL TEST AND RETAINABILITY		11-18-02	RL
	I) FIRING PIN INDENT .020 MIN	<u>1021</u> <u>1024</u> <u>1021</u>	10-11-02	DA
	J) ASSEMBLE STOCK		9-30-02	RL
	K) ASSEMBLE SWIVEL STUDS		11-18-02	RL
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		11/8/02	RL
	M) IRON SIGHT ALIGNMENT		11/8/02	RL
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		11/8/02	RL
640	GALLERY TEST AND TARGET	PASS FAIL	10/2/02	TRW
	MALFUNCTION	CORRECTION	10/2/02	TRW
	MALFUNCTION	CORRECTION	10/2/02	TRW
	MALFUNCTION	CORRECTION	10/2/02	TRW
	MALFUNCTION	CORRECTION	10/2/02	TRW
645	INSPECT FOR LIVE AMMO		10/2/02	TRW
655	FINAL INSPECTION A) HEADSPACE		11-18-02	RL
	B) TRIGGER PULL +/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	<u>2.77</u> <u>2.79</u> <u>2.77</u> <u>2.71</u> <u>2.65</u>	10-22-02	DA
	C) FUNCTION		11-18-02	RL
660	PACK		12/3/02	DA

AVERAGE
 INITIAL & CYCLE TESTS
 2.50# ± .50#
 3.00# ± .75#
 4.00# ± 1.00#

DATE 9-30-02

TESTER

TRW
 66736361

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.52	2.52	2.64	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2
PULL #2	2.65	2.62	2.59	
PULL #3	2.56	2.61	2.29	
PULL #4	2.55	2.55	2.33	
PULL #5	2.59	2.60	2.49	
TOTAL	12.87	12.90	12.34	
AVG.	2.57	2.58	2.46	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.33	3.41	
PULL #2	3.44	3.34	
PULL #3	3.32	3.39	
PULL #4	3.33	3.39	
PULL #5	3.40	3.45	
TOTAL	16.82	16.68	
AVG.	3.36	3.33	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCUR
PULL #1	4.25	4.13		4.09
PULL #2	4.19	4.20		4.12
PULL #3	4.19	4.09		4.08
PULL #4	4.19	4.07		4.41
PULL #5	4.18	4.14		4.14
TOTAL	21.00	20.63		20.84
AVG.	4.20	4.12		4.16

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6236261.___0

FILE DATE AND TIME: 10/03/2002 12:22


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.005
The Average Y Centroid of the Five Target Set:	0.054
The Average Point of Impact of the Five Target Set:	0.054
The Average Mean Radius of the Five Target Set:	0.622
The Distance from POA to Centroid Target #1:	0.167
The Distance from Centroid Target #2 to Centroid Target #1:	0.422
The Distance from Centroid Target #3 to Centroid Target #1:	0.310
The Distance from Centroid Target #4 to Centroid Target #1:	0.296
The Distance from Centroid Target #5 to Centroid Target #1:	0.122

SERIAL NUMBER: G6236261. __0
TARGET NUMBER: 1
FILE DATE: 10/03/2002
FILE TIME: 12:22

POINT#	X	Y
1:	0.187	-1.348
2:	-0.686	-2.186
3:	-0.360	0.566
4:	0.221	1.492
5:	0.317	0.168
6:	0.264	-0.266
7:	-0.200	-0.188
8:	-0.202	0.093
9:	0.030	0.111
10:	0.087	-0.072

X CENTROID: -0.034
Y CENTROID: -0.163
POA TO CENTROID: 0.167
HORZ SPREAD: 1.003
VERT SPREAD: 3.678
GROUP SPREAD: 3.788
MIN RADIUS: 0.152
MAX RADIUS: 2.125
MEAN RADIUS: 0.751
IN 1 IN DIAMETER: 6
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 8

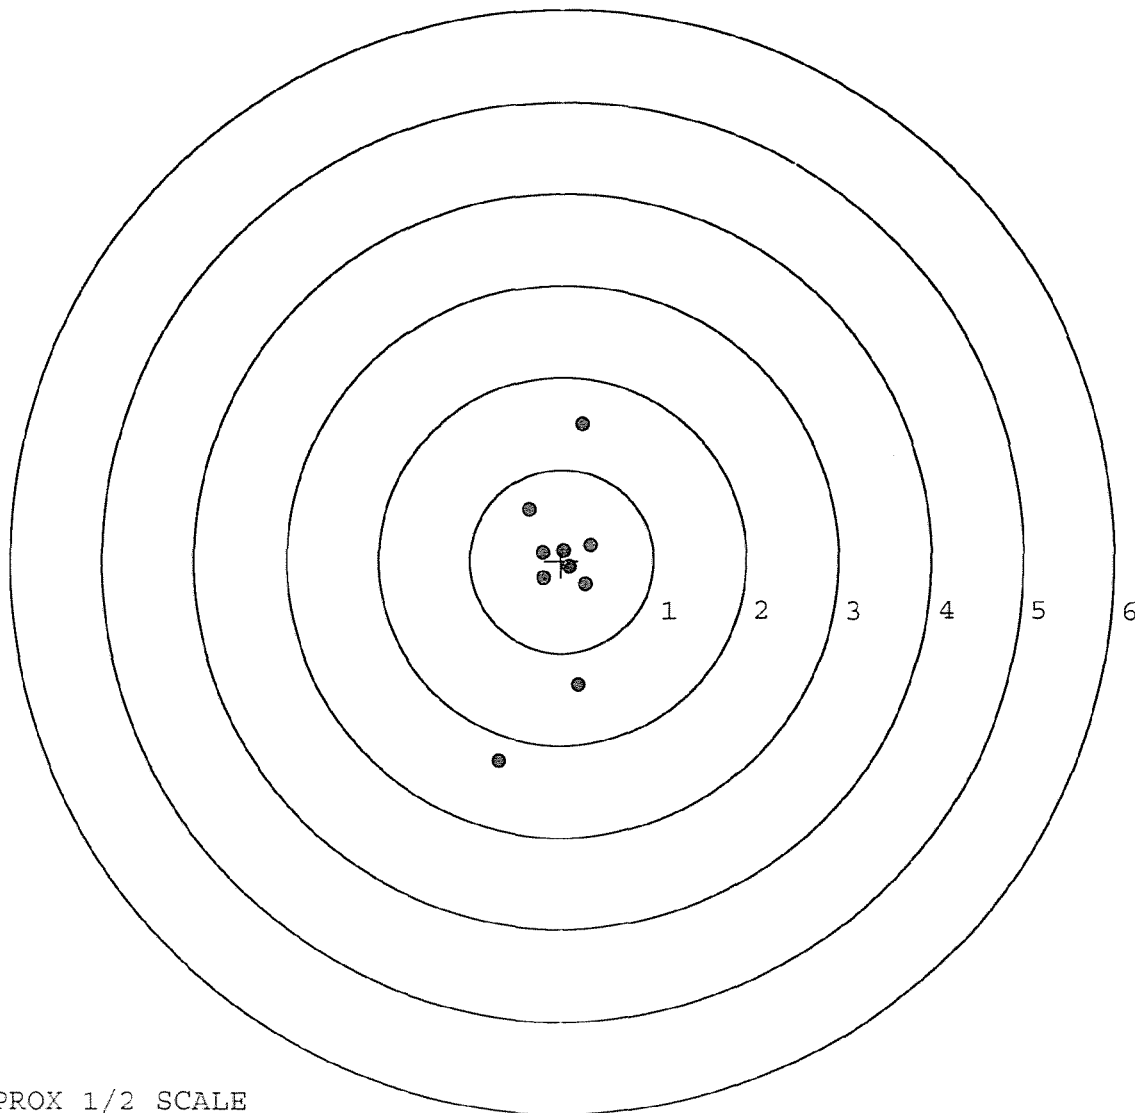


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6236261. __0
TARGET NUMBER: 2
FILE DATE: 10/03/2002
FILE TIME: 12:22

1 CENTROID: 0.000
7 CENTROID: 0.258
POA TO CENTROID: 0.258
HORZ SPREAD: 1.421
VERT SPREAD: 3.239
GROUP SPREAD: 3.463
MIN RADIUS: 0.064
MAX RADIUS: 2.031
MEAN RADIUS: 0.790
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 7
IN 3 IN DIAMETER: 8

POINT#	X	Y
1:	0.962	1.483
2:	0.308	0.970
3:	0.017	-1.136
4:	-0.262	-1.756
5:	-0.132	0.190
6:	0.131	0.400
7:	-0.006	0.322
8:	-0.194	0.778
9:	-0.364	0.789
10:	-0.459	0.538

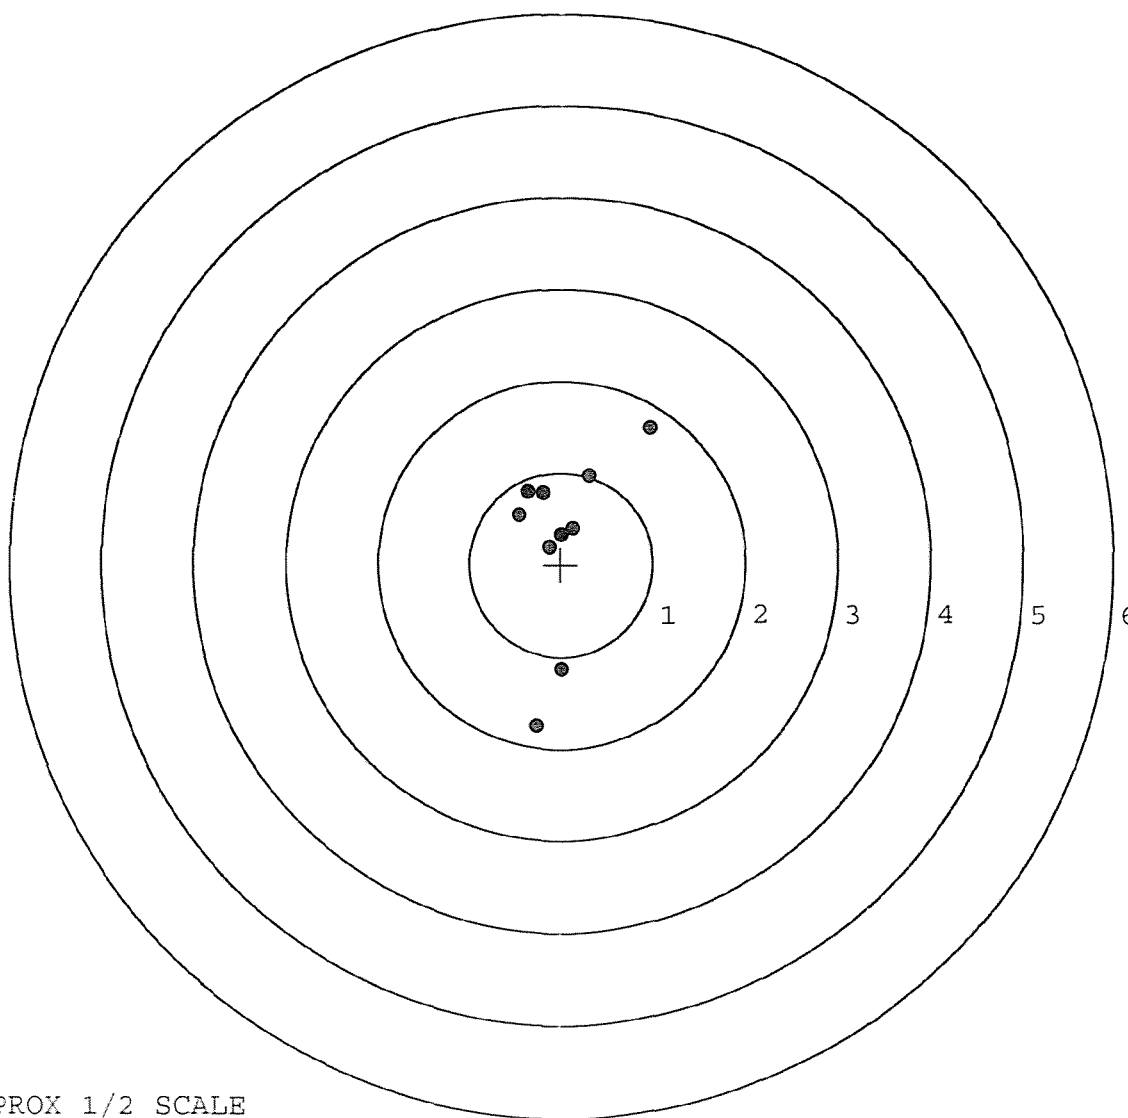


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6236261. __0
TARGET NUMBER: 3
FILE DATE: 10/03/2002
FILE TIME: 12:22

{ CENTROID: -0.025
/ CENTROID: 0.147
POA TO CENTROID: 0.149
HORZ SPREAD: 1.009
VERT SPREAD: 3.036
GROUP SPREAD: 3.065
MIN RADIUS: 0.075
MAX RADIUS: 1.956
MEAN RADIUS: 0.675
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.005	2.102
2:	0.034	0.944
3:	0.596	-0.165
4:	0.196	-0.372
5:	-0.413	-0.934
6:	-0.305	-0.549
7:	-0.362	-0.195
8:	0.004	0.341
9:	-0.023	0.222
10:	0.020	0.073

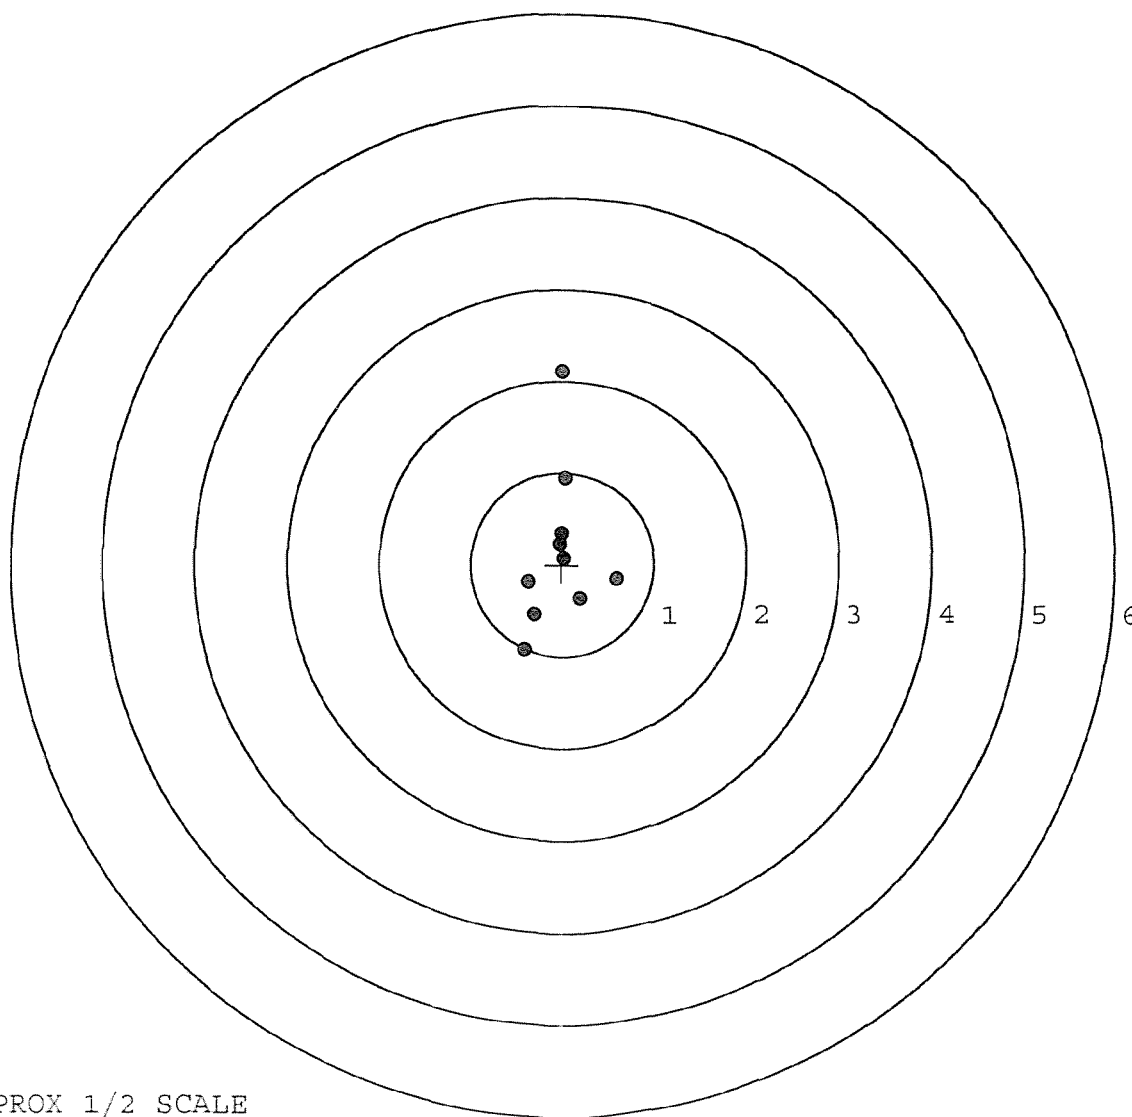


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6236261. __0
TARGET NUMBER: 4
FILE DATE: 10/03/2002
FILE TIME: 12:22

POINT#	X	Y
1:	0.397	0.238
2:	0.233	-0.467
3:	-0.398	0.289
4:	-0.277	1.159
5:	-0.063	0.296
6:	-0.169	-0.280
7:	0.040	-0.140
8:	-0.143	0.139
9:	-0.006	0.145
10:	0.013	-0.050

X CENTROID: -0.037
Y CENTROID: 0.133
POA TO CENTROID: 0.138
HORZ SPREAD: 0.795
VERT SPREAD: 1.626
GROUP SPREAD: 1.704
MIN RADIUS: 0.034
MAX RADIUS: 1.054
MEAN RADIUS: 0.376
IN 1 IN DIAMETER: 8
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

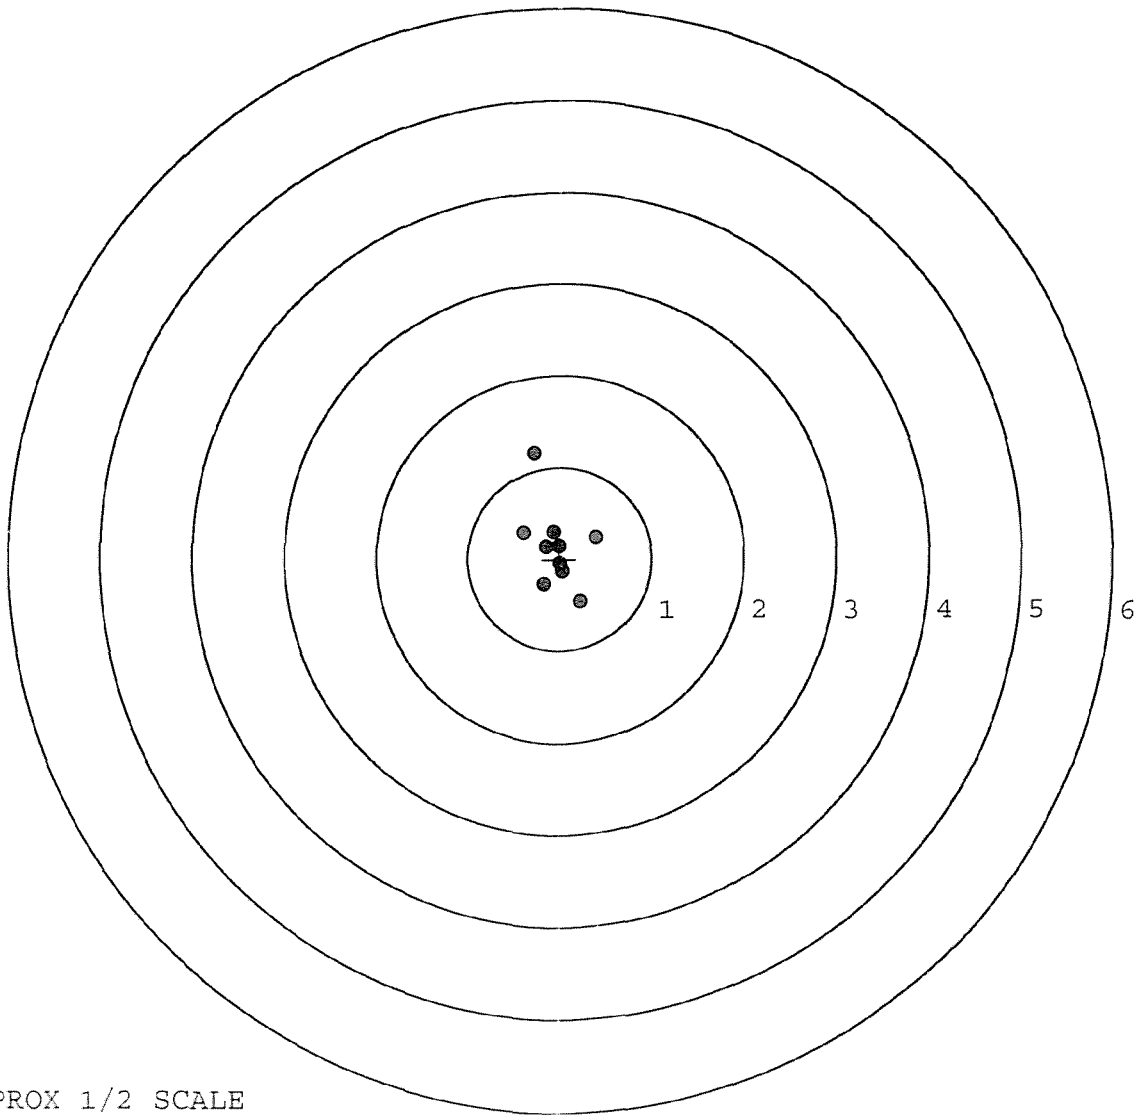


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6236261. __0
TARGET NUMBER: 5
FILE DATE: 10/03/2002
FILE TIME: 12:22

POINT#	X	Y
1:	0.019	-1.307
2:	0.425	-0.501
3:	0.820	0.197
4:	-0.615	0.885
5:	-0.234	0.307
6:	0.256	0.094
7:	-0.082	0.001
8:	0.079	-0.122
9:	0.134	-0.309
10:	-0.078	-0.292

X CENTROID: 0.072
Y CENTROID: -0.105
POA TO CENTROID: 0.127
HORZ SPREAD: 1.435
VERT SPREAD: 2.192
GROUP SPREAD: 2.282
MIN RADIUS: 0.019
MAX RADIUS: 1.205
MEAN RADIUS: 0.519
IN 1 IN DIAMETER: 5
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

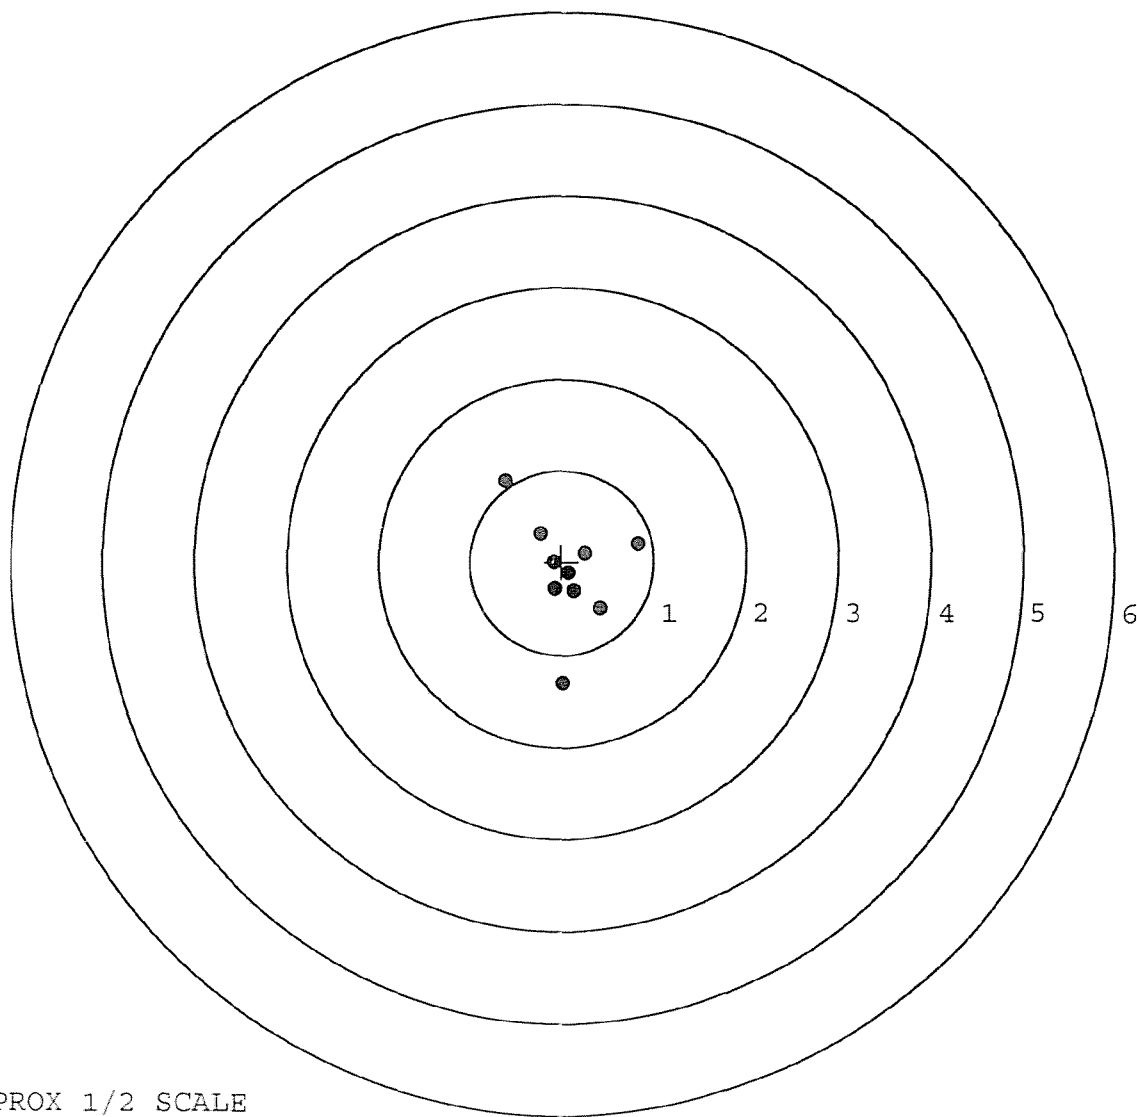

TARGET APPROX 1/2 SCALE