

G 6410221
Replicas
E 6413457

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6410221.__2
FILE DATE AND TIME: 02/27/2006 07:28


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.042
The Average Y Centroid of the Five Target Set:	-0.269
The Average Point of Impact of the Five Target Set:	0.272
The Average Mean Radius of the Five Target Set:	1.011
The Distance from POA to Centroid Target #1:	0.628
The Distance from Centroid Target #2 to Centroid Target #1:	0.544
The Distance from Centroid Target #3 to Centroid Target #1:	0.456
The Distance from Centroid Target #4 to Centroid Target #1:	0.572
The Distance from Centroid Target #5 to Centroid Target #1:	0.293

SERIAL NUMBER: G6410221.___2
TARGET NUMBER: 1
FILE DATE: 02/27/2006
FILE TIME: 07:28

X CENTROID: 0.009
Y CENTROID: -0.628
POA TO CENTROID: 0.628
HORZ SPREAD: 2.010
VERT SPREAD: 4.416
GROUP SPREAD: 4.424
MIN RADIUS: 0.185
MAX RADIUS: 2.224
MEAN RADIUS: 1.401
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 3
in 3 IN DIAMETER: 5

POINT#	X	Y
1:	1.113	-2.429
2:	0.163	-2.456
3:	0.002	-2.836
4:	-0.155	-0.923
5:	0.027	-0.951
6:	0.192	-0.655
7:	0.571	0.426
8:	-0.668	0.605
9:	-0.897	1.363
10:	-0.260	1.580

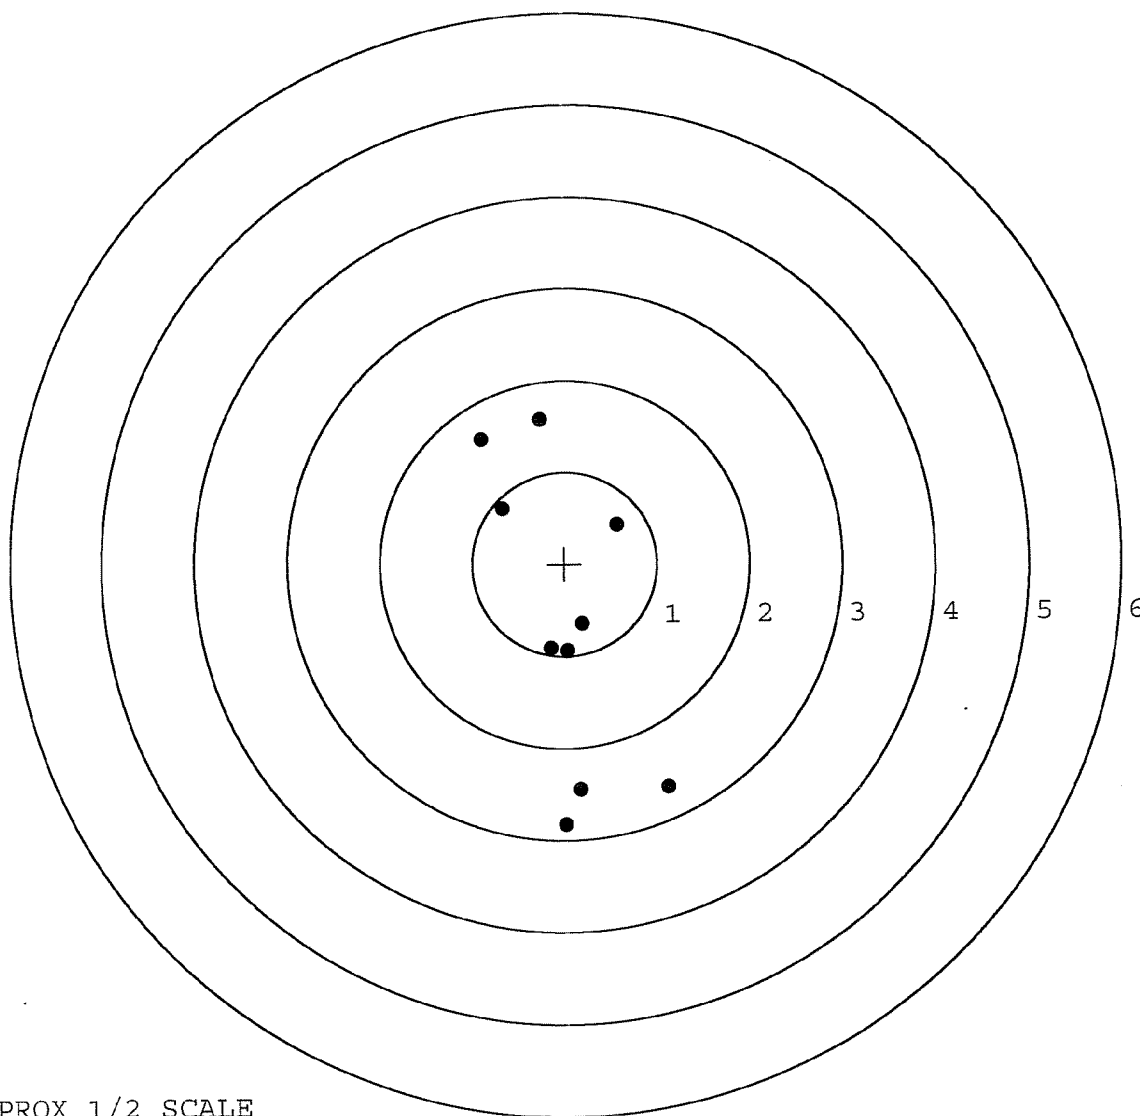


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6410221.___2
TARGET NUMBER: 2
FILE DATE: 02/27/2006
FILE TIME: 07:28

POINT#	X	Y
1:	0.361	-1.545
2:	0.107	-1.332
3:	0.077	-0.763
4:	0.653	-0.008
5:	0.521	0.456
6:	0.257	0.368
7:	-0.020	0.360
8:	-0.305	0.254
9:	-0.882	0.538
10:	-1.204	0.806

X CENTROID: -0.044
Y CENTROID: -0.087
POA TO CENTROID: 0.097
HORZ SPREAD: 1.857
VERT SPREAD: 2.351
GROUP SPREAD: 2.824
MIN RADIUS: 0.429
MAX RADIUS: 1.513
MEAN RADIUS: 0.887
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 6
in 3 IN DIAMETER: 9

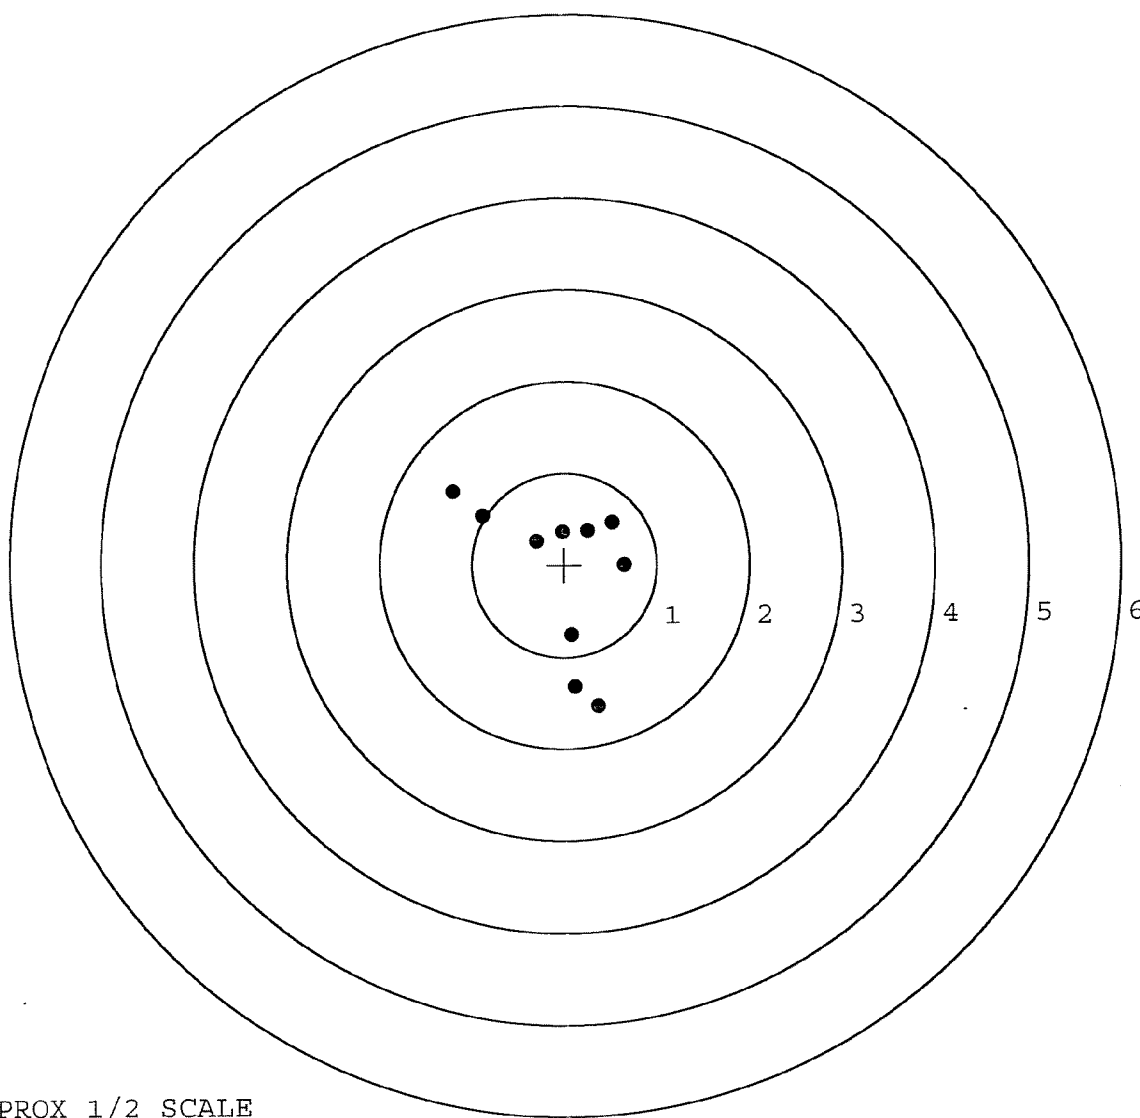


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6410221. __2
TARGET NUMBER: 3
FILE DATE: 02/27/2006
FILE TIME: 07:28

POINT#	X	Y
1:	0.821	-0.797
2:	0.155	-0.862
3:	0.316	-0.460
4:	0.429	0.026
5:	0.954	0.591
6:	0.331	0.669
7:	-0.359	0.329
8:	-0.779	0.073
9:	-0.831	-0.417
10:	-1.687	-0.931

X CENTROID: -0.065
Y CENTROID: -0.178
POA TO CENTROID: 0.189
HORZ SPREAD: 2.641
VERT SPREAD: 1.600
GROUP SPREAD: 3.048
MIN RADIUS: 0.474
MAX RADIUS: 1.788
MEAN RADIUS: 0.895
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 9

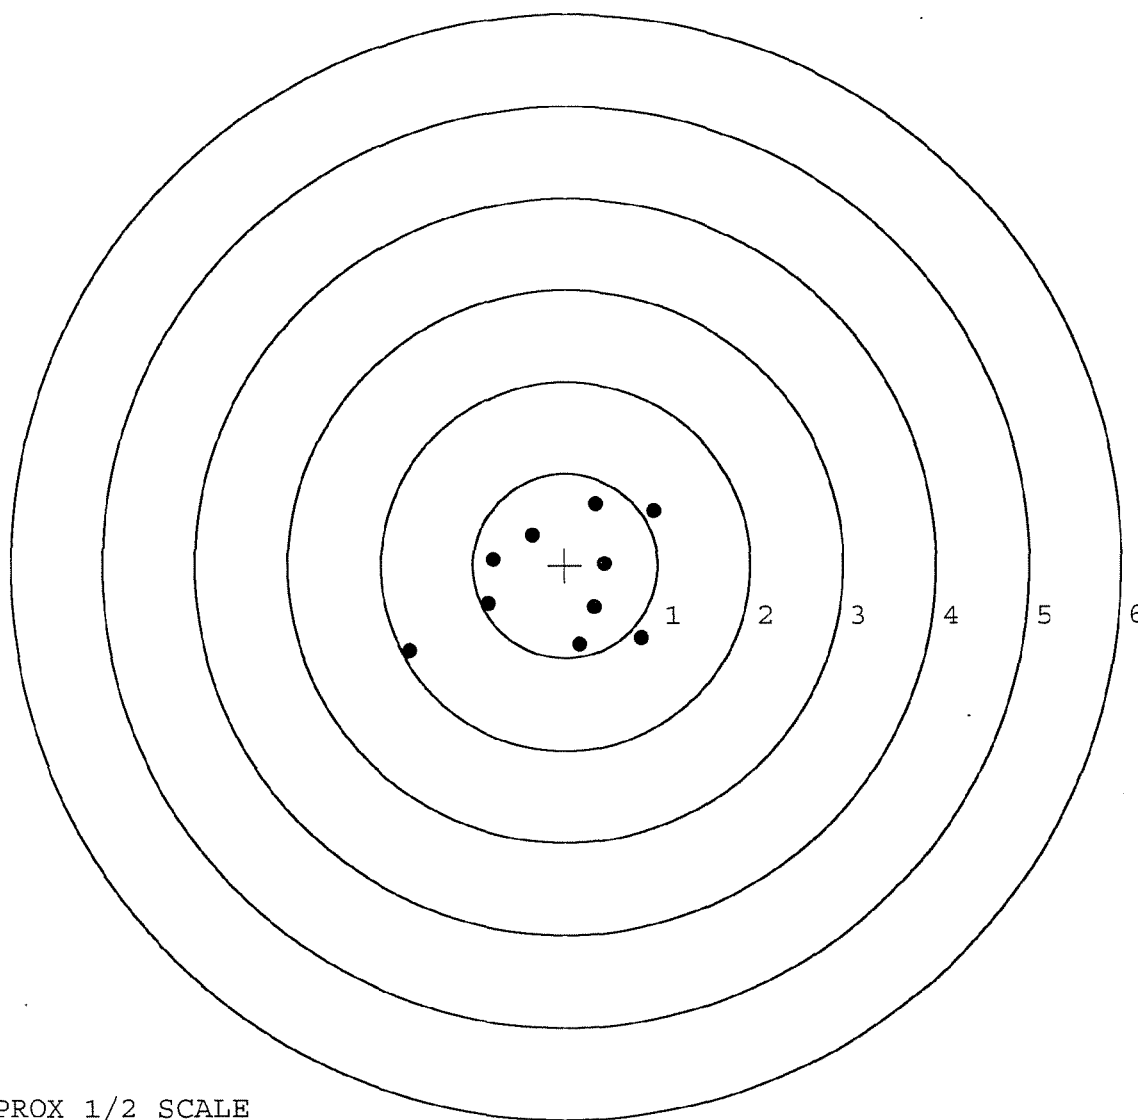

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6410221. __2

TARGET NUMBER: 4

FILE DATE: 02/27/2006

FILE TIME: 07:28

POINT#	X	Y
1:	0.693	-0.876
2:	0.460	-0.967
3:	-0.057	-0.817
4:	-0.650	-0.958
5:	0.645	-0.344
6:	0.683	0.233
7:	0.065	0.394
8:	0.327	0.961
9:	-0.080	0.922
10:	-0.687	0.746

X CENTROID: 0.140

Y CENTROID: -0.071

POA TO CENTROID: 0.157

HORZ SPREAD: 1.380

VERT SPREAD: 1.928

GROUP SPREAD: 2.153

MIN RADIUS: 0.471


MAX RADIUS: 1.188

MEAN RADIUS: 0.878

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 10

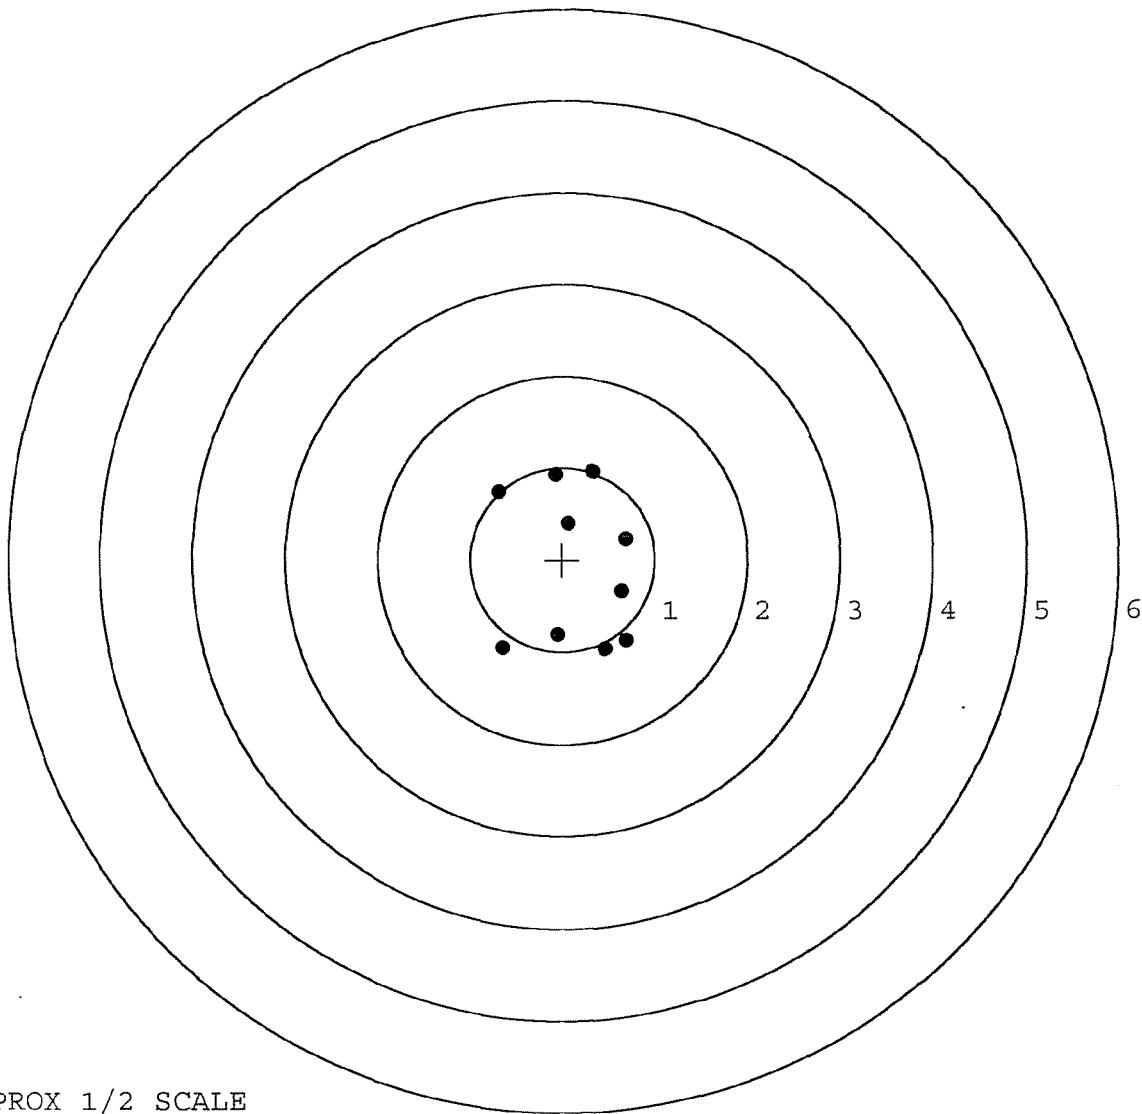


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6410221. __2
TARGET NUMBER: 5
FILE DATE: 02/27/2006
FILE TIME: 07:28

X CENTROID: 0.171
Y CENTROID: -0.383
POA TO CENTROID: 0.419
HORZ SPREAD: 1.513
VERT SPREAD: 2.849
GROUP SPREAD: 3.212
MIN RADIUS: 0.309
MAX RADIUS: 1.934
MEAN RADIUS: 0.994
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 5
in 3 IN DIAMETER: 8

POINT#	X	Y
1:	1.072	-2.094
2:	0.179	-2.078
3:	-0.367	-0.980
4:	-0.067	-0.772
5:	-0.133	-0.324
6:	0.357	-0.106
7:	0.438	0.383
8:	0.730	0.755
9:	-0.060	0.646
10:	-0.441	0.739

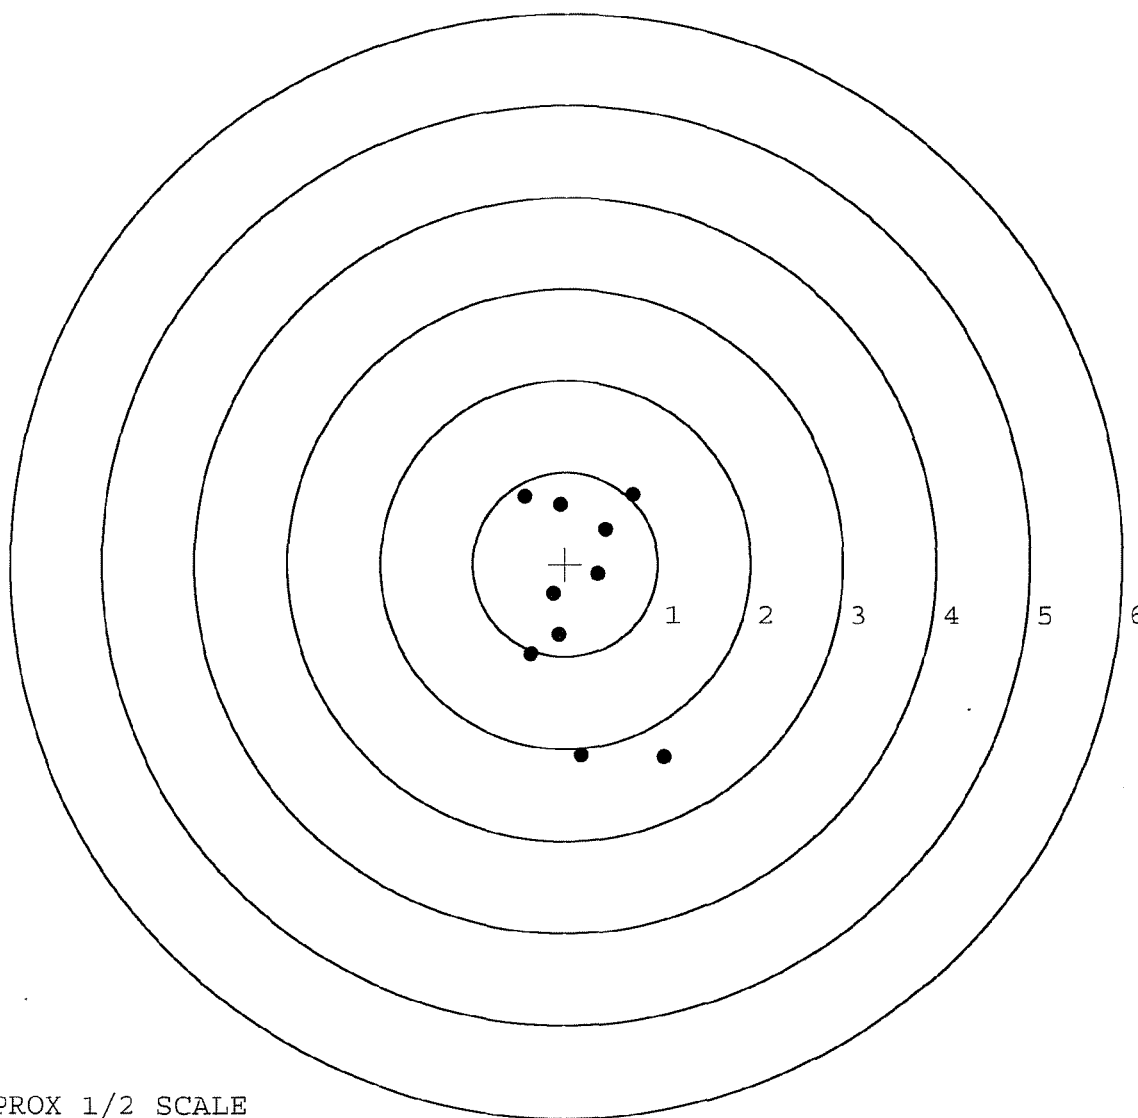

TARGET APPROX 1/2 SCALE

4355

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R & E NUMBER	99510		
SERIAL NUMBER	E6413457 C66410221 (New)		
LOG-IN DATE			
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	8-9-05	RTL
560 A	RE-BARREL		
B	DRILL AND TAP	2-20-06	TRW
575	ASSEMBLE		
600	PROOF		
605	CHECK HEADSPACE		
610	DIS-ASSEMBLE GUN		
2/20/06 612	MAGNAFLUX OPERATOR	8/12/05	unus
615	ROLLMARK CALIBER	8-15-05	CW
618	ROTO-BLAST	8-17-05	LB
620	APPLY COATINGS	8/17/05	HP
625 A	FINAL ASSEMBLY	2-23-06	RTL
B	TRIGGER PULL TEST	N/A	N/A
C	SAFETY "ON" FORCE	3-16-06	AC
D	SAFETY "OFF" FORCE	3-16-06	K
E	FIRING PIN INDENT	3-16-06	AG
640	TARGET	2-27-06 9-19-05	TRW TRW
655	FINAL INSPECT	3-16-06	AC
660	PACK	4-6-06	DA
		SHIP DATE	
		QAR INSPECTION DATE	

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00043096** Serial: C6225508 Model 700 Center Fire Caliber 762 NATO M-24 (SWS) Repairman: Status: Closed 3/11/02 4:17:03 PM

Verify Repair

Address Information

Customer: ☒ Received From Return To: ☐ Received From

Name: **COMMANDER** **COMMANDER**

Address 1: **HHC 1 504TH PIR** **HHC 1 504TH PIR**

Address 2: PO Box: PO Box:

City: **FORT BRAGG** **FORT BRAGG**

State: **NC** Zip Code: **28310** Country: **US** State: **NC** Zip Code: **28310** Country: **US**

FFL:

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information

Phone: **810 432 1944**

Fax:

Email:

Comments:

Received Condition

Poor

Condition Notes:

CSR Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	1
A045	Bi Pod	1

Repair Search Refresh Close

3/11/02 4:43 PM CAPS NUM INS 3:FL

Start nb... SW... RA... SW... Ar... SW... Sco...

Serial Number:

C6225508

Model: **700**



RE00043096

New #
E6413457

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-97-C-242

R & E NUMBER 43096

SERIAL NUMBER C6225508

E6413457

LOG-IN DATE 3/11/02

INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	3/15/02	RH
560 A	RE-BARREL AT CUSTOM SHOP	3/18/02	BWT
B	DRILL AND TAP	3/18/02	BWT
C	POLISH		
575	ASSEMBLE	3/27/02	RH
600	PROOF	3/18/02	RW LUX
605	CHECK HEADSPACE	3/18/02	RW
610	DIS-ASSEMBLE GUN	3/18/02	RW
612	MAGNAFLUX		OPERATOR RH
615	ROLLMARK CALIBER	3/19/02	TD
618	ROTO-BLAST		
620	APPLY COATINGS	3-21	TA
625 A	FINAL ASSEMBLY	3-23-02	RW
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	3-27-02	TRW
655	FINAL INSPECT	3/27/02	RH
660	PACK	3-27-02	TA
		SHIP DATE	
		QAR INSPECTION DATE	

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: E6413457.__0
FILE DATE AND TIME: 03/27/2002 02:31

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.101
The Average Y Centroid of the Five Target Set:	0.033
The Average Point of Impact of the Five Target Set:	0.106
The Average Mean Radius of the Five Target Set:	0.650
The Distance from POA to Centroid Target #1:	0.355
The Distance from Centroid Target #2 to Centroid Target #1:	0.376
The Distance from Centroid Target #3 to Centroid Target #1:	0.418
The Distance from Centroid Target #4 to Centroid Target #1:	0.255
The Distance from Centroid Target #5 to Centroid Target #1:	0.498

SERIAL NUMBER: E6413457. __0

TARGET NUMBER: 1

FILE DATE: 03/27/2002

FILE TIME: 02:31

POINT#	X	Y
1:	0.472	-0.601
2:	-0.577	-0.700
3:	0.843	0.317
4:	0.245	0.644
5:	0.198	0.285
6:	-0.447	0.540
7:	-0.221	0.262
8:	-1.206	0.295
9:	-0.399	1.198
10:	0.039	1.155

X CENTROID: -0.105

Y CENTROID: 0.339

POA TO CENTROID: 0.355

HORZ SPREAD: 2.049

VERT SPREAD: 1.898

GROUP SPREAD: 1.955

MIN RADIUS: 0.139


MAX RADIUS: 1.142

MEAN RADIUS: 0.734

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 10

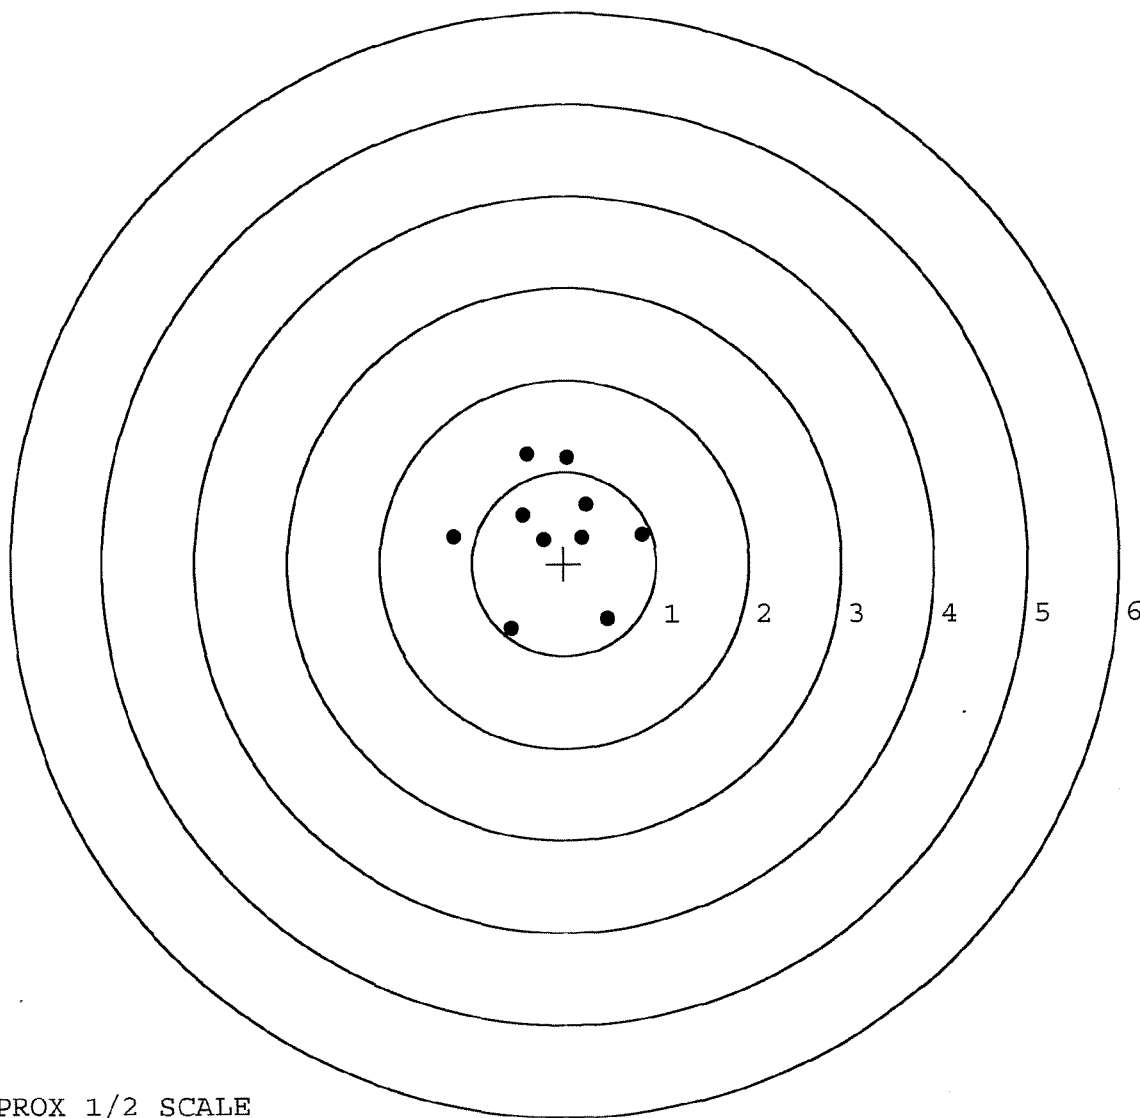


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413457.___0
TARGET NUMBER: 2
FILE DATE: 03/27/2002
FILE TIME: 02:31

X CENTROID: -0.108
Y CENTROID: -0.037
POA TO CENTROID: 0.114
HORZ SPREAD: 2.394
VERT SPREAD: 1.359
GROUP SPREAD: 2.410
MIN RADIUS: 0.283
MAX RADIUS: 1.274
MEAN RADIUS: 0.731
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	1.165	0.004
2:	0.644	-0.904
3:	-0.536	-0.335
4:	-0.020	-0.328
5:	-0.642	0.451
6:	-1.229	0.281
7:	-1.017	-0.248
8:	0.208	0.455
9:	0.190	0.193
10:	0.157	0.064

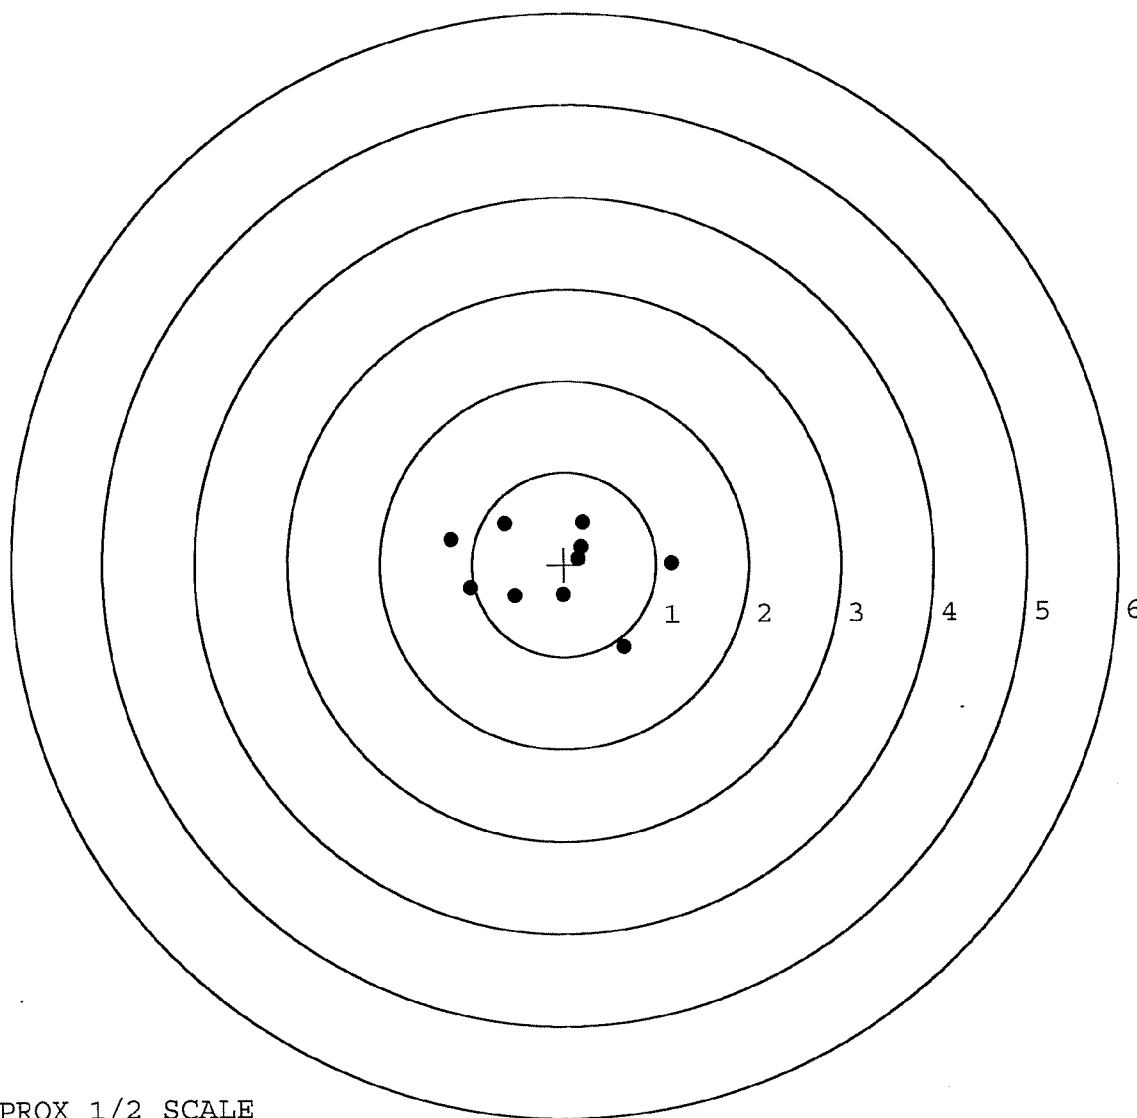

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413457. __0

TARGET NUMBER: 3

FILE DATE: 03/27/2002

FILE TIME: 02:31

POINT#	X	Y
1:	0.559	-0.559
2:	0.321	-0.474
3:	-0.059	-0.535
4:	0.037	-0.300
5:	-0.196	-0.329
6:	0.356	0.045
7:	0.397	0.515
8:	-0.337	0.264
9:	-1.000	-0.113
10:	-1.135	0.702

X CENTROID: -0.106

Y CENTROID: -0.078

POA TO CENTROID: 0.132

HORZ SPREAD: 1.694

VERT SPREAD: 1.261

GROUP SPREAD: 2.112

MIN RADIUS: 0.264


MAX RADIUS: 1.292

MEAN RADIUS: 0.625

IN 1 IN DIAMETER: 5

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

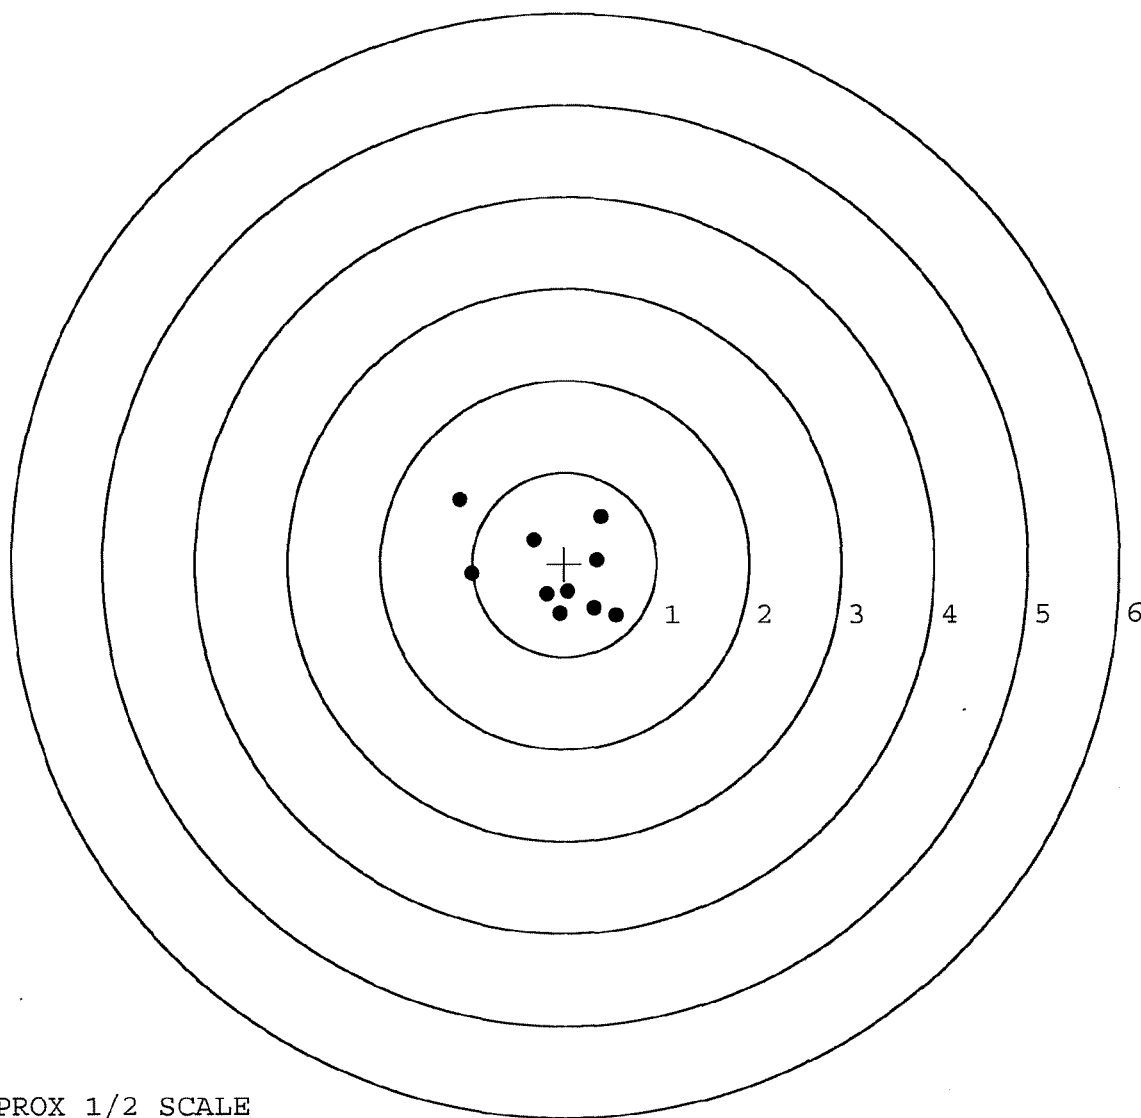


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413457. __0
TARGET NUMBER: 4
FILE DATE: 03/27/2002
FILE TIME: 02:31

POINT#	X	Y
1:	0.795	0.026
2:	0.577	0.054
3:	0.352	0.015
4:	0.104	-0.947
5:	-0.067	-0.324
6:	-0.398	0.087
7:	-0.901	0.123
8:	-0.256	0.649
9:	-0.485	0.670
10:	-1.423	0.576

X CENTROID: -0.170
Y CENTROID: 0.093
POA TO CENTROID: 0.194
HORZ SPREAD: 2.218
VERT SPREAD: 1.617
GROUP SPREAD: 2.285
MIN RADIUS: 0.228
MAX RADIUS: 1.343
MEAN RADIUS: 0.727
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

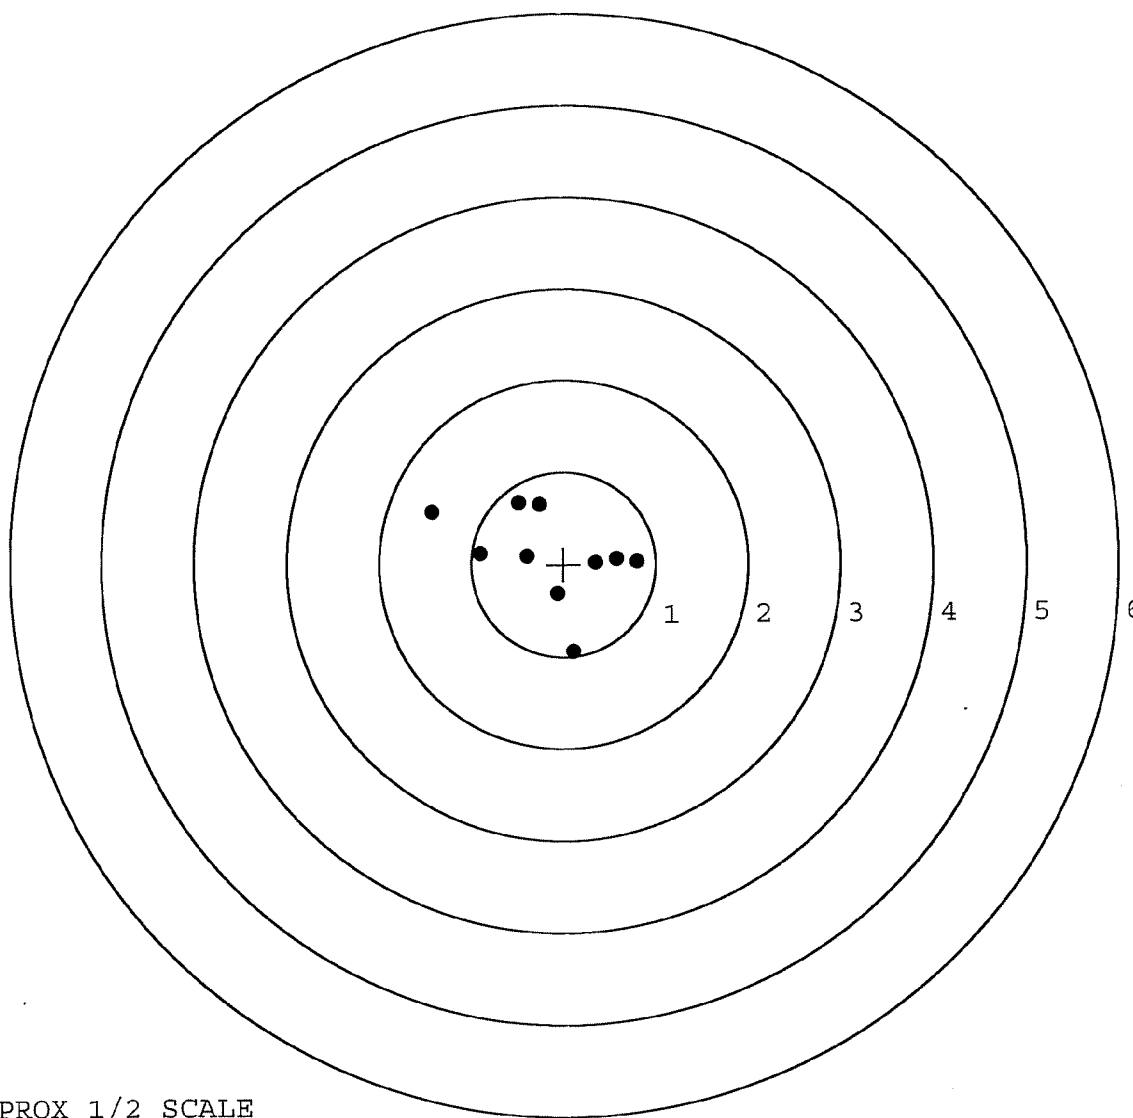


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413457. __0
TARGET NUMBER: 5
FILE DATE: 03/27/2002
FILE TIME: 02:31

X CENTROID: -0.016
Y CENTROID: -0.150
POA TO CENTROID: 0.151
HORZ SPREAD: 1.274
VERT SPREAD: 1.357
GROUP SPREAD: 1.832
MIN RADIUS: 0.035
MAX RADIUS: 0.954
MEAN RADIUS: 0.433
IN 1 IN DIAMETER: 7
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.471	-0.970
2:	0.334	-0.500
3:	-0.803	0.346
4:	0.255	-0.017
5:	-0.157	-0.539
6:	0.002	-0.180
7:	-0.281	0.043
8:	0.095	0.387
9:	0.038	0.066
10:	-0.118	-0.138

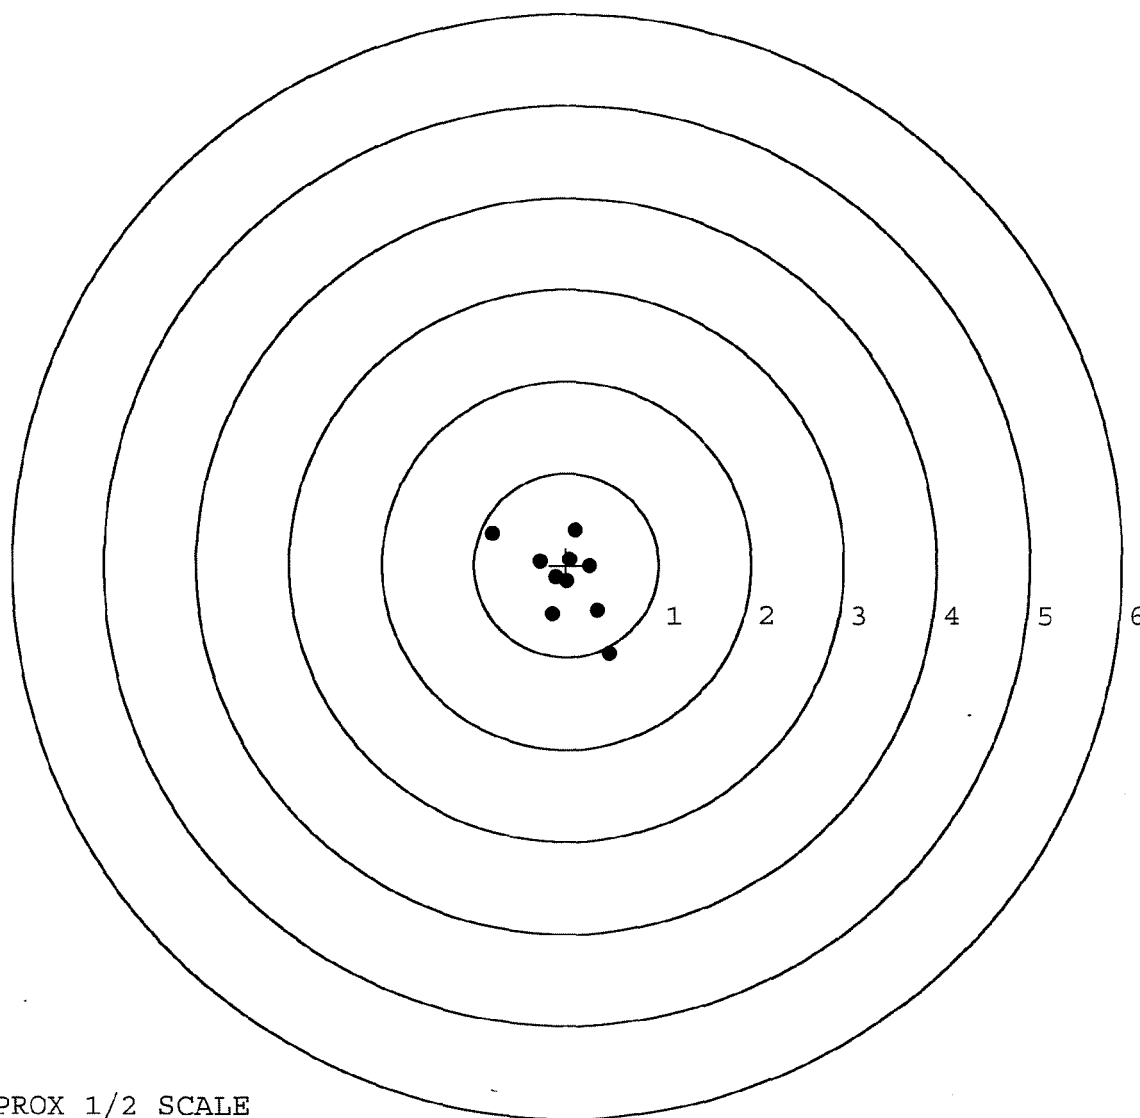

TARGET APPROX 1/2 SCALE

Score #
1064

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225508

OP.#	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and stock	8 9/88	8 9/88	FB
600	Proof	9 7/88	9 7/88	RW
607	Check Headspace	9 7/88	9 7/88	RW
610	Dis-assemble gun	9 7/88	9 7/88	RW
612	Magnaflux Barrel Action		9-14-88	PFL
	Magnaflux Bolt		9-14-88	PFL
615	Rollmark Caliber		10/12	WC
617	Drill & Tap Sight Holes		10/12	FB
618	Polish Barrel		10/20	WT
620	Apply Coatings (Barrel Action)		10-31-88	TJA
	Apply Coatings (Bolt)		10-31-88	TJA
625	Final Assembly A) Clean inside of Bolt Assembly		11/2/88	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		11/2/88	RW
	C) Inspect Ejector Hole for Chamfer		11/2/88	RW

OVER

OP.#		READINGS	DATE	INITIAL
625	D) Oil Firing Pin Ass'y		11/2/88	RW
cont.	E) Adjust Trigger Pull to Min. Setting and Stake		2 NOV 88	JS
	F) Safety on Force	5 5 5	2 NOV 88	JS
	G) Safety off Force	3 3 3	2 NOV 88	JS
	H) Trigger Pull Test & Retainability		2 NOV 88	JS
	I) Firing Pin Indent	.0205 .0205 .0205	2 NOV 88	JS
	J) Assemble Stock		11/8/88	RW
	K) Attach Front & Rear Sight Assemblies		11/8/88	RW
	L) Iron Sight Alignment		11/8/88	RW
	M) Detach Front & Rear Sights & place in numbered container		11/8/88	RW
	N) Attach Scope to Rifle		11 NOV 88	JS
	O) Detach & Attach Scope 20 times			
640	Gallery Target & Test	88 R 57 L	11/14/88	DH
	A) Optical Clarity of Scope		11/14/88	DH
645	Inspect for Live Ammo		11/14/88	DH
655	Final Inspection			
	A) Headspace		30 NOV 88	JS
	B) Trigger Pull	2.56 2.51 2.53	2.58 2.58	JS
	C) Function		30 NOV 88	JS
	D) Assemble Swivel Studs		30 NOV 88	JS
660	Pack		15 Dec 88	JS

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. C6225508

DATE 3/10/88

TESTER J. L. + R. S.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.56	2.55	2.69	2.56	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.52	2.59	2.63	2.51	
PULL #3	2.64	2.60	2.60	2.53	
PULL #4	2.60	2.59	2.66	2.58	
PULL #5	2.61	2.60	2.64	2.58	
TOTAL	12.93	12.93	13.22	12.76	
AVG.	2.586	2.586	2.644	2.552	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.03	2.93		
PULL #2	3.01	2.99		
PULL #3	3.01	2.89		
PULL #4	3.05	3.02		
PULL #5	3.05	3.04		
TOTAL	15.15	14.87		
AVG.	3.03	2.974		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.29	4.00		4.06
PULL #2	4.29	4.15		4.05
PULL #3	4.27	4.18		4.08
PULL #4	4.29	4.20		4.07
PULL #5	4.30	4.24		4.10
TOTAL	21.44	20.77		20.36
AVG.	4.288	4.154		4.072

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225508

CENTROIDAL DISTANCES

0 TO	1	.627479
1 TO	2	.316139
1 TO	3	.430711
1 TO	4	.325972
1 TO	5	.483175


1.25
4.1 <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.3062
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .139
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .336273
THE AMR FOR THIS RIFLE IS: .9826

14 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/058225500

CENTERFIRE PATTERNS # 1

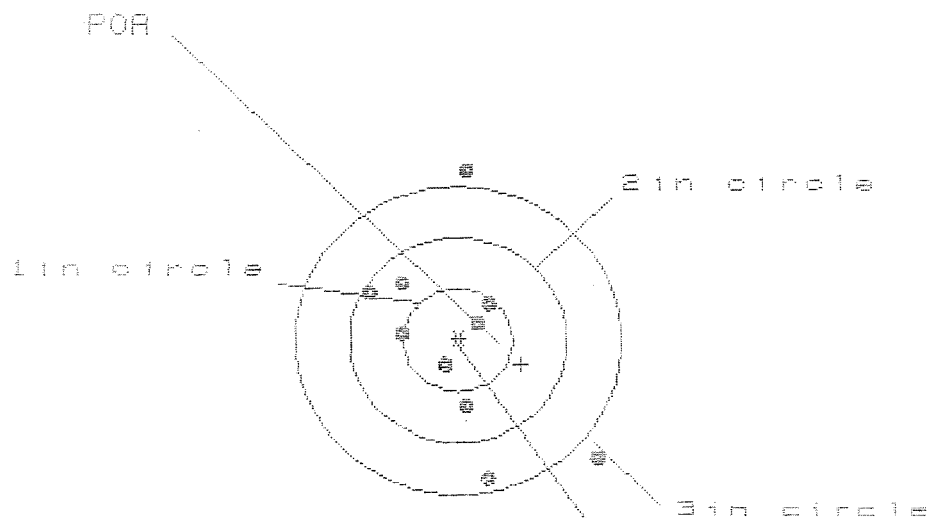

OF SHOTS = 10

IN CIR

1 in = 4

2 in = 7

3 in = 8

HS = 2.072

VS = 3.046

GS = 3.120


CENTROID *

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.256	.401	.428
MINIMUM X	-.816	-.677	-.650
MAXIMUM Y	1.704	1.572	.634
MINIMUM Y	-1.342	-1.474	-1.277
CENTROID X	-.581	-.720	-.747
CENTROID Y	.237	.369	.172
POA TO CENTROID in.	.627	.809	.767
MIN RADIUS	.235	.287	.166
MEAN RADIUS	.861	.745	.629
MAX RADIUS	1.725	1.587	1.347
HORIZONTAL SPREAD	2.072	1.078	1.078
VERTICAL SPREAD	3.046	3.046	1.911
EXTREME SPREAD	3.120	3.052	2.116
NUMBER IN ONE INCH CIRCLE =	4		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	8		

14 May 1988

FILE:/PATTERNING/CENTERFIRE_PATT/08225508

CENTERFIRE PATTERNS # 2

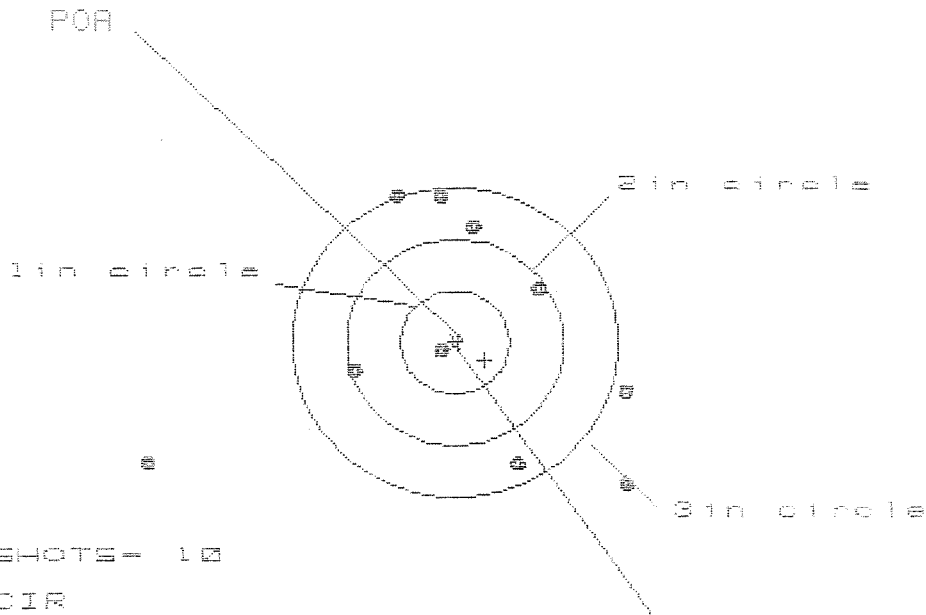

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 3

3 in = 6

HSI= 4.358

VS= 2.801


GS= 4.393

PATTERN #	:	2
SHOTS (BEST OF)	:	10
MAXIMUM X	:	1.565
MINIMUM X	:	-2.793
MAXIMUM Y	:	1.473
MINIMUM Y	:	-1.328
CENTROID X	:	-.271
CENTROID Y	:	.175
POA TO CENTROID in.	:	.323
MIN RADIUS	:	.188
MEAN RADIUS	:	1.418
MAX RADIUS	:	3.024
HORIZONTAL SPREAD	:	4.358
VERTICAL SPREAD	:	2.801
EXTREME SPREAD	:	4.393
NUMBER IN ONE INCH CIRCLE	=	1
NUMBER IN TWO INCH CIRCLE	=	3
NUMBER IN THREE INCH CIRCLE	=	6

14 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C0225588

CENTERFIRE PATTERNS # 3

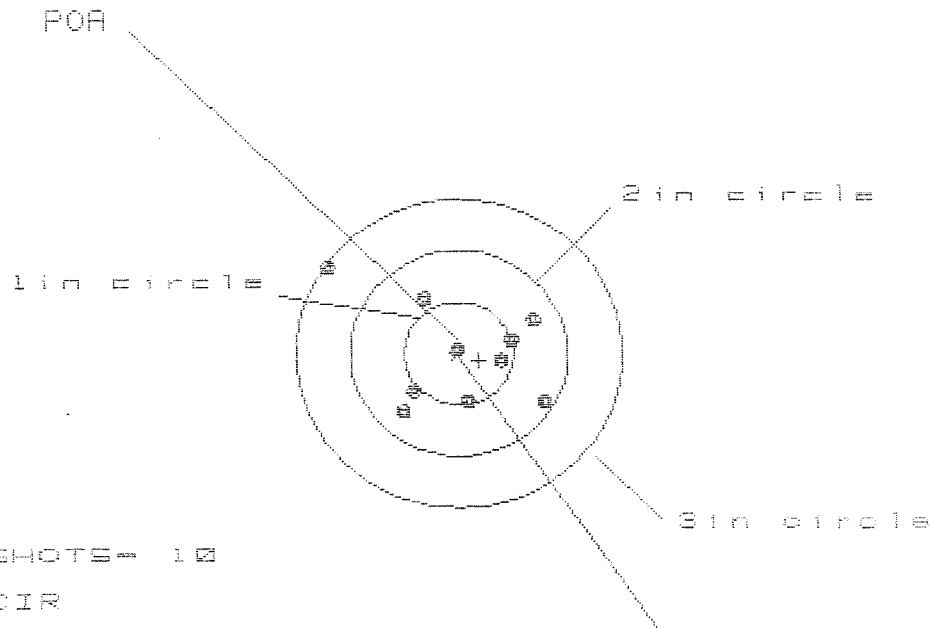

OF SHOTS- 10

IN CIR

1in = 3

2in = 9

3in = 10

HS= 2.0337

VS= 1.359

GS= 2.418

CENTROID *


PATTERN #	3
SHOTS (BEST OF)	10
MAXIMUM X	.836
MINIMUM X	-1.201
MAXIMUM Y	.822
MINIMUM Y	-.537
CENTROID X	-.187
CENTROID Y	.063
POA TO CENTROID in.	.197
MIN RADIUS	.082
MEAN RADIUS	.657
MAX RADIUS	1.455
HORIZONTAL SPREAD	2.037
VERTICAL SPREAD	1.359
EXTREME SPREAD	2.418
NUMBER IN ONE INCH CIRCLE =	3
NUMBER IN TWO INCH CIRCLE =	9
NUMBER IN THREE INCH CIRCLE =	10

14 May 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06225508

CENTERFIRE PATTERNS

4

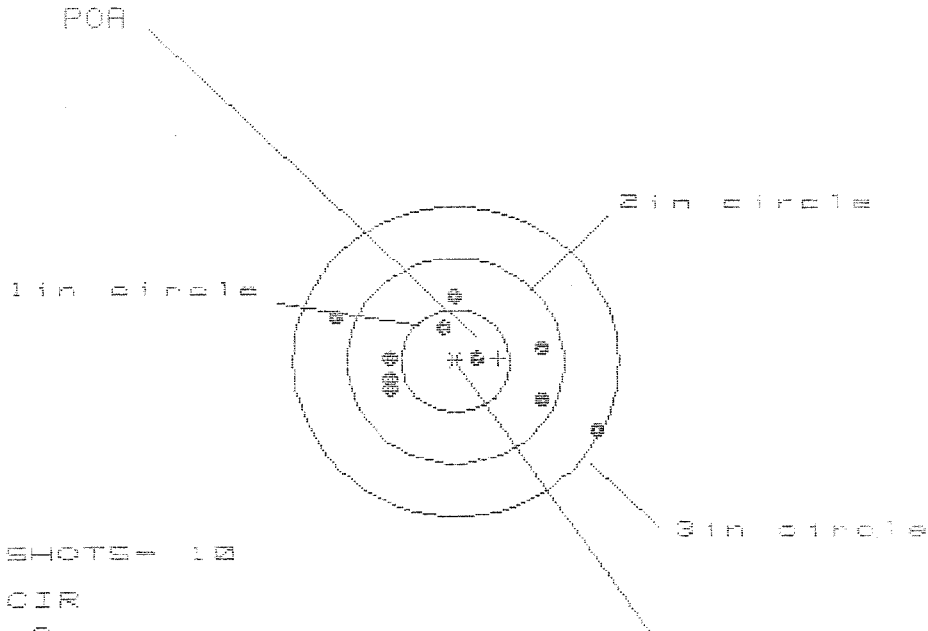

OF SHOTS = 10

IN CIR

1 in = 2

2 in = 8

3 in = 10

HS = 2.284

VS = 1.290

GS = 2.645


CENTROID *

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.248	.963	.838
MINIMUM X	-1.136	-.997	-.629
MAXIMUM Y	.592	.514	.561
MINIMUM Y	-.698	-.415	-.368
CENTROID X	-.394	-.533	-.408
CENTROID Y	-.030	.048	.001
POA TO CENTROID in.	.395	.535	.408
MIN RADIUS	.156	.232	.172
MEAN RADIUS	.738	.642	.587
MAX RADIUS	1.430	1.064	.915
HORIZONTAL SPREAD	2.384	1.960	1.467
VERTICAL SPREAD	1.290	.929	.929
EXTREME SPREAD	2.645	2.111	1.510
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		8	
NUMBER IN THREE INCH CIRCLE =		10	

14 May 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06225588

CENTERFIRE PATTERNS # 5

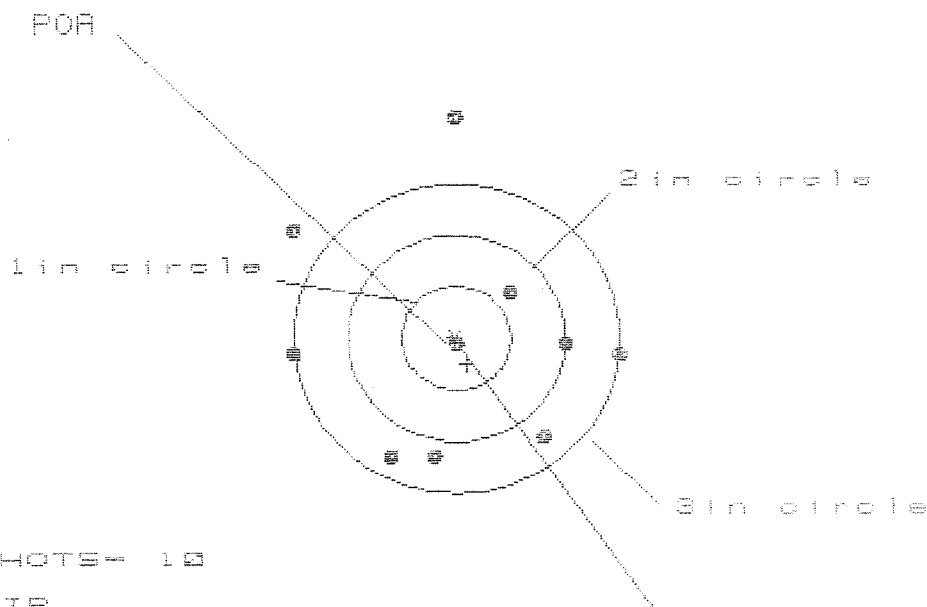

OF SHOTS= 10

IN CIR

1in = 1

2in = 2

3in = 8

HE= 2.988

VS= 3.317

GS= 3.336

CENTROID #

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.477	1.478	1.298
MINIMUM X	:	-1.506	-1.505	-1.656
MAXIMUM Y	:	2.131	1.288	.871
MINIMUM Y	:	-1.186	-.949	-.789
CENTROID X	:	-.098	-.099	.089
CENTROID Y	:	.250	.013	-.147
POR TO CENTROID in.	:	.269	.100	.172
MIN RADIUS	:	.036	.204	.404
MEAN RADIUS	:	1.239	1.128	.998
MAX RADIUS	:	2.131	1.980	1.677
HORIZONTAL SPREAD	:	2.983	2.983	2.946
VERTICAL SPREAD	:	3.317	2.237	1.660
EXTREME SPREAD	:	3.336	3.215	2.946
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		2	
NUMBER IN THREE INCH CIRCLE	=		8	

RC54

M-24

12/88

OI

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C 6725508

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel RB		2/5/90	WB
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	4	4	4			2/27/90	WB
	G) Safety Off Force	2 1/4	2 1/4	2 1/4			2/27/90	WB
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent	.021	.021	.0205			2/27/90	WB
	J) Assemble Stock							
	K) Assemble Swivel Studs						2/27/90	WB
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test						2/23/90	A
	A) Time						2/23/90	A
	B) Malfunctions						2/23/90	A
	C) Pierced Primers						2/23/90	A
	D) Optical Clarity of Scope						2/23/90	A
645	Inspect for Live Ammo						2/23/90	A
655	Final Inspection						2/27/90	WB
	A) Headspace							
	B) Trigger Pull	2.67	2.62	2.63	2.61	2.58	2/27/90	WB
	C) Function						2/27/90	WB
660	Pack							

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225508
23 Feb 1990

CENTROIDAL DISTANCES

0 TO	1	.25965
1 TO	2	.263486
1 TO	3	.0590762
1 TO	4	.244904
1 TO	5	.241373

53 $\frac{1}{2}$ <----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.193
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .099
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .21691

THE AMR FOR THIS RIFLE IS: .8376

23 Feb 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C0225500.1

CENTERFIRE PATTERNS # 1

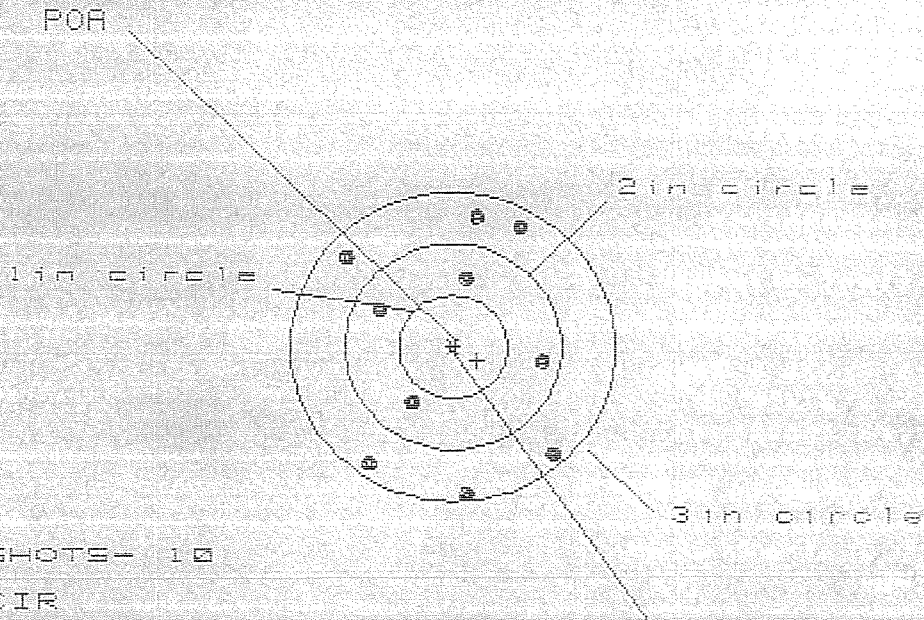

OF SHOTS- 10

IN CIR

1in = 0

2in = 4

3in = 10

HS= 1.960

VS= 2.671

ES= 2.769

PATTERN #	1	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.958	.906	.935
MINIMUM X	-1.002	-1.896	-1.057
MAXIMUM Y	1.268	1.150	.959
MINIMUM Y	-1.403	-1.521	-1.406
CENTROID X	-.223	-.329	-.358
CENTROID Y	.133	.251	.442
POA TO CENTROID in.	.259	.414	.568
MIN RADIUS	.654	.578	.434
MEAN RADIUS	1.111	1.058	.969
MAX RADIUS	1.434	1.539	1.572
HORIZONTAL SPREAD	1.960	1.802	1.802
VERTICAL SPREAD	2.671	2.671	2.395
EXTREME SPREAD	2.769	2.699	2.699
NUMBER IN ONE INCH CIRCLE	= 0		
NUMBER IN TWO INCH CIRCLE	= 4		
NUMBER IN THREE INCH CIRCLE	= 10		

23 Feb 1998

FILE:/PATTERNING/CENTERFIRE_PATT/08225500.1

CENTERFIRE PATTERNS # 2

POA

1in circle

2in circle

3in circle

OF SHOTS = 10

IN CIR

1in = 3

2in = 7

3in = 10

HE = 2.028

VS = 2.325

GS = 2.640

CENTROID #

PATTERN #


2

SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.093	.989	1.015
MINIMUM X	-.935	-.849	-.823
MAXIMUM Y	1.302	1.189	.430
MINIMUM Y	-1.023	-.716	-.568
CENTROID X	-.003	.101	.075
CENTROID Y	-.012	.101	-.047
POA TO CENTROID in.	.013	.143	.089
MIN RADIUS	.217	.277	.270
MEAN RADIUS	.777	.714	.634
MAX RADIUS	1.386	1.207	1.024
HORIZONTAL SPREAD	2.028	1.838	1.838
VERTICAL SPREAD	2.325	1.905	.998
EXTREME SPREAD	2.640	1.937	1.844
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		7	
NUMBER IN THREE INCH CIRCLE =		10	

23 Feb 1998

FILE:/PATTERNING/CENTERFIRE_PATT/CB225588.1

CENTERFIRE PATTERNS # 3

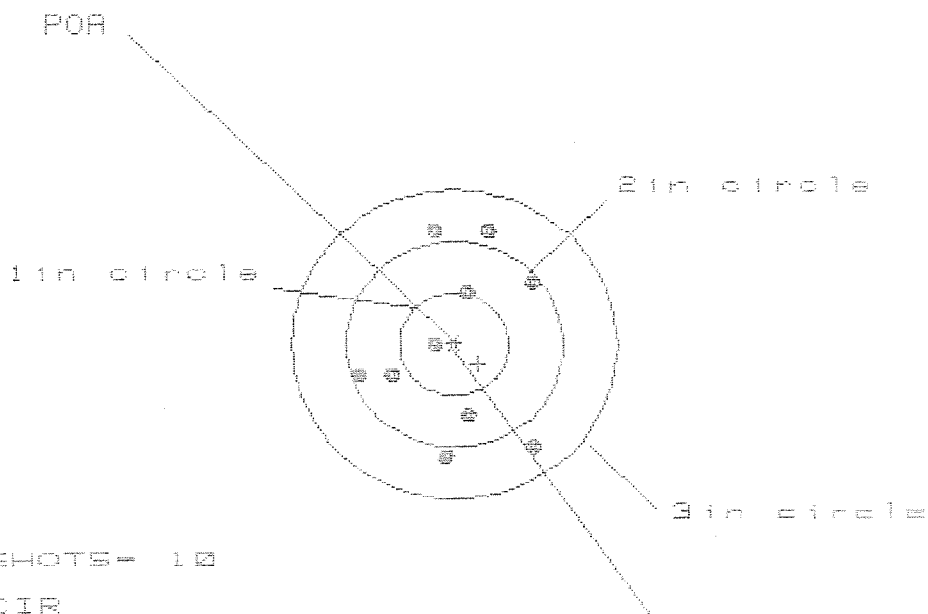

OF SHOTS- 10

IN CIR

1in = 1

2in = 6

3in = 10

HS= 1.545

VS= 2.237

ES= 2.272

PATTERN #	:	3	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.707	.756	.881
MINIMUM X	:	-.838	-.759	-.714
MAXIMUM Y	:	1.147	1.039	1.105
MINIMUM Y	:	-1.090	-1.198	-1.069
CENTROID X	:	-.220	-.299	-.344
CENTROID Y	:	.192	.300	.171
POA TO CENTROID in.	:	.292	.424	.384
MIN RADIUS	:	.164	.163	.039
MEAN RADIUS	:	.840	.789	.726
MAX RADIUS	:	1.205	1.199	1.105
HORIZONTAL SPREAD	:	1.545	1.515	1.515
VERTICAL SPREAD	:	2.237	2.237	2.174
EXTREME SPREAD	:	2.272	2.272	2.174
NUMBER IN ONE INCH CIRCLE	=	1		
NUMBER IN TWO INCH CIRCLE	=	6		
NUMBER IN THREE INCH CIRCLE	=	10		

23 Feb 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06225508.1

CENTERFIRE PATTERNS # 4

POA

1in circle

2in circle

3in circle

OF SHOTS - 10

IN CIR

1in = 2

2in = 8

3in = 10

HS= 1.614

VS= 1.665

GS= 1.916


CENTROID #

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.738	.810	.725
MINIMUM X	-.876	-.804	-.889
MAXIMUM Y	.880	.737	.640
MINIMUM Y	-.835	-.779	-.563
CENTROID X	-.086	-.158	-.073
CENTROID Y	-.070	.023	.120
POA TO CENTROID in.	.111	.160	.140
MIN RADIUS	.066	.178	.220
MEAN RADIUS	.691	.649	.598
MAX RADIUS	1.059	1.036	.899
HORIZONTAL SPREAD	1.614	1.614	1.614
VERTICAL SPREAD	1.665	1.516	1.203
EXTREME SPREAD	1.916	1.759	1.699
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	8		
NUMBER IN THREE INCH CIRCLE =	10		

23 Feb 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C0225300.1

CENTERFIRE PATTERNS # 5

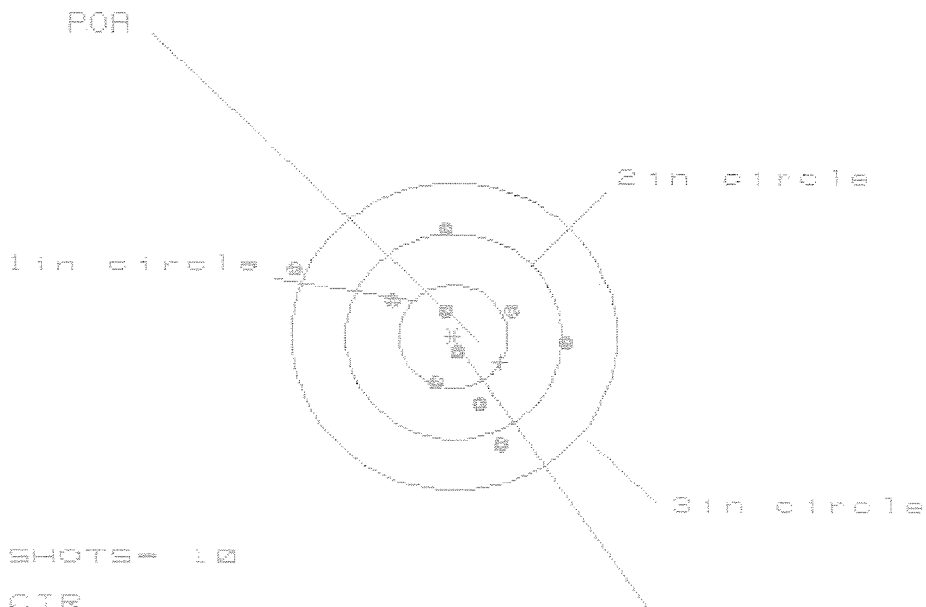

OF SHOTS- 10

IN CIR

1in = 2

2in = 6

3in = 9

HS= 2.502

VS= 2.079

GS= 2.585

CENTROID #

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.009	.844	.679
MINIMUM X	:	-1.493	-.693	-.657
MAXIMUM Y	:	1.046	1.115	.994
MINIMUM Y	:	-1.033	-.964	-.748
CENTROID X	:	-.433	-.268	-.303
CENTROID Y	:	.252	.183	.304
POA TO CENTROID in.	:	.501	.324	.429
MIN RADIUS	:	.206	.166	.235
MEAN RADIUS	:	.769	.661	.615
MAX RADIUS	:	1.615	1.139	1.014
HORIZONTAL SPREAD	:	2.502	1.537	1.537
VERTICAL SPREAD	:	2.079	2.079	1.742
EXTREME SPREAD	:	2.585	2.144	1.771
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

RECEIVING AND ESTIMATING REPORT

INITIAL JJM		CUSTOMER ORDER NO.		COMMENTS W/10X LEUPOLD SCOPE M-24 SNIPER			
DATE RECEIVED 01/18/90	DATE OPENED 01/25/90	DATE CODE DI 12/88	SERIAL NUMBER C6225508	MODEL AND GRADE 9999 7.62 NATO		ORDER R 90-02947	
ACCESSORIES HARD CASE		SLING STRAP		W/STUDS		W/SWIVELS	

FROM:

CDR D/782 MAINT BN
ATTN CW2 BURKHARDT
782 MAIN BN
FT BRAGG NC 28307-5100

SHIP TO:

CDR D/782 MAINT BN
ATTN CW2 BURKHARDT
782 MAIN BN
FT BRAGG

NC
28307-5100

ACCOUNT NUMBER	ACCOUNT NUMBER N/C	WRITE ☐	PROM. DATE	ESTIMATED	VIA UPS
----------------	--------------------	--------------------------------	------------	-----------	------------

REPAIR CHARGE	TAX	INSURANCE	UPS	PARCEL POST	TOTAL
---------------	-----	-----------	-----	-------------	-------

GUN CONDITION:

☐ NEW

☒ SLIGHTLY WORN

☒ VERY WORN

☐ MISUSED

☐ MARRED

CUSTOMER'S REQUEST

BENT BARREL + CRACKED STOCK

MAIN FAULT

① REPOWDER COAT TRIGGER GUARD ASSY.
② REPLACE STOCK

PARTS

PARTS MISSING

1- 96115 - OIL BOTTLE

1- 96056 - SCOPE LENS CLEANING
FLUID

REPAIRMAN RW	PROOF L	CLEAN L	TEST L	TARGET L	PATTERN
GALLERY TESTER ALC	DATE 2/22/90	DATE 2/22/90	DATE 2/22/90	DATE 2/22/90	DATE 2/22/90

RD6925 REV. 6/88

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400148879

[illegible]

M-24

Scope # 1139

New Barrel

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225508

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock		12/2/93	RW
600	Proof		12/2/93	RW
607	Check Headspace		12/2/93	RW
610	Dis-assemble Gun		12/2/93	RW
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		12/8/93	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		12/8/93	RW
	C) Inspect Ejector Hole for Chamfer		12/8/93	RW
	D) Oil Firing Pin Ass'y		12/8/93	RW
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS					DATE	INIT
5 cont.	F) Safety On Force							
	G) Safety Off Force							
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent							
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test						12/8/93	RW
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo						12/8/95	RW
655	Final Inspection							
	A) Headspace						12/9/95	RW
	B) Trigger Pull	2.42	2.43	2.41	2.41	2.44	12/9/95	RW
	C) Function						12/9/95	RW
660	Pack							

Final Inspection

In: C6225508

DATE REC'D: 11/7/93

DATE RET'D: 12/10/93

EDITOR: RW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☒ Scope☒ Scope Rings☒ Mounting Screws☒ Mounting Base☒ SCREWS☒ FINISH☒ LOOSENESS☒ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ Stock☒ Sling Swivel Studs☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ Scope Case☐ Iron SIGHTS☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments: _____

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06225508
10 Dec 1993

CENTROIDAL DISTANCES

0 TO	1	.606031
1 TO	2	.281603
1 TO	3	.587688
1 TO	4	1.00826
1 TO	5	1.09381

$\frac{4}{3\pi}$ <----POA
 $\frac{1}{r^2}$

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .004
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0392
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0394636

THE AMR FOR THIS RIFLE IS: 1.103

10 Dec 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C6225508

CENTERFIRE PATTERNS

1

POA

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS= 10

IN CIR

1in = 1

2in = 3

3in = 6

HS= 2.768

VS= 3.470

GS= 3.601

PATTERN #

SHOTS (BEST OF)

MAXIMUM X

MINIMUM X

MAXIMUM Y

MINIMUM Y

CENTROID X

CENTROID Y

POA TO CENTROID in.

MIN RADIUS

MEAN RADIUS

MAX RADIUS

HORIZONTAL SPREAD

VERTICAL SPREAD

EXTREME SPREAD

NUMBER IN ONE INCH CIRCLE =

NUMBER IN TWO INCH CIRCLE =

NUMBER IN THREE INCH CIRCLE =

10

9

8

1.429

1.375

1.190

-1.339

-1.393

-1.221

1.898

1.559

1.442

-1.572

-1.361

-1.478

.125

.179

.007

-.593

-.804

-.686

.606

.824

.687

.308

.431

.377

1.215

1.130

1.019

1.959

1.862

1.869

2.768

2.768

2.411

3.470

2.920

2.920

3.601

2.992

2.992

1


3

6

18 Dec 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C6225508

CENTERFIRE PATTERNS # 2

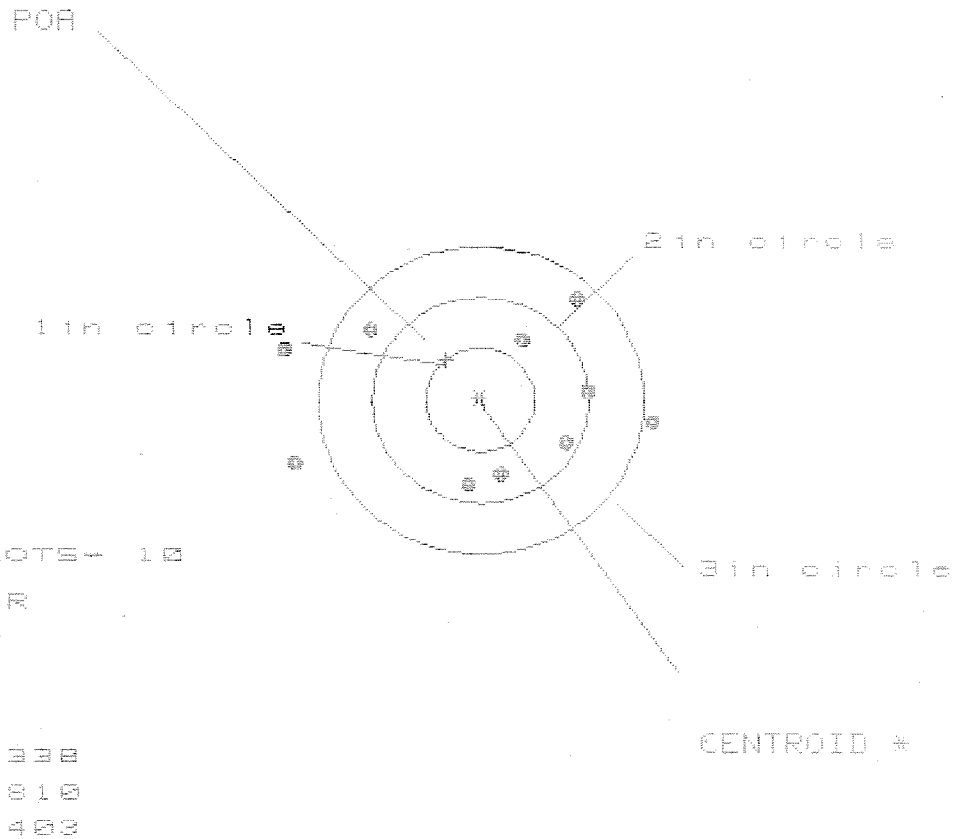


PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.565	1.369	1.123
MINIMUM X	:	-1.773	-1.969	-1.443
MAXIMUM Y	:	1.012	.940	.987
MINIMUM Y	:	-.798	-.870	-.823
CENTROID X	:	.317	.513	.759
CENTROID Y	:	-.387	-.315	-.362
POA TO CENTROID in.	:	.500	.602	.841
MIN RADIUS	:	.664	.506	.504
MEAN RADIUS	:	1.189	1.074	.903
MAX RADIUS	:	1.877	2.004	1.584
HORIZONTAL SPREAD	:	3.338	3.338	2.566
VERTICAL SPREAD	:	1.810	1.810	1.810
EXTREME SPREAD	:	3.403	3.403	2.718
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		7	

10 Dec 1993

FILE:/PATTERNING/CENTERFIRE_PATT/08225500

CENTERFIRE PATTERNS

3

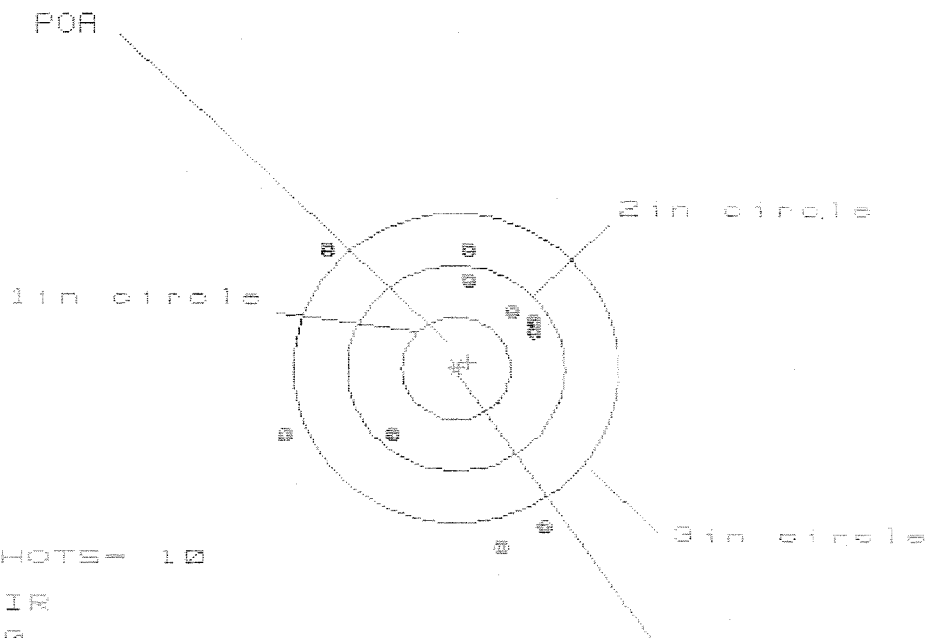

OF SHOTS- 10

IN CIR

1in = 0

2in = 5

3in = 6

HS= 2.479

VS= 2.917

GS= 3.369

CENTROID #


PATTERN #			
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.849	.890	.844
MINIMUM X	-1.630	-1.589	-1.478
MAXIMUM Y	1.190	.998	.782
MINIMUM Y	-1.727	-1.725	-1.059
CENTROID X	-.116	-.157	-.268
CENTROID Y	-.057	.135	.351
POA TO CENTROID in.	.129	.207	.441
MIN RADIUS	.748	.655	.536
MEAN RADIUS	1.218	1.120	.990
MAX RADIUS	1.766	1.941	1.809
HORIZONTAL SPREAD	2.479	2.479	2.322
VERTICAL SPREAD	2.917	2.723	1.842
EXTREME SPREAD	3.369	3.369	2.559
NUMBER IN ONE INCH CIRCLE =		0	
NUMBER IN TWO INCH CIRCLE =		5	
NUMBER IN THREE INCH CIRCLE =		6	

10 Dec 1993

FILE:/PATTERNING/CENTERFIRE_PATT/08225588

CENTERFIRE PATTERNS # 4

POA

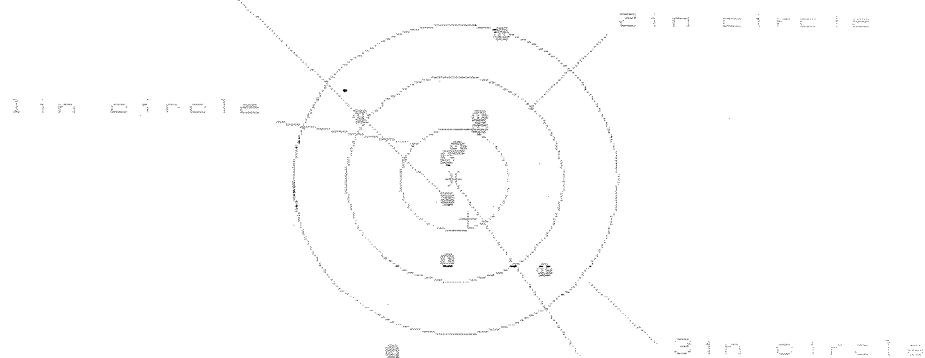

OF SHOTS- 10

IN CIR

1in = 3

2in = 6

3in = 9

HS= 1.668

VS= 3.117

GS= 3.280


CENTROID #

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.794	.728	.773
MINIMUM X	-.874	-.940	-.895
MAXIMUM Y	1.393	1.201	.616
MINIMUM Y	-1.724	-1.123	-.973
CENTROID X	-.128	-.062	-.107
CENTROID Y	.383	.575	.425
POA TO CENTROID in.	.404	.578	.438
MIN RADIUS	.177	.091	.184
MEAN RADIUS	.831	.682	.622
MAX RADIUS	1.823	1.338	1.242
HORIZONTAL SPREAD	1.668	1.668	1.668
VERTICAL SPREAD	3.117	2.324	1.589
EXTREME SPREAD	3.280	2.352	2.280
NUMBER IN ONE INCH CIRCLE =	3		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	9		

18 Dec 1993

FILE:/PATTERNING/CENTERFIRE_PATT/08225508

CENTERFIRE PATTERNS # 5

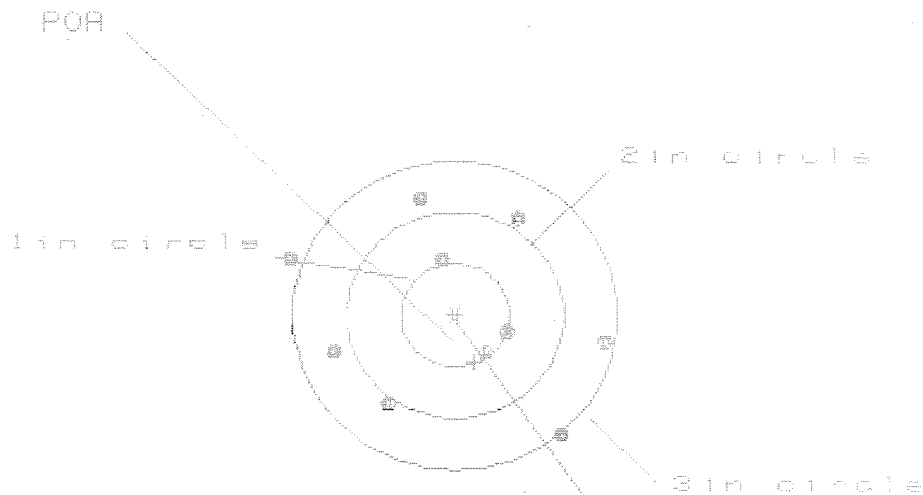

* OF SHOTS= 10

1 IN CIR

1 in = 2

2 in = 3

3 in = 8

HS= 2.804

VS= 2.332

GS= 3.047

CENTROID #

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.418	1.253	1.357
MINIMUM X	:	-1.486	-1.285	-1.181
MAXIMUM Y	:	1.131	1.194	1.052
MINIMUM Y	:	-1.201	-1.138	-.921
CENTROID X	:	-.178	-.013	-.117
CENTROID Y	:	.458	.395	.537
POA TO CENTROID in.	:	.491	.395	.550
MIN RADIUS	:	.464	.295	.438
MEAN RADIUS	:	1.062	.979	.926
MAX RADIUS	:	1.589	1.410	1.399
HORIZONTAL SPREAD	:	2.904	2.538	2.538
VERTICAL SPREAD	:	2.332	2.332	1.973
EXTREME SPREAD	:	3.047	2.667	2.542
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		3	
NUMBER IN THREE INCH CIRCLE	=		8	

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 93-25386INITIAL
FPS

CUSTOMER ORDER NO.

ATTN: FRED MARTIN W/ULTRA 10X-M3A SCOPE
W/REDFIELD PEEP SIGHT/M24 SWSDATE RECEIVED
11/17/93DATE OPENED
11/23/93DATE CODE
DI 9-88SERIAL NUMBER
C6225508

NEW SERIAL NUMBER

MODEL AND GRADE
700 7.62

NATO

ACCESSORIES SCOPE MNTS SCOPE BASE W/STUDS

FROM:

DEPT OF THE ARMY
CDR 1/504 PIR
ATTN: SCOUTS
FT BRAGG

NC 28307

SHIP TO:

DEPT OF THE ARMY
CDR 1/504 PIR
ATTN: SCOUTS
FT BRAGGNC
28307

CUST NO: 087740 C.O.D L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

FROM DATE

ESTIMATED

VIA

R760136635

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN AMMO FUNCTION FINISH ACCURACY FIT INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

L5

I5

METAL

C2

MAIN FAULT

*Re-Barrel
Check For Damaged parts*

PARTS

COMMENTS

*Barrel Assy - 96002**Re-Zinc - Scope Base, Scope Rings,
Swivel Studs
Re-powder coat - Floor plate, latch
Trigger Guard, Front & Rear Sight
Bases*

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 1/92

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400148890

DA Label 18-1, Sep 83
Edition of Oct 74 will be used until exhausted.

DEPARTMENT OF THE ARMY
CDR, 1/504 PIR
ATTN: SCOUTS
FT BRAGG NC 28307
OFFICIAL BUSINESS

10/3

NOV 18
MC

Arms Service Division
Remington Arms Co
Uia

REGISTERED MAIL
R 760 136 635

S/N: CG225508

PLEASE SURVEY ALL EQUIPMENT
AND REPLACE MISSING OR BROKEN PARTS

PLEASE CHECK STOCKS FOR DAMAGE
CAUSED BY EXPOSURE TO EXCESSIVE
DESERT HEAT

MISSING: BIPOD , SLING