

G641 4426
Rep/19220
C-6225475-

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6414426.__1
FILE DATE AND TIME: 12/15/2004 08:11


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.020
The Average Y Centroid of the Five Target Set:	-0.087
The Average Point of Impact of the Five Target Set:	0.089
The Average Mean Radius of the Five Target Set:	0.885
The Distance from POA to Centroid Target #1:	0.152
The Distance from Centroid Target #2 to Centroid Target #1:	0.406
The Distance from Centroid Target #3 to Centroid Target #1:	0.266
The Distance from Centroid Target #4 to Centroid Target #1:	0.260
The Distance from Centroid Target #5 to Centroid Target #1:	0.364

SERIAL NUMBER: G6414426. 0
TARGET NUMBER: 1
FILE DATE: 12/15/2004
FILE TIME: 08:10

POINT#	X	Y
1:	-0.471	-1.523
2:	0.090	-0.937
3:	0.045	-0.612
4:	-0.001	-0.055
5:	0.322	0.322
6:	0.399	0.627
7:	0.045	1.086
8:	-1.002	0.401
9:	-1.266	0.152
10:	0.346	0.849

X CENTROID: -0.149
Y CENTROID: 0.031
POA TO CENTROID: 0.152
HORZ SPREAD: 1.665
VERT SPREAD: 2.609
GROUP SPREAD: 2.660
MIN RADIUS: 0.171
MAX RADIUS: 1.587
MEAN RADIUS: 0.887
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 9

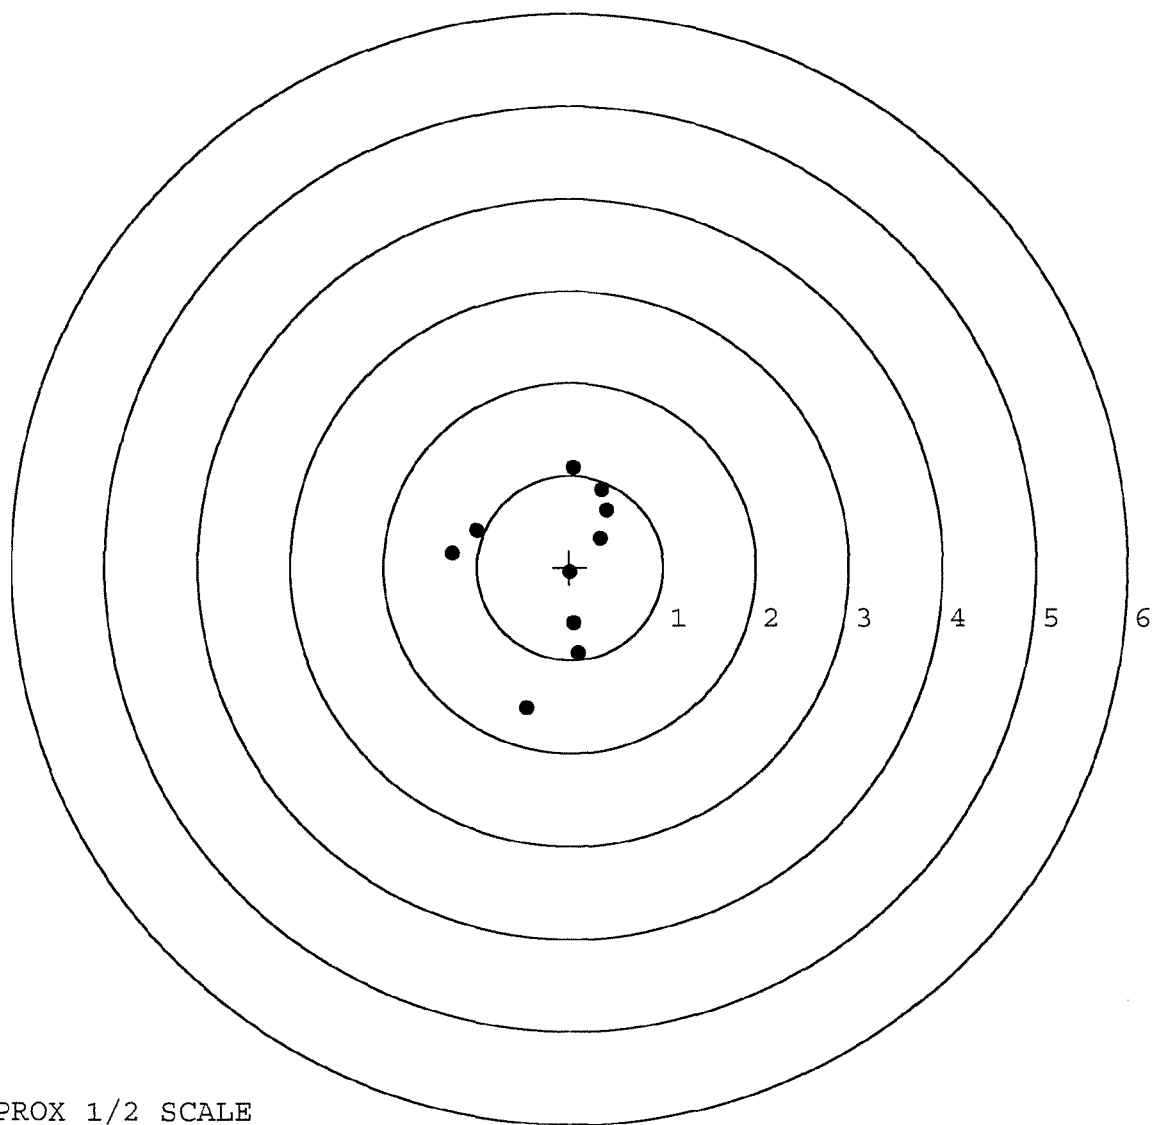

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6414426. __0

TARGET NUMBER: 2

FILE DATE: 12/15/2004

FILE TIME: 08:10

POINT#	X	Y
--------	---	---

1:	0.366	-1.474
----	-------	--------

2:	0.060	-1.188
----	-------	--------

3:	0.273	-1.177
----	-------	--------

4:	0.697	-0.348
----	-------	--------

5:	0.934	0.538
----	-------	-------

6:	-0.171	0.772
----	--------	-------

7:	-0.162	0.533
----	--------	-------

8:	-0.168	0.359
----	--------	-------

9:	0.167	0.097
----	-------	-------

10:	-0.151	-0.105
-----	--------	--------

X CENTROID: 0.184

Y CENTROID: -0.199

POA TO CENTROID: 0.272

HORZ SPREAD: 1.105

VERT SPREAD: 2.246

GROUP SPREAD: 2.309

MIN RADIUS: 0.297


MAX RADIUS: 1.288

MEAN RADIUS: 0.800

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 10

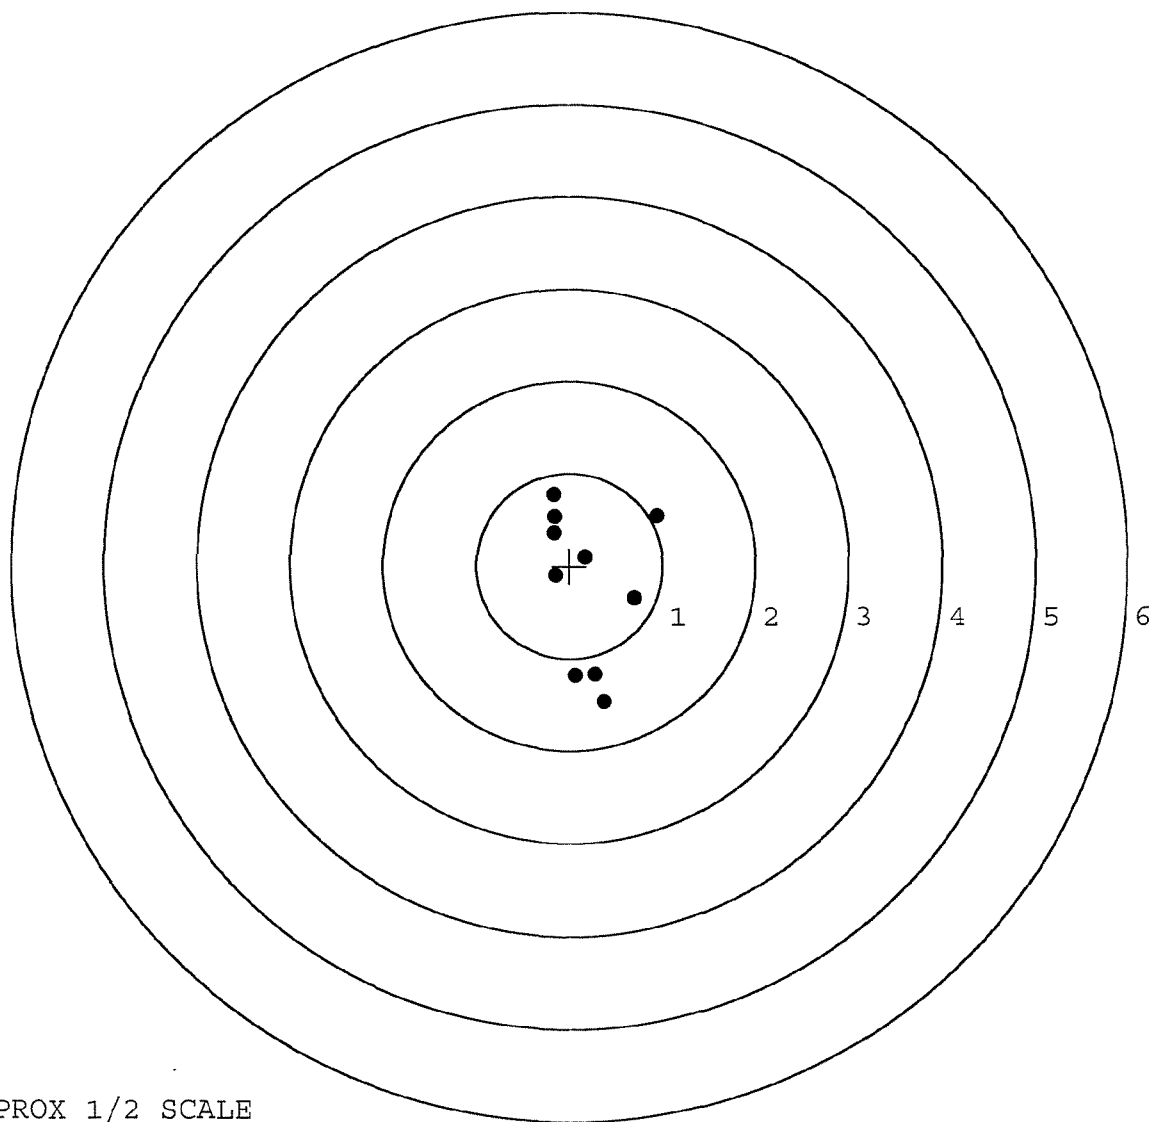

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6414426.___0

TARGET NUMBER: 3

FILE DATE: 12/15/2004

FILE TIME: 08:10

POINT#	X	Y
1:	0.278	-2.169
2:	0.672	-0.640
3:	0.772	0.546
4:	0.323	1.016
5:	-0.024	1.237
6:	0.182	0.169
7:	-0.388	0.189
8:	-0.421	-0.141
9:	-0.213	-0.595
10:	-0.529	-0.882

X CENTROID: 0.065

Y CENTROID: -0.127

POA TO CENTROID: 0.143

HORZ SPREAD: 1.301

VERT SPREAD: 3.406

GROUP SPREAD: 3.419

MIN RADIUS: 0.318


MAX RADIUS: 2.053

MEAN RADIUS: 0.922

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 9

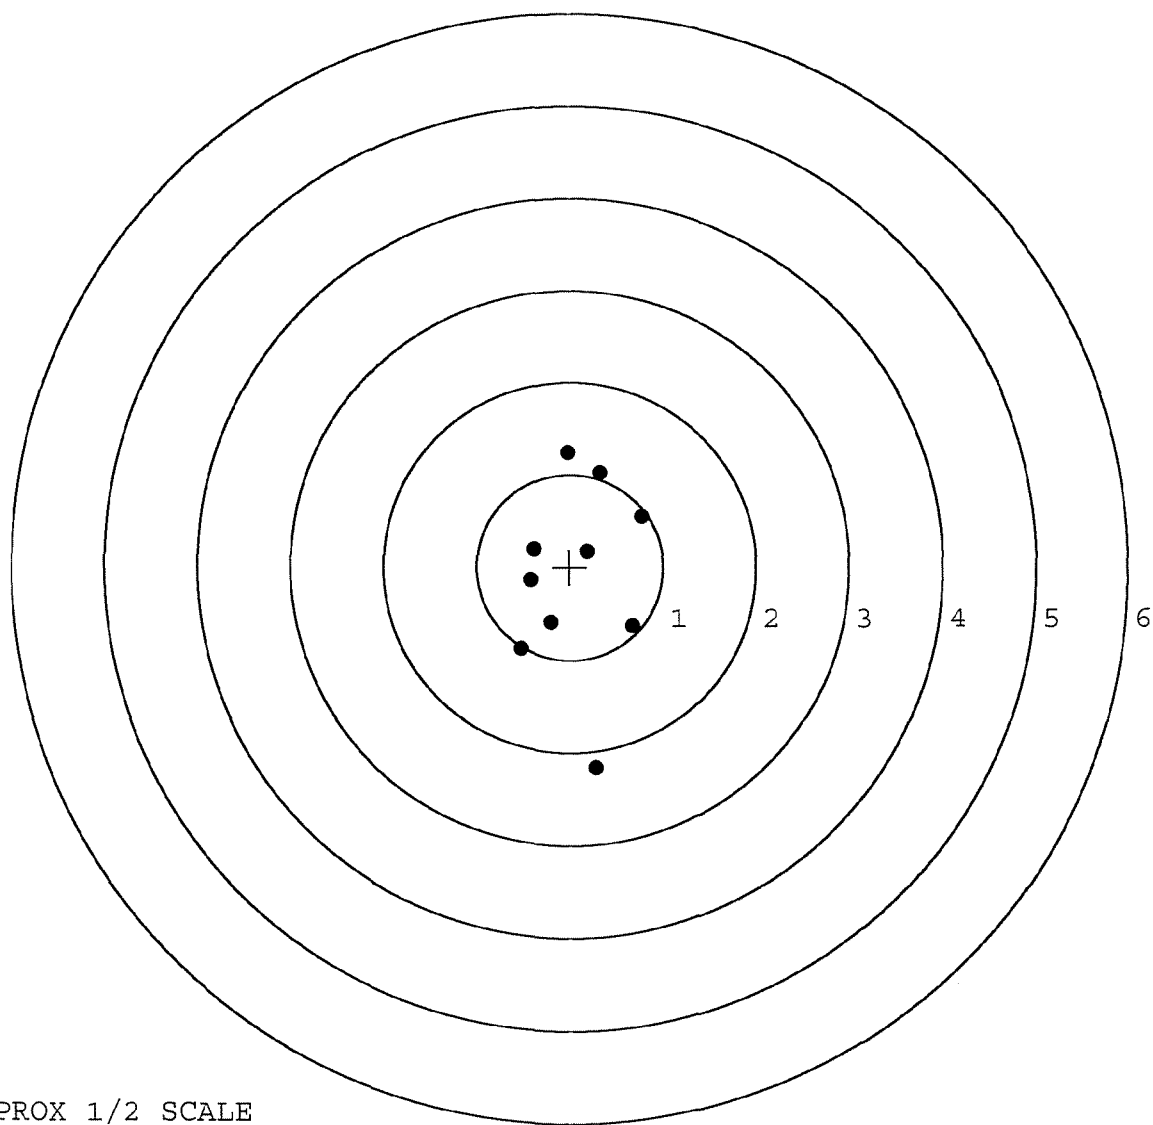

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6414426.____0

TARGET NUMBER: 4

FILE DATE: 12/15/2004

FILE TIME: 08:10

POINT#	X	Y
--------	---	---

1:	1.244	0.757
----	-------	-------

2:	0.638	1.286
----	-------	-------

3:	0.281	0.553
----	-------	-------

4:	-0.155	0.730
----	--------	-------

5:	-0.809	1.353
----	--------	-------

6:	-0.255	0.117
----	--------	-------

7:	-0.368	-0.307
----	--------	--------

8:	-0.247	-0.809
----	--------	--------

9:	0.020	-0.926
----	-------	--------

10:	0.339	-1.027
-----	-------	--------

X CENTROID: 0.069

Y CENTROID: 0.173

POA TO CENTROID: 0.186

HORZ SPREAD: 2.053

VERT SPREAD: 2.380

GROUP SPREAD: 2.642

MIN RADIUS: 0.329


MAX RADIUS: 1.471

MEAN RADIUS: 0.941

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 4

in 3 IN DIAMETER: 10

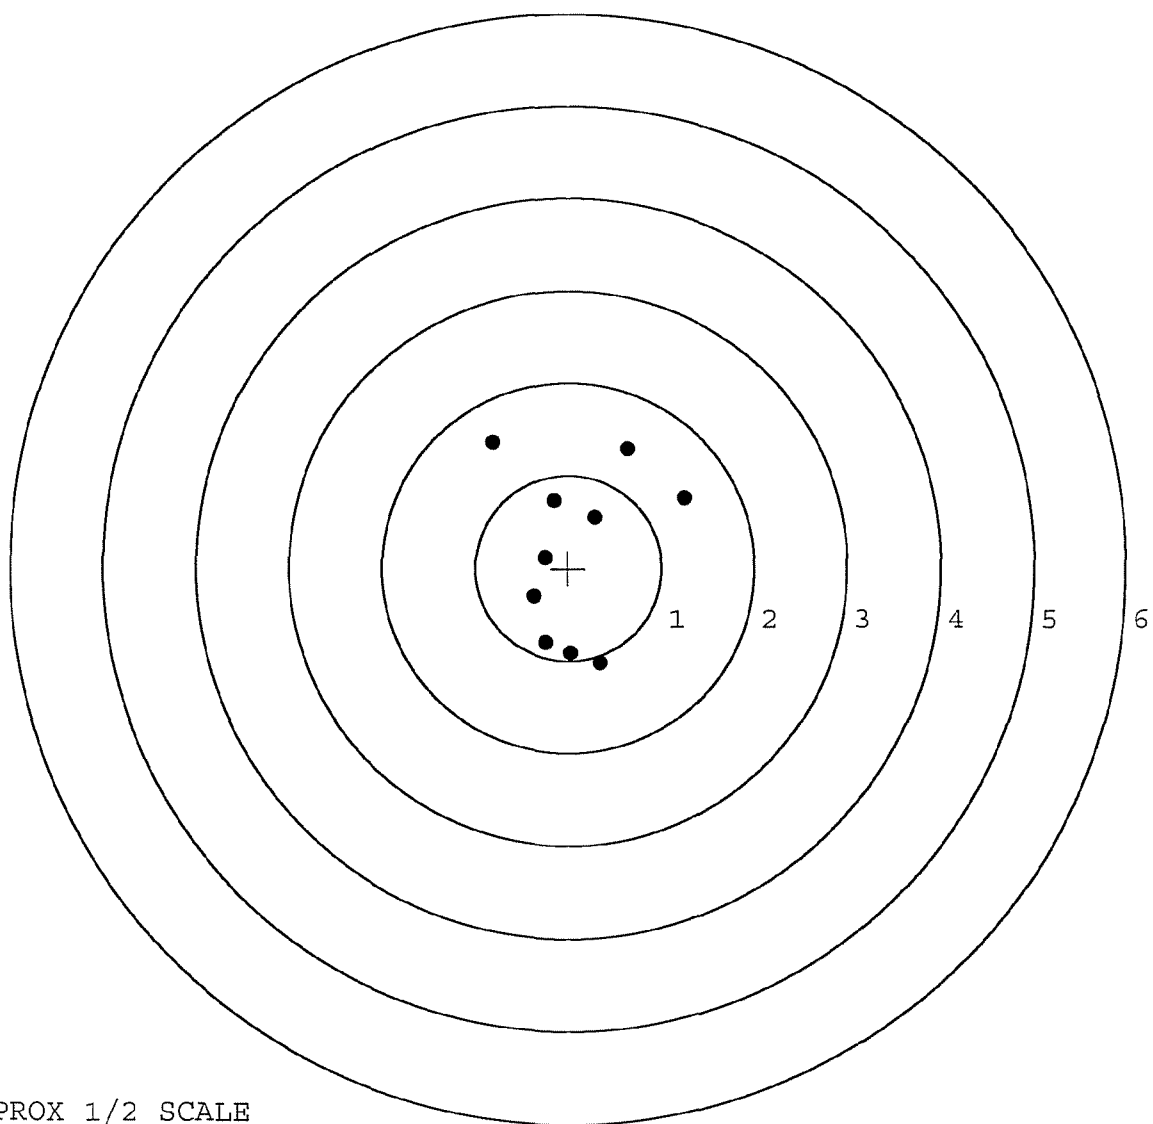


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6414426.____0
TARGET NUMBER: 5
FILE DATE: 12/15/2004
FILE TIME: 08:10

POINT#	X	Y
1:	0.059	-0.979
2:	-0.130	-0.908
3:	-0.532	-0.934
4:	-0.921	-1.182
5:	-1.834	-0.602
6:	-0.468	-0.203
7:	0.524	0.209
8:	0.263	0.175
9:	-0.024	0.466
10:	0.366	0.828

X CENTROID: -0.270
Y CENTROID: -0.313
POA TO CENTROID: 0.413
HORZ SPREAD: 2.358
VERT SPREAD: 2.010
GROUP SPREAD: 2.624
MIN RADIUS: 0.227
MAX RADIUS: 1.591
MEAN RADIUS: 0.873
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 9

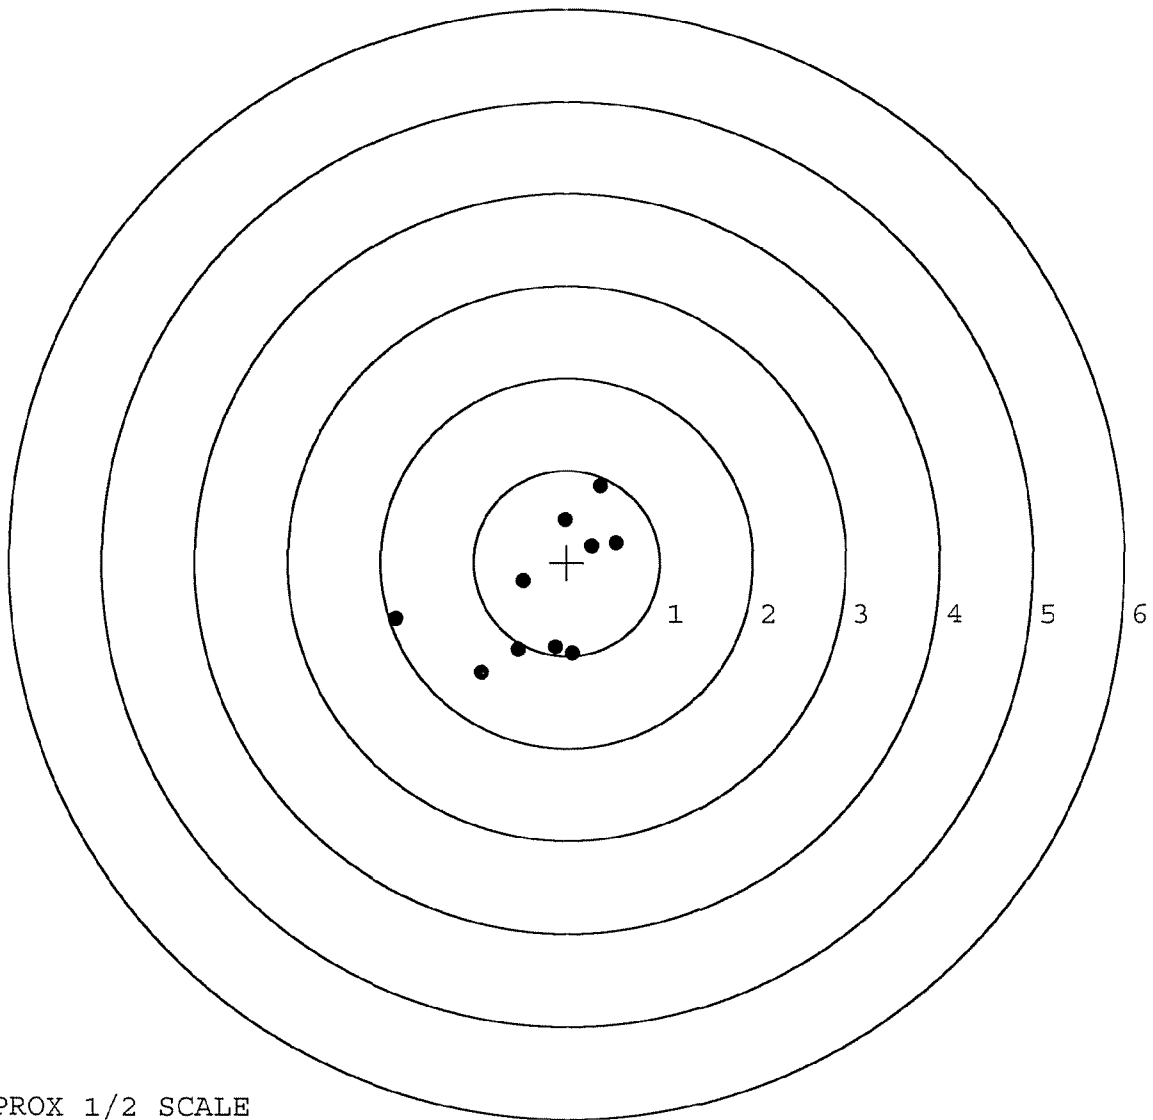

TARGET APPROX 1/2 SCALE

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50 LBS (plus or minus 0.50 LBS)
3.00 LBS (plus or minus 0.75 LBS)
4.00 LBS (plus or minus 1.00 LBS)

SERIAL NO. _____

DATE 12-7-04

TESTER TRC

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.48	2.77		2.19	
PULL #2	2.81	2.79		2.32	
PULL #3	2.79	2.52		2.06	
PULL #4	2.75	2.52		2.25	
PULL #5	2.59	2.43		2.21	
TOTAL	13.42	13.03		11.03	
AVERAGE	2.68	2.60		2.20	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.22	3.33		
PULL #2	3.25	3.38		
PULL #3	3.35	3.20		
PULL #4	3.34	3.37		
PULL #5	3.34	3.37		
TOTAL	16.50	16.65		
AVERAGE	3.30	3.33		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.35	4.25		4.38
PULL #2	4.38	4.26		4.38
PULL #3	4.33	4.29		4.32
PULL #4	4.39	4.30		4.40
PULL #5	4.36	4.30		4.46
TOTAL	21.81	21.40		21.94
AVERAGE	4.36	4.28		4.38

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R & E NUMBER	88172		
SERIAL NUMBER	06225475	064144	26 RTZ
LOG-IN DATE	11-19-04		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	11-24-04	AC
560 A	RE-BARREL	12-1-04	RTZ
B	DRILL AND TAP	12-3-04	TRW
575	ASSEMBLE	12-2-04	RTZ
600	PROOF	12-2-04	RTZ
605	CHECK HEADSPACE	12-2-04	RTZ
610	DIS-ASSEMBLE GUN	12-3-04	RTZ
612	MAGNAFLUX	12-3-04	SB
615	ROLLMARK CALIBER	12-6-04	LB
618	ROTO-BLAST	12-7-04	HP
620	APPLY COATINGS	12-13-04	RTZ
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	12-14-04	TRW
655	FINAL INSPECT	12-15-04	AC
660	PACK	12-17-04	RTZ
		SHIP DATE	
		QAR INSPECTION DATE	

AC 53

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C 6225475

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force							
	G) Safety Off Force							
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent							
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test							
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo							
655	Final Inspection							
	A) Headspace							
	B) Trigger Pull	2.52	2.52	2.63	2.57	2.53	4/9/90	RW
	C) Function							
660	Pack						4/10/90	DH

RECEIVING AND ESTIMATING REPORT

COMMENTS

W/ 10X LEUPOLD SCOPE
M-24

INITIAL CUSTOMER ORDER NO.

RLP

DATE RECEIVED	DATE OPENED	DATE CODE	SERIAL NUMBER	MODEL AND GRADE	ORDER
02/12/90	02/15/90	DZ 3/89	C6225475	9999 7.62 NATO	R 90-06409
ACCESSORIES					HARD CASE

FROM:

COMMANDER D C O
782ND MAINTENANCE BLDG
ATTN: ARMAMENT SECTION
FORT BRAGG NC 28307-5100

SHIP TO:

COMMANDER D C O
782ND MAINTENANCE BLDG
ATTN: ARMAMENT SECTION
FORT BRAGG NC
28307-5100

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

REPAIR CHARGE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

GUN CONDITION:

☐ NEW

☒ SLIGHTLY WORN

☐ VERY WORN

☐ MISUSED

☐ MARRED

CUSTOMER'S REQUEST

PIKE FIRES WHEN PUSHING SAFE OFF

MAIN FAULT

PARTS

PARTS MISSING

1- 96043- FRONT SCOPE DUST COVER
1- 96044- REAR SCOPE DUST COVER
1- 96114 BORE BRUSH
1- 96106 M-16 CLEANING BRUSH
1- 96091 CLEANING ROD ASSY
1- 96115 OIL BOTTLE
1- 16935 CHAMBER BRUSH

SYSTEM HAS 2 :

96053 LENS CLEANING KITS

SETS OF ACCESSORIES AC

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

RD6925 REV. 6/88

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400152289

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. C6225475
DATE 4/9/80
TESTER AW

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.38	2.51	2.52	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.38	2.44	2.52	
PULL #3	2.34	2.56	2.63	
PULL #4	2.34	2.53	2.57	
PULL #5	2.41	2.54	2.53	
TOTAL	11.85	12.58	12.77	
AVG.	2.37	2.52	2.55	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.19	3.15	
PULL #2	3.25	3.18	
PULL #3	3.24	3.07	
PULL #4	3.23	3.21	
PULL #5	3.32	3.16	
TOTAL	16.23	15.77	
AVG.	3.25	3.15	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.12	4.10		
PULL #2	4.14	4.06		
PULL #3	4.08	4.00		
PULL #4	4.15	4.05		
PULL #5	4.11	4.04		
TOTAL	20.60	20.25		
AVG.	4.12	4.05		

SCOPE 0496

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225475

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and stock	8	9/88	FB
600	Proof	9	7/88	RW
607	Check Headspace	9	7/88	RW
610	Dis-assemble gun	9	7/88	RW
612	Magnaflux Barrel Action		9-14-88	RFL.
	Magnaflux Bolt		9-14-88	RFL.
615	Rollmark Caliber		9-20-88	G-5
617	Drill & Tap Sight Holes		9-27-88	FB
618	Polish Barrel		9-27-88	BT
620	Apply Coatings (Barrel Action)		10-31-88	TJA
	Apply Coatings (Bolt)		10-31-88	TJA
625	Final Assembly A) Clean inside of Bolt Assembly		1/10/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		1/10/89	RW
	C) Inspect Ejector Hole for Chamfer		1/10/89	RW

OVER

OP.#		READINGS	DATE	INITIAL
625 cont.	D) Oil Firing Pin Ass'y		1/10/89	RLW
	E) Adjust Trigger Pull to Min. Setting and Stake		1/9/89	RLS
	F) Safety on Force	5 5 5	1/10/89	RLS
	G) Safety off Force	3 3 3	1/10/89	RLS
	H) Trigger Pull Test & Retainability		1/9/89	RLS
	I) Firing Pin Indent	.020 .020 .0205	1/10/89	RLS
	J) Assemble Stock		1/10/89	RLW
	K) Assemble Swivel Studs			
	L) Attach Front & Rear Sight Assemblies		1/10/89	RLW
	M) Iron Sight Alignment		1/10/89	RLW
	N) Detach Front & Rear Sights & place in numbered container		1/10/89	RLW
	O) Attach Scope to Rifle		16 Jan 89	RLS
	P) Detach & Attach Scope 20 times		16 Jan 89	RLS
640	Gallery Target & Test	38R 115L	Jan 20, 89	DH
	A) Optical Clarity of Scope		Jan 20, 89	DH
645	Inspect for Live Ammo		Jan 20, 89	DH
655	Final Inspection			
	A) Headspace		29 Jan 89	RLS
	B) Trigger Pull		27 Jan 89	RLS
	C) Function		27 Jan 89	RLS
660	Pack		22 Mar 89	RLS

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6225475

DATE 9 Jan 89

TESTER J. J. + D. S.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.45	2.35	2.55	2.37	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.33	2.31	2.51	2.34	
PULL #3	2.33	2.28	2.47	2.31	
PULL #4	2.30	2.32	2.56	2.32	
PULL #5	2.28	2.32	2.49	2.32	
TOTAL	11.69	11.58	12.58	11.66	
AVG.	2.338	2.316	2.516	2.332	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.32	3.37		
PULL #2	3.34	3.38		
PULL #3	3.33	3.39		
PULL #4	3.36	3.42		
PULL #5	3.34	3.41		
TOTAL	16.69	16.97		
AVG.	3.338	3.394		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.10	4.16		4.22
PULL #2	4.12	4.15		4.20
PULL #3	4.09	4.18		4.18
PULL #4	4.03	4.15		4.24
PULL #5	4.16	4.15		4.23
TOTAL	20.50	20.79		21.07
AVG.	4.10	4.158		4.214

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225475
26 Jan 1989

CENTROIDAL DISTANCES

0 TO 1	.425735
1 TO 2	.839002
1 TO 3	.565632
1 TO 4	.289443
1 TO 5	1.45367

5

32

1


POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.304
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .4096
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .510086
THE AMR FOR THIS RIFLE IS: .9612

23 Jan 1989

FILE: /PATTERNING/CENTERFIRE_PATT/C6225475

CENTERFIRE PATTERNS # 1

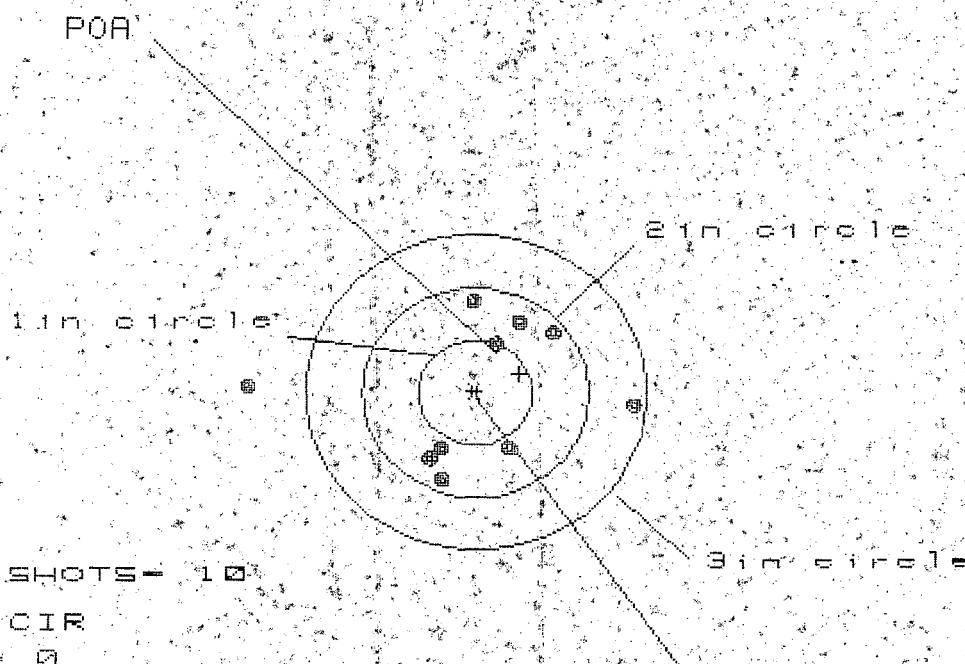

OF SHOTS - 10

IN CIR

1 in = 0

2 in = 8

3 in = 9

HS = 3.472

VS = 1.651

GS = 3.477

PATTERN #

1

SHOTS (BEST OF)

10

9

8

MAXIMUM X

1.434

1.208

.641

MINIMUM X

-2.038

-1.597

-.446

MAXIMUM Y

.825

.829

.810

MINIMUM Y

-.826

-.822

-.841

CENTROID X

-.389

-.163

-.314

CENTROID Y

-.173

-.177

-.158

POA TO CENTROID in.

.426

.240

.351

MIN RADIUS

.540

.516

.506

MEAN RADIUS

.940

.800

.736

MAX RADIUS

2.038

1.217

.912

HORIZONTAL SPREAD

3.472

1.805

1.087

VERTICAL SPREAD

1.651

1.651

1.651

EXTREME SPREAD

3.477

1.877

1.718

NUMBER IN ONE INCH CIRCLE =

0

NUMBER IN TWO INCH CIRCLE =

8


NUMBER IN THREE INCH CIRCLE =

9

23 Jan 1989

FILE: PATTERNING/CENTERFIRE_PATT/C6225475

CENTERFIRE PATTERNS # 2

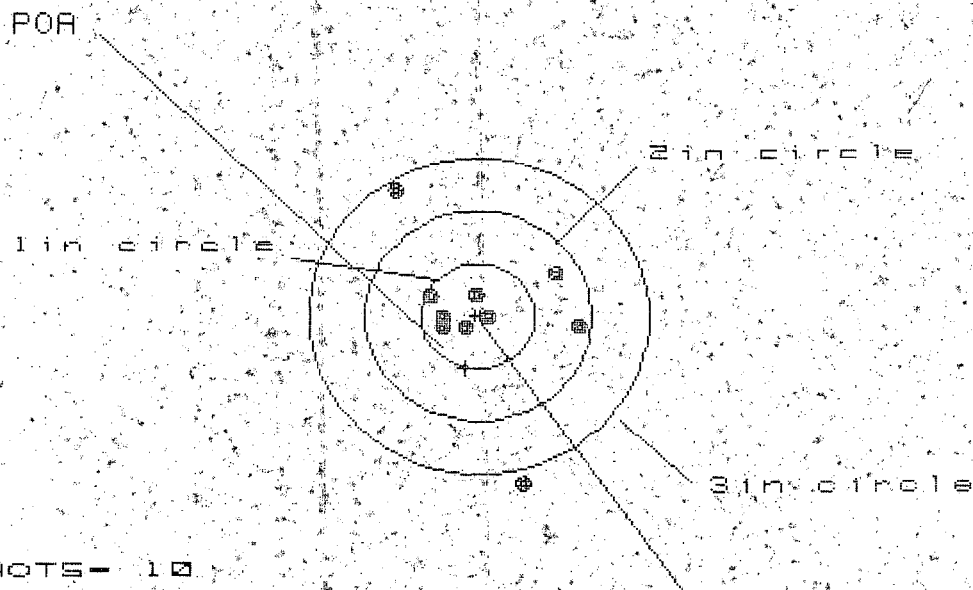

OF SHOTS - 10

IN CIR

1 in = 6

2 in = 8

3 in = 9

HS = 1.546

VS = 2.833

GS = 3.012


CENTROID #

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.866	.904	.823
MINIMUM X	:	-.680	-.642	-.410
MAXIMUM Y	:	1.202	1.020	.324
MINIMUM Y	:	-1.631	-.320	-.192
CENTROID X	:	.116	.078	.159
CENTROID Y	:	.497	.679	.551
POA TO CENTROID in.	:	.511	.683	.574
MIN RADIUS	:	.068	.053	.045
MEAN RADIUS	:	.627	.504	.408
MAX RADIUS	:	1.667	1.206	.846
HORIZONTAL SPREAD	:	1.546	1.546	1.233
VERTICAL SPREAD	:	2.833	1.340	.516
EXTREME SPREAD	:	3.012	2.046	1.271
NUMBER IN ONE INCH CIRCLE	=		6	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		9	

23 Jan 1989

FILE: PATTERNING/CENTERFIRE_PATT/C6225475

CENTERFIRE PATTERNS # 3

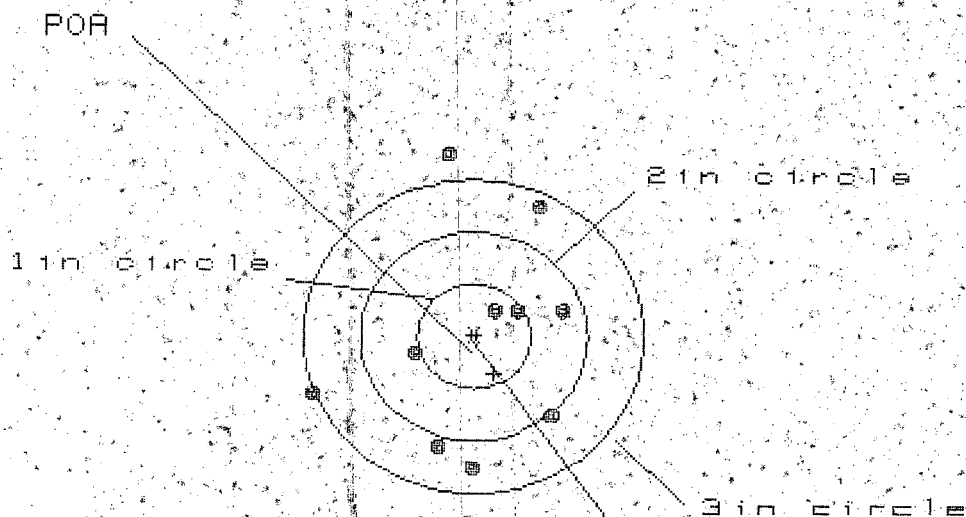

OF SHOTS = 10

IN CIR

1 in = 2

2 in = 5

3 in = 8

HS = 2.166

VS = 2.931

GS = 2.935

CENTROID *

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.762	.742	.564
MINIMUM X	:	-1.404	-1.424	-1.764
MAXIMUM Y	:	1.726	1.468	1.419
MINIMUM Y	:	-1.205	-1.013	-1.062
CENTROID X	:	-.181	-.161	.017
CENTROID Y	:	.353	.161	.210
POA TO CENTROID in.	:	.396	.228	.210
MIN RADIUS	:	.302	.462	.384
MEAN RADIUS	:	1.013	.926	.831
MAX RADIUS	:	1.735	1.557	1.460
HORIZONTAL SPREAD	:	2.166	2.166	1.328
VERTICAL SPREAD	:	2.931	2.481	2.481
EXTREME SPREAD	:	2.935	2.688	2.542
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		8	

23 Jan 1989

FILE: /PATTERNING/CENTERFIRE_PATT/C6225475

CENTERFIRE PATTERNS

4

POA

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS - 10

IN CIR

1in 10

2in 5

3in 7

ME = 2.591

VS = 3.218

GS = 3.463

PATTERN #

4

SHOTS (BEST OF)

10

9

8

MAXIMUM X

1.290

1.258

1.079

MINIMUM X

-1.401

-1.433

-1.163

MAXIMUM Y

2.000

1.848

.734

MINIMUM Y

-1.218

-.996

-1.110

CENTROID X

-.405

-.373

-.194

CENTROID Y

.146

-.106

.008

POA TO CENTROID in.

.422

.388

.194

MIN RADIUS

.655

.653

.451

MEAN RADIUS

1.195

1.101

.988

MAX RADIUS

2.021

1.697

1.354

HORIZONTAL SPREAD

2.691

2.691

2.242

VERTICAL SPREAD

3.218

1.844

1.844

EXTREME SPREAD

3.463

2.739

2.554

NUMBER IN ONE INCH CIRCLE =

0

NUMBER IN TWO INCH CIRCLE =

5


NUMBER IN THREE INCH CIRCLE =

7

23 Jan 1989

FILE: /PATTERNING/CENTERFIRE_PATT/C6225475

CENTERFIRE PATTERNS # 5

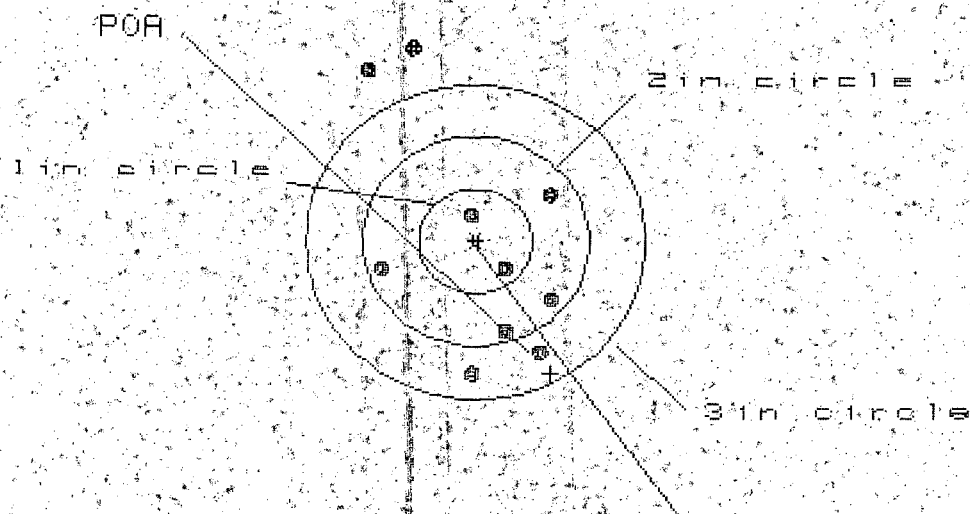

OF SHOTS - 10

IN CIR

1 in = 2

2 in = 6

3 in = 8

HS = 1.553

VS = 3.103

GS = 3.152

CENTROID *

PATTERN #	5		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.647	.587	.466
MINIMUM X	-.906	-.966	-1.066
MAXIMUM Y	1.891	1.900	.871
MINIMUM Y	-1.212	-1.002	-.765
CENTROID X	-.661	-.601	-.480
CENTROID Y	1.255	1.045	.808
POA TO CENTROID in.	1.419	1.205	.939
MIN RADIUS	.210	.182	.155
MEAN RADIUS	1.031	.877	.663
MAX RADIUS	1.968	2.132	1.087
HORIZONTAL SPREAD	1.553	1.553	1.532
VERTICAL SPREAD	3.103	2.902	1.636
EXTREME SPREAD	3.152	3.099	1.758
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		6	
NUMBER IN THREE INCH CIRCLE =		8	



VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

Remington®

MODEL 700™ H24

SERIAL NO.
C6225473


ORDER NO.
5716

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.



5716 C6225473

UPC



0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6225475

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock		8/3/92	RW
600	Proof		8/3/92	RW
607	Check Headspace		8/3/92	RW
610	Dis-assemble Gun		8/3/92	RW
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force							
	G) Safety Off Force							
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent							
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test						8-11-92	DH
	A) Time						8-11-92	DH
	B) Malfunctions						8-11-92	DH
	C) Pierced Primers						8-11-92	DH
	D) Optical Clarity of Scope						8-11-92	DH
645	Inspect for Live Ammo						8-11-92	DH
655	Final Inspection							
	A) Headspace						8/11/92	AW
	B) Trigger Pull	2.18	2.27	2.07	2.21	2.22	8/11/92	AW
	C) Function						8/11/92	AW
660	Pack							

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 92-14799INITIAL
JJM

CUSTOMER ORDER NO.

M-24 SNIPER

DATE RECEIVED 07/21/92	DATE OPENED 07/21/92	DATE CODE DI 9-88	SERIAL NUMBER C6225475	NEW SERIAL NUMBER	MODEL AND GRADE 700 7162	NATO
ACCESSORIES W/STUDS	SCOPE BASE	HARD CASE				

FROM:

D CO 782ND MAINTANCE BA
FORT BRAGG NC 28307

SHIP TO:

D CO 782ND MAINTANCE BA
FORT BRAGG NC
28307

CUST NO: 045582 CJO.DL

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

CLEAN/TEST

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
------------------	------	----------	--------	----------	-----	---------

CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

PARTS

COMMENTS

Searc Spring missing in
Fire Control

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 1/92

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400152304

MAINTENANCE REQUEST				PAGE NO	NO OF PAGES	REQUIREMENTS CONTROL SYMBOL CSGLD - 1047(R1)			
For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG									
SECTION I - EQUIPMENT DATA									
CONTROL NUMBER		WORK ORDER NO.		WESDC		ORG. PD		PD AUTHENTICATION	
☐ Work Request ☐ MWO ☒ Warranty Claim		1A. ORGANIZATION <i>DCo 782d M + Bn</i>		B. LOCATION <i>FE Bragg NC 28307-5100</i>			C. UNIT IDENT CODE <i>WABY DO</i>		
2. SERIAL NO. <i>C60225475</i>		3. NOUN NOMENCLATURE <i>Sniper Rifle 7.62mm</i>		4. LINE NO. <i>11</i>		5. MODEL <i>M24</i>		6. NATIONAL STOCK NUMBER <i>1005-01-240-2136</i>	
7A. MAINTENANCE ACTIVITY <i>Remington Arms</i>		B. LEVEL <i>D</i>		8. UTILIZATION CODE		9A. MCSR ITEM		9B. ERC	
						9C. PACING ITEM		10. HOURS	
								11. MILES	
								12. ROUNDS	
								13. STARTS	
14. FAILURE DETECTED DURING (Select one - use ☒ or X)					15. FIRST INDICATION OF TROUBLE (Select one - use ☒ or X)				
☐ A Sch. Main. ☐ C Test ☐ E Storage ☐ G Flight ☐ B Handling ☐ D Normal Op ☐ F Inspection ☐ H Other					☐ 058 Inoperative ☐ 258 Overheating ☐ 790 Out of Adjustment ☐ 008 Noisy ☐ 387 Low Performance ☐ Other				
16A. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs). <i>Worn Chamber</i>									
B. REMARKS									
SECTION II - WORK ACCOMPLISHED									
17A. REPAIR ORGANIZATION/ACTIVITY				C. UNIT IDENT. CODE		18. TYPE ORGANIZATION/ACTIVITY ACCOMPLISHING WORK (Select one - use ☒ or X)		19. AMS ACCT. CODE	
B. LOCATION						☐ 1 TOE ☐ 2 TD ☐ 3 Contractor			
20A. ACT. CODE	B. FAILURE CODE	C. COMPONENT/PART NOUN, SVC, OR MWO NO.			D. MANHOURS (Hrs. & tenths)	E. NATIONAL STOCK NUMBER	F. PART SOURCE CODE	G. QTY.	H. PARTS COST
		(1) CB CODE	(2) REF DESIGN.	(3) MFR. CODE					
					.				\$
					.				\$
					.				\$
					.				\$
					.				\$
					.				\$
					.				\$
					.				\$
					.				\$
					.				\$
					.				\$
					.				\$
					I. TOTAL MANHOURS	J. TOTAL MANHOURS COST	K. TOTAL PARTS COST		
						\$	\$		
21. DELAY (Select One)		☐ 1 Parts	☐ 2 Manpower	☐ 3 Facilities	☐ 4 Funds	☐ 5 Tools	22. Data Transcribed		
23. SUBMITTED BY <i>[Signature]</i>		24. RECEIVED BY		25. WORK STARTED BY		26. INSPECTED BY		27. ACCEPTED BY	
JULIAN DATE <i>2192</i>		JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE	
					28. DISPOSITION (Select One)				
					☐ A To User ☐ D Evacuated ☐ B To Stock ☐ E Cannibalization ☐ C Salvaged				

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225475
11 Aug 1992

CENTROIDAL DISTANCES

0 TO	1	.385804
1 TO	2	.453035
1 TO	3	.238288
1 TO	4	.673131
1 TO	5	.239401


+sla (---POB

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .2596
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0984
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .277623
THE PPR FOR THIS RIFLE IS: 1.11

11 Aug 1992

FILE: PATTERNING/CENTERFIRE_PATT/C6225475

CENTERFIRE PATTERNS # 1

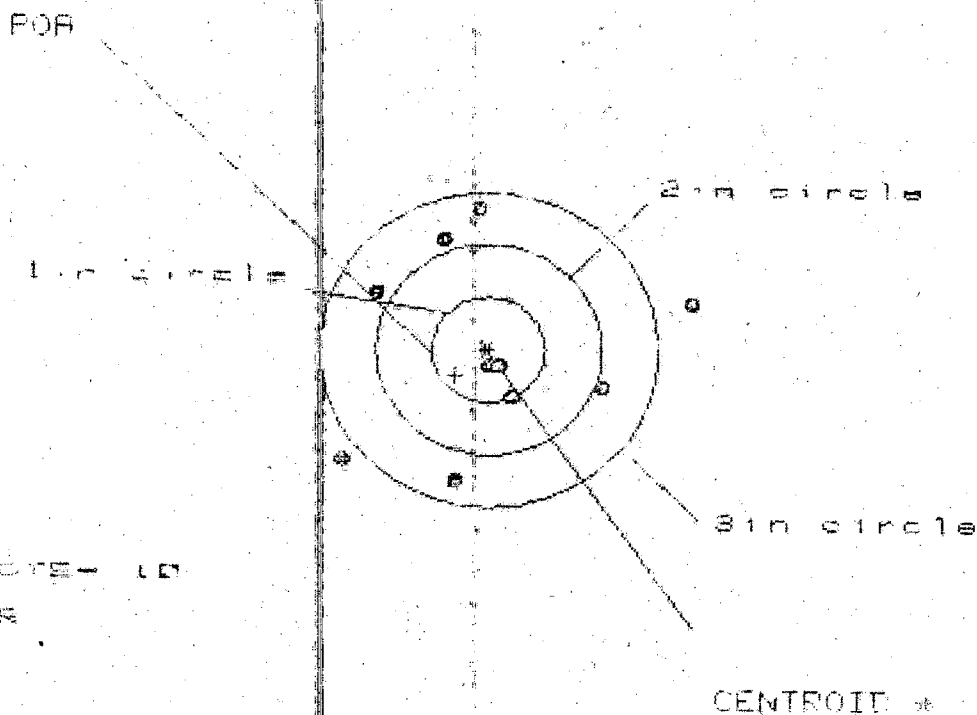

OF SHOTS - 10

INCHES

MIN

MAX

SPREAD

MIN 3.006

MAX 3.549


SPREAD 3.455

PATTERN #	10	9	8
SHOTS BEST OF	10	9	8
MINIMUM X	1.727	1.197	1.062
MINIMUM Y	-1.279	-1.081	-0.967
MAXIMUM X	1.315	1.370	1.240
MAXIMUM Y	-1.204	-1.179	-1.389
CENTROID X	.296	.098	.233
CENTROID Y	.219	.194	.324
POB TO CENTROID IN.	.387	.217	.399
MIN RADIUS	.152	.202	.230
MAX RADIUS	1.035	.954	.871
HA. RADIUS	1.854	1.501	1.333
HORIZONTAL SPREAD	3.066	2.278	2.029
VERTICAL SPREAD	2.549	2.549	2.549
EXTREME SPREAD	3.455	2.762	2.562
NUMBER IN ONE INCH CIRCLE	=	3	
NUMBER IN TWO INCH CIRCLE	=	3	
NUMBER IN THREE INCH CIRCLE	=	8	

11 Aug 1992

FILE: \PATTERNING\CENTERFIRE_PATT\08225475

CENTERFIRE PATTERNS # 2

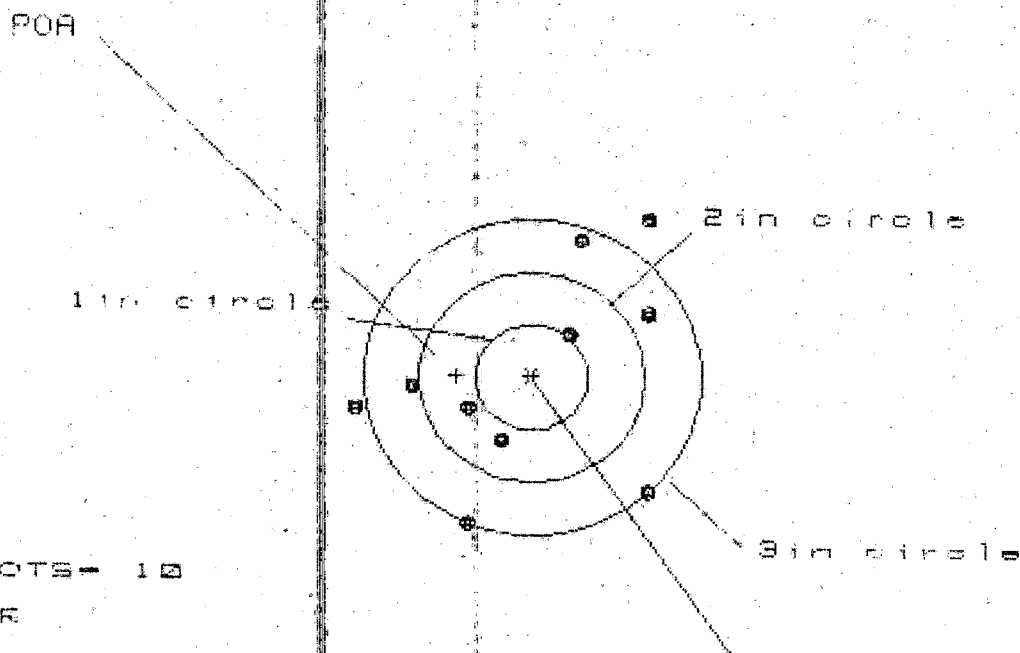

* OF SHOTS - 10

IN CIR

1 in = 0

2 in = 3

3 in = 6

1st 2.566

2nd 2.908

3rd 3.315

PATTERN #

024

SHOTS (BEST OF)


	10	9	8
MAXIMUM X	1.080	1.197	1.014
MINIMUM X	-1.586	-1.469	-1.175
MAXIMUM Y	1.590	1.446	1.426
MINIMUM Y	-1.488	-1.241	-1.261
CENTROID X	.667	.550	.733
CENTROID Y	-.011	.178	-.158
POA TO CENTROID in.	.667	.578	.750
MIN RADIUS	.552	.415	.528
MEAN RADIUS	1.196	1.094	1.056
MAX RADIUS	1.837	1.565	1.485
HORIZONTAL SPREAD	2.666	2.666	2.189
VERTICAL SPREAD	2.908	2.687	2.687
EXTREME SPREAD	3.315	2.872	2.872
NUMBER IN ONE INCH CIRCLE	=	0	
NUMBER IN TWO INCH CIRCLE	=	3	
NUMBER IN THREE INCH CIRCLE	=	6	

1. Aug 1982

FILE: PATTERNING/CENTERFIRE_PATT/C8225475

CENTERFIRE PATTERNS # 3

FOR

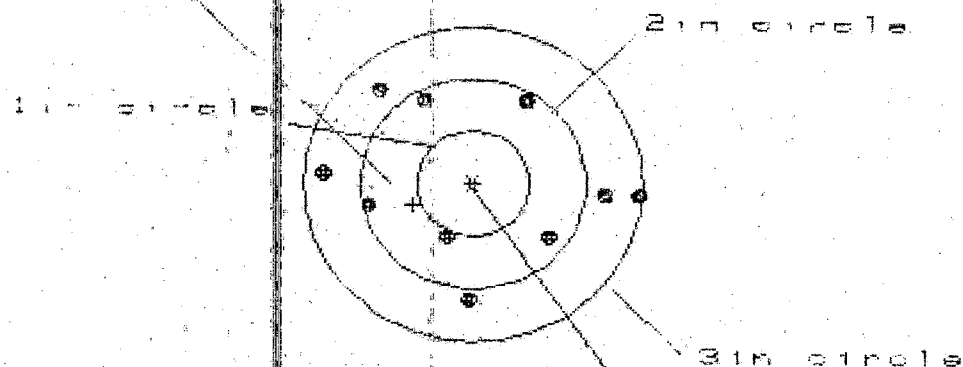

OF SHOTS - 10

IN CIR

1 in = 0

2 in = 5

3 in = 10

MAX = 2.732

YOR = 2.077

MAX = 2.734


CENTROID *

PATTERN #	10	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.441	1.373	1.232
MINIMUM X	-1.291	-1.131	-.941
MAXIMUM Y	.927	.921	.936
MINIMUM Y	-1.150	-1.156	-1.151
CENTROID X	.530	.370	.512
CENTROID Y	.204	.210	.205
FOR TO CENTROID in.	.558	.426	.351
1 in RADIUS	.572	.527	.564
MEAN RADIUS	1.054	.996	.975
MA. RADIUS	1.442	1.377	1.236
HORIZONTAL SPREAD	2.732	2.504	2.172
VERTICAL SPREAD	2.077	2.077	2.077
EXTREME SPREAD	2.734	2.509	2.271
NUMBER IN ONE INCH CIRCLE	=	0	
NUMBER IN TWO INCH CIRCLE	=	5	
NUMBER IN THREE INCH CIRCLE	=	10	

11 Aug 1992

FILE: PATTERNING-CENTERFIRE_PATT/06223475

CENTERFIRE PATTERNS # 4

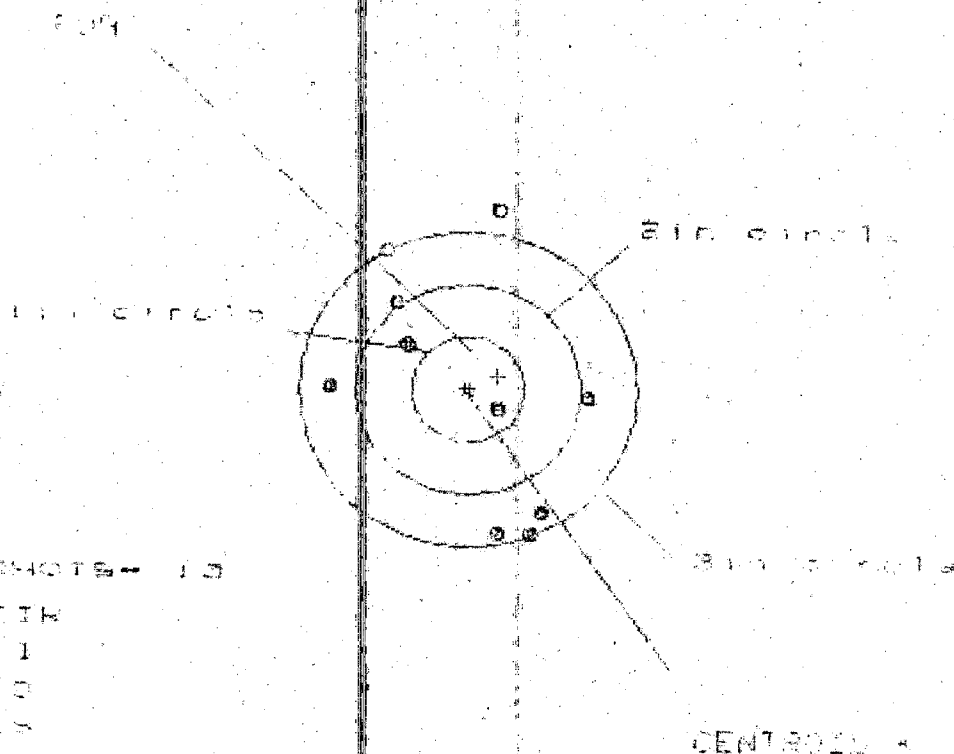

OF SHOTS- 10

IN CIR

100 = 1

200 = 2

300 = 3

400 = 4

500 = 5

600 = 6

SHOTS #

741


SHOTS best OF	10	9	8
MAXIMUM X	1.033	1.062	1.143
MINIMUM X	-1.253	-1.221	-1.140
IF MINIMUM Y	1.772	1.505	1.455
MINIMUM Y	-1.345	-1.201	-1.307
CENTROID X	-1.263	-1.295	-1.076
CENTROID Y	-1.126	-1.319	-1.109
FOR TO CENTROID IN	.291	.435	.412
MIN RADIUS	.335	.290	.430
MAX RADIUS	1.179	1.102	1.060
SPREAD	1.706	1.650	1.498
HORIZONTAL SPREAD	2.283	2.283	2.283
VERTICAL SPREAD	3.136	2.706	2.682
SPREAD	3.152	3.019	2.851
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		3	
NUMBER IN THREE INCH CIRCLE =		8	

11 Aug 1992

FILE: PATTERNING/CENTERFIRE_PATT/06225475

CENTERFIRE PATTERNS # 5

POA

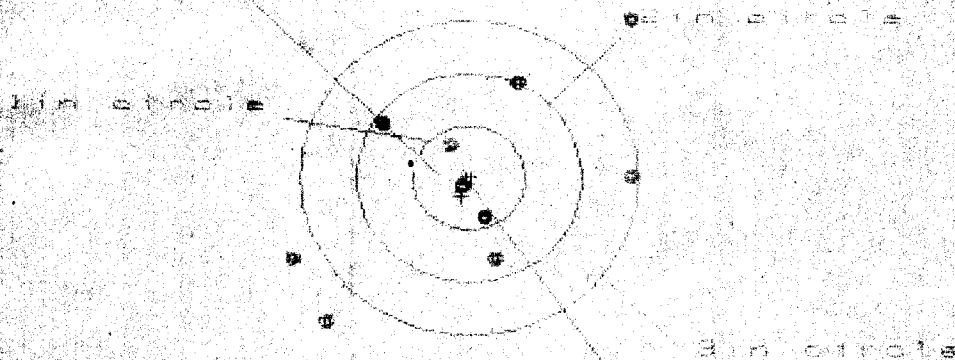

OF SHOTS = 10

IN CIR

1 in = 3

2 in = 5

3 in = 7

HS = 2.085

VS = 2.993

ES = 3.969

PATTERN #

SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.481	1.573	1.341
MINIMUM X	-1.605	-1.441	-1.573
MAXIMUM Y	1.513	1.131	.979
MINIMUM Y	-1.385	-1.216	-1.792
CENTROID X	.068	.096	.036
CENTROID Y	.176	.007	.159
POA TO CENTROID in.	.188	.097	.163
MIN RADIUS	.093	.154	.069
MEAN RADIUS	1.085	.974	.858
MAX RADIUS	2.121	1.613	1.761
HORIZONTAL SPREAD	3.086	3.014	3.014
VERTICAL SPREAD	2.993	2.347	1.771
EXTREME SPREAD	3.969	3.132	3.132
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		5	
NUMBER IN THREE INCH CIRCLE =		7	

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER

R 94-02455

INITIAL CUSTOMER ORDER NO.

M24 W/ULTRA 10X-M3A SCOPE/ATTN: FRED MARTIN

FPS

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

01/18/94

01/19/94

OM 7-92

C6225475

700 7.62

NATO

ACCESSORIES

W/STUDS

SCOPE MNTS

SCOPE BASE

FROM:

SHIP TO:

DEPT OF THE ARMY
ARMS ROOM
HHC 3/504TH P.I.R.
FORT BRAGG

NC 28307

DEPT OF THE ARMY
ARMS ROOM
HHC 3/504TH P.I.R.
FORT BRAGG

NC

28307

CUST NO: 090958 C.E.D L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

FROM DATE

ESTIMATED

VIA

R760136643

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

Bolt Stop Doesn't Work
New Barrel

PARTS

COMMENTS

Barrel Assy - 76002

Re zinc - Scope Base, Scope Rings
Swivel Studs
Re powder Chest, Floor plate,
Latch, Trigger Guard, Front &
Rear Sight Bases.

W 35 H 094030 H 227

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD5925 REV. 1/92

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400152314

REGISTERED MAIL

R 760 136 643

FROM:

ARMS ROOM
HHC 3/504th P.I.R.
FORT BRAGG, NC 28307-5100

TO:

ARMS SERVICE DIV.
REMINGTON ARMS CO.
ILION, NY 13357

M-24

CONTRACT # DAAA21-87-C-0086

Scope # 0515

New Barrel

GUN SERIAL #

C6225475

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock		1/19/94	RW
600	Proof		1/19/94	RW
607	Check Headspace		1/19/94	RW
610	Dis-assemble Gun		1/19/94	RW
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		2/2/94	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		2/2/94	RW
	C) Inspect Ejector Hole for Chamfer		2/2/94	RW
	D) Oil Firing Pin Ass'y		2/2/94	RW
	E) Adjust Trigger Pull to Min Setting and Stake		2/2/94	RW

op. #	OP. NAME	READINGS					DATE	INIT
635 Cont.	F) Safety On Force							
	G) Safety Off Force							
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent							
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test						2/7/94	RW
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo						2/7/94	RW
655	Final Inspection							
	A) Headspace						2/8/94	RW
	B) Trigger Pull	1.24	1.22	1.28	1.32	1.24	2/8/94	RW
	C) Function						2/8/94	RW
660	Pack							

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225475
24 Feb 1994

CENTROIDAL DISTANCES

Ø TO	1	.395032
1 TO	2	.572496
1 TO	3	.218506
1 TO	4	.892121
1 TO	5	.312835


2⁴
3¹ ←---POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.282
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.113
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .383798
THE AMR FOR THIS RIFLE IS: .8896

24 Feb 1994

FILE:/PATTERNING/CENTERFIRE_PATT/C8225475

CENTERFIRE PATTERNS # 1

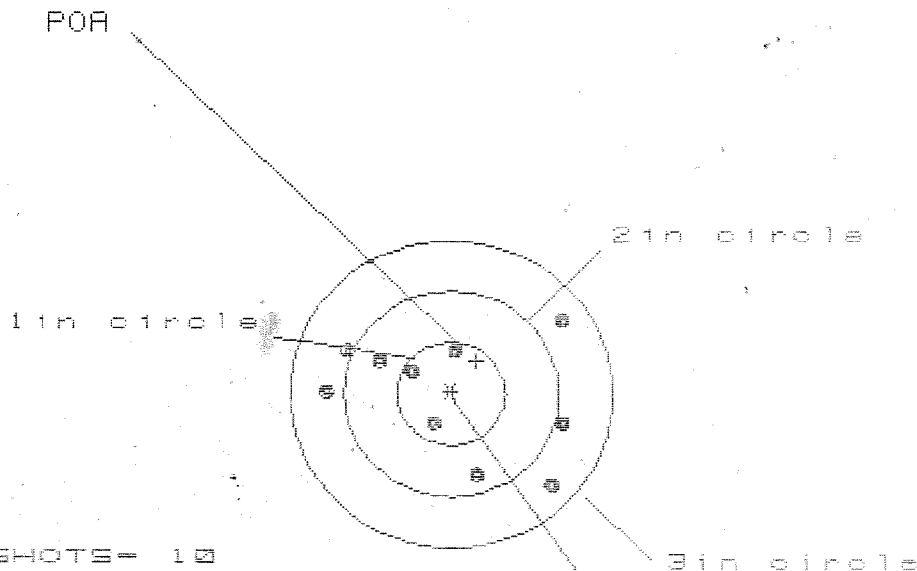

OF SHOTS= 10

IN CIR

1in = 3

2in = 5

3in = 10

HS= 2.207

VS= 1.521

GS= 2.295


CENTROID *

PATTERN #	:	1		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.067	1.185	1.318
MINIMUM X	:	-1.140	-1.022	-0.889
MAXIMUM Y	:	.685	.522	.427
MINIMUM Y	:	-.836	-.760	-.756
CENTROID X	:	-.233	-.351	-.484
CENTROID Y	:	-.319	-.395	-.300
POA TO CENTROID in.	:	.395	.529	.569
MIN RADIUS	:	.307	.200	.225
MEAN RADIUS	:	.858	.792	.698
MAX RADIUS	:	1.264	1.304	1.345
HORIZONTAL SPREAD	:	2.207	2.207	2.207
VERTICAL SPREAD	:	1.521	1.282	1.183
EXTREME SPREAD	:	2.295	2.295	2.227
NUMBER IN ONE INCH CIRCLE =			3	
NUMBER IN TWO INCH CIRCLE =			5	
NUMBER IN THREE INCH CIRCLE =			10	

24 Feb 1994

FILE:/PATTERNING/CENTERFIRE_PATT/06225475

CENTERFIRE PATTERNS # 2

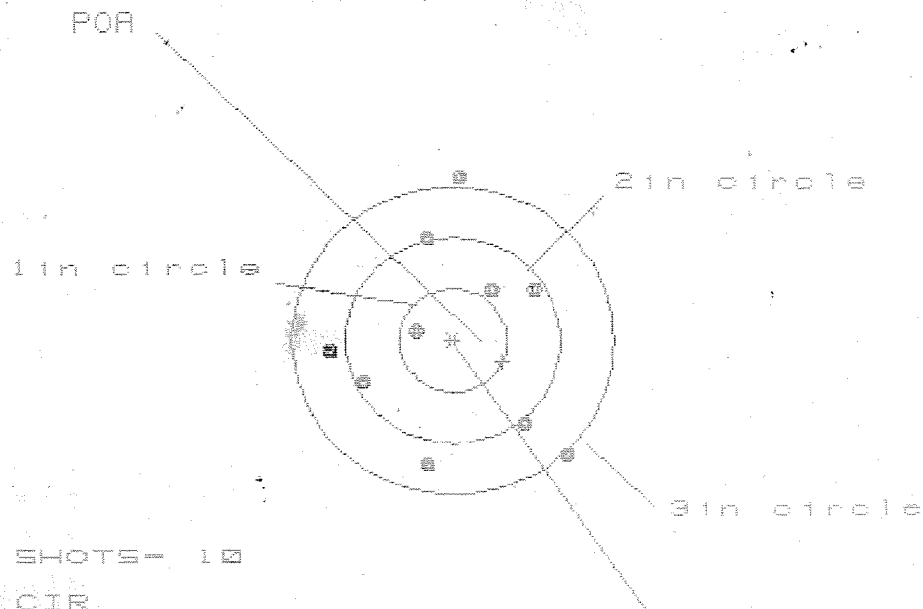

OF SHOTS- 10

IN CIR

1in = 1

2in = 5

3in = 8

HS= 2.163

VS= 2.760

GS= 2.829

PATTERN # 2

SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.060	1.071	.868
MINIMUM X	-1.103	-1.092	-.959
MAXIMUM Y	1.577	1.123	1.009
MINIMUM Y	-1.183	-1.008	-1.122
CENTROID X	-.459	-.470	-.604
CENTROID Y	.207	.032	.146
POA TO CENTROID in.	.503	.471	.621
MIN RADIUS	.386	.458	.283
MEAN RADIUS	1.022	.962	.876
MAX RADIUS	1.580	1.404	1.130
HORIZONTAL SPREAD	2.163	2.163	1.826
VERTICAL SPREAD	2.760	2.131	2.131
EXTREME SPREAD	2.829	2.410	2.131
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		5	
NUMBER IN THREE INCH CIRCLE =		8	

24 Feb 1994

FILE://PATTERNING/CENTERFIRE_PATT/C6225475

CENTERFIRE PATTERNS # 3

POA

1in circle

2in circle

3in circle

CENTROID #

OF SHOTS= 10

IN CIR

1in = 3

2in = 8

3in = 10

HS= 1.864

VS= 2.018

GS= 2.271


PATTERN #	3	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.958	.857	.862
MINIMUM X	-.906	-.867	-.862
MAXIMUM Y	1.103	1.002	.689
MINIMUM Y	-.915	-.561	-.436
CENTROID X	-.389	-.288	-.293
CENTROID Y	-.472	-.371	-.496
POA TO CENTROID in.	.612	.470	.576
MIN RADIUS	.122	.263	.179
MEAN RADIUS	.751	.700	.640
MAX RADIUS	1.287	1.003	.903
HORIZONTAL SPREAD	1.864	1.724	1.724
VERTICAL SPREAD	2.018	1.563	1.125
EXTREME SPREAD	2.271	1.787	1.787
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		8	
NUMBER IN THREE INCH CIRCLE =		10	

24 Feb 1994

FILE:/PATTERNING/CENTERFIRE_PATT/C6225475

CENTERFIRE PATTERNS

4

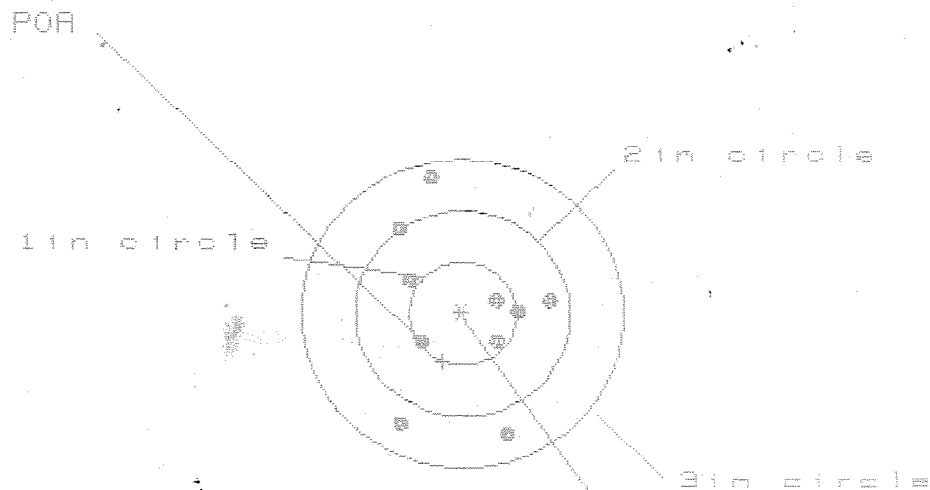

OF SHOTS- 10

IN CIR

1in = 4

2in = 7

3in = 10

HS= 1.356

VS= 2.422

GS= 2.522

CENTROID #


PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.768	.740	.792
MINIMUM X	:	-.588	-.616	-.564
MAXIMUM Y	:	1.283	.968	.835
MINIMUM Y	:	-1.139	-.997	-1.000
CENTROID X	:	.189	.217	.165
CENTROID Y	:	.467	.325	.449
POA TO CENTROID in.	:	.504	.391	.479
MIN RADIUS	:	.294	.318	.323
MEAN RADIUS	:	.772	.705	.652
MAX RADIUS	:	1.308	1.120	1.148
HORIZONTAL SPREAD	:	1.356	1.356	1.356
VERTICAL SPREAD	:	2.422	1.957	1.835
EXTREME SPREAD	:	2.522	2.195	1.835
NUMBER IN ONE INCH CIRCLE	=		4	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		10	

24 Feb 1934

FILE:/PATTERNING/CENTERFIRE PATT/C8225475

CENTERFIRE PATTERNS # 5

FOR

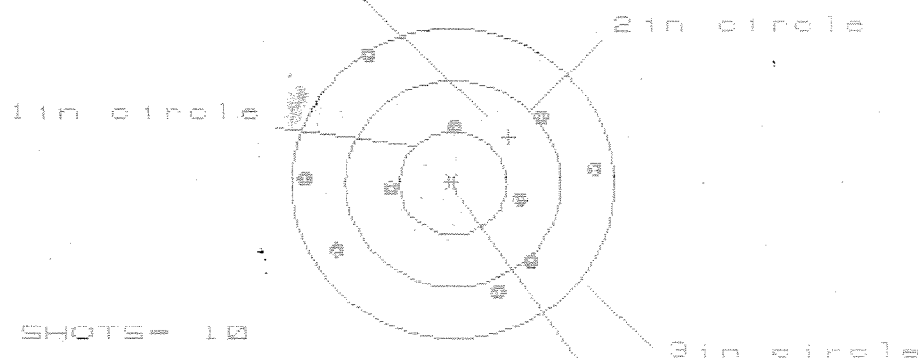

OF SHOTS= 10

IN CIR

1in = 0

2in = 3

3in = 7

HS= 2.598

VS= 2.316

GS= 2.700

CENTROID #

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.321	1.232	1.048
MINIMUM X	:	-1.377	-1.466	-1.366
MAXIMUM Y	:	1.272	.765	.784
MINIMUM Y	:	-1.044	-.902	-.882
CENTROID X	:	-.518	-.430	-.246
CENTROID Y	:	-.448	-.590	-.610
FOR TO CENTROID in.	:	.685	.730	.657
MIN RADIUS	:	.587	.507	.323
MEAN RADIUS	:	1.045	.981	.888
MAX RADIUS	:	1.503	1.475	1.440
HORIZONTAL SPREAD	:	2.698	2.698	2.414
VERTICAL SPREAD	:	2.316	1.667	1.667
EXTREME SPREAD	:	2.700	2.700	2.523
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		3	
NUMBER IN THREE INCH CIRCLE	=		9	

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 99-02042

INITIAL
SWS

CUSTOMER ORDER NO.

DATE RECEIVED 01/12/99	DATE OPENED 01/21/99	DATE CODE	SERIAL NUMBER C6225475	NEW SERIAL NUMBER	MODEL AND GRADE 700	7.62 NATO
---------------------------	-------------------------	-----------	---------------------------	-------------------	------------------------	-----------

ACCESSORIES

FROM:

COMMANDER
HHC 3/504TH PIR - BLDG C-4125
FT BRAGG NC 28307

SHIP TO:

COMMANDER
HHC 3/504TH PIR - BLDG C-4125
FT BRAGG NC 28307

CUST NO:188511 C.O.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
------------------	------	----------	--------	----------	-----	---------

CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

PARTS	COMMENTS
-------	----------

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE


DATE

OFFICE COPY

RD6925 REV. 7/97

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400152326

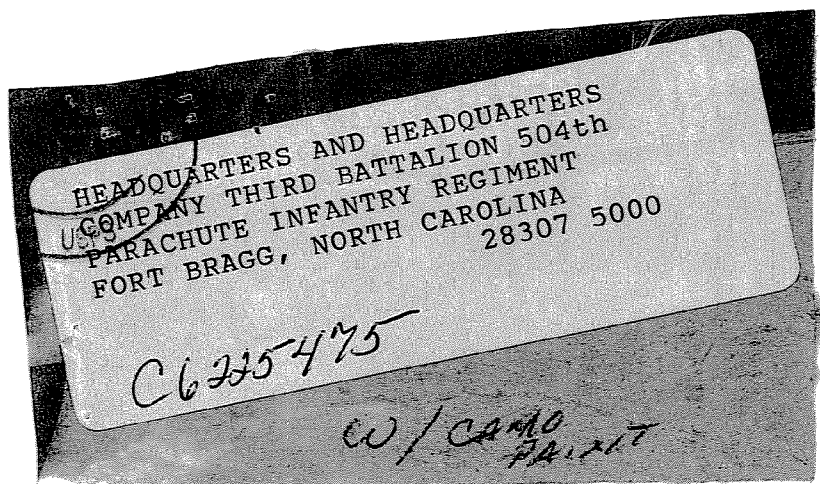

7 Jan 99

The Round count for this Rifle
was not accurate Before the month of
July, but there is a estimated guess
around 4000 Rounds fired through this
Barrel before 17 July 98

Thank You

WEAPON RECORD DATA

For use of this form, see DA PAMs 738-750 and 738-751; the proponent agency is DSCLOG

REQUIREMENT CONTROL SYMBOL
CSGLD-1051

1. TUBE SERIAL NO. <i>06225475</i>	2. CANNON TYPE, MODEL OR SERIES <i>M24</i>	3. ORGANIZATION (UIC) <i>HHC 3/504 PIR</i> <i>FT. BRAGG, N.C. 28307</i>	4. SPECIAL LIFE DATA
5. END ITEM IDENTIFICATION		6. RDS/EFC COMPUTATION	
7. CANNON SERIAL NO.	8. RETUBINGS	9. REBUSHINGS	

10. Date <i>a</i>	Projectile Type <i>b</i>	Zone or Charge <i>c</i>	Rounds Fired <i>d</i>	EFC RDS Fired <i>e</i>	Cumulative RDS Fired <i>f</i>	Cumulative EFC RDS <i>g</i>			Remaining Life (EFC RDS) <i>h</i>	Remarks: Recoil Exercise (RE), Gage or Velocity Reading, Safety Inspection (SI) <i>i</i>	Signature <i>j</i>
(Previous DA Form 2408-4 final entries)											
17 July 98	M118		60							Estimated guess on Round Count Before July is 4000 So a total of <u>5,240</u> Rounds through this Barrel	
18 July 98	M118		80								
19 July 98	M118		60								
20 July 98	M118		60		360						
21 July 98	M118		100								
22 July 98	M118		1								
15 Sept 98	M118		500		860						
2 Oct 98	M118		120		980						
6 Oct 98	M118		160		1140						
9 Oct 98	M118		120		1240						

CONTINUE ON REVERSE

DA FORM 1 JAN 79 **2408-4**

EDITION OF 1 DEC 77 WILL BE USED

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400152329

10.	Date	Projectile Type	Zone or Charge	Rounds Fired	EFC RDS Fired	Cumulative RDS Fired	Cumulative EFC RDS		Remaining Life (EFC RDS)	Remarks: Recoil Exercise (RE), Gage or Velocity Reading, Safety Inspection (SI)	Signature
	<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e</i>	<i>f</i>	<i>g</i>		<i>h</i>	<i>i</i>	<i>j</i>

NOTE: START A NEW FORM BEFORE MAILING THIS ONE

MAINTENANCE REQUEST For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG				PAGE NO 1	NO OF PAGES 1	REQUIREMENT CONTROL SYMBOL CSGLD-1047(R1)	
SECTION I - CUSTOMER DATA				SECTION II - MAINTENANCE ACTIVITY DATA			
1a. UIC CUSTOMER WHPXTO		1b. CUSTOMER UNIT NAME HHC 3/504th PIR		1c. PHONE NO 432-8229		3a. WORK ORDER NUMBER (WON)	
2a. SAMS-2 UIC/SAMS-I/TDA		2b. UTILIZATION CODE		2c. MCSR		3b. SHOP	
						3c. PHONE NO	
SECTION III - EQUIPMENT DATA							
5. TYPE MNT REQ CODE		6. ID		7. NSN 1005-01-204-2136		15a. FAILURE DETECTED DURING/WHEN DISCOVERED CODE (Enter code) See DA Pamphlets 738-750 and 738-751	
8. MODEL M24		9. NOUN RIFLE, 7.62mm SNIPER		10a. ORG WON/DOC NO		10b. EIC	
11. SERIAL NUMBER C6223475		12. QTY 0001		13. PD		15b. FIRST INDICATION OF TROUBLE/HOW RECOGNIZED CODE (Enter Code) See DA Pamphlets 738-750 and 738-751	
14. MALFUNCTION DESCRIPTION (for DSU, GSU/AVIM, DEPOT use)		21. REIMBURSABLE CUSTOMER (if Intransit customer enter Y or N)		22. LEVEL OF WORK		23. SIGNATURE	
24. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURES IN EQUIPMENT TM (Do not prescribe repairs)							
Request a complete technical inspection be done on this weapon. Services should be done after							
25. REMARKS every 1,000 rounds fired and none have been done after approximately 6,000 rounds fired.							
POC for this request is SSG Penhollow or SSG Combs at DSN 239-8229. or commercial 1-910-432-8229							
PREPARATION INSTRUCTIONS FOR THIS PAGE							
SECTION I Block 1a. Enter UIC of submitting organization. Block 1b. Enter name of submitting organization. Block 1c. Enter number to be called when maint. is completed. Block 2a. Enter UIC of supporting SAMS-2/SAMS-I/TDA if work is requested while intransit and away from your support maintenance unit. Block 2b. Enter utilization code. See DA Pamphlets 738-750 and 738-751. Block 2c. Enter "Y" if reportable under AR 700-138. If not, leave blank.				SECTION III (Cont'd) Block 12. Enter the quantity of items being submitted. Block 13. Enter the maintenance priority designator determined from DA PAM 710-2-1. Block 14. For DSU, GSU/AVIM, DEPOT use. Block 15a. Enter the code that most accurately describes when the fault or deficiency was detected. See DA Pamphlets 738-750 and 738-751. Block 15b. Select one. Enter the code. See DA Pamphlets 738-750 and 738-751. Block 16. Enter the accumulated usage data in blocks, when equipment is subject to usage reporting. Block 17. Enter the project code if one has been assigned. If not, leave blank. Block 18. See DA Pamphlets 738-750 and 738-751. Block 19. Enter "Y" or "N" to indicate whether equipment is still under manufacturer's warranty. Block 20. Enter the admin number assigned for property control purposes for the equipment being submitted. Block 21. For DSU/GSU/AVIM/Depot use. Block 22. Enter level of work performed "O" for UNIT LEVEL/AVUM, "F" for DSU/AVIM, "H" for GSU, "D" for DEPOT, "K" for contractor or "L" for Spc Rpr Act. Block 23. Enter the signature of the CO or the CO's designated representative when the priority designator is 01-10. For priority designators 11-15, leave blank. Block 24. Enter a brief description of the deficiencies or symptoms that you feel require attention at this level of maint. Block 25. Self-explanatory.			
SECTION II Leave blank. To be completed by the support maintenance DSU/GSU/AVIM/DEPOT.							
SECTION III Block 5. Enter the Type Maintenance Request Code. See DA Pamphlets 738-750 and 738-751. Block 6. Enter ID associated with block 7. See DA Pamphlets 738-750 and 738-751. Block 7. Enter the NSN or stock number of the item being submitted. Block 8. Enter model of item being submitted. Block 9. Enter noun/nomenclature of item being submitted. Block 10a. Enter Work Order Number (WON)/DOC NO assigned when item is submitted. Otherwise, leave blank. Block 10b. Enter End Item Code. See AMDF. Block 11. Enter serial number of item being submitted.							
34a. SUBMITTED BY Scott C. Bellon		35a. ACCEPTED BY		35c. DATE			
34b. DATE		35b. STATUS		35d. TIME			

DA FORM 2407, JUL 94

PREVIOUS EDITIONS OF DA FORM 2407 AND DA FORM 5504 ARE OBSOLETE

RECEIPT COPY 1

1. TOTAL PRICE										2. SHIP FROM HHC 3/504										3. SHIP TO																																							
UNIT PRICE										DOLLARS										CTS																																							
DOLLARS										CTS										4. MARK FOR WHPXTO																																							
5. DOC DATE										6. NMFC										7. FRT RATE										8. TYPE CARGO										9. PS																			
10. QTY. RECD										11. UP										12. UNIT WEIGHT										13. UNIT CUBE										14. UFC										15. SL									
16. FREIGHT CLASSIFICATION NOMENCLATURE																																																											
17. ITEM NOMENCLATURE RIFLE 7.62mm SNIPER M24																																																											
18. TY CONT										19. NO CONT										20. TOTAL WEIGHT										21. TOTAL CUBE																													
22. RECEIVED BY																														82nd PBO Team # 1 Approved <i>[Signature]</i> Int. 0001										23. DATE RECEIVED																			

24 DOCUMENT NUMBER & SUFFIX (30-44)
W36QZ9 8352-4000

25 NATIONAL STOCK NO & ADD (8-22)
R95387
1005-01-240-2136

26 RIC (4-6)
QTY (23-24)
CON CODE (71)
COST (55-56)
DUP (74-80)
00001 EA
C/C F
SERIAL # C6225475

27 ADDITIONAL DATA
REQUEST TO HAVE ITEM REPAIRED AND RETURNED
AOE DOC # FOR RETURN OF EQUIPMENT IS W36QZ9

1. TOTAL PRICE										2. SHIP FROM HHC 3/504										3. SHIP TO																																							
UNIT PRICE										DOLLARS										CTS																																							
DOLLARS										CTS										4. MARK FOR WHPXTO																																							
5. DOC DATE										6. NMFC										7. FRT RATE										8. TYPE CARGO										9. PS																			
10. QTY. RECD										11. UP										12. UNIT WEIGHT										13. UNIT CUBE										14. UFC										15. SL									
16. FREIGHT CLASSIFICATION NOMENCLATURE																																																											
17. ITEM NOMENCLATURE RIFLE, 7.62mm SNIPER																																																											
18. TY CONT										19. NO CONT										20. TOTAL WEIGHT										21. TOTAL CUBE																													
22. RECEIVED BY																														82nd PBO Team # 1 Approved <i>[Signature]</i> Int. 0001										23. DATE RECEIVED																			

24 DOCUMENT NUMBER & SUFFIX (30-44)
W36QZ9 8352-4001

25 NATIONAL STOCK NO & ADD (8-22)
R95387
1005-01-240-2136

26 RIC (4-6)
QTY (23-24)
CON CODE (71)
COST (55-56)
DUP (74-80)
00001EA
C/C F
SERIAL # C6225475

27 ADDITIONAL DATA
REQUEST TO HAVE ITEM REPAIRED AND RETURNED
ADE DOC # FOR RETURN OF EQUIPMENT IS: W36QZ9

1. TOTAL PRICE		2. SHIP FROM		3. SHIP TO	
4. MARK FOR		5. MARK FOR		6. MARK FOR	
7. MARK FOR		8. MARK FOR		9. MARK FOR	
10. MARK FOR		11. MARK FOR		12. MARK FOR	
13. MARK FOR		14. MARK FOR		15. MARK FOR	
16. MARK FOR		17. MARK FOR		18. MARK FOR	
19. MARK FOR		20. MARK FOR		21. MARK FOR	
22. MARK FOR		23. MARK FOR		24. MARK FOR	
25. MARK FOR		26. MARK FOR		27. MARK FOR	
28. MARK FOR		29. MARK FOR		30. MARK FOR	
31. MARK FOR		32. MARK FOR		33. MARK FOR	
34. MARK FOR		35. MARK FOR		36. MARK FOR	
37. MARK FOR		38. MARK FOR		39. MARK FOR	
40. MARK FOR		41. MARK FOR		42. MARK FOR	
43. MARK FOR		44. MARK FOR		45. MARK FOR	
46. MARK FOR		47. MARK FOR		48. MARK FOR	
49. MARK FOR		50. MARK FOR		51. MARK FOR	
52. MARK FOR		53. MARK FOR		54. MARK FOR	
55. MARK FOR		56. MARK FOR		57. MARK FOR	
58. MARK FOR		59. MARK FOR		60. MARK FOR	
61. MARK FOR		62. MARK FOR		63. MARK FOR	
64. MARK FOR		65. MARK FOR		66. MARK FOR	
67. MARK FOR		68. MARK FOR		69. MARK FOR	
70. MARK FOR		71. MARK FOR		72. MARK FOR	
73. MARK FOR		74. MARK FOR		75. MARK FOR	
76. MARK FOR		77. MARK FOR		78. MARK FOR	
79. MARK FOR		80. MARK FOR		81. MARK FOR	
82. MARK FOR		83. MARK FOR		84. MARK FOR	
85. MARK FOR		86. MARK FOR		87. MARK FOR	
88. MARK FOR		89. MARK FOR		90. MARK FOR	
91. MARK FOR		92. MARK FOR		93. MARK FOR	
94. MARK FOR		95. MARK FOR		96. MARK FOR	
97. MARK FOR		98. MARK FOR		99. MARK FOR	
100. MARK FOR		101. MARK FOR		102. MARK FOR	
103. MARK FOR		104. MARK FOR		105. MARK FOR	
106. MARK FOR		107. MARK FOR		108. MARK FOR	
109. MARK FOR		110. MARK FOR		111. MARK FOR	
112. MARK FOR		113. MARK FOR		114. MARK FOR	
115. MARK FOR		116. MARK FOR		117. MARK FOR	
118. MARK FOR		119. MARK FOR		120. MARK FOR	
121. MARK FOR		122. MARK FOR		123. MARK FOR	
124. MARK FOR		125. MARK FOR		126. MARK FOR	
127. MARK FOR		128. MARK FOR		129. MARK FOR	
130. MARK FOR		131. MARK FOR		132. MARK FOR	
133. MARK FOR		134. MARK FOR		135. MARK FOR	
136. MARK FOR		137. MARK FOR		138. MARK FOR	
139. MARK FOR		140. MARK FOR		141. MARK FOR	
142. MARK FOR		143. MARK FOR		144. MARK FOR	
145. MARK FOR		146. MARK FOR		147. MARK FOR	
148. MARK FOR		149. MARK FOR		150. MARK FOR	
151. MARK FOR		152. MARK FOR		153. MARK FOR	
154. MARK FOR		155. MARK FOR		156. MARK FOR	
157. MARK FOR		158. MARK FOR		159. MARK FOR	
160. MARK FOR		161. MARK FOR		162. MARK FOR	
163. MARK FOR		164. MARK FOR		165. MARK FOR	
166. MARK FOR		167. MARK FOR		168. MARK FOR	
169. MARK FOR		170. MARK FOR		171. MARK FOR	
172. MARK FOR		173. MARK FOR		174. MARK FOR	
175. MARK FOR		176. MARK FOR		177. MARK FOR	
178. MARK FOR		179. MARK FOR		180. MARK FOR	
181. MARK FOR		182. MARK FOR		183. MARK FOR	
184. MARK FOR		185. MARK FOR		186. MARK FOR	
187. MARK FOR		188. MARK FOR		189. MARK FOR	
190. MARK FOR		191. MARK FOR		192. MARK FOR	
193. MARK FOR		194. MARK FOR		195. MARK FOR	
196. MARK FOR		197. MARK FOR		198. MARK FOR	
199. MARK FOR		200. MARK FOR		201. MARK FOR	
202. MARK FOR		203. MARK FOR		204. MARK FOR	
205. MARK FOR		206. MARK FOR		207. MARK FOR	
208. MARK FOR		209. MARK FOR		210. MARK FOR	
211. MARK FOR		212. MARK FOR		213. MARK FOR	
214. MARK FOR		215. MARK FOR		216. MARK FOR	
217. MARK FOR		218. MARK FOR		219. MARK FOR	
220. MARK FOR		221. MARK FOR		222. MARK FOR	
223. MARK FOR		224. MARK FOR		225. MARK FOR	
226. MARK FOR		227. MARK FOR		228. MARK FOR	
229. MARK FOR		230. MARK FOR		231. MARK FOR	
232. MARK FOR		233. MARK FOR		234. MARK FOR	
235. MARK FOR		236. MARK FOR		237. MARK FOR	
238. MARK FOR		239. MARK FOR			

[illegible]

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6225475
24 Mar 1999

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0474
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.076
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0895699

THE AMR FOR THIS RIFLE IS: 1.118

CENTROIDAL DISTANCES

0 TO	1	.387939
1 TO	2	.0277308
1 TO	3	.898276
1 TO	4	.365411
1 TO	5	.444416

3 5
 # <----POA
 4

PATTERN #: 1

POA TO CENTROID: .388

MIN RADIUS : .170

MEAN RADIUS : 1.032

MAX RADIUS : 2.368


CENTROID X : .304

CENTROID Y : -.241

24 Mar 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225475

CENTERFIRE PATTERN # 1

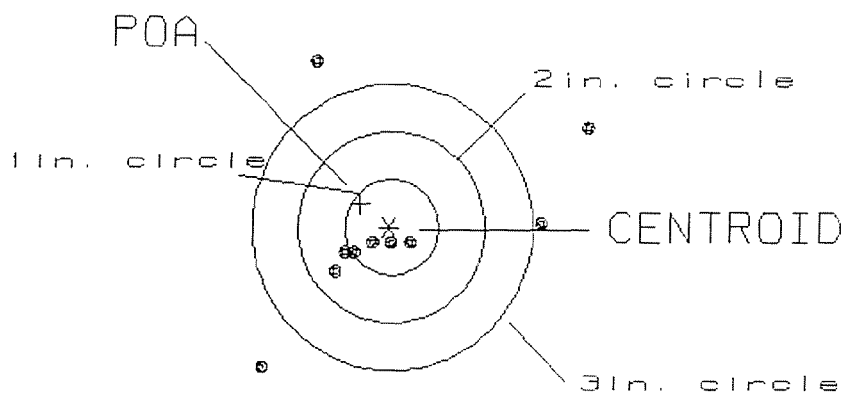

OF SHOTS= 10

IN CIRCLE

HS= 3.54

4

VS= 3.26

6

GS= 4.35


6

PATTERN #: 2
 POA TO CENTROID: .363
 MIN RADIUS : .093
 MEAN RADIUS : 1.014
 MAX RADIUS : 2.348
 CENTROID X : .292
 CENTROID Y : -.216

24 Mar 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225475

CENTERFIRE PATTERN # 2

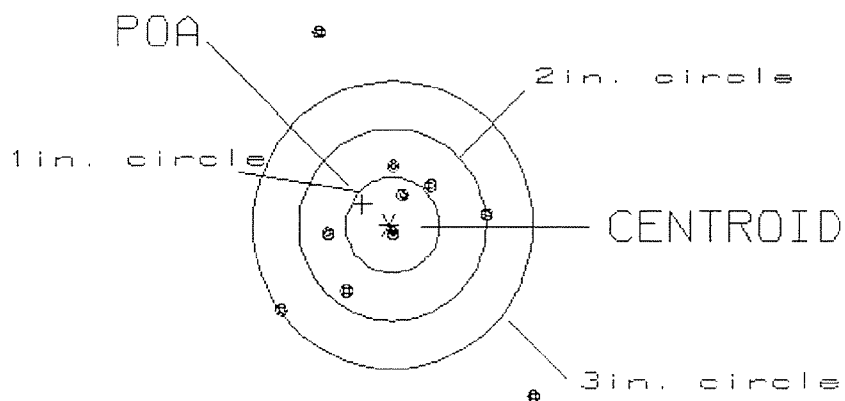

OF SHOTS= 10

IN CIRCLE

HS= 2.73

2

VS= 3.76

7

GS= 4.41


7

PATTERN #: ☐ 3 ☐
 POA TO CENTROID: .590
 MIN RADIUS : .034
 MEAN RADIUS : .964
 MAX RADIUS : 1.765
 CENTROID X : -.582
 CENTROID Y : -.093

24 Mar 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225475

CENTERFIRE PATTERN # 3

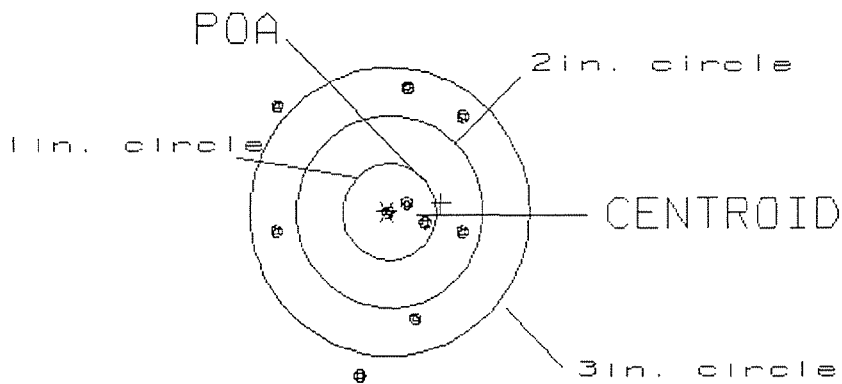

OF SHOTS= 10

IN CIRCLE

HS= 2.00

3

US= 3.00

4

GS= 3.04


8

PATTERN #: 4
 POA TO CENTROID: .026
 MIN RADIUS : .488
 MEAN RADIUS : 1.027
 MAX RADIUS : 2.221
 CENTROID X : .010
 CENTROID Y : -.024

24 Mar 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225475

CENTERFIRE PATTERN # 4

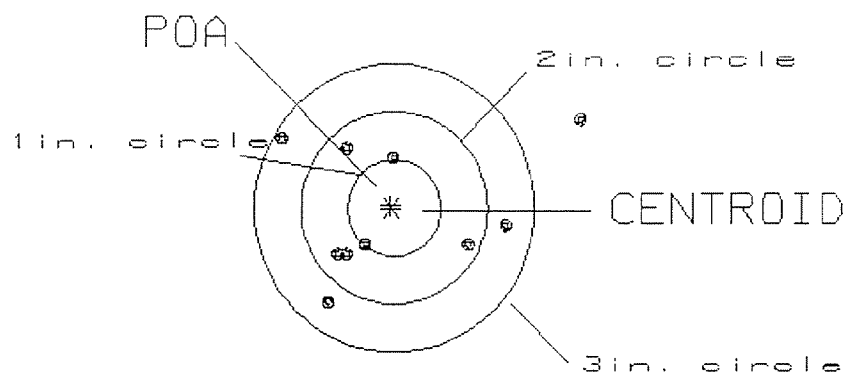

OF SHOTS= 10

IN CIRCLE

HS= 3.24

1

VS= 1.89

6

GS= 3.31


9

PATTERN #: ☐ 5 ☐
 POA TO CENTROID: .287
 MIN RADIUS : .601
 MEAN RADIUS : 1.555
 MAX RADIUS : 2.382
 CENTROID X : .213
 CENTROID Y : .194

24 Mar 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225475

CENTERFIRE PATTERN # 5

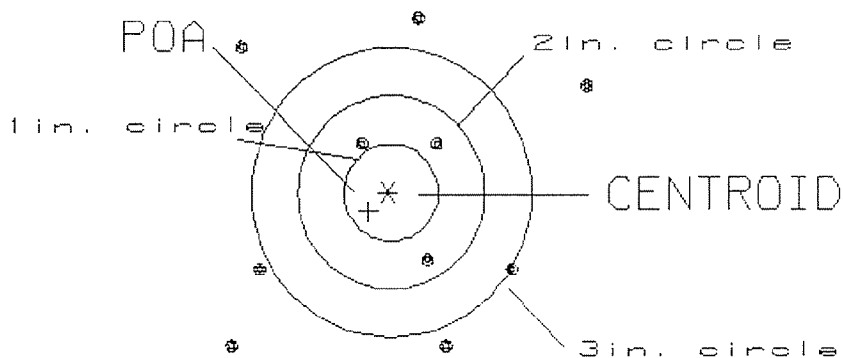

OF SHOTS= 10

IN CIRCLE

HS= 3.82

0

VS= 3.42

3

GS= 4.68

4