

G 6288191

VERY IMPORTANT
 INSTRUCTION BOOK
 ENCLOSED TO ASSURE
 SAFE USE OF THIS
 WEAPON

Remington®

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
 BOLT ACTION CENTERFIRE RIFLE
 24" BARREL 7.62 NATO

Serial No. **G6288191**
 Order No. **25716**

Made in Illinois, U.S. Pat. & Inv. Off. Marca Registrada. Marque Déposée.

07EX

5716 G6288191

ORDER 25716
 M/24 7.62 NATO S.W.S. (COMPLETE SYST

UPC



ORDER 25716
 M/24 7.62 NATO S.W.S. (COMPLETE SYST

UPC



SERIAL NO.



M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)

**BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO**

- INSTRUCTION BOOK 3518

28 FORM

proof of purchase



owner registration sticker




ORDER NO. **25716**

BARREL LENGTH **24"**

CAPACITY **6**

G6288191

UPC



M-24
INSPECTION CHECKLIST-NEW GUNS

GUN SERIAL # G 6288191

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		8-7-03	RL
600	PROOF		8-8-03	AC
607	CHECK HEADSPACE	MAGNA FLUX	8-8-03	AC
610	DIS-ASSEMBLE GUN	INSPECTED	8-8-03	RL
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT	AUG 11 2003 OPERATOR <i>RL</i>		
615	ROLLMARK CALIBER		8-12-03	SB
617	DRILL AND TAP SIGHT HOLES		8-11-03	TRW
620	APPLY COATINGS (BARREL ACTION)		8-26	TA
	(BOLT)		8-26	TA
625	FINAL ASSEMBLY A) CLEAN INSIDE OF BOLT ASSEMBLY		8-28-03	RW
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		8-28-03	RW
	C) INSPECT EJECTOR HOLE FOR CHAMFER		8-28-03	RW
	D) OIL FIRING PIN ASSEMBLY		8-28-03	RW
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE 2.50 LBS +/- .5 LBS			

M-24
INSPECTION CHECKLIST-NEW GUNS

GUN SERIAL # G 6288191

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		8-7-03	RL
600	PROOF		8-8-03	AC
607	CHECK HEADSPACE	MAGNA FLUX INSPECTED	8-8-03	AC
610	DIS-ASSEMBLE GUN		8-8-03	RL
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT	INSPECTED OPERATOR <i>RL</i>		
615	ROLLMARK CALIBER		8-12-03	SB
617	DRILL AND TAP SIGHT HOLES		8-11-03	TRW
620	APPLY COATINGS (BARREL ACTION)		8-26	TA
	(BOLT)		8-26	TA
625	FINAL ASSEMBLY			
	A) CLEAN INSIDE OF BOLT ASSEMBLY		8-28-03	RW
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		8-28-03	RW
	C) INSPECT EJECTOR HOLE FOR CHAMFER		8-28-03	RW
	D) OIL FIRING PIN ASSEMBLY		8-28-03	RW
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE	2.50 LBS +/- .5 LBS		

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50 LBS (plus or minus 0.50 LBS)

3.00 LBS (plus or minus 0.75 LBS)

4.00 LBS (plus or minus 1.00 LBS)

SERIAL NO. _____

DATE 8-14-03

TESTER TRW

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.49	2.44		2.83	
PULL #2	2.36	2.52		2.66	
PULL #3	2.20	2.39		2.82	
PULL #4	2.13	2.42		2.39	
PULL #5	2.05	2.28		2.87	
TOTAL	11.23	12.05		13.57	
AVERAGE	2.24	2.41		2.71	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.21	3.14		
PULL #2	3.17	3.17		
PULL #3	3.30	3.18		
PULL #4	3.26	3.23		
PULL #5	3.31	3.25		
TOTAL	16.25	15.97		
AVERAGE	3.25	3.19		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.16	4.40		4.41
PULL #2	4.21	4.08		4.37
PULL #3	4.32	4.18		4.48
PULL #4	4.45	4.12		4.32
PULL #5	4.25	4.22		4.29
TOTAL	21.39	21.00		21.87
AVERAGE	4.27	4.20		4.37

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6288191.___0
FILE DATE AND TIME: 09/30/2003 06:46

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES


ERROR - NOT POSSIBLE TO REPORT SWS STATS ON DATA
WHERE TOTAL TARGETS ARE NOT EQUAL TO FIVE

mean 1.027

SERIAL NUMBER: G6288191. __0
TARGET NUMBER: 1
FILE DATE: 09/30/2003
FILE TIME: 06:46

POINT#	X	Y
1:	-0.089	-1.839
2:	0.221	-1.006
3:	0.853	-0.036
4:	-0.503	0.275
5:	-0.261	0.660

X CENTROID: 0.044
Y CENTROID: -0.389
POA TO CENTROID: 0.392
HORZ SPREAD: 1.356
VERT SPREAD: 2.499
GROUP SPREAD: 2.505
MIN RADIUS: 0.642
MAX RADIUS: 1.456
MEAN RADIUS: 0.987
IN 1 IN DIAMETER: 0
IN 2 IN DIAMETER: 3
in 3 IN DIAMETER: 5

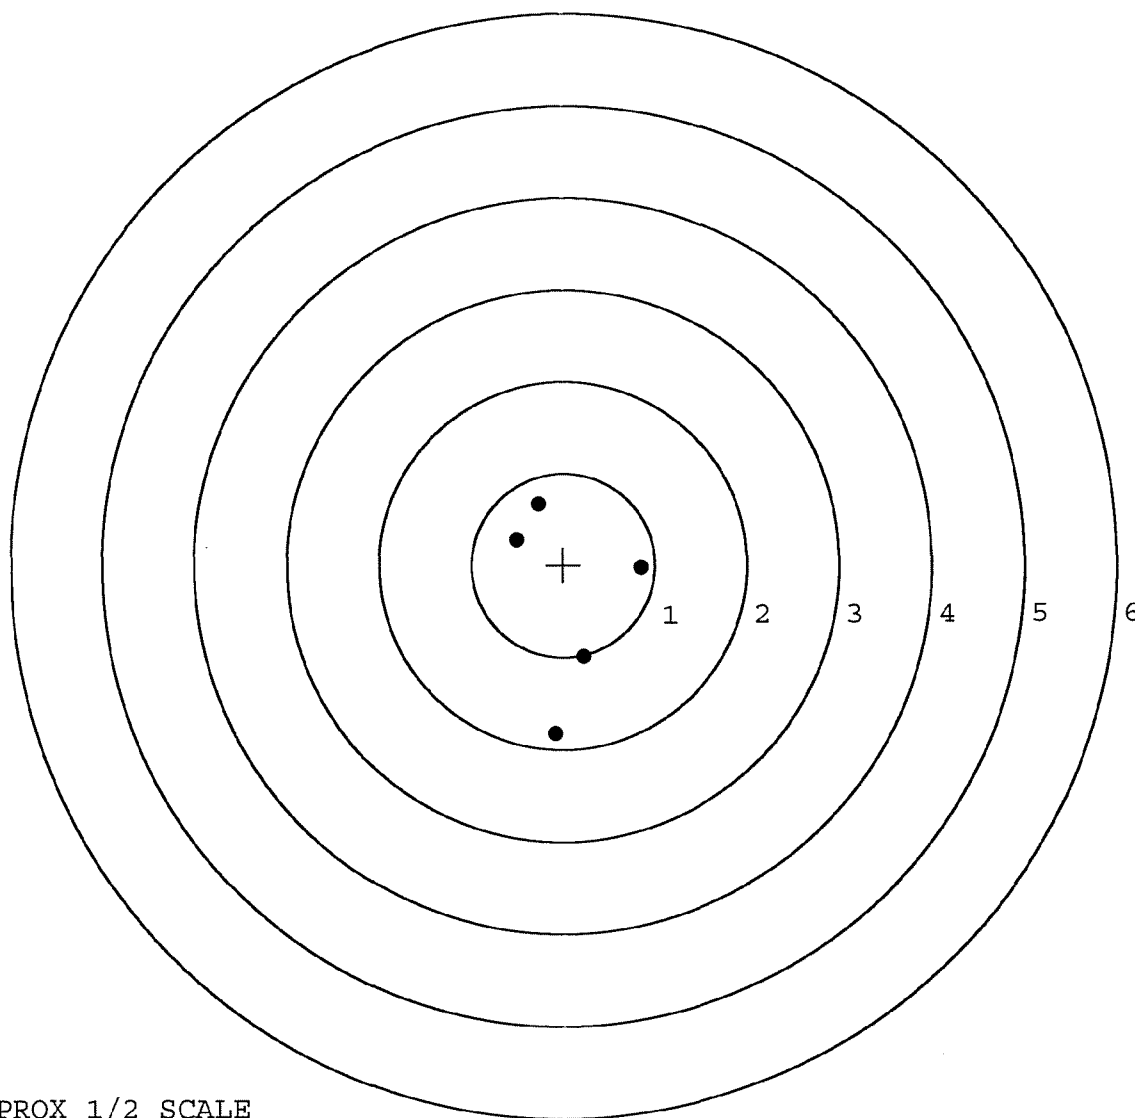


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6288191. __0
TARGET NUMBER: 2
FILE DATE: 09/30/2003
FILE TIME: 06:46

POINT#	X	Y
1:	0.252	-0.801
2:	-0.224	-0.140
3:	-0.410	0.398
4:	0.564	0.548
5:	2.023	1.955

X CENTROID: 0.441
Y CENTROID: 0.392
POA TO CENTROID: 0.590
HORZ SPREAD: 2.433
VERT SPREAD: 2.756
GROUP SPREAD: 3.276
MIN RADIUS: 0.199
MAX RADIUS: 2.224
MEAN RADIUS: 1.067
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 3
in 3 IN DIAMETER: 4

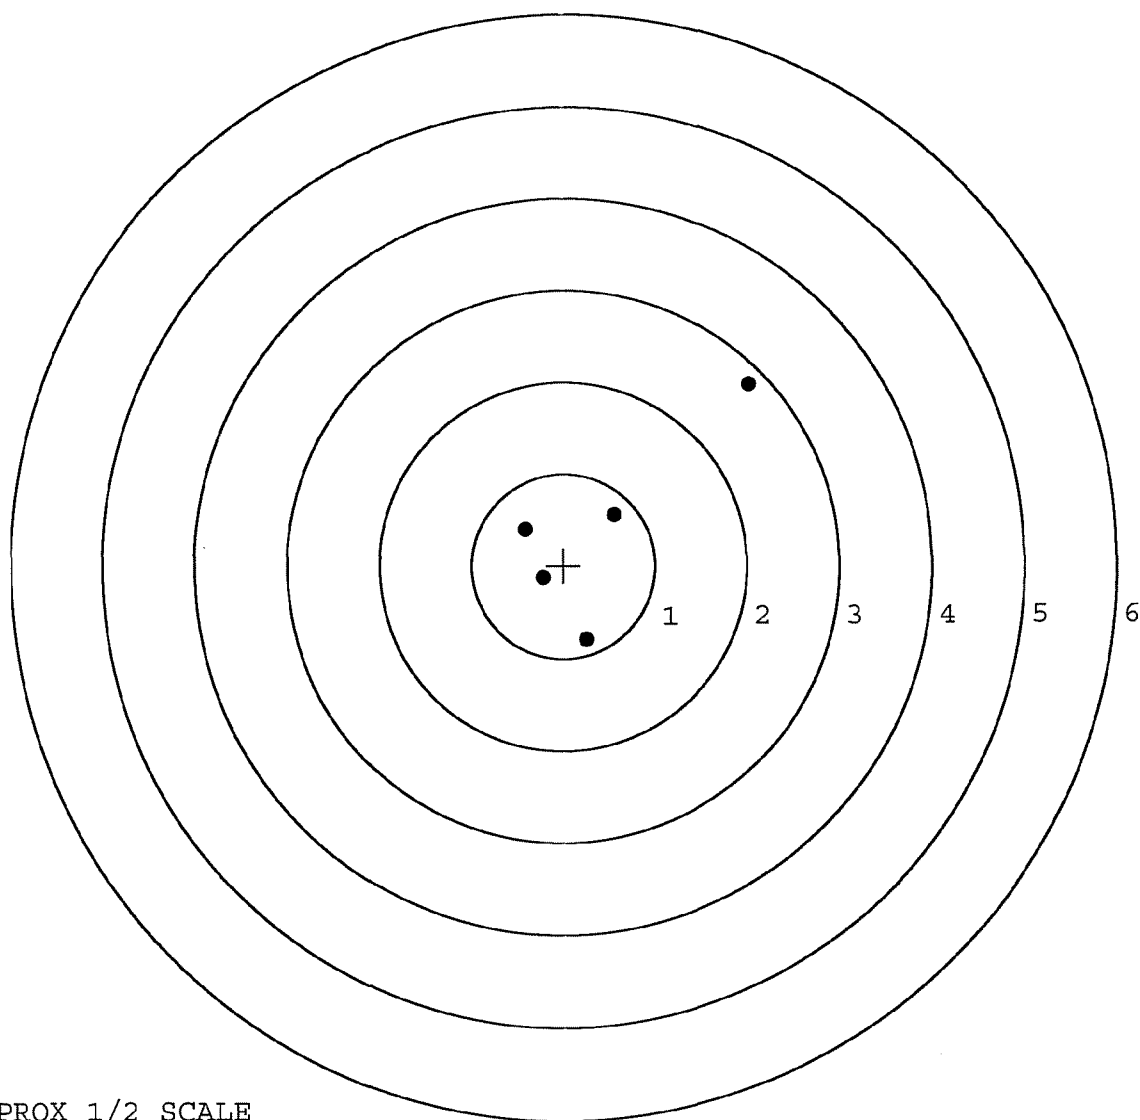

TARGET APPROX 1/2 SCALE