

66300554

-Address Information

Customer: Received From: Return To: Received From:

60 AERIAL PORT SQD, TRTCD

TRAFFIC MANAGEMENT OFFICE

PO Box

BLDG 977 90 RAGSDALE ST

PO Box:

City: } TRAVIS AFB

TRAVIS AFB

State: CA Zip Code: 94535

Country: US

State: CA

Zip Code: 94535

Country: US

[illegible]

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

- Contact Information

Phone: NAFax:

Email:

Comments:- Received Condition

Fair

Condition
Notes:

CSR
Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A008	With Swivel	2
A010	Hard Case	1
A017	Scope Base	1
A057	Fit and Rear Sgt Base	1

Repair Search

Refresh

Close

naglet

4/12/2006

1:51 PM


CAPS

NUM	DATE	DESCRIPTION	AMOUNT
1	1/1/78	...	...
2	1/15/78	...	...
3	2/1/78	...	...
4	2/15/78	...	...
5	3/1/78	...	...
6	3/15/78	...	...
7	4/1/78	...	...
8	4/15/78	...	...
9	5/1/78	...	...
10	5/15/78	...	...
11	6/1/78	...	...
12	6/15/78	...	...
13	7/1/78	...	...
14	7/15/78	...	...
15	8/1/78	...	...
16	8/15/78	...	...
17	9/1/78	...	...
18	9/15/78	...	...
19	10/1/78	...	...
20	10/15/78	...	...
21	11/1/78	...	...
22	11/15/78	...	...
23	12/1/78	...	...
24	12/15/78	...	...
25	1/1/79	...	...
26	1/15/79	...	...
27	2/1/79	...	...
28	2/15/79	...	...
29	3/1/79	...	...
30	3/15/79	...	...
31	4/1/79	...	...
32	4/15/79	...	...
33	5/1/79	...	...
34	5/15/79	...	...
35	6/1/79	...	...
36	6/15/79	...	...
37	7/1/79	...	...
38	7/15/79	...	...
39	8/1/79	...	...
40	8/15/79	...	...
41	9/1/79	...	...
42	9/15/79	...	...
43	10/1/79	...	...
44	10/15/79	...	...
45	11/1/79	...	...
46	11/15/79	...	...
47	12/1/79	...	...
48	12/15/79	...	...
49	1/1/80	...	...
50	1/15/80	...	...
51	2/1/80	...	...
52	2/15/80	...	...
53	3/1/80	...	...
54	3/15/80	...	...
55	4/1/80	...	...
56	4/15/80	...	...
57	5/1/80	...	...
58	5/15/80	...	...
59	6/1/80	...	...
60	6/15/80	...	...
61	7/1/80	...	...
62	7/15/80	...	...
63	8/1/80	...	...
64	8/15/80	...	...
65	9/1/80	...	...
66	9/15/80	...	...
67	10/1/80	...	...
68	10/15/80	...	...
69	11/1/80	...	...
70	11/15/80	...	...
71	12/1/80	...	...
72	12/15/80	...	...
73	1/1/81	...	...
74	1/15/81	...	...
75	2/1/81	...	...
76	2/15/81	...	...
77	3/1/81	...	...
78	3/15/81	...	...
79	4/1/81	...	...
80	4/15/81	...	...
81	5/1/81	...	...
82	5/15/81	...	...
83	6/1/81	...	...
84	6/15/81	...	...
85	7/1/81	...	...
86	7/15/81	...	...
87	8/1/81	...	...
88	8/15/81	...	...
89	9/1/81	...	...
90	9/15/81	...	...
91	10/1/81	...	...
92	10/15/81	...	...
93	11/1/81	...	...
94	11/15/81	...	...
95	12/1/81	...	...
96	12/15/81	...	...
97	1/1/82	...	...
98	1/15/82	...	...
99	2/1/82	...	...
100	2/15/82	...	...

INS

SCAL

Model: M24 SWS



RE00111036

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6300554.__1
FILE DATE AND TIME: 05/22/2006 16:21

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES


ERROR - NOT POSSIBLE TO REPORT SWS STATS ON DATA
WHERE TOTAL TARGETS ARE NOT EQUAL TO FIVE

Avg. mean Radius: 2740

SERIAL NUMBER: G6300554. __1
TARGET NUMBER: 1
FILE DATE: 05/22/2006
FILE TIME: 16:21

X CENTROID: 0.077
Y CENTROID: 0.398
POA TO CENTROID: 0.405
HORZ SPREAD: 2.469
VERT SPREAD: 2.208
GROUP SPREAD: 2.485
MIN RADIUS: 0.379
MAX RADIUS: 1.370
MEAN RADIUS: 0.878
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 6
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.029	1.658
2:	0.355	1.643
3:	-0.236	0.612
4:	-0.323	0.186
5:	-1.247	0.048
6:	-0.066	-0.205
7:	-0.056	-0.550
8:	0.407	-0.155
9:	0.745	0.412
10:	1.222	0.329

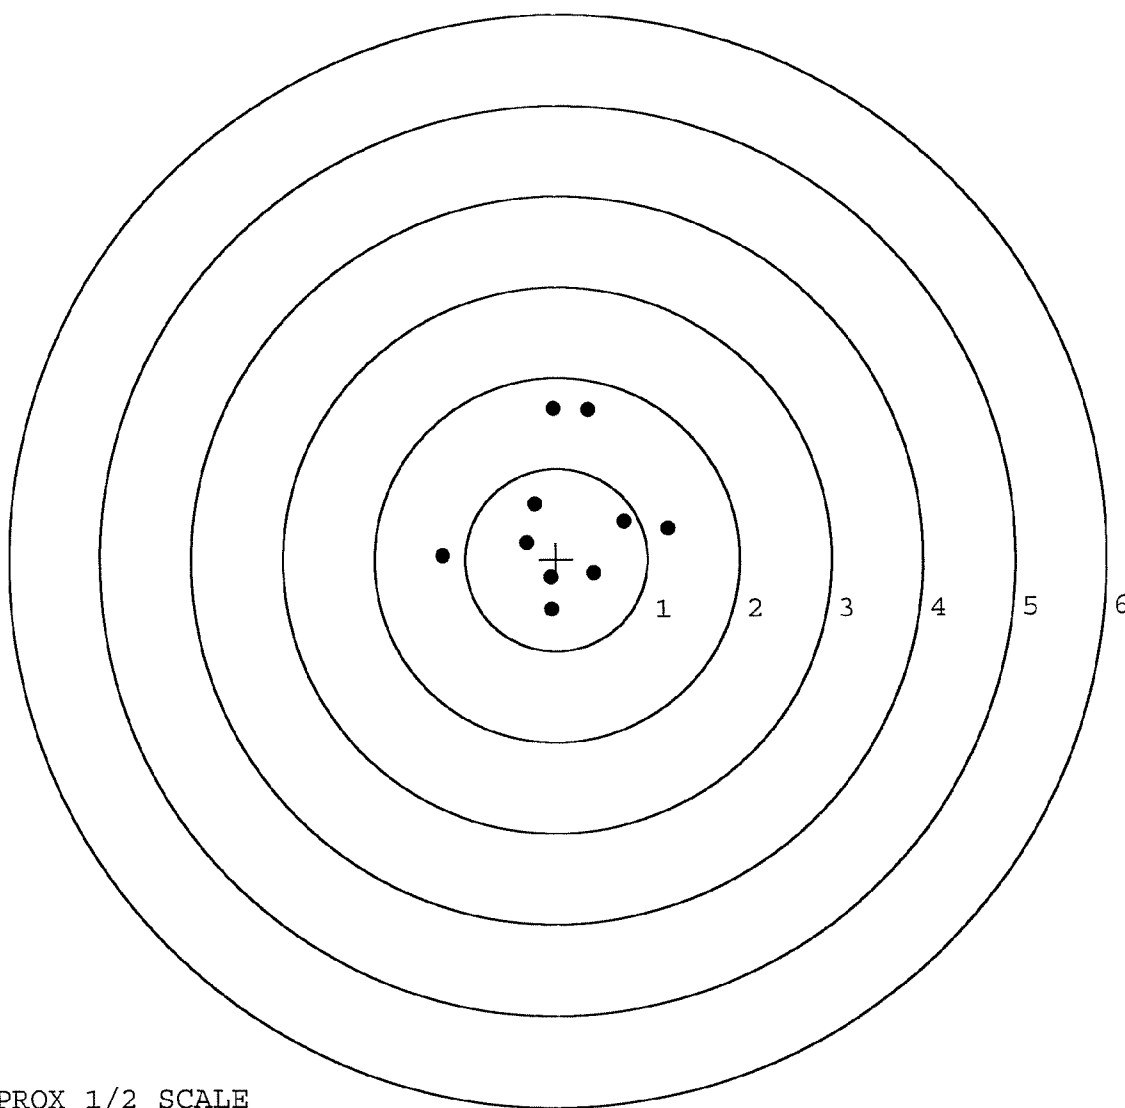


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6300554. __1
TARGET NUMBER: 2
FILE DATE: 05/22/2006
FILE TIME: 16:21

X CENTROID: -0.052
Y CENTROID: 0.017
POA TO CENTROID: 0.055
HORZ SPREAD: 1.561
VERT SPREAD: 1.428
GROUP SPREAD: 1.677
MIN RADIUS: 0.325
MAX RADIUS: 1.031
MEAN RADIUS: 0.602
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.199	0.632
2:	0.365	0.444
3:	0.863	0.493
4:	0.271	0.059
5:	-0.572	0.211
6:	-0.373	0.070
7:	-0.698	-0.120
8:	-0.401	-0.295
9:	-0.234	-0.528
10:	0.061	-0.796

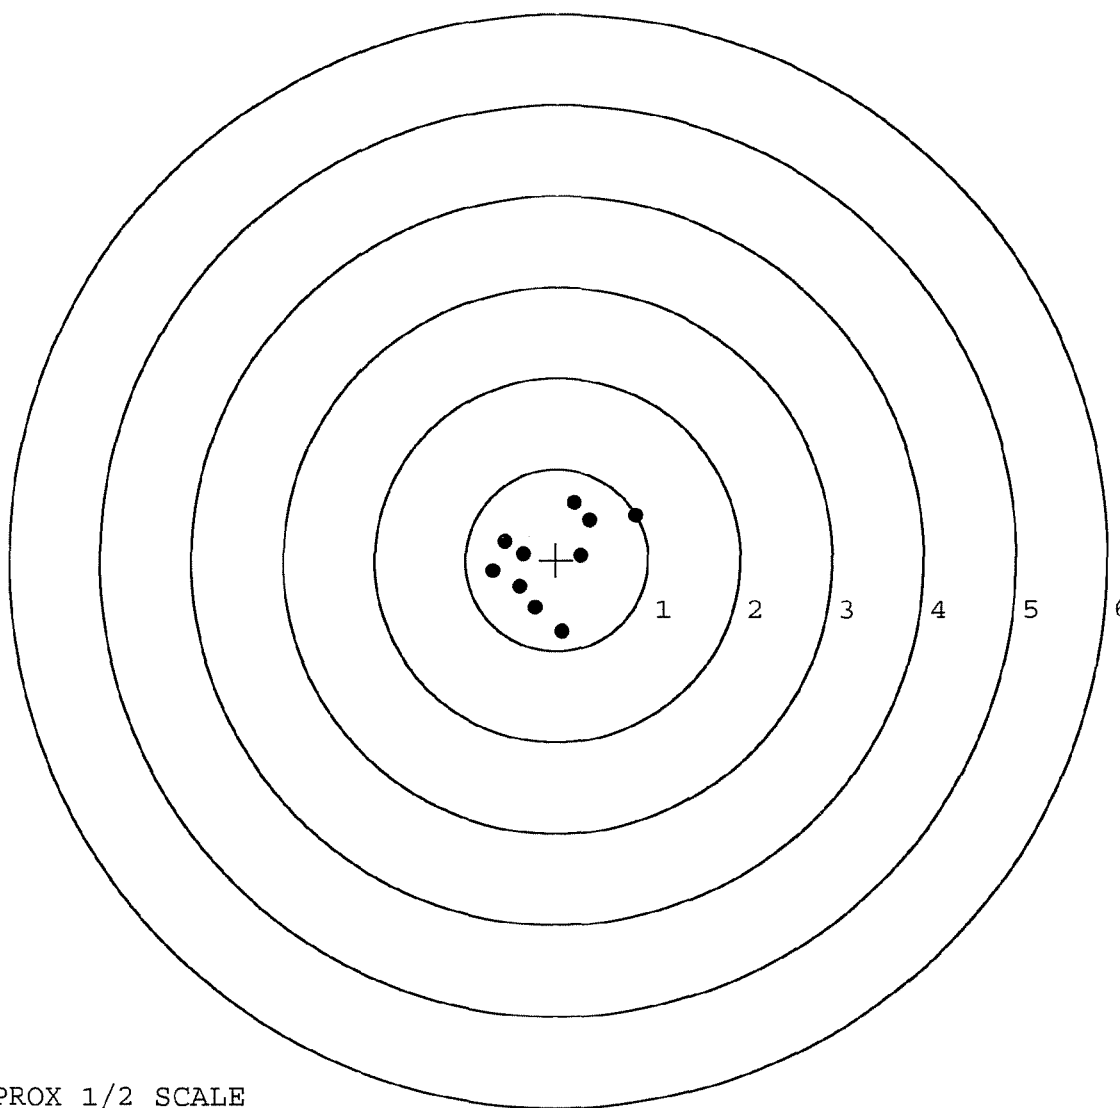

TARGET APPROX 1/2 SCALE

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50 LBS (plus or minus 0.50 LBS)
3.00 LBS (plus or minus 0.75 LBS)
4.00 LBS (plus or minus 1.00 LBS)

DATE 5-10-06

TESTER R.P

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	249	247		257	
PULL #2	251	255		256	
PULL #3	256	262		240	
PULL #4	253	261		255	
PULL #5	259	251		243	
TOTAL	1268	1276		1251	
AVERAGE	253	255		250	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	313	306		
PULL #2	320	320		
PULL #3	310	313		
PULL #4	318	319		
PULL #5	318	302		
TOTAL	1579	1560		
AVERAGE	315	312		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	398	399		419
PULL #2	413	405		408
PULL #3	415	414		392
PULL #4	409	401		409
PULL #5	403	392		402
TOTAL	2038	2011		2030
AVERAGE	407	402		406

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-C-0149

		<i>JAPAN</i>		
R & E NUMBER	<i>111036</i>			
SERIAL NUMBER	<i>G6300554</i>			
LOG-IN DATE	<i>4-12-06</i>			
OPERATION #	OPERATION NAME		DATE	INITIAL
500	DIS-ASSEMBLE GUN		<i>5-5-06</i>	<i>AC</i>
505	RE-BARREL			
560	ASSEMBLE			
600	PROOF			
605	CHECK HEADSPACE			
610	DIS-ASSEMBLE GUN			
612	MAGNAFLUX			
510	DRILL AND TAP			
615	ROLLMARK CALIBER			
618	ROTO-BLAST			
620	APPLY COATINGS		<i>5/12</i>	<i>HTO</i>
625	FINAL ASSEMBLY		<i>5-17-06</i>	<i>AC</i>
640	FUNCTION TEST AND	PASS	FAIL	<i>5-22-06</i> <i>MTM</i>
650	TARGET	PASS	FAIL	<i>5-22-06</i> <i>MTM</i>
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
670	FINAL INSPECTION		<i>5-23-06</i>	<i>MTM</i>
	A) HEADSPACE	PASS	FAIL	<i>5-23-06</i> <i>MTM</i>
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS <i>2.72 2.78 2.26 2.38 2.39</i>		
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX <i>8 lbs. 9 lbs. 8 lbs.</i>		<i>MTM</i>
	G) SAFETY OFF FORCE	2 LBS MIN <i>3 lbs. 2 lbs. 3 lbs.</i>		<i>MTM</i>
	I) FIRING PIN INDENT	.020 <i>.023 .023 .023</i>		<i>MTM</i>
690	PACK		<i>5-31-06</i>	<i>DA</i>

VERY IMPORTANT: Instruction Book enclosed to assure safe use of this firearm.

Remington®

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

46

SERIAL NO. **G6300554**
 ORDER NO. **25716**

Made in U.S.A. Pat. & Tel. Off. Marks Registered Parquet Deposee.

12RX

5716 G6300554

ORDER 25716
 M/24 7.62 NATO S.W.S. (COMPLETE SYST
UPC



ORDER 25716
 M/24 7.62 NATO S.W.S. (COMPLETE SYST
UPC



SERIAL NO.



M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

- INSTRUCTION BOOK 3518

46 FORM

proof of purchase



owner registration sticker




ORDER NO. **25716**

BARREL LENGTH **24"**

CAPACITY **6**

G6300554

UPC



M-24
INSPECTION CHECKLIST-NEW GUNS

GUN SERIAL # G 6300554

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		5/20/03	RTL
600	PROOF		5-21-03	AC
607	CHECK HEADSPACE	MAGNA-FLUX INSPECTED	5/22/03	RTL
610	DIS-ASSEMBLE GUN		5/22/03	RTL
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT	MAY 21 2003 OPERATOR <u>RL</u>		
615	ROLLMARK CALIBER		6-2-03	ls
617	DRILL AND TAP SIGHT HOLES		5-28-03	TRL
620	APPLY COATINGS (BARREL ACTION)		6-13	TH
	(BOLT)		6-13	TH
625	FINAL ASSEMBLY			
	A) CLEAN INSIDE OF BOLT ASSEMBLY		7/8/03	RA
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		7/8/03	RA
	C) INSPECT EJECTOR HOLE FOR CHAMFER		7/8/03	RA
	D) OIL FIRING PIN ASSEMBLY		7/8/03	RA
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE	2.50 LBS +/- .5 LBS		

OP #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE 2 LBS MIN 10 LBS MAX	<u>6.0</u> <u>5.5</u> <u>5.5</u>	8/12/03	DA
CONT.				
	G) SAFETY OFF FORCE 2 LBS MIN	<u>2.5</u> <u>2.0</u> <u>2.0</u>	8/12/03	DA
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT .020 MIN	<u>.022.5</u> <u>.022</u> <u>.022</u>	8/12/03	DA
	J) ASSEMBLE STOCK		7/30/03	RW
	K) ASSEMBLE SWIVEL STUDS		11-6-03	RW
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		7/30/03	RW
	M) IRON SIGHT ALIGNMENT		7/30/03	RW
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		7/30/03	RW
640	GALLERY TEST AND TARGET	PASS FAIL	8-4-03	AL
	MALFUNCTION <i>BAC</i>	CORRECTION <i>8-7-03 OK</i>	8-4-03	AL
	MALFUNCTION	CORRECTION	8-4-03	AL
	MALFUNCTION	CORRECTION	8-4-03	AL
	MALFUNCTION	CORRECTION	8-4-03	AL
645	INSPECT FOR LIVE AMMO		8-4-03	AL
655	FINAL INSPECTION A) HEADSPACE		11-6-03	RW
	B) TRIGGER PULL +/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	<u>2.83</u> <u>2.84</u> <u>2.75</u> <u>2.77</u> <u>2.78</u>	8/12/03	DA
	C) FUNCTION		11-6-03	RW
660	PACK		11/7/03	DA

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50 LBS (plus or minus 0.50 LBS)
3.00 LBS (plus or minus 0.75 LBS)
4.00 LBS (plus or minus 1.00 LBS)

SERIAL NO. _____

DATE 7-22-03

TESTER TRW

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.52	2.56		2.64	
PULL #2	2.70	2.80		2.51	
PULL #3	2.68	2.68		2.52	
PULL #4	2.60	2.71		2.59	
PULL #5	2.84	2.87		2.52	
TOTAL	13.34	13.62		12.78	
AVERAGE	2.66	2.72		2.55	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.17	3.23		
PULL #2	3.13	3.16		
PULL #3	3.11	3.18		
PULL #4	3.06	3.05		
PULL #5	3.07	3.15		
TOTAL	15.54	15.77		
AVERAGE	3.10	3.15		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.29	4.11		4.03
PULL #2	4.14	3.90		3.97
PULL #3	4.12	4.16		4.01
PULL #4	4.14	4.18		4.00
PULL #5	4.13	4.33		3.99
TOTAL	20.82	20.68		20.00
AVERAGE	4.16	4.13		4.00

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6300554.__0
FILE DATE AND TIME: 08/04/2003 06:46


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.024
The Average Y Centroid of the Five Target Set:	0.038
The Average Point of Impact of the Five Target Set:	0.045
The Average Mean Radius of the Five Target Set:	0.831
The Distance from POA to Centroid Target #1:	0.316
The Distance from Centroid Target #2 to Centroid Target #1:	0.207
The Distance from Centroid Target #3 to Centroid Target #1:	0.354
The Distance from Centroid Target #4 to Centroid Target #1:	0.661
The Distance from Centroid Target #5 to Centroid Target #1:	0.276

SERIAL NUMBER: G6300554. 0
TARGET NUMBER: 1
FILE DATE: 08/04/2003
FILE TIME: 16:46

POINT#	X	Y
1:	-0.569	-0.668
2:	-0.202	-0.367
3:	0.299	-0.370
4:	0.170	-0.506
5:	0.793	0.347
6:	0.002	0.625
7:	-0.099	0.404
8:	-0.164	0.214
9:	-0.418	1.229
10:	0.776	2.198

X CENTROID: 0.059
Y CENTROID: 0.311
POA TO CENTROID: 0.316
HORZ SPREAD: 1.362
VERT SPREAD: 2.866
GROUP SPREAD: 3.166
MIN RADIUS: 0.183
MAX RADIUS: 2.019
MEAN RADIUS: 0.797
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 9

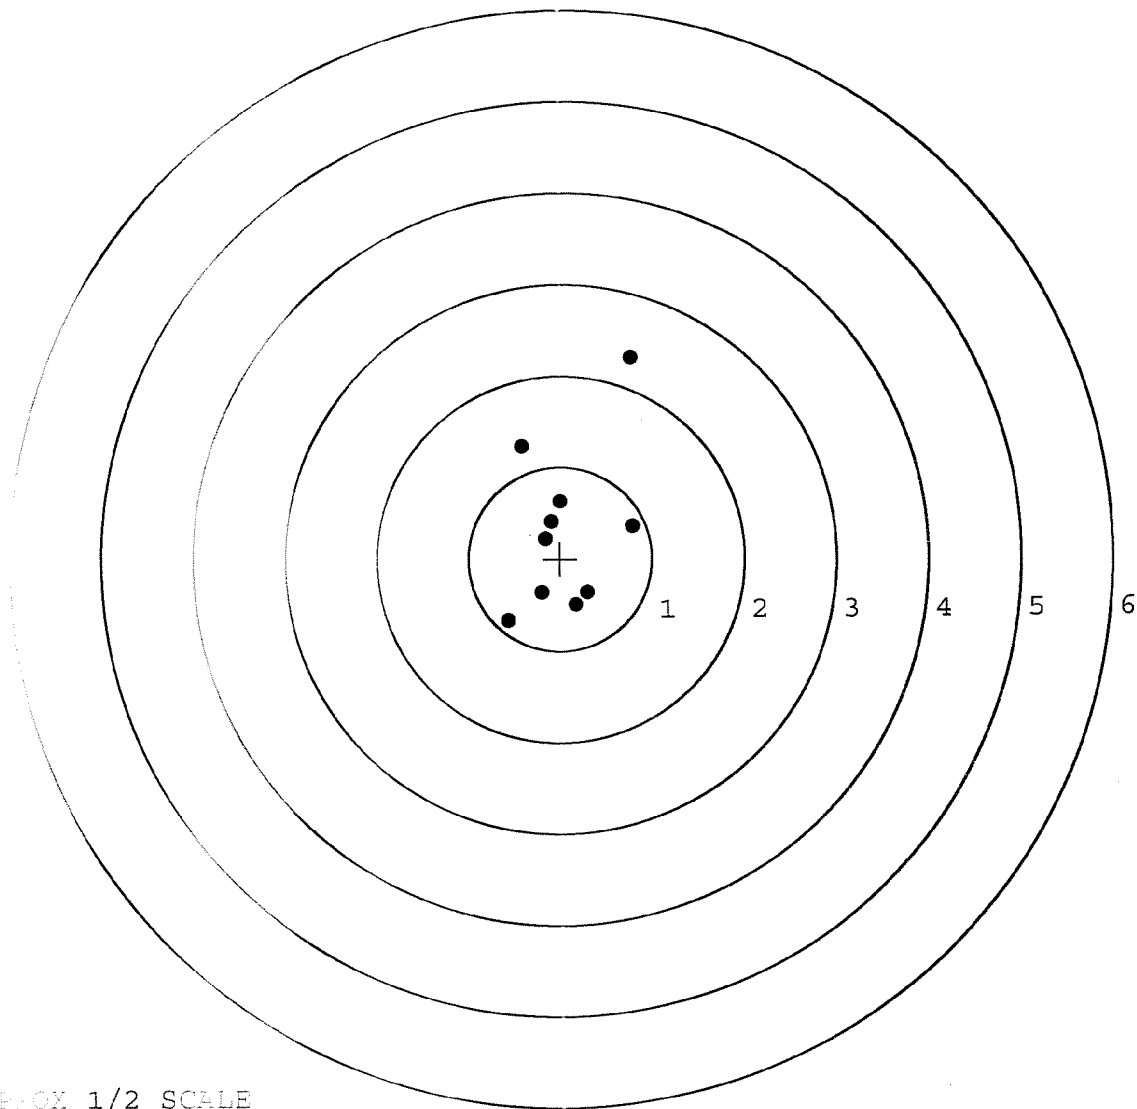


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6300554. 0
TARGET NUMBER: 2
FILE DATE: 08/04/2003
FILE TIME: 06:46

X CENTROID: -0.122
Y CENTROID: 0.210
POA TO CENTROID: 0.243
HORZ SPREAD: 0.796
VERT SPREAD: 3.189
GROUP SPREAD: 3.206
MIN RADIUS: 0.195
MAX RADIUS: 1.835
MEAN RADIUS: 0.763
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	-0.073	2.044
2:	-0.391	0.938
3:	0.199	0.412
4:	0.328	-0.536
5:	0.252	-1.145
6:	-0.200	-0.589
7:	-0.294	-0.193
8:	-0.206	0.034
9:	-0.368	0.446
10:	-0.468	0.685

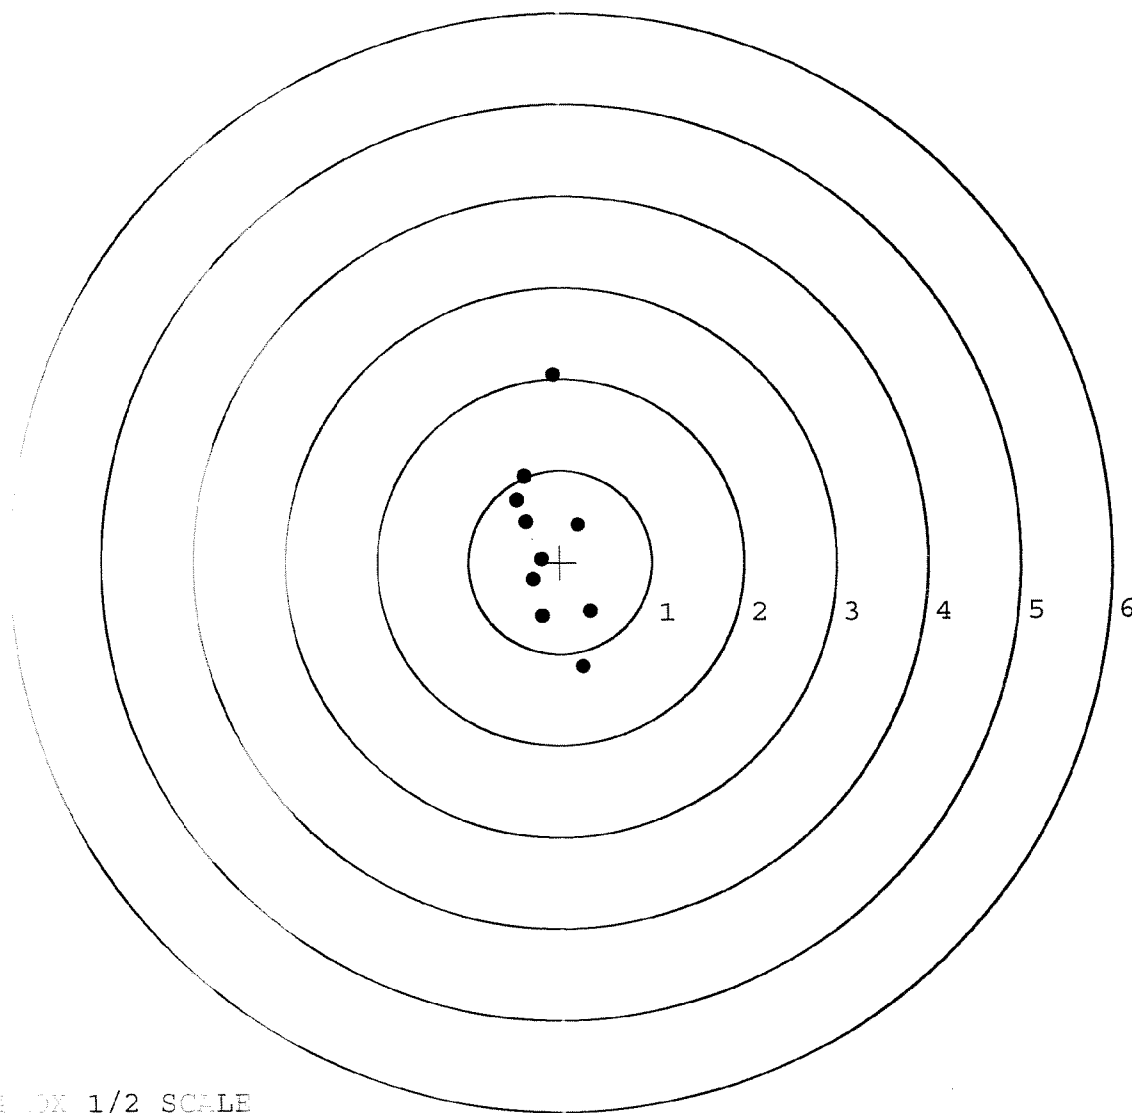


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6300554. __0
TARGET NUMBER: 3
FILE DATE: 08/04/2003
FILE TIME: 06:46

X CENTROID: 0.034
Y CENTROID: -0.042
POA TO CENTROID: 0.055
HORZ SPREAD: 1.386
VERT SPREAD: 3.913
GROUP SPREAD: 3.915
MIN RADIUS: 0.026
MAX RADIUS: 2.458
MEAN RADIUS: 0.879
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 6
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	-0.012	-1.502
2:	0.759	-0.981
3:	0.089	-0.728
4:	-0.122	2.411
5:	-0.627	0.957
6:	-0.297	0.411
7:	-0.190	-0.340
8:	0.010	-0.052
9:	0.285	-0.210
10:	0.449	-0.391

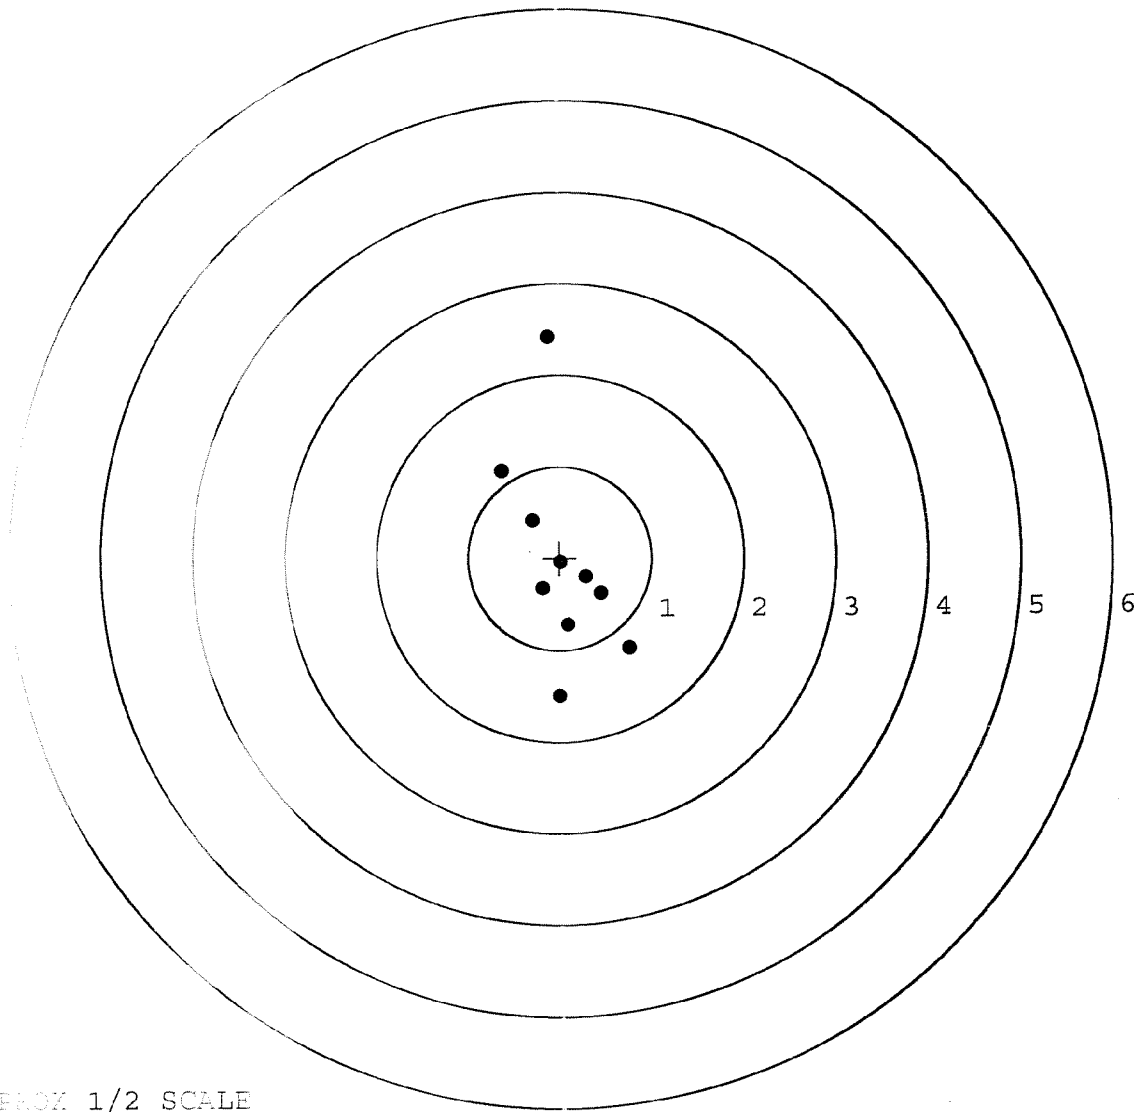


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6300554. 0
TARGET NUMBER: 4
FILE DATE: 08/04/2003
FILE TIME: 08:46

X CENTROID: -0.050
Y CENTROID: -0.341
POA TO CENTROID: 0.345
HORZ SPREAD: 1.615
VERT SPREAD: 3.538
GROUP SPREAD: 3.538
MIN RADIUS: 0.294
MAX RADIUS: 2.179
MEAN RADIUS: 0.962
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 5
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	1.026	-0.229
2:	-0.095	-2.520
3:	-0.568	-1.438
4:	-0.207	-0.884
5:	-0.589	-0.228
6:	-0.386	-0.233
7:	-0.200	-0.089
8:	0.273	0.347
9:	0.382	0.842
10:	-0.136	1.018

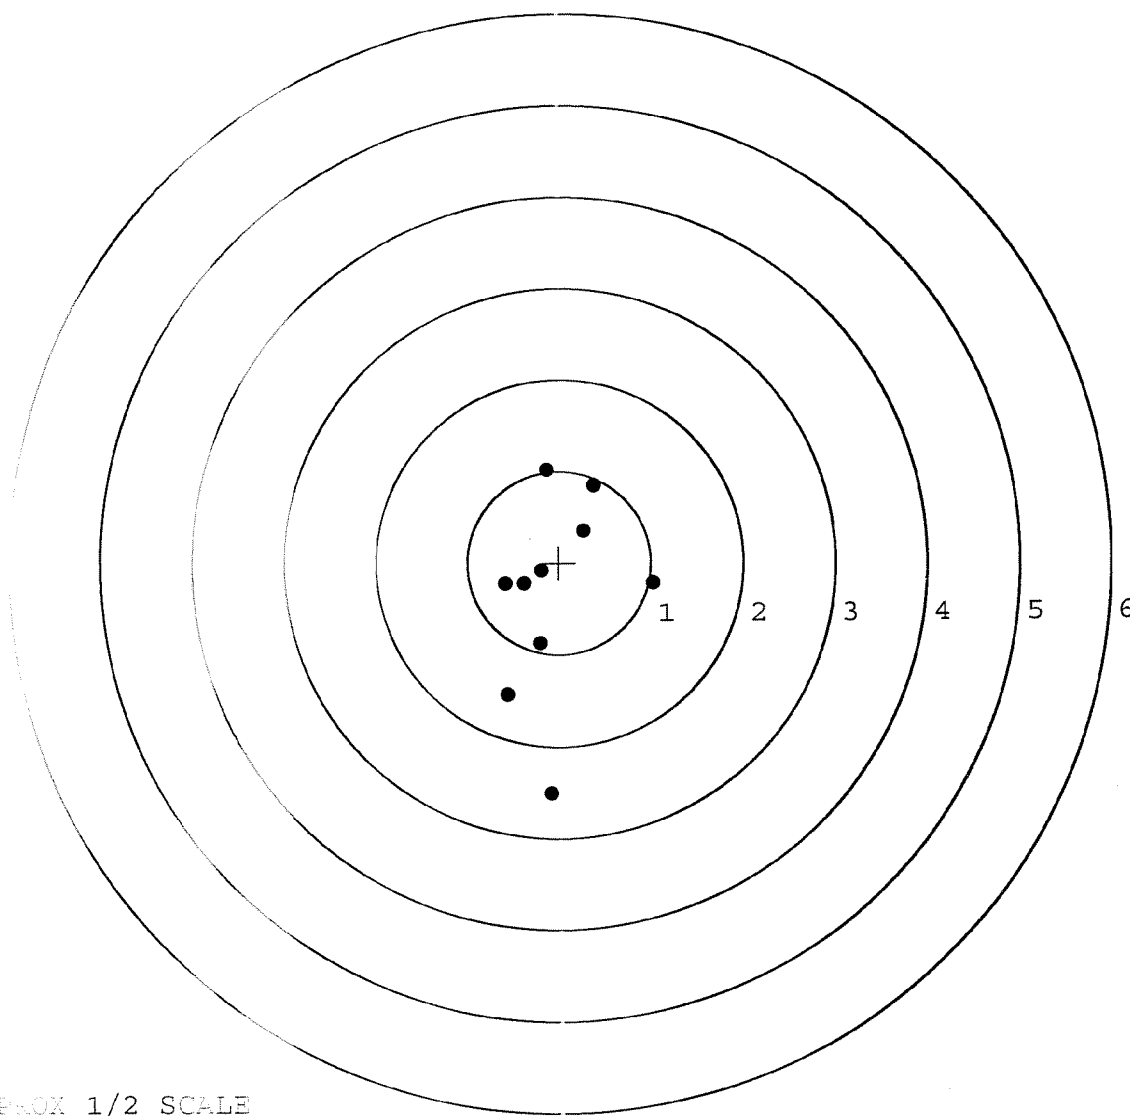


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6300554. 0
TARGET NUMBER: 5
FILE DATE: 08/04/2003
FILE TIME: 06:46

X CENTROID: -0.039
Y CENTROID: 0.053
POA TO CENTROID: 0.066
HORZ SPREAD: 1.833
VERT SPREAD: 1.882
GROUP SPREAD: 2.152
MIN RADIUS: 0.186
MAX RADIUS: 1.110
MEAN RADIUS: 0.753
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.791	-0.764
2:	-0.635	-0.660
3:	-0.419	-0.564
4:	0.379	-0.355
5:	0.145	0.030
6:	-0.443	0.021
7:	0.252	1.118
8:	1.042	0.211
9:	0.051	0.611
10:	0.024	0.883

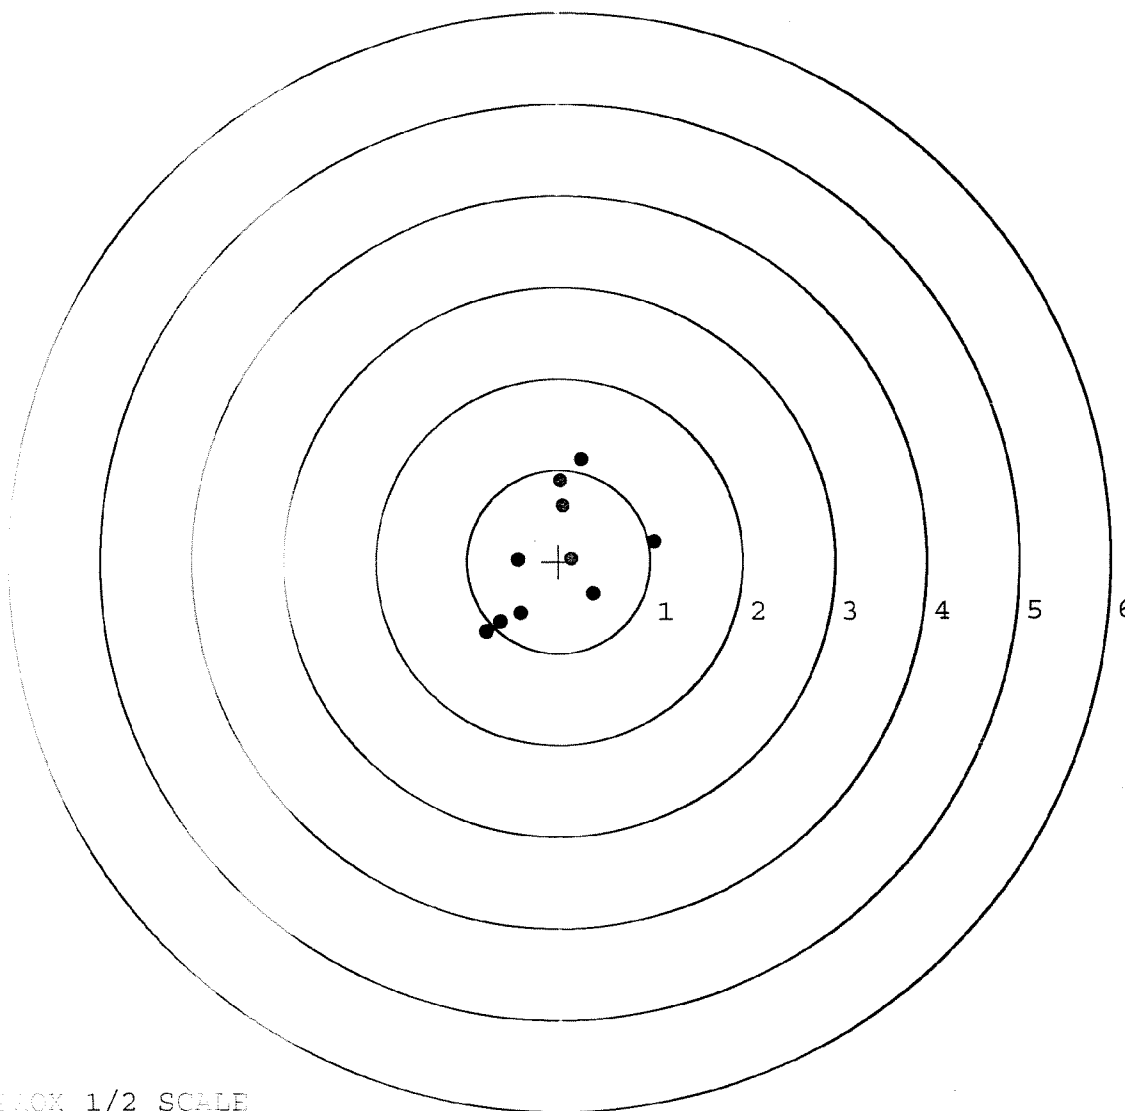

TARGET APPROX 1/2 SCALE