

G 6300587

VERY IMPORTANT
Instruction Book
enclosed to assure
safe use of this
firearm.

Remington®

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

Made in Ilion, NY Reg. U.S. Pat & tm. Off. Marca Registrada Marque Deposee.

SERIAL NO.
G6300587

ORDER NO.
25716

DD


5716 G6300587

16LY

ORDER 25716
M/24 7.62 NATO S.W.S. (COMPLETE SYST
UPC



ORDER 25716
M/24 7.62 NATO S.W.S. (COMPLETE SYST
UPC



M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

- INSTRUCTION BOOK 3518

proof of purchase



owner registration sticker




ORDER NO. **25716**

BARREL LENGTH **24"**

CAPACITY **6**

G6300587

UPC



DD FORM

M-24
INSPECTION CHECKLIST-NEW GUNS

GUN SERIAL # G 6300587

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		1-9-04	RTL
600	PROOF		1-9-04	Ac
607	CHECK HEADSPACE		1-9-04	Ac
610	DIS-ASSEMBLE GUN		1-9-04	RTL
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT	MAGNA-FLUX INSPECTED JAN 13 2004 OPERATOR <u>RL</u>	1-12-04	RL
615	ROLLMARK CALIBER		1-13-04	JB
617	DRILL AND TAP SIGHT HOLES		1-12-04	TRW
620	APPLY COATINGS (BARREL ACTION)		1-29	TA
	(BOLT)		1-29	TA
625	FINAL ASSEMBLY A) CLEAN INSIDE OF BOLT ASSEMBLY		2-6-04	RLW
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		2-6-04	RLW
	C) INSPECT EJECTOR HOLE FOR CHAMFER		2-6-04	RLW
	D) OIL FIRING PIN ASSEMBLY		2-6-04	RLW
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE 2.50 LBS +/- .5 LBS			

OP #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE 2 LBS MIN 10 LBS MAX	<u>6.0</u> <u>6.0</u> <u>6.0</u>	2/12/04	DA
CONT.				
	G) SAFETY OFF FORCE 2 LBS MIN	<u>2.5</u> <u>3.0</u> <u>2.5</u>	2/12/04	DA
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT .020 MIN	<u>.024</u> <u>.024</u> <u>.024</u>	2/12/04	DA
	J) ASSEMBLE STOCK		2-6-04	RLW
	K) ASSEMBLE SWIVEL STUDS		2-16-04	RLW
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		2-6-04	RLW
	M) IRON SIGHT ALIGNMENT		2-6-04	RLW
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		2-6-04	RLW
640	GALLERY TEST AND TARGET	PASS FAIL	2-6-04	TRW
	MALFUNCTION	CORRECTION	2-6-04	TRW
	MALFUNCTION	CORRECTION	2-6-04	TRW
	MALFUNCTION	CORRECTION	2-6-04	TRW
	MALFUNCTION	CORRECTION	2-6-04	TRW
645	INSPECT FOR LIVE AMMO		2-6-04	TRW
655	FINAL INSPECTION A) HEADSPACE		2-16-04	RLW
	B) TRIGGER PULL +/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	<u>2.22</u> <u>2.17</u> <u>2.18</u> <u>2.30</u> <u>2.18</u>	2/12/04	DA
	C) FUNCTION		2-16-04	RLW
660	PACK		2-18-04	DA

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50 LBS (plus or minus 0.50 LBS)
3.00 LBS (plus or minus 0.75 LBS)
4.00 LBS (plus or minus 1.00 LBS)

SERIAL NO. _____

DATE 2-5-04

TESTER TRW

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.46	2.58		2.62	
PULL #2	2.44	2.85		2.57	
PULL #3	2.67	2.85		2.50	
PULL #4	2.62	2.77		2.38	
PULL #5	2.76	2.83		2.52	
TOTAL	12.95	13.88		12.59	
AVERAGE	2.59	2.77		2.51	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.11	3.53		
PULL #2	3.47	3.28		
PULL #3	3.29	3.27		
PULL #4	3.38	3.21		
PULL #5	3.66	3.24		
TOTAL	16.91	16.53		
AVERAGE	3.38	3.30		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.33	4.14		4.32
PULL #2	4.28	4.09		4.16
PULL #3	4.22	3.99		4.18
PULL #4	4.17	4.06		4.11
PULL #5	4.09	4.28		4.15
TOTAL	21.09	20.56		20.92
AVERAGE	4.21	4.11		4.18

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6300587.___0

FILE DATE AND TIME: 02/06/2004 06:53


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.054
The Average Y Centroid of the Five Target Set:	-0.177
The Average Point of Impact of the Five Target Set:	0.185
The Average Mean Radius of the Five Target Set:	0.790
The Distance from POA to Centroid Target #1:	0.239
The Distance from Centroid Target #2 to Centroid Target #1:	0.291
The Distance from Centroid Target #3 to Centroid Target #1:	0.011
The Distance from Centroid Target #4 to Centroid Target #1:	0.289
The Distance from Centroid Target #5 to Centroid Target #1:	0.334

SERIAL NUMBER: G6300587.____0
TARGET NUMBER: 1
FILE DATE: 02/06/2004
FILE TIME: 06:53

X CENTROID: -0.155
Y CENTROID: -0.182
POA TO CENTROID: 0.239
HORZ SPREAD: 2.542
VERT SPREAD: 2.310
GROUP SPREAD: 3.302
MIN RADIUS: 0.455
MAX RADIUS: 2.132
MEAN RADIUS: 0.933
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.710	0.079
2:	0.301	-0.620
3:	0.109	0.727
4:	1.437	1.236
5:	-0.744	0.088
6:	-1.105	-0.017
7:	-0.231	-0.630
8:	-0.477	-0.756
9:	-0.626	-0.851
10:	-0.923	-1.074

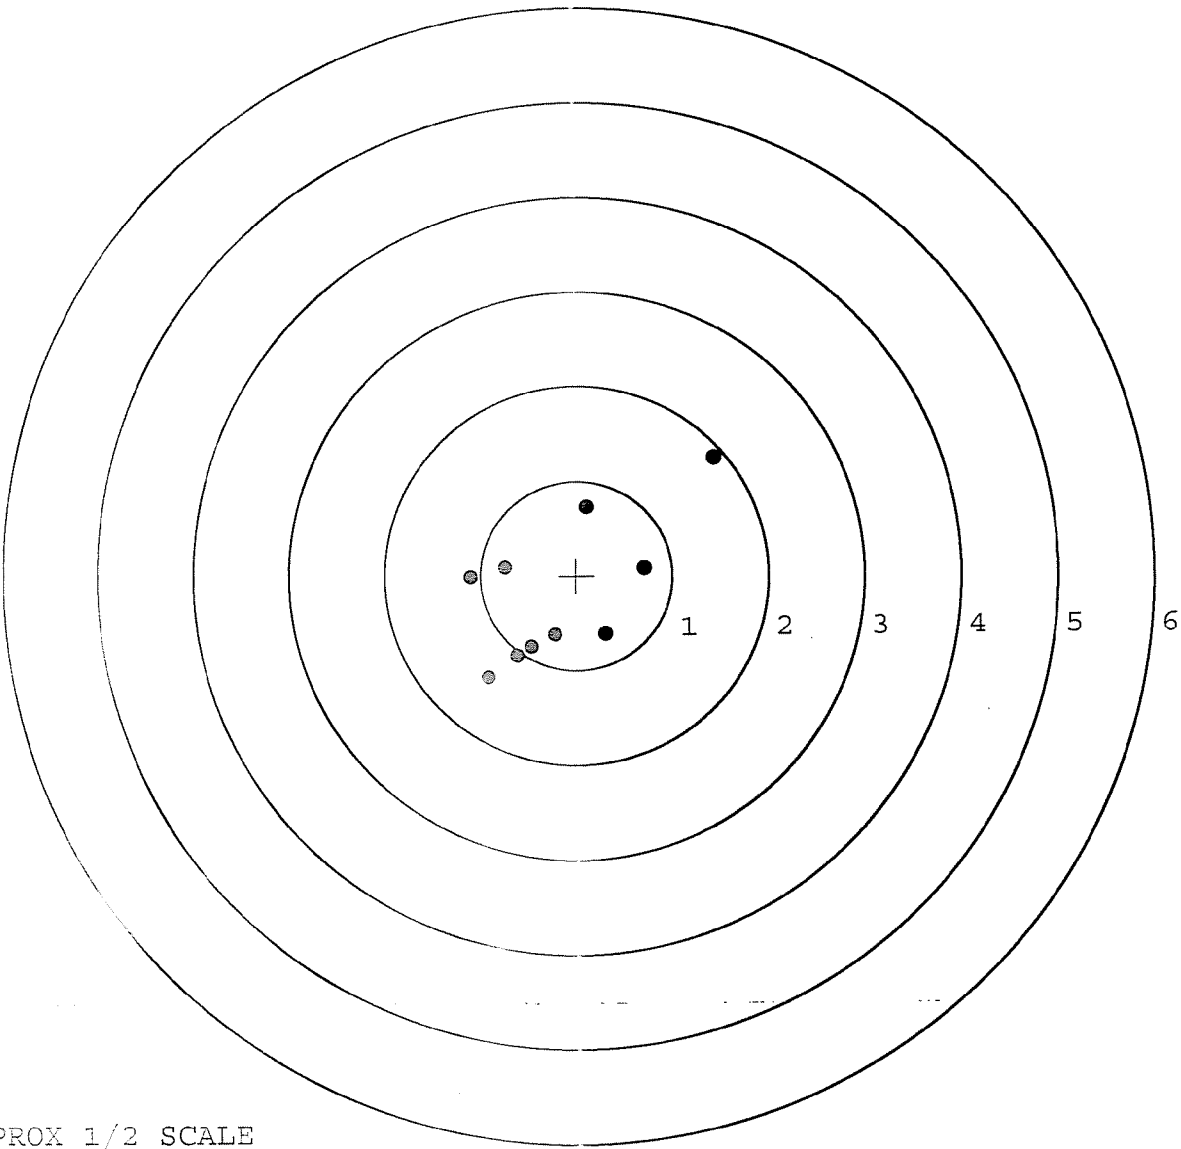


SERIAL NUMBER: G6300587. __0
TARGET NUMBER: 2
FILE DATE: 02/06/2004
FILE TIME: 06:53

X CENTROID: -0.060
Y CENTROID: 0.093
POA TO CENTROID: 0.111
HORZ SPREAD: 1.619
VERT SPREAD: 1.929
GROUP SPREAD: 2.148
MIN RADIUS: 0.239
MAX RADIUS: 1.289
MEAN RADIUS: 0.634

IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.732	0.042
2:	0.307	0.871
3:	0.269	0.634
4:	0.203	0.387
5:	0.112	0.260
6:	-0.399	0.320
7:	-0.887	0.154
8:	-0.046	-0.202
9:	-0.249	-0.476
10:	-0.639	-1.058

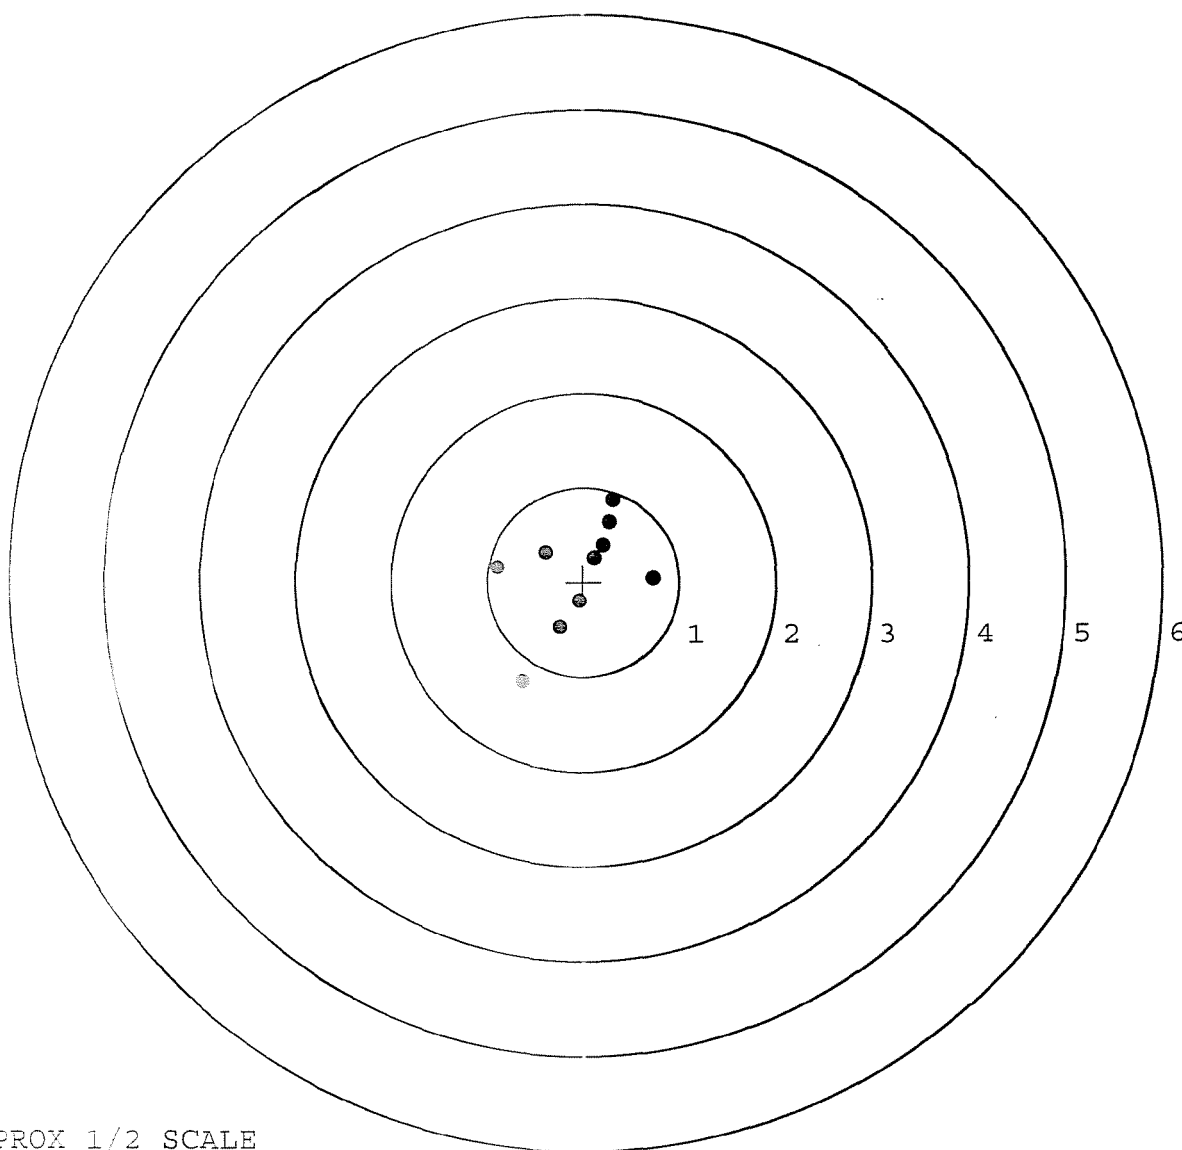


SERIAL NUMBER: G6300587.____0
TARGET NUMBER: 3
FILE DATE: 02/06/2004
FILE TIME: 06:53

X CENTROID: -0.148
Y CENTROID: -0.189
POA TO CENTROID: 0.240
HORZ SPREAD: 2.412
VERT SPREAD: 2.090
GROUP SPREAD: 2.497
MIN RADIUS: 0.194
MAX RADIUS: 1.695
MEAN RADIUS: 0.797

IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 6
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.523	-1.076
2:	-0.147	-1.246
3:	-0.897	0.039
4:	-1.801	-0.564
5:	-0.012	0.844
6:	0.611	0.083
7:	0.084	-0.343
8:	0.039	-0.137
9:	0.166	0.200
10:	-0.042	0.306

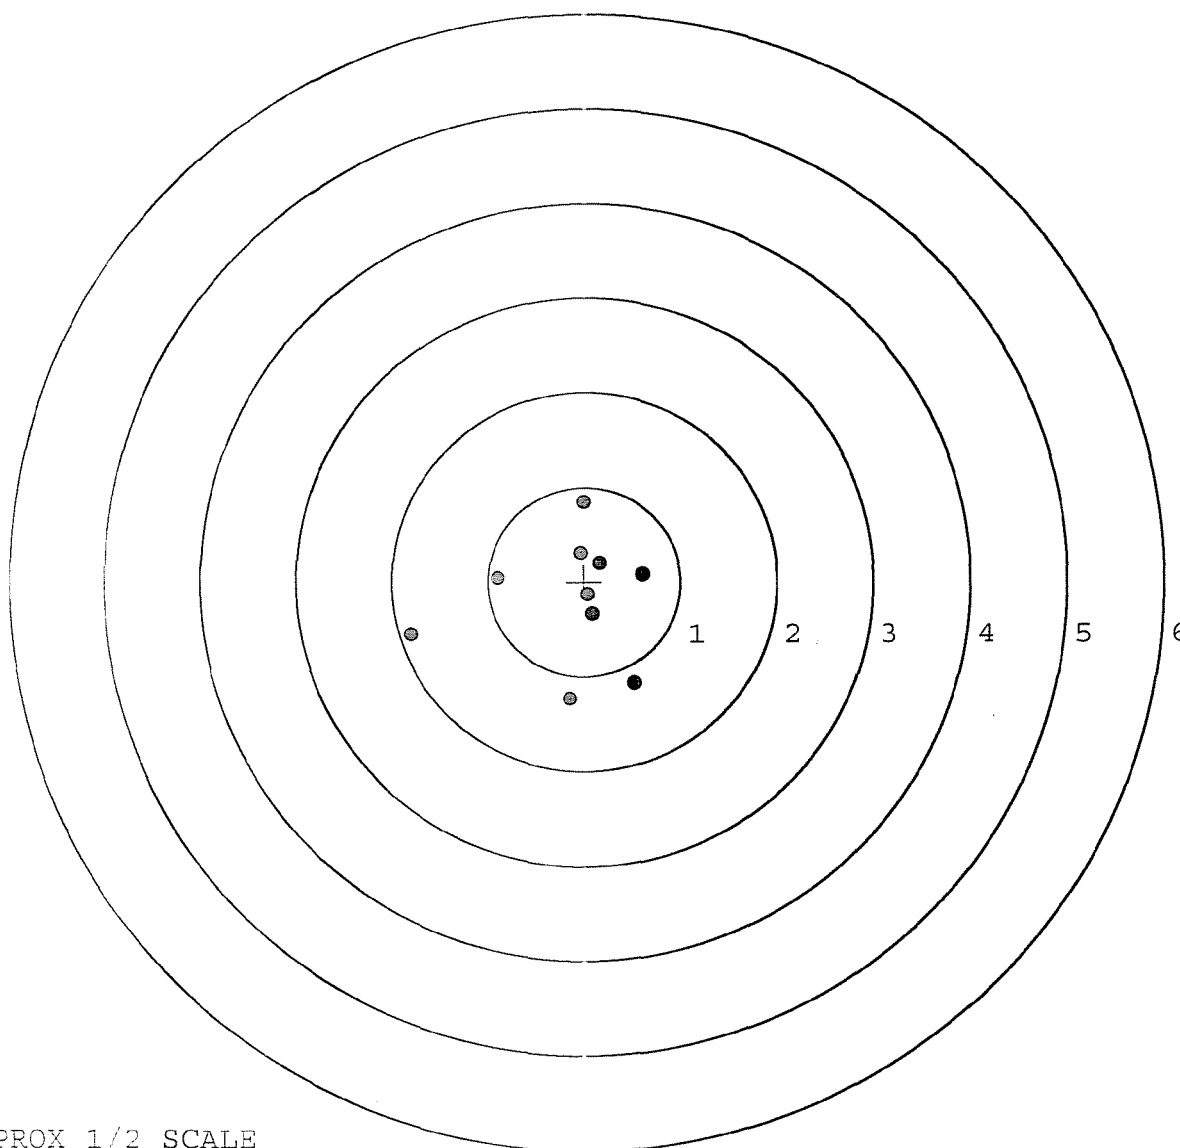


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6300587. __0
TARGET NUMBER: 4
FILE DATE: 02/06/2004
FILE TIME: 06:53

X CENTROID: 0.126
Y CENTROID: -0.117
POA TO CENTROID: 0.172
HORZ SPREAD: 1.625
VERT SPREAD: 1.539
GROUP SPREAD: 1.861
MIN RADIUS: 0.347
MAX RADIUS: 1.115
MEAN RADIUS: 0.694
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10


POINT#	X	Y
1:	0.988	-0.825
2:	0.606	-0.546
3:	0.499	-0.824
4:	-0.220	-0.437
5:	-0.637	-0.597
6:	0.357	0.481
7:	0.202	0.356
8:	-0.058	0.714
9:	-0.355	0.378
10:	-0.118	0.130

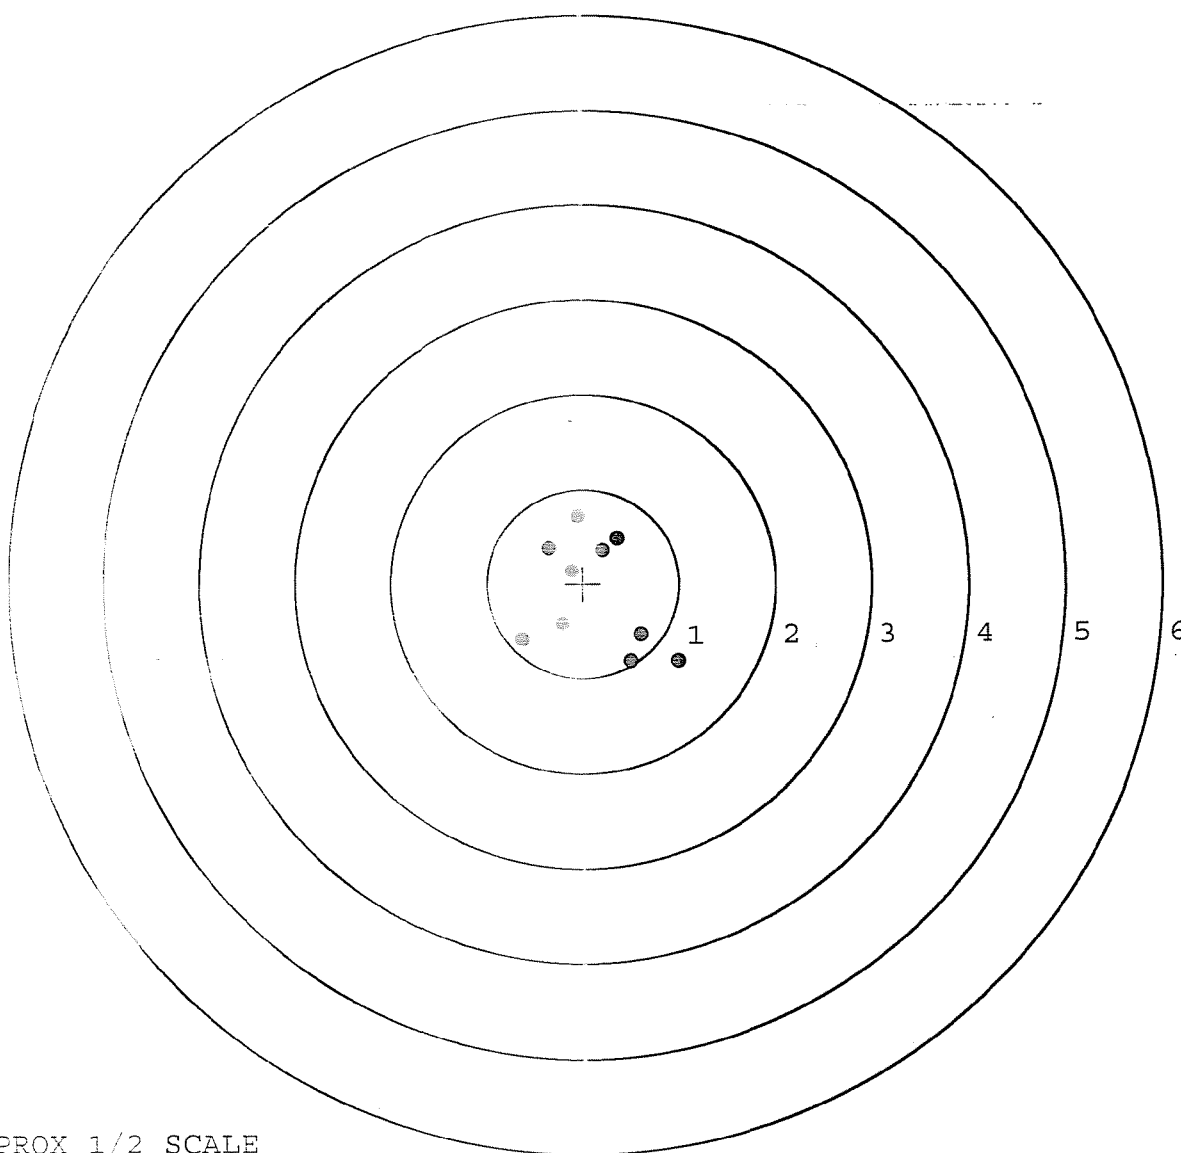

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6300587.0
TARGET NUMBER: 5
FILE DATE: 02/06/2004
FILE TIME: 06:53

	POINT#	X	Y
	1:	0.883	-0.259
	2:	0.423	-1.172
	3:	0.023	-1.539
	4:	-0.009	-0.703
X CENTROID:	5:	-0.331	-2.128
Y CENTROID:	6:	-0.689	-0.628
POA TO CENTROID:	7:	0.019	0.296
HORZ SPREAD:	8:	-0.148	0.291
VERT SPREAD:	9:	-0.391	0.287
GROUP SPREAD:	10:	-0.101	0.635
MIN RADIUS:			
MAX RADIUS:			
MEAN RADIUS:			
# IN 1 IN DIAMETER:			1
# IN 2 IN DIAMETER:			7
# in 3 IN DIAMETER:			9

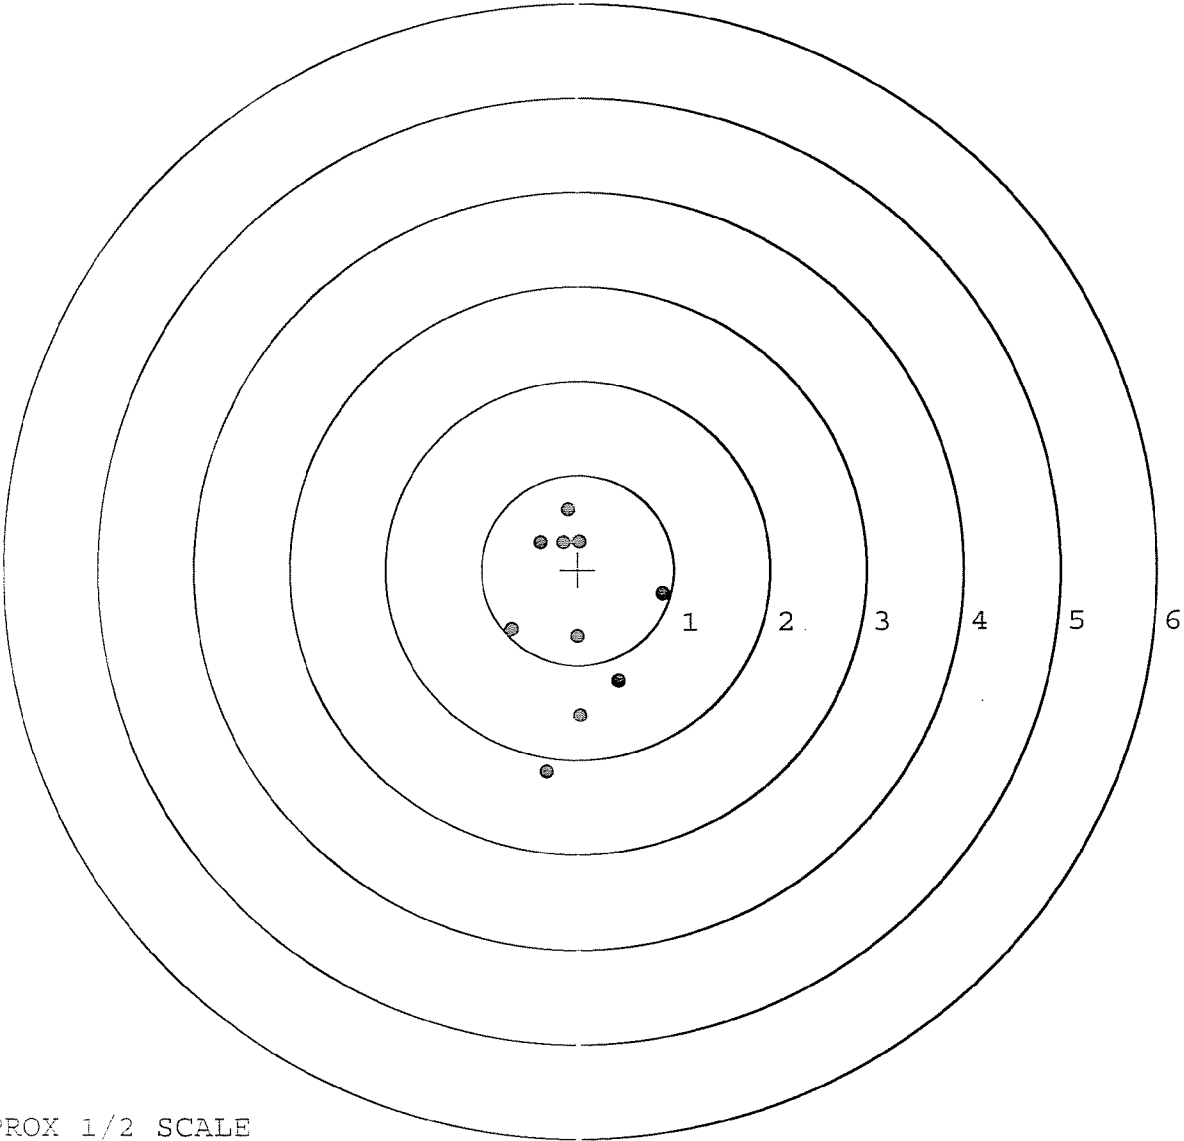

TARGET APPROX 1/2 SCALE