

G 6300612
Replace
C-6225274

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6300612.___0
FILE DATE AND TIME: 11/17/2003 11:40

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.038
The Average Y Centroid of the Five Target Set:	0.081
The Average Point of Impact of the Five Target Set:	0.090
The Average Mean Radius of the Five Target Set:	0.761
The Distance from POA to Centroid Target #1:	0.395
The Distance from Centroid Target #2 to Centroid Target #1:	0.634
The Distance from Centroid Target #3 to Centroid Target #1:	0.309
The Distance from Centroid Target #4 to Centroid Target #1:	0.495
The Distance from Centroid Target #5 to Centroid Target #1:	0.274

SERIAL NUMBER: G6300612. __0

TARGET NUMBER: 1

FILE DATE: 11/17/2003

FILE TIME: 11:40

POINT#	X	Y
1:	0.218	1.247
2:	-0.986	0.296
3:	-0.381	-0.602
4:	0.530	-0.448
5:	0.512	-1.037
6:	0.596	0.705
7:	0.387	0.411
8:	0.143	0.256
9:	-0.113	0.367
10:	0.850	2.345

X CENTROID: 0.176

Y CENTROID: 0.354

POA TO CENTROID: 0.395

HORZ SPREAD: 1.836

VERT SPREAD: 3.382

GROUP SPREAD: 3.399

MIN RADIUS: 0.103


MAX RADIUS: 2.102

MEAN RADIUS: 0.873

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 9

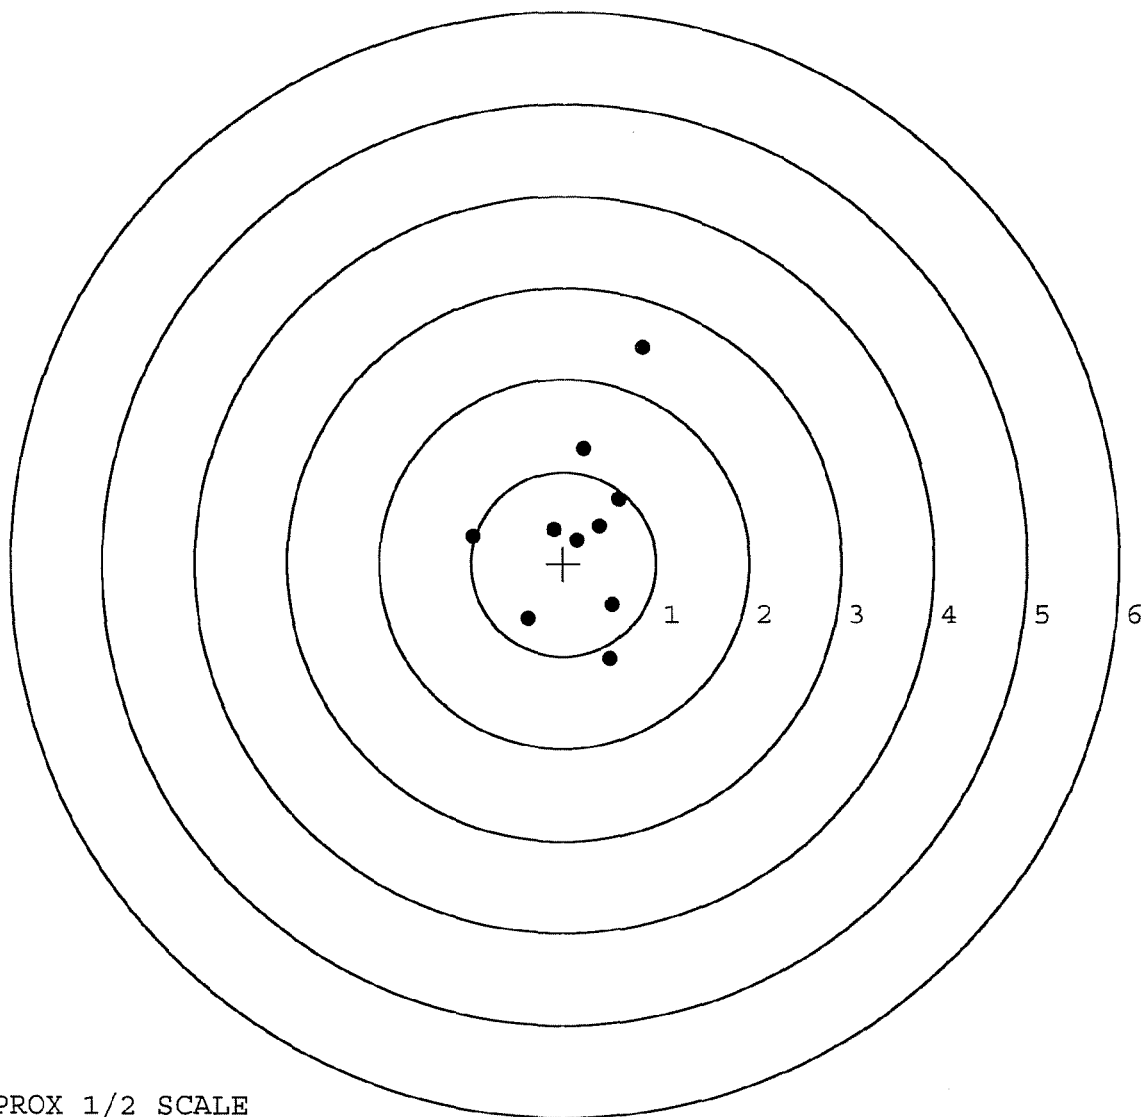


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6300612. __0
TARGET NUMBER: 2
FILE DATE: 11/17/2003
FILE TIME: 11:40

X CENTROID: 0.163
Y CENTROID: -0.280
POA TO CENTROID: 0.324
HORZ SPREAD: 1.087
VERT SPREAD: 1.702
GROUP SPREAD: 1.739
MIN RADIUS: 0.145
MAX RADIUS: 1.054
MEAN RADIUS: 0.597
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.773	0.178
2:	0.665	-0.224
3:	0.477	-1.286
4:	0.073	-1.307
5:	0.093	-0.406
6:	-0.314	-0.338
7:	-0.267	0.145
8:	0.030	0.395
9:	0.162	0.087
10:	-0.062	-0.039

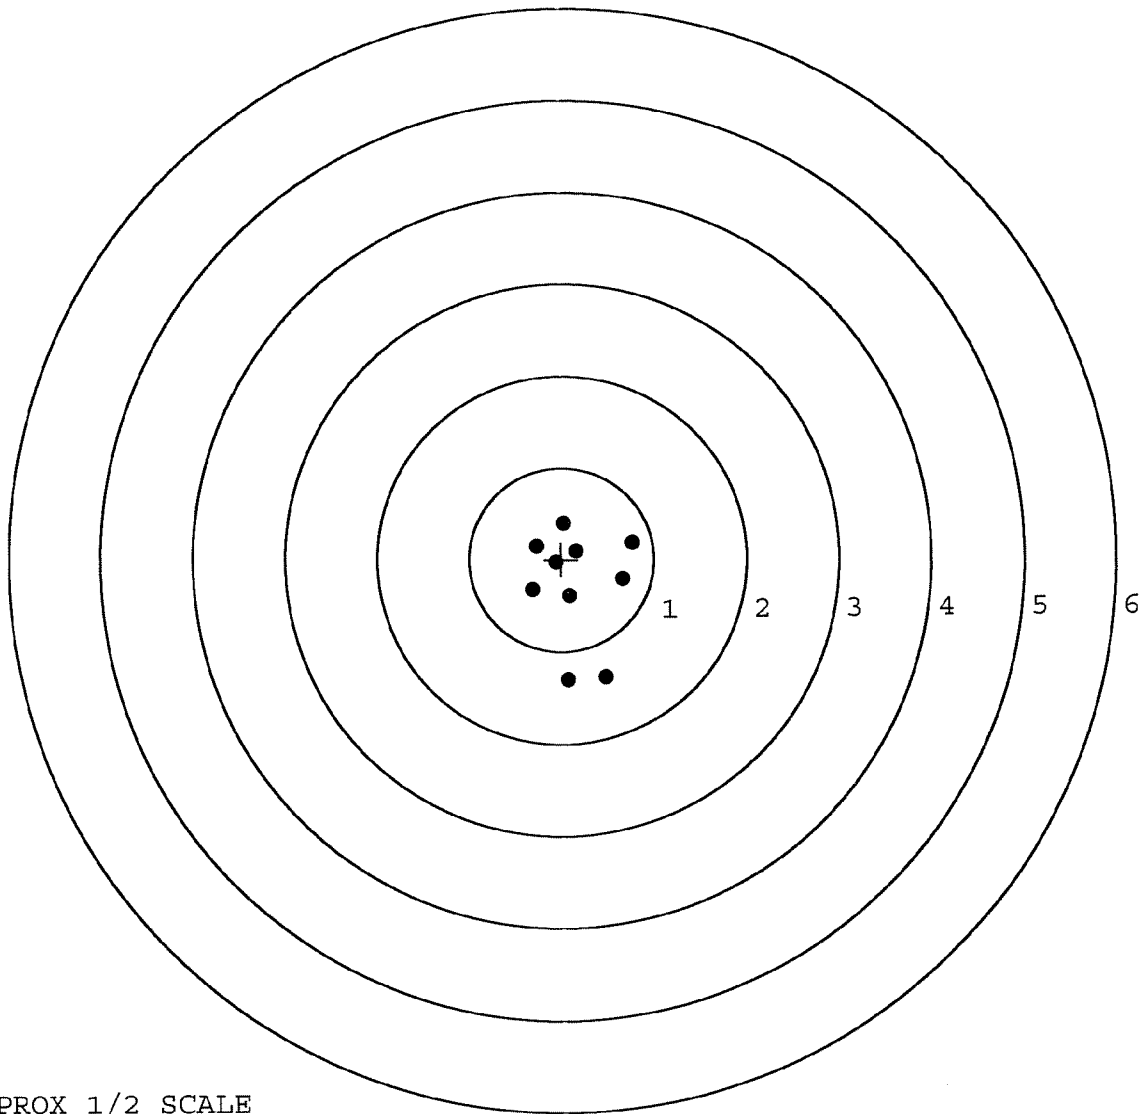


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6300612.___0
TARGET NUMBER: 3
FILE DATE: 11/17/2003
FILE TIME: 11:40

X CENTROID: -0.061
Y CENTROID: 0.154
POA TO CENTROID: 0.165
HORZ SPREAD: 1.947
VERT SPREAD: 1.845
GROUP SPREAD: 2.483
MIN RADIUS: 0.268
MAX RADIUS: 1.285
MEAN RADIUS: 0.698
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.831	1.079
2:	0.569	0.507
3:	0.493	0.241
4:	-0.207	-0.508
5:	-0.831	-0.766
6:	-1.116	-0.083
7:	-0.386	0.085
8:	-0.283	0.304
9:	-0.183	0.394
10:	0.508	0.287

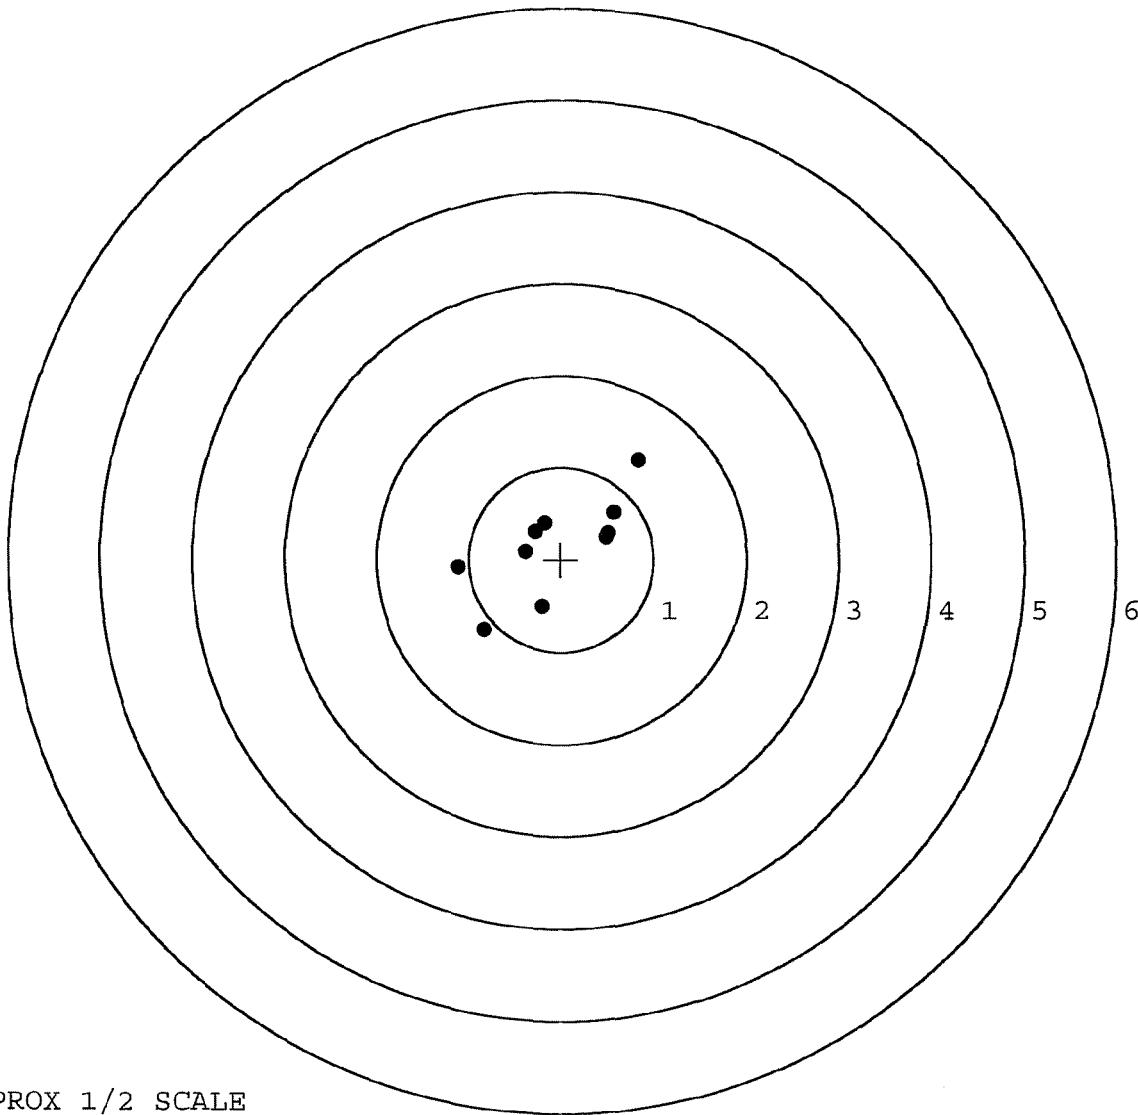


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6300612. __0
TARGET NUMBER: 4
FILE DATE: 11/17/2003
FILE TIME: 11:40

POINT#	X	Y
1:	0.712	0.003
2:	0.889	-0.142
3:	0.307	-0.460
4:	0.023	-0.456
5:	-0.548	-0.275
6:	-0.644	-0.017
7:	-0.850	0.378
8:	0.212	0.728
9:	0.423	1.220
10:	-0.478	-2.089

X CENTROID: 0.005
Y CENTROID: -0.111
POA TO CENTROID: 0.111
HORZ SPREAD: 1.739
VERT SPREAD: 3.309
GROUP SPREAD: 3.429
MIN RADIUS: 0.345
MAX RADIUS: 2.036
MEAN RADIUS: 0.892
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 9

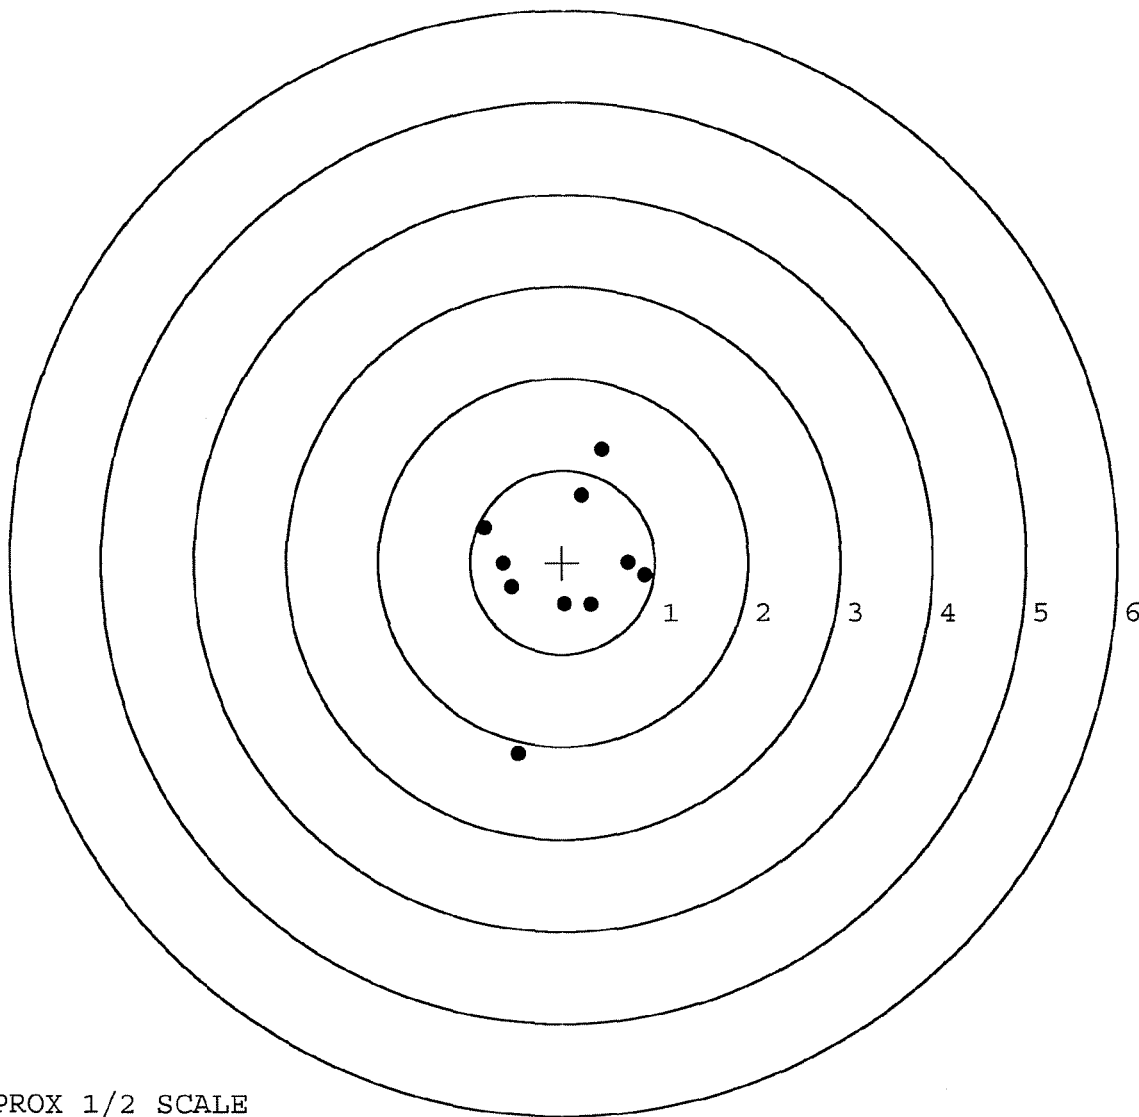

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6300612. __ 0

TARGET NUMBER: 5

FILE DATE: 11/17/2003

FILE TIME: 11:40

POINT#	X	Y
1:	0.543	0.086
2:	0.419	-0.421
3:	-0.121	-0.723
4:	-0.414	-0.600
5:	-0.422	0.019
6:	-0.480	0.344
7:	-0.320	0.854
8:	0.062	0.856
9:	-0.271	1.586
10:	0.101	0.880

X CENTROID: -0.090

Y CENTROID: 0.288

POA TO CENTROID: 0.302

HORZ SPREAD: 1.023

VERT SPREAD: 2.309

GROUP SPREAD: 2.314

MIN RADIUS: 0.394


MAX RADIUS: 1.310

MEAN RADIUS: 0.745

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

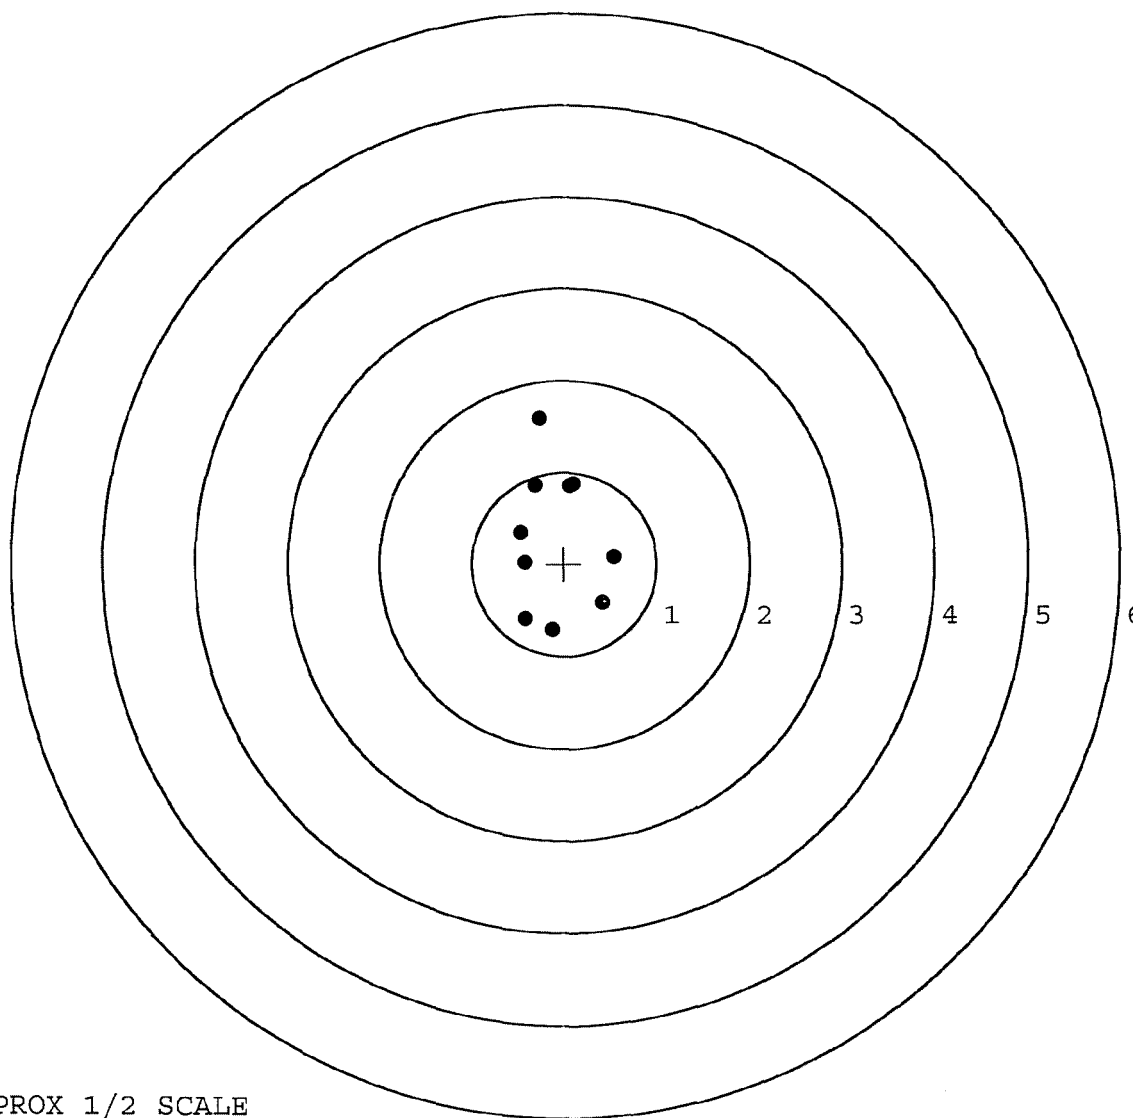

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R & E NUMBER	071845		
SERIAL NUMBER	G6225274 G6300612 New		
LOG-IN DATE	10-22-03		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	11-3-03	RW
560 A	RE-BARREL	11-5-03	RTL
B	DRILL AND TAP	11-6-03	TRW
575	ASSEMBLE	11-5-03	RTL
600	PROOF	11-5-03	AC
605	CHECK HEADSPACE	11-5-03	AC
610	DIS-ASSEMBLE GUN	11-6-03	RTL
612	MAGNAFLUX		
615	ROLLMARK CALIBER	11-7-03	AS
618	ROTO-BLAST	11/7/2003	Dans
620	APPLY COATINGS	11-11	TA
625 A	FINAL ASSEMBLY	11-13-03	RW
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	11-17-03	AC
655	FINAL INSPECT	12-16-03	RW
660	PACK	12-18-03	NA
		SHIP DATE	
QAR INSPECTION DATE			

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225274

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock	9 12	8 8	FB
600	Proof	9 19	8 8	RW
607	Check Headspace	9 19	8 8	RW
610	Dis-assemble Gun	9 19	8 8	RW
612	Magnaflux Barrel Action		9/22/88	Afl.
	Magnaflux Bolt		9/22/88	Afl.
615	Rollmark Caliber		10/1/88	WC
617	Drill and Tap Sight Holes		10/1/88	FB
618	Polish Barrel		10/2/88	WT
620	Apply Coatings (Barrel Action)		10-31-88	TJA
	Apply Coating (Bolt)		10-31-88	TJA
625	Final Assembly A) Clean inside of Bolt Assembly		11/9/88	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		11/9/88	RW
	C) Inspect Ejector Hole for Chamfer		11/9/88	RW
	D) Oil Firing Pin Ass'y		11/9/88	RW
	E) Adjust Trigger Pull to Min Setting and Stake		11/16/88	AS

op. #	OP. NAME	READINGS					DATE	INITIAL
625 cont.	F) Safety On Force	5	5	5			14 NOV 88	JSB
	G) Safety Off Force	3	3	3			14 NOV 88	JSB
	H) Trigger Pull Test & Retainability						11 NOV 88	JSB
	I) Firing Pin Indent	.021	.021	.021			14 NOV 88	JSB
	J) Assemble Stock						11/14/88	RW
	K) Assemble Swivel Studs						30 NOV 88	JSB
	L) Attach Front and Rear Sight Assemblies						11/14/88	RW
	M) Iron Sight Alignment						11/14/88	RW
	N) Detach Front & Rear Sights & place in numbered container						11/14/88	RW
	O) Attach Scope to Rifle						11/15/88	WCB
	P) Detach & Attach Scope 20 Times						11/15/88	WCB
640	Gallery Target & Test	51 R	99 L				11/16/88	DH
	A) Time						11/16/88	DH
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope						11/16/88	DH
645	Inspect for Live Ammo						11/16/88	DH
655	Final Inspection							
	A) Headspace						30 NOV 88	JSB
	B) Trigger Pull	2.45	2.42	2.42	2.23	2.38	30 NOV 88	JSB
	C) Function						30 NOV 88	JSB
660	Pack						15 Dec 88	JSB

SWS TRIGGER PULL TEST

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. 5279
DATE 4/5/90
TESTER DH

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.47	2.31	2.26	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.37	2.31	2.28	
PULL #3	2.50	2.30	2.29	
PULL #4	2.38	2.32	2.30	
PULL #5	2.49	2.31	2.28	
TOTAL	12.21	11.55	11.41	
AVG.	2.44	2.31	2.28	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.38	3.36		
PULL #2	3.36	3.37		
PULL #3	3.37	3.36		
PULL #4	3.38	3.35		
PULL #5	3.36	3.29		
TOTAL	16.85	16.73		
AVG.	3.37	3.34		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.30	4.29		
PULL #2	4.30	4.29		
PULL #3	4.30	4.24		
PULL #4	4.35	4.23		
PULL #5	4.32	4.23		
TOTAL	21.57	21.28		
AVG.	4.31	4.25		

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225274

CENTROIDAL DISTANCES

0 TO	1	.174195
1 TO	2	.263473
1 TO	3	.347039
1 TO	4	.299862
1 TO	5	.301811


sp <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0722
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .032
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0789737
THE AMR FOR THIS RIFLE IS: .9394

17 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C6225824

CENTERFIRE PATTERNS # 1

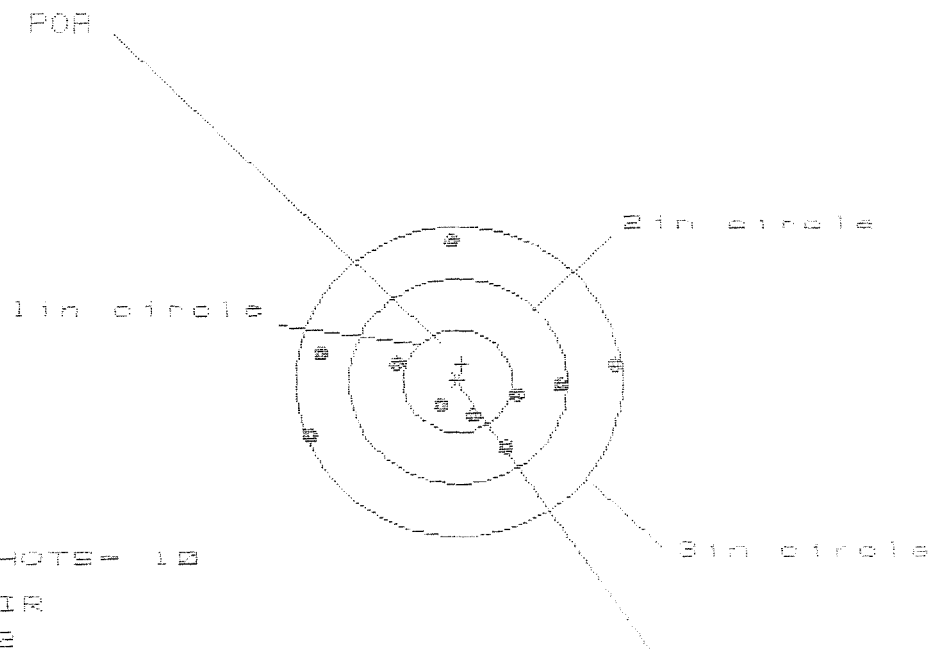

OF SHOTS = 10

IN CIR

1in = 2

2in = 6

3in = 2

MEAN = 0.070

VAR = 2.014

GB = 0.853


CENTROID #

PATTERN #			
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.462	1.306	.897
MINIMUM X	-1.408	-1.383	-1.220
MAXIMUM Y	1.345	1.283	1.293
MINIMUM Y	-.669	-.731	-.721
CENTROID X	-.038	.118	-.045
CENTROID Y	-.170	-.108	-.112
POA TO CENTROID in.	.175	.160	.126
MIN RADIUS	.277	.351	.317
MEAN RADIUS	.898	.825	.760
MAX RADIUS	1.514	1.399	1.293
HORIZONTAL SPREAD	2.870	2.689	2.117
VERTICAL SPREAD	2.014	2.014	2.014
EXTREME SPREAD	2.953	2.692	2.143
NUMBER IN ONE INCH CIRCLE	=	2	
NUMBER IN TWO INCH CIRCLE	=	6	
NUMBER IN THREE INCH CIRCLE	=	9	

17 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/0823274

CENTERFIRE PATTERNS # 2

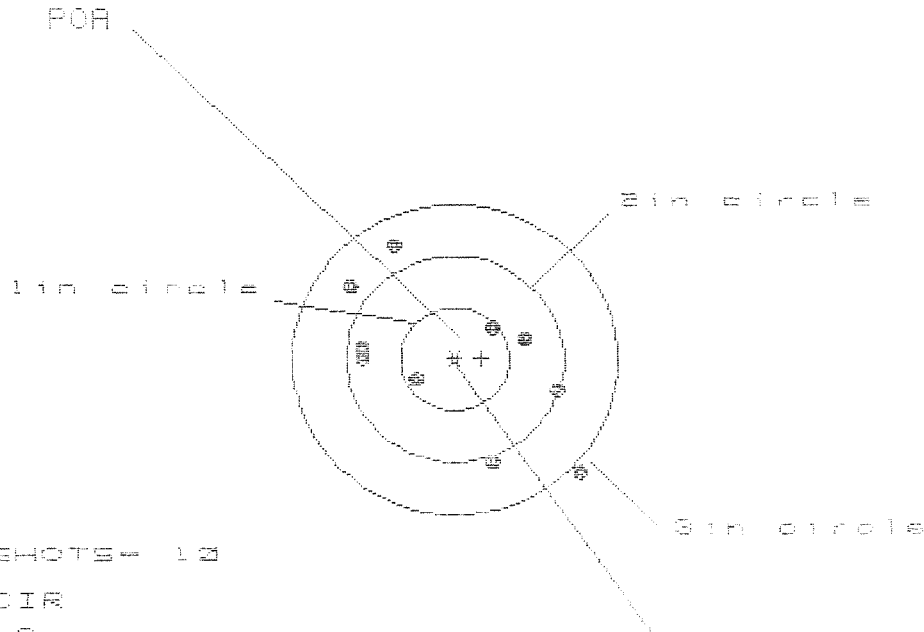

OF SHOTS = 10

IN CIR

1 in = 2

2 in = 6

3 in = 8

HE = 2.047

VS = 2.163

GS = 2.778


CENTROID #

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.141	1.070	1.011
MINIMUM X	-1.905	-1.779	-1.838
MAXIMUM Y	1.084	.964	.731
MINIMUM Y	-1.079	-1.091	-1.971
CENTROID X	-.245	-.371	-.312
CENTROID Y	-.007	.113	-.007
POR TO CENTROID in.	.245	.388	.312
MIN RADIUS	.413	.384	.352
MEAN RADIUS	.923	.833	.798
MAX RADIUS	1.571	1.209	1.112
HORIZONTAL SPREAD	2.047	1.849	1.849
VERTICAL SPREAD	2.163	2.055	1.702
EXTREME SPREAD	2.778	2.282	2.141
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		6	
NUMBER IN THREE INCH CIRCLE =		9	

17 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/08285874

CENTERFIRE PATTERNS # 3

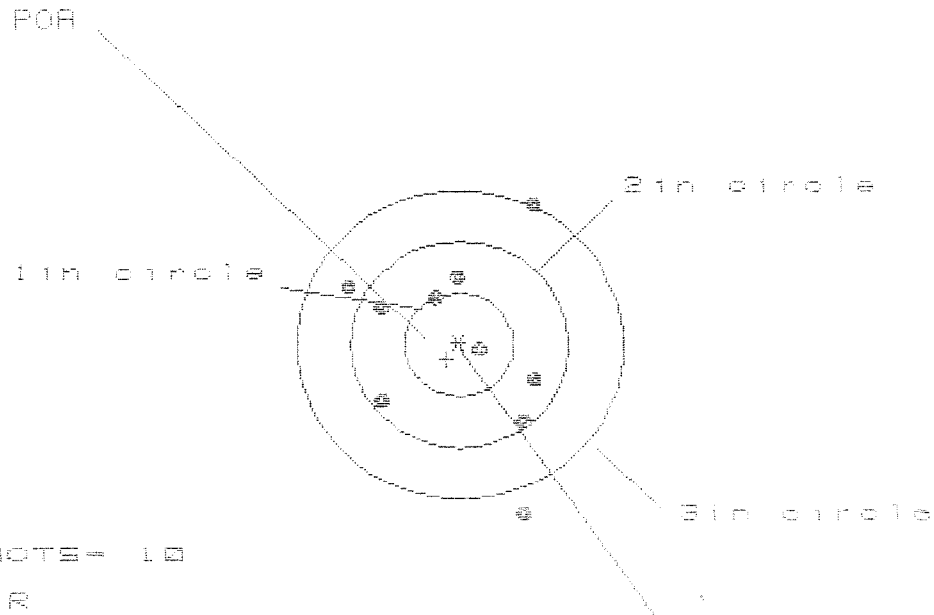

OF SHOTS = 10

IN CIR

1 in = 2

2 in = 7

3 in = 8

HSI = 1.E444

VS = 2.841

GS = 2.842

CENTROID +

PATTERN #	10	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.686	.733	.920
MINIMUM X	-.978	-.911	-.819
MAXIMUM Y	1.347	1.179	.584
MINIMUM Y	-1.594	-.911	-.765
CENTROID X	.118	.051	-.041
CENTROID Y	.140	.317	.171
POR TO CENTROID in.	.183	.321	.176
MIN RADIUS	.137	.277	.299
MEAN RADIUS	.895	.784	.712
MAX RADIUS	1.785	1.381	1.066
HORIZONTAL SPREAD	1.644	1.644	1.639
VERTICAL SPREAD	2.941	2.081	1.349
EXTREME SPREAD	2.942	2.354	2.023
NUMBER IN ONE INCH CIRCLE =	2	2	2
NUMBER IN TWO INCH CIRCLE =	7	7	7
NUMBER IN THREE INCH CIRCLE =	8	8	8

17 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/08225274

CENTERFIRE PATTERNS

4

POA

1in circle

2in circle

3in circle

OF SHOTS = 10

IN CIR

1in = 1

2in = 5

3in = 9

CENTROID *

HE = 2.277

VE = 2.787


GE = 3.009

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.844	.888	.801
MINIMUM X	:	-1.433	-1.389	-1.476
MAXIMUM Y	:	1.259	1.089	1.173
MINIMUM Y	:	-1.528	-1.113	-1.977
CENTROID X	:	.021	-.023	.064
CENTROID Y	:	.124	.294	.158
POA TO CENTROID in.	:	.126	.295	.170
MIN RADIUS	:	.489	.448	.435
MEAN RADIUS	:	1.054	.985	.927
MAX RADIUS	:	1.578	1.426	1.488
HORIZONTAL SPREAD	:	2.277	2.277	2.277
VERTICAL SPREAD	:	2.787	2.202	2.150
EXTREME SPREAD	:	3.009	2.712	2.587
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		9	

17 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C8225274

CENTERFIRE PATTERNS # 5

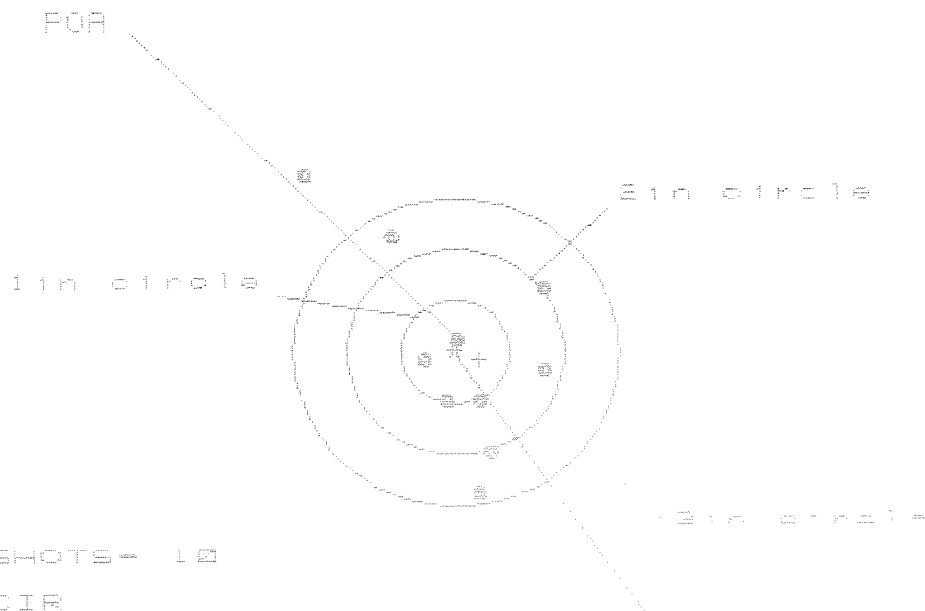

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 6

3 in = 2

HS= 2.201

VS= 3.095

GS= 3.446

CENTROID *

PATTERN #	10	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.862	.713	.716
MINIMUM X	-1.339	-.758	-.755
MAXIMUM Y	1.697	1.341	1.109
MINIMUM Y	-1.398	-1.269	-.913
CENTROID X	-.217	-.068	-.071
CENTROID Y	.073	-.116	.036
FOR TO CENTROID in.	.229	.134	.080
MIN RADIUS	.171	.320	.234
MEAN RADIUS	.927	.756	.705
MAX RADIUS	2.162	1.540	1.499
HORIZONTAL SPREAD	2.201	1.471	1.471
VERTICAL SPREAD	3.095	2.550	2.192
EXTREME SPREAD	3.446	2.668	2.289
NUMBER IN ONE INCH CIRCLE =	2	2	2
NUMBER IN TWO INCH CIRCLE =	6	6	6
NUMBER IN THREE INCH CIRCLE =	9	9	9

ESTIMATING REPORT

COMMENTS

ORDER
R 97-11816

CUSTOMER ORDER NO.

JJM

DATE RECEIVED 06/24/97	DATE OPENED 06/24/97	DATE CODE	SERIAL NUMBER C6225274	NEW SERIAL NUMBER	MODEL AND GRADE 700 7.62	NATO
ACCESSORIES						

FROM:

TRANSPORTATION OFFICER USAIC
ATTN ATZB-LOT-MM
BLDG 280
FORT BENNING GA 31905

SHIP TO:

TRANSPORTATION OFFICER USAIC
ATTN ATZB-LOT-MM
BLDG 280
FORT BENNING GA 31905

CUST NO:161641 C.O.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

FROM DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

PARTS

COMMENTS

Barrel
Stock

96003
96018

Repower Coat Trigger Guard
Assy, Front & Rear Sight Bases
Reticle Scope Base & Swivel
Studs

REPAIRMAN RW	PROOF ✓	CLEAN ✓	TEST ✓	TARGET ✓	PATTERN
GALLERY TESTER JW	DATE 6-27-97	DATE 8-18-97	DATE 8-26-97	DATE 8-26-97	DATE

OFFICE COPY

RD6925 REV. 6/96

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

M2400163149

21 DAY TURN - AROUND

New
Barrel
&
Stock

M-24

CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO. C6225274

LOG IN DATE: / /		DATE	INIT.
INSPECT & VERIFY:			
OP. #	OP. NAME		
550	DIS-ASSEMBLE GUN		
560 A	RE-BARREL AT CUSTOM SHOP		
B	DRILL & TAP		
C	POLISH		
575	ASSEMBLE		
600	PROOF	6-27-97	A
605	CHECK HEADSPACE	6-27-97	A
610	DIS-ASSEMBLE		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY	8-18-97	RW
B	TRIGGER PULL TEST		
C	SAFETY ON FORCE		
D	SAFETY OFF FORCE		
E	FIRING PIN INDENT		
640	TARGET	8-26-97	RW
655	FINAL INSPECT		
660	PACK		

QAR INSPECTION

SHIP DATE

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6225274
26 Aug 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.1472
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0392
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .15233

THE AMR FOR THIS RIFLE IS: 1.168

CENTROIDAL DISTANCES

Ø TO	1	.325853
1 TO	2	.174011
1 TO	3	.234047
1 TO	4	.217332
1 TO	5	.309511

1 2
3+ <----POA
5


PATTERN #: 1

POA TO CENTROID: .325
 MIN RADIUS : .465
 MEAN RADIUS : 1.347
 MAX RADIUS : 2.628
 CENTROID X : -.312
 CENTROID Y : .094

26 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225274

CENTERFIRE PATTERN # 1

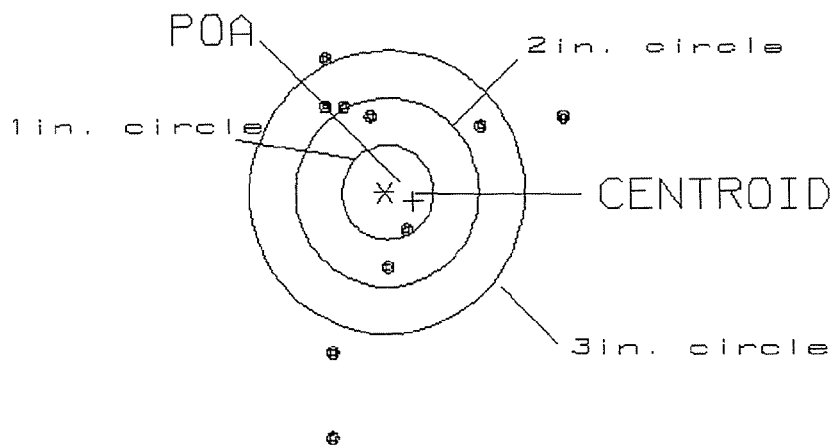

OF SHOTS= 10

IN CIRCLE

HS= 2.59
 VS= 4.01
 GS= 4.16


1
 4
 6

PATTERN #: 2
 POA TO CENTROID: .168
 MIN RADIUS : .167
 MEAN RADIUS : 1.272
 MAX RADIUS : 2.239
 CENTROID X : -.138
 CENTROID Y : .096

26 Aug 1997

FILE:/Hqbasic/Accuracy/Patterning/Centerfire_Patt/C6225274

CENTERFIRE PATTERN # 2

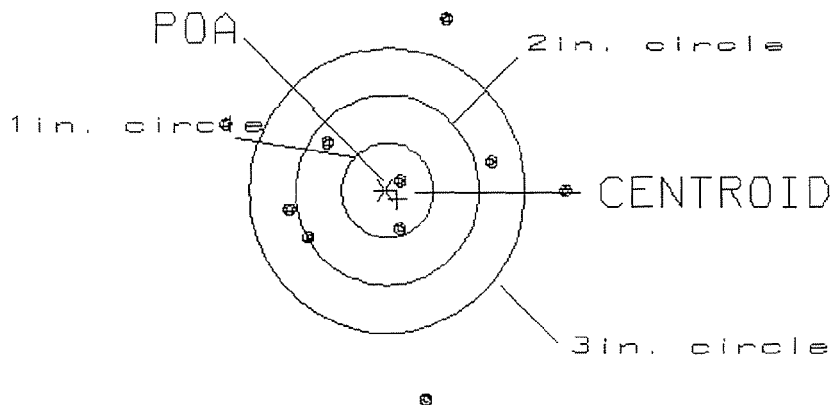

OF SHOTS= 10

IN CIRCLE

HS= 3.74
 VS= 4.04
 GS= 4.04


2
 3
 6

PATTERN #: 13
 POA TO CENTROID: .092
 MIN RADIUS : .349
 MEAN RADIUS : 1.331
 MAX RADIUS : 2.235
 CENTROID X : -.085
 CENTROID Y : .037

26 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225274

CENTERFIRE PATTERN # 3

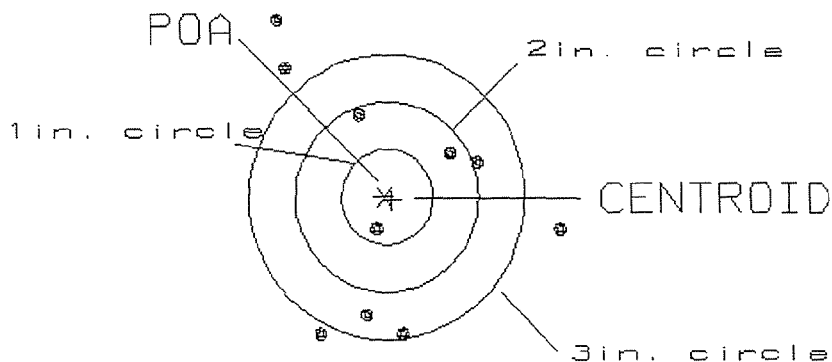

OF SHOTS= 10

IN CIRCLE

HS= 3.09
 VS= 3.35
 GS= 3.79


1
 4
 6

PATTERN #: 4
 POA TO CENTROID: .142
 MIN RADIUS : .506
 MEAN RADIUS : 1.126
 MAX RADIUS : 2.052
 CENTROID X : -.095
 CENTROID Y : .106

26 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225274

CENTERFIRE PATTERN # 4

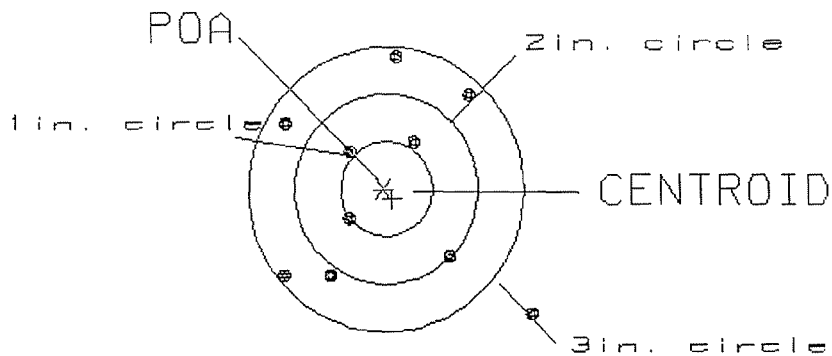

OF SHOTS= 10

IN CIRCLE

HS= 2.74
 VS= 2.67
 GS= 3.40


0
 4
 9

PATTERN #: 5
 POA TO CENTROID: .173
 MIN RADIUS : .061
 MEAN RADIUS : .762
 MAX RADIUS : 1.520
 CENTROID X : -.106
 CENTROID Y : -.137

26 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225274

CENTERFIRE PATTERN # 5

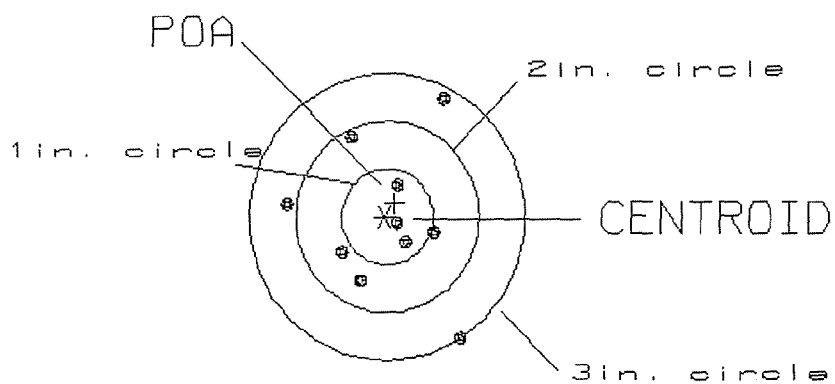

OF SHOTS= 10

IN CIRCLE

HS= 1.91
 VS= 2.57
 GS= 2.57

3
 7
 9

Final Inspection

Sn: C6225774

DATE REC'D: 6-24-97

DATE RET'D:

Auditor: RW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☐ Scope☐ Scope Rings☐ Mounting Screws☒ Mounting Base☒ Screws☐ Finish☐ Looseness☐ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ Scope Case☐ IRON SIGHTS☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments: