| Summary Total 7 | est + Proof Failures | 770 | | | | | | |
|---------------------------|-----------------------|-----------------|-----------|------------|------------|-----------|-----------|----------------------|
| | | 73 | | | | | | |
| | Overall Reject Rate: | 9.48 | | | | | | |
| Proof | Shot: | 396 | 87 | 178 | 28 | I | 53 | |
| Proof | Rejected: | 0 | 1 | 0 | 0 | 0 | 0 | 0 |
| | Percent | 1999000.cz | 1.1 | 0.0 | 0.0 | _ | 0.0 | |
| | Shot | 445 | 50 | 148 | 28 | 2 | 19 | |
| Test | Rejected: Percent | 14 3.1 | 5 10.0 | 27 18.2 | 0 0.0 | 1 50.0 | 4 21.1 | 0 |
| | Shot; | GERRICA, SERVIC | 10.0 3 | | | 1.0 | | 1 |
| Target | Shot: Rejected: | <u>51</u> | 0 | 14 0 | 28 | 0 | 2 | 0 |
| Target | Percent: | | 0.0 | 0.0 / | 0.0 | • | 0.0 | Ū |
| CODE MALFUN | CTION INDEX | 780 ADL | 700 BDL | 700 55 | 700 Police | 700 ML | Model 7 | Model 7 Stainless |
| | | | | | | | | |
| AB Action binds | | | | | | | 200. | |
| BABS Bulge at body shou | ılder | | | | | | | |
| BAC Burr at chamber | | 1 | | | | | 3 | ing and |
| BBMA BBL-to-bolt misalig | nment | | | | | | | |
| 3B Bolt binds/catches | | 5 | | 1 | | 1 | | |
| BOIt catches on bo | It stop | | | | | | | |
| BCOF Bolt catches on fol | lower | | | | | 4 | | |
| BC Blows cases | | | | | | | | |
| BHR Bolt hits receiver | | | | | | | | |
| HS Bolt plug hits safet | y switch | | | | | | | |
| BLOP Bar lock or disconr | ector out of position | | | | | | | |
| BLSO Barrel lug shot off | | | | | | | | |
| BOIt pulls out | | | | | | | | |
| Bolt stems shell in | magazine | | | | | | | |
| BWCD Bolt won't cam dov | 'n | | | | | | | |
| BWCFM Bolt won't close ov | er full magazine | | 3 | 2 | | | | |
| Case dented | | | | | | | | |

| M Can't lack inagistive Image: Second S | CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 SS | 700 Police | 700 ML | Model 7 | Model 7 Stainless |
|---|------|--------------------------------------|---------|---------|------------|------------|--------------|------------------------|----------------------|
| Dutoff Image: Second Secon | СН | Closes hand | | 1 | | | | | |
| Cotta sim | | Can't laod magazine | | | | | | | |
| Cases swell Common or gouget Comm | co 🔌 | Cut-off | | | | | | | |
| OG Chamber tom or gougett Image: Second | CR | Cuts rim | | | | | | | |
| P Creepy trigger pull Image: Second Sec | cs | Cases swelt | | | | | | | |
| VSB Cams wrong side of action bar Image: Cams wrong side of action bar Image: Cams wrong side of action bar Image: Cams wrong side of action bar B Doesn't blow back Image: Cams wrong side of action bar Image: Cams wrong side of action bar Image: Cams wrong side of action bar S Double click in stafety switch Image: Cams wrong side of action bar Image: Cams wrong side of action bar Image: Cams wrong side of action bar T Double click in trigger Image: Cams wrong side of action bar Image: Cams wrong side of action bar Image: Cams wrong side of action bar T Double click in trigger Image: Cams wrong side of action bar Image: Cams Image: Cams | CTOG | Chamber torn or gouged | | | às. | | | | |
| Searce Carlins wrong side of action bar Carlins wrong side of action bar Carlins wrong side of action bar B Doesn't blow back Carlins wrong side of action bar Carlins wrong side of action bar S Double click in safety switch Carlins wrong side of action bar Carlins wrong side of action bar S Double click in safety switch Carlins wrong side of action bar Carlins wrong side of action bar T Double click in trigger Carlins wrong side of action bar Carlins wrong side of action bar U Doesn't close-up Carlins wrong side of action bar Carlins wrong side of action bar U Doesn't eloct Carlins wrong side of action bar Carlins wrong side of action bar Carlins wrong side of action bar U Doesn't eloct bar Carlins wrong side of action bar Carlins wrong side of action bar Carlins wrong side of action bar U Doesn't feed up Carlins wrong side of action bar Carlins wrong side of acti | CTP | 1111 A. 1997 | | | | | | | |
| S Double click in safety switch Image: Click in trigger Ima | CWSB | Cams wrong side of action bar | | | | 4 | Į | | |
| Same Double Click in startey switch Image: Same Same Same Same Same Same Same Same | DBB | Doesn't blow back | | | | | | | |
| UDoesn't close-upImage: Close sectorImage: | DCS | Double click in safety switch | | | 7 Million. | | | | |
| Doesn't ejectImage: Section of the sector of th | DCT | Double click in trigger | | | | | | | |
| LDoesn't eject live roundImage: Construction of the | | Doesn't close-up | | | | | | | |
| B Doesn't feed back Image: Construct of the found Image: Construct of the found U Doesn't feed up Image: Construct of the found Image: Construct of the found O Doesn't lock-up Image: Construct of the found Image: Construct of the found U Doesn't extract Image: Construct of the found Image: Construct of the found D Doesn't extract live round Image: Construct of the found Image: Construct of the found S Extractor drops shell Image: Construct of the found Image: Construct of the found CR Empty shell catches receiver Image: Construct of the found Image: Construct of the found S Extractor stems shell Image: Construct of the found Image: Construct of the found Image: Construct of the found S Extractor stems shell Image: Construct of the found Image: Construct of the found Image: Construct of the found S Extractor stems shell Image: Construct of the found Image: Construct of the found Image: Construct of the found Fires automatically Image: Construct of the found | DE | Doesn't eject | | | | | *///// | | ×. |
| UDeesn't leed upImage: selection of the | | Doesn't eject live round | | | | | 100000000000 | 1 - <i>80</i> 000 - 11 | |
| ODoesn't lock open (after last shell)Image: Construct open (after last shell)Image: Construct open (after last shell)UDoesn't lock-upImage: Construct open (after last shell)Image: Construct open (after last shell)Image: Construct open (after last shell)Dead safeImage: Construct open (after last shell)Image: Construct open (after last shell)Image: Construct open (after last shell)Image: Construct open (after last shell)Doesn't extractImage: Construct open (after last shell)Image: Construct open (after last shell)Image: Construct open (after last shell)Image: Construct open (after last shell)SExtractor drops shellImage: Construct open (after last shell)Image: Construct open (after last shell)Image: Construct open (after last shell)Image: Construct open (after last shell)SExtractor stems shellImage: Construct open (after last shell)Image: Construct open (after last shell)Image: Construct open (after last shell)GExtractor stems shellImage: Construct open (after last shell)Image: Construct open (after last shell)Image: Construct open (after last shell)GExtractor stems shellImage: Construct open (after last shell)Image: Construct open (after last shell)Image: Construct open (after last shell)GExtractor stems shellImage: Construct open (after last shell)Image: Construct open (after last shell)Image: Construct open (after last shell)GExtractor stems shellImage: Construct open (after last shell)Image: Construct open (after last shell)Image: Construct open (after last shell)G | DFB | Doesn'i feed back | | | | | 1 | | 7.2.2.2.2.7. |
| UDoesn't lock-upImage: Construct of the struct of th | | Doesn't feed up | | | | | | 10000000 | ////// |
| O Deest HockupO Deest HockupO Deest HockupO Deest HockupDead safeIIIIDoesn't extractIIIILDoesn't extract live round1IIISExtractor drops shellIIIIBEjector sticks backIIIIICREmpty shell catches receiverIIIIISExtractor stems shellIIIIIFires automaticallyIIIIII | | Doesn't lock open (after last shell) | | | | | 2 | | |
| Doesn't extractImage: Construct of the stractImage: Construct | | Doesn't lock-up | | | | | | | |
| LDoesn't extract live round1IIIISExtractor drops shellIIIIIBEjector sticks backIIIIICREmpty shell catches receiverIIIIISExtractor stems shellIIIIIFires automaticallyIIIIII | | Dead safe | | | | | | 1 | |
| SExtractor drops shellImage: Solution of the shell< | | Doesn't extract | | | | | | | |
| BEjector sticks backImage: Sticks back <td></td> <td></td> <td>1</td> <td></td> <td></td> <td></td> <td>ļ</td> <td></td> <td></td> | | | 1 | | | | ļ | | |
| CR Empty shell catches receiver Image: CR in the shell catches receiver Image: CR | | Extractor drops shell | | | | | | | |
| S Extractor stems shell Image: Constraint of the stems shell Fires automatically Image: Constraint of the stems shell | | | | | | | | | |
| Fires automatically | | Empty shell catches receiver | | | | | | | |
| | | | | | | | | | |
| Follower binds | | | | | | | ļ | | |
| | В | Follower binds | | | | | l | | |



*#@};

| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 SS | 700 Police | 700 ML | Model 7 | Model 7 Stainless |
|------|-----------------------------------|---------|---------|--------|------------|--------|---------|----------------------|
| c | Fails to connect | | | | | | | |
| СВ | Fore-end cracked or broken | | | | | | | |
| D 👘 | Fellows-down | | | | | | | |
| F | Fails to fire | | | | | | | |
| -P | Flat firing page | | | | | | | |
| os | Fires on safe | | | | | | | |
| PHB | Firing pin hits bbl | | | | | | | |
| PHI | Firing pin hits inside rim | | | | éten. | | | |
| PO | Floor plate opens | | | | | | | |
| рон | Floor plate opens hard | | | | | | | |
| SR | Fires when safe is released | | | | | | | |
| T | Follower tips | 1 | | | | | | |
| CSO | Gas cyl shot off | | | **** | | | | eta. |
| BL | Heavy bolt lift | 3 | | 18 | | | | |
| MSC | Heading mismatch-steps on case | | | | | | | |
| PA | High pressure ammo | | | | | | | |
| UR | Hard under rail | | | | | | | |
| s | Jumps cartridge | | | | | | | |
| M | Jumps magazine | | | | | | | |
| > | Jars off | | | | | | | |
| 3 | Light blow | | | | | | | |
| AH | Magazine assembles hard | | | | | | | |
| CW | Magazine capacity wrong | | | | | | | |
| FA | Misfires (ammo) | | | | | | | |
| FOP | Magazine follower out of position | | | | | | | |
| L | Magazine loose | | | | | | | |
| H | Magazine loads hard | | | | | | | |




| CODE | | 700 ADL | 700 BDL | 700 SS | 700 Police | 700 ML | Model 7 | Model 7 |
|---------------------|-------------------------------|---------|---------|-----------------------|--|--------|----------|-----------|
| MRH | | | | | | | | Stainless |
| икп Ж | Magazine removes hard | | | | | | | |
| <u></u> | Opens hard | | | | | | | |
| R | Overnities | | | 1 | | | | |
| + | Puils hard | | 280 | 2 2 2 2 2 | | | | |
| 1 | | | | | | | | |
| SM | Proof stamp missing | | | | | | | |
| BOC | Rings and bulges on case | | | | | | | |
| DW | (Action) release doesn't work | | | | (| | | |
| с | Rings in chamber | | | 4 | | | | |
| S | Ring in sholder | ~ | | | | | | |
| 3 | Rim srem | | | | | | | |
| BC | Stems bottom chambers | | | | | | | |
| 3E | Stems bbl extension | | | | | | | <i>.</i> |
| в | Stock cracked or broken | | | | | | | |
| х | Shell catches | | | | | | | |
| I | Short indent | | | | a 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 | | | |
| | Stems incline | | | | | | | |
| C | Stems in chamber | | | | | | | |
| | shaves lead | | | | | | | |
| _C | Stems left side of chamber | | | | | | | |
| NOC | Stretch marks on case | | | | | | | |
| R | Stem over-ride | | 1 | | | | | |
| | Stems port | | | | | | | |
| | Shoulder rough | | | | 2 | I | 1 | |
| RC 25 | Stems right side of chamber | | | | <u>.</u> | I | 3 | |
| งเต | Specific rings in chamber | | | | | • | <u>ا</u> | |
| 00 | Surface scratches on case | | | | | | | |


| CODE | | 700 ADL | 700 BDL | 700 SS | 700 Police | 700 ML | Model 7 | Model 7 Stainless |
|--------|---|---------|---------|---|------------|--------|---------|----------------------|
| STC | Stems top chamber | | | | | | | |
| SWE | Safety switch works too easily | | | | | | | |
| SWH | Safety switch works too hard | | | | | | | |
| sww | Safety ewitxh won't work | | | | | ĺ | | |
| TD | Tips down | | | | | 1 | | |
| ти | Tips up | | | | | | | |
| TWP | Trigger won't pull | | | | | | | |
| TWR | Trigger won't retract | | | | éten. | | | |
| UNCN-T | Uncoded | | | 1000 - 1000 - 1000 - 1000 - 1000 - 1000 - 1000 - 1000 - 1000 - 1000 - 1000 - 1000 - 1000 - 1000 - 1000 - 1000 - | | | | |
| ХН | Extracts hard | ** .// | | l Maria | | | | |
| | | | | | | | | |
| HI | High | | | | | | | |
| LO | Low | | | | | | | <i>w.</i> |
| LEFT | Left | | | | | | | |
| RIGHT | Right | | | | | | | |
| DG | Doesn't Group | | | | | | | |
| FSST | Front sight tipped | | | | | 2 | | |
| RS⊺T | Rear sight tipped | | | | | | | |
| RSBR | Rear sight base raised | | | | | | | |
| FSTR | Front sight raised | | | | | | | |
| FSTL | Front sight loose | | | | | | | |
| RSTL | Rear sight loose | | | | | | | |
| MGPT-G | Missing parts at target | | | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | | | |
| | | | | | | | | |
| AI-P | Assembly incompleye at proof | | | | | Ī | | |
| BBB | Barrel bracket cracked or broken at proof | | | | | | | |





| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 SS | 700 Police | 700 ML | Model 7 | Model 7 Stainless |
|--------|-----------------------------------|---------|---------|--------|------------|--------|---------|----------------------|
| С-Р | Blows cases at proof | | | | | | | |
| EB-P | Barrel extension broken at proof | | | | | | | |
| LP-P | Blanked primer at proof | | | | | | | |
| BLSO-P | Barrel lug shet off at preof | | | | | Î | | |
| P-P | Blown primer al proof | | | | | | | |
| BS-P | Barrel split at proof | | | | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | | | | |
| ESB-P | Ejector sticks back at proof | | | | Stor. | | | |
| CB-P | Fore-end cracked at proof | | | | | | | |
| ESO-P | Fore-end shot off at proof | | | | | | | |
| F-P | Fails to fire at proof | | | | | | | |
| SCSO-P | Gas cylinder shot off at proof | | | | | | | |
| ISI-P | Magnaflux stamp illegible on bbl | | | | | | | |
| ISM-P | Magnaflux stamp missing on bbl | | | | | | | |
| PP-P | Pierced primer at proof | | | | | | | |
| SCB-P | Stock cracked or broken at proof | | | | | | | |
| JNCM-P | Uncoded proof malfunctions | | 1 | | | | | |

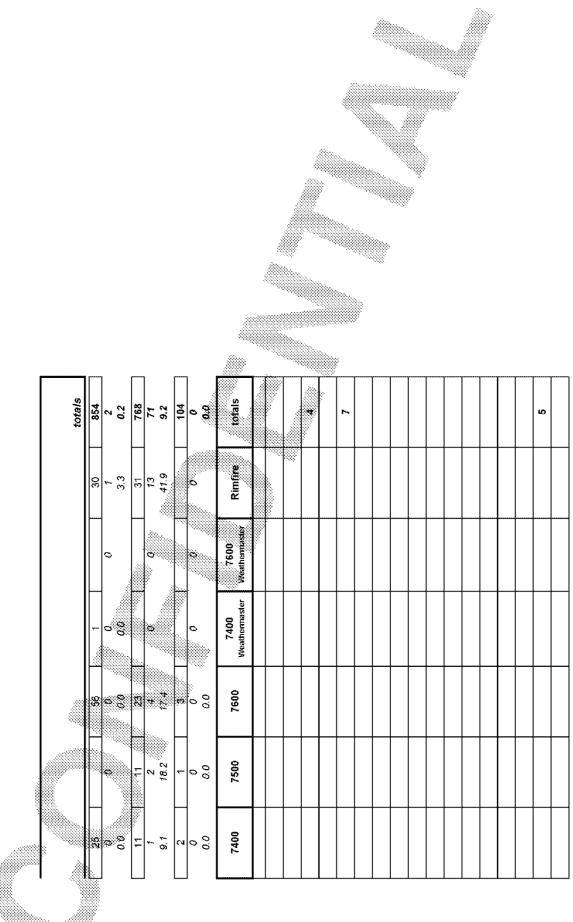



Subject to Protective Order - Williams v. Remington

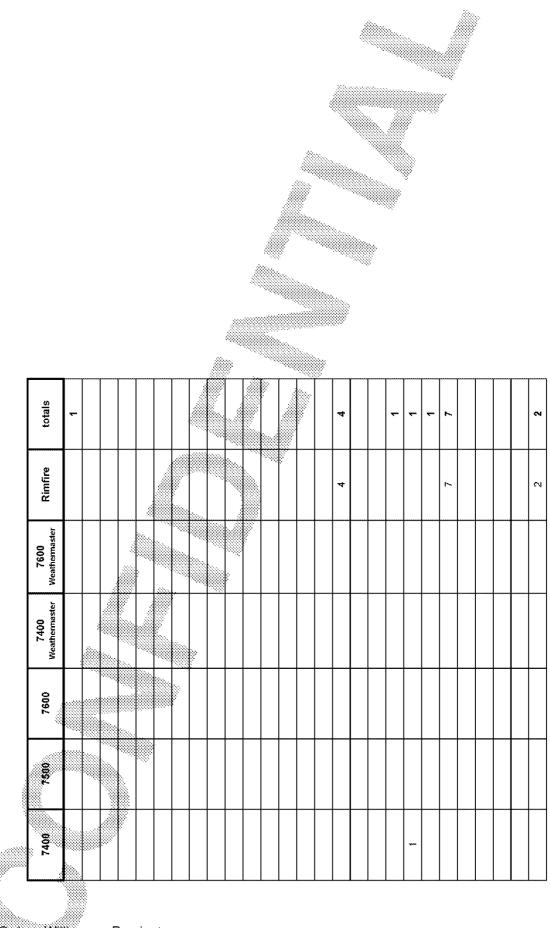

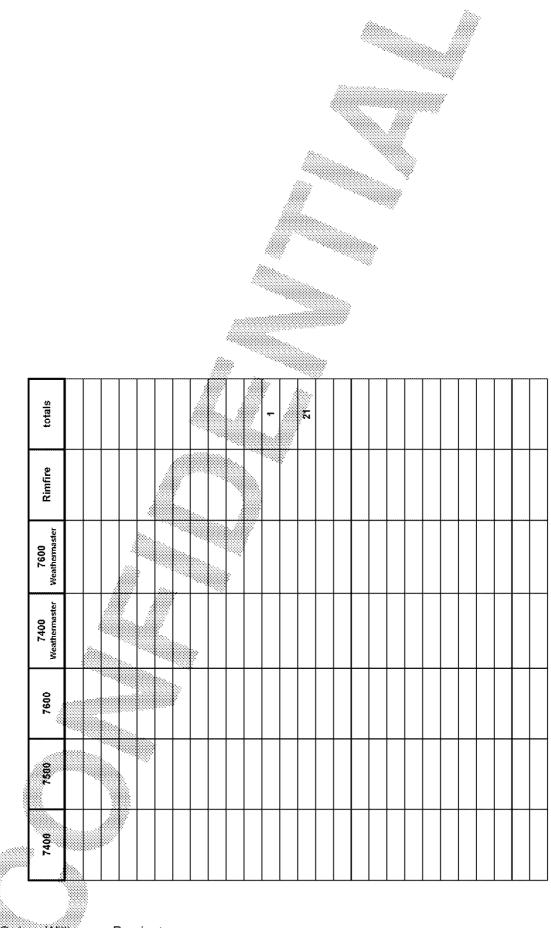

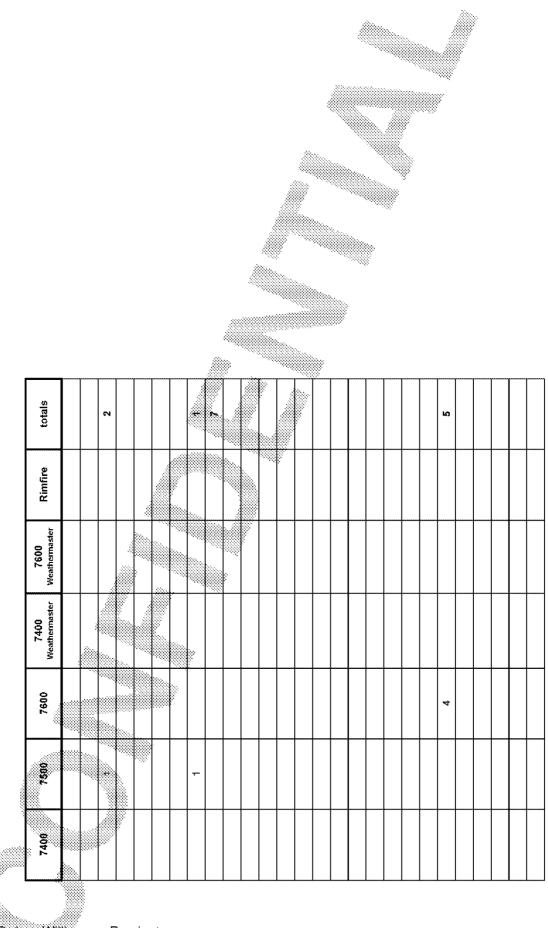

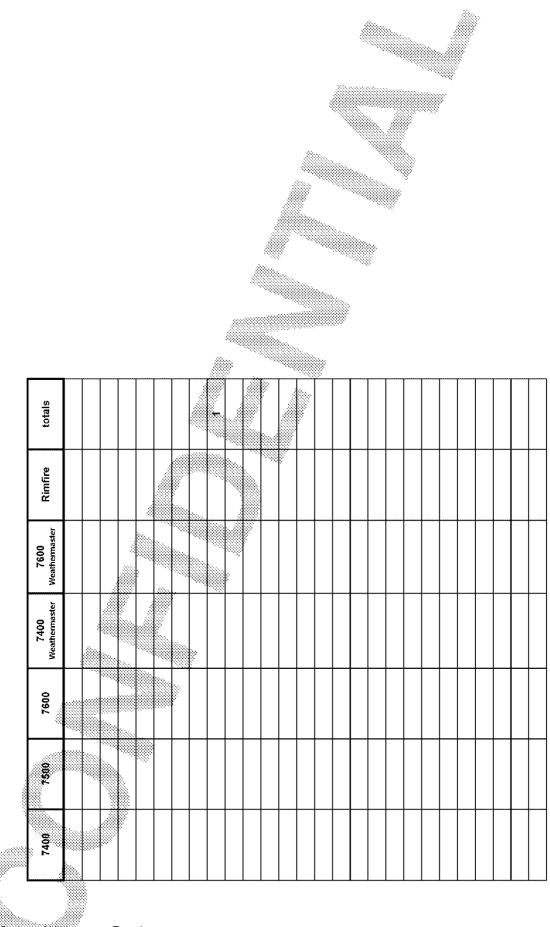

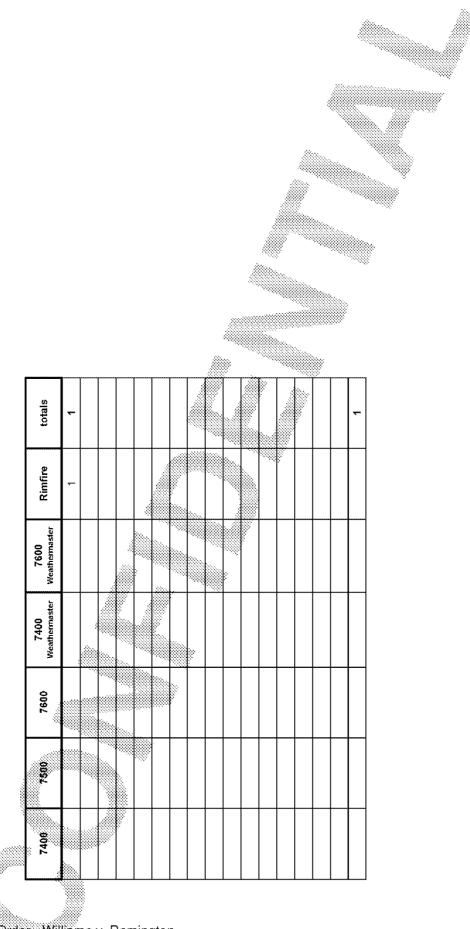

Subject to Protective Order - Williams v. Remington

| Summary | Total Test + Proof Fai | | 770 | | | | | | • |
|---------|---------------------------------------|-------------------------------|-----------|---------|------------|--------|----------|-----------|---|
| | Total Reje Overall Reject | | 73 .48 | | | | | | |
| | | Shot 396 | 87 | 178 | 28 | | 53 | 1 | - |
| | Proof Rej | ected. | 1 | 0 | 0 | 0 | 0 | 0 | 1 |
| | | rcent 0.0 | 1.1 | 0.0 | 0.0 | | 0.0 | | - |
| | | Shot. <u>445</u> ected: 14 | 50 | 148 | 28 | 2 | 19 4 | 0 | |
| | | rcent: 31 | 10.0 | 18.2 | 0.0 | 50.0 | 21.1 | , v | |
| | | Shot. 51 | | 14 | 28 | _ | 2 | _ |] |
| | | ečted: 0 vrcent: 0.0 | 0 0,0 | 0 00 | 0 00 | 0 | 0 0.0 | 0 | |
| CODE | | | | | | 700 ML | | Model 7 | 1 |
| CODE | MALFUNCTION INDEX | 700 AD | L 700 BDL | 700 58 | 700 Police | FOU ML | Model 7 | Stainless | |
| | | | | | | | | | - |
| AB | Action binds | | | | | | | | |
| BABS | Bulge at body shoulder | | | | | | | | |
| BAC | Burr at chamber | 1 | | | | | 3 | | |
| BBMA | BBL-to-bolt misalignment | | | | | | | | |
| BB | Bolt binds/catches | 5 | | 1 | | 1 | | | |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | | | | | | | |
| BC | Blows cases | | | | | | | | |
| BHR | Bolt hits receiver | | | | | | | |] |
| BHS | Bolt plug hits safety switch | | | | | | | | 🧠 |
| BLOP | Bar lock or disconnector out of posit | ion | | | | | | |] |
| BLSO | Barrel lug shot off | | | | | | | | |
| BPO | Bolt pulls out | | | | | | | | 1 |
| BSSM | Bolt stems shell in magazine | | | | | | | | 1 |
| BWCD | Bolt won't cam down | | | | | | | | |

| BWCFM | Bolt won't close over full magazine | | 3 | 2 | | | |
|-------|--------------------------------------|-----------|-----|------|--|------|--|
| CD | Case dented | | | | | | |
| СН | Closes hard | | 1 | | | | |
| CLM | Can't laod magazine | | | | | | |
| co | Cut-off | | in. | | | | |
| CR | Cuts rim | | | | | | |
| CS | Cases swell | | | | | | |
| CTOG | Chamber torn or gouged | | | | | | |
| СТР | Creepy trigger pull | | | | | | |
| CWSB | Cams wrong side of action bar | | | | | | |
| DBB | Doesn't blow back | · · · · · | | | | | |
| DCS | Double click in safety switch | | | | | 80x. | |
| DCT | Double click in trigger | | | | | | |
| DCU | Doesn't close-up | | | | | | |
| DE | Doesn't eject | | | 1100 | | | |
| DEL | Doesn't eject live round | | | | | | |
| DFB | Doesn't feed back | | | | | | |
| DFU | Doesn't feed up | | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | | |
| DLU | Doesn't lock-up | | | | | ž. | |
| DS | Dead safe | | | | | 1 | |
| хo | Doesn't extract | | | | | | |
| DXL | Doesn't extract live round | 1 | | | | | |
| EDS | Extractor drops shell | | | | | | |
| ESB | Ejector sticks back | | | | | | |
| ESCR | Empty shell catches receiver | | | | | | |
| ESS | Extractor sterns shell | | | | | | |




| Protective Order | | |
|----------------------|------|-----------------|
| | FA | Fires automat |
| ē | FB | Follower bind |
| ns 🐄 | FC | Fails to come |
| Illiams v. Remingtor | FCB | Fore-end crac |
| ren | FD | Follows-down |
| nin | FF | Fails to fire |
| gto | FFP | Flat firing pin |
| D | FOS | Fires on safe |
| | FPHB | Firing pin hits |
| | FPHI | Firing pin hits |

Subject to

| FA 🥼 | Fires automatically | | | | | | | |
|------|-----------------------------------|---|-------|----|--|------|--|-----------|
| FB | Follower binds | | | | | | | |
| FC | Fails to connect | | | | | | | |
| FCB | Fore-end cracked of broken | | | | | | | |
| FD | Follows-down | | itte. | | | | | |
| FF | Fails to fire | | | | | | | |
| FFP | Flat firing pin | | | | | | | |
| FOS | Fires on safe | | | | | | | |
| FPHB | Firing pin hits bbl | | | | | | | |
| FPHI | Firing pin hits inside rim | | | | | | | |
| FPO | Floor plate opens | | | | | | | |
| FPOH | Floor plate opens hard | | | | | 8eo. | | |
| FSR | Fires when safe is released | | | | | | | |
| FT | Follower tips | 1 | | | | | | |
| GCSO | Gas cyl shot off | | | | | | | |
| HBL | Heavy bolt lift | 3 | | 18 | | | | |
| HMSC | Heading mismatch-steps on case | | | | | | | |
| HPA | High pressure ammo | | | | | | | William. |
| HUR | Hard under rail | | | | | | | |
| JCS | Jumps cartridge | | | | | ; | | |
| JM | Jumps magazin e | | | | | | | |
| JO | Jars off | | | | | | | |
| LB | Light blow | | | | | | | William . |
| MAH | Magazine assembles hard | | | | | | | |
| MCW | Magazine capacity wrong | | | | | | | |
| MFA | Misfires (ammo) | | | | | | | |
| MFOP | Magazine follower out of position | | | | | | | |

| Subject to Protective Order | |
|---------------------------------------|-------|
| N. | ML |
| a a a a a a a a a a a a a a a a a a a | MLH |
| ns 🐃 | MRH 🛞 |
| | ОН |
| fen | OR |
| nin | PH |
| ams v. Remington | PSI |
| | PSM |
| | PBOC |


| ML | Magazine loose | | | | | |] |
|------|-------------------------------|---|-------|-------|--|---|----|
| MLH | Magazine loads hard | | | | | | |
| MRH | Magazine removes hard | | | | | | |
| он | Opens hard | | | | | | |
| OR | Over-ndes | | itte. | 1 | | |] |
| PH | Pulls hard | | | | | |] |
| PSI | Proof stamp illegible | | | - | | | |
| PSM | Proof stamp missing | | | | | | |
| RBOC | Rings and bulges on case | | | | | | |
| RDW | (Action) release doesn't work | | | | | | |
| RIC | Rings in chamber | 3 | | 4 | | | |
| RIS | Ring in sholder | | | | | | |
| RS | Rim srem | | | | | | |
| SBC | Stems bottom chambers | | | | | | |
| SBE | Stems bbl extension | | | | | | |
| SCB | Stock cracked or broken | | | | | | |
| SCX | Shell catches | | | | | |]. |
| SHI | Short indent | | | | | | |
| SI | Stems incline | | | | | | Þ |
| SIC | Stems in chamber | | | | | á | |
| SL | shaves lead | | | | | | |
| SLC | Stems left side of chamber | | | | | | |
| SMOC | Stretch marks on case | | | | | | |
| SOR | Stem over-ride | | 1 | | | | |
| SP | Stems port | | | | | | |
| SR | Shoulder rough | | | | | | |
| SRC | Stems right side of chamber | | | | | | |



| Protective Order | |
|------------------|-------|
| | SRIC |
| <u>ē</u> | SSOC |
| iams v. | STC 👋 |
| TI | SWE |
| Remington | SWH |
| jnir | SWW |
| jtoj | TD |
| <u>د</u> | TU |
| | TWP |

Subject to

| SRIC | Specific rings in chamber | | | | | |
|--------|---------------------------------|-------|------|--|------|--------|
| SSOC | Surface scratches on case | | | | | |
| STC | Stems top chamber | | | | | |
| SWE | Satety switch works too easily | ***** | | | | |
| SWH | Safety switch works too hard | | | | | |
| sww | Safety ewitxh won't work | | | | | |
| TD | Tips down | | | | | |
| ΤU | Tips up | | | | | |
| TWP | Trigger won't pull | | | | | |
| TWR | Trigger won't retract | | | | | |
| UNCN-T | Uncoded | | 1 | | | |
| ХН | Extracts hard | | | | 900. | |
| | | | | | | |
| HI | High | | | | | |
| LO | Low | | 1100 | | | |
| LEFT | Left | | | | | |
| RIGHT | Right | | | | | |
| DG | Doesn't Group | | | | | 4 |
| FSST | Front sight tipped | | | | | |
| RSTT | Rear sight tipped | | | | â | |
| RSBR | Rear sight base raised | | | | |]~ |
| FSTR | Front sight raised | | | | | |
| FSTL | Front sight loose | | | | | |
| RSTL | Rear sight loose | | | | | |
| MGPT-G | Missing parts at target | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | |
| | | | | | | |





| Subject to Protective Order | |
|-----------------------------|--------|
| N. | AI-P |
| B r | 868 |
| S S L | BC-P |
| TI | BEB-P |
| len | BLP-P |
| ams v. Remington | BLSO-P |
| ytor | BP-P |
| ر_ | BC D |


| AI-P | Assembly incompleye at proof | | | | | | |] | |
|--------|---|-----|------|--|------|----|------|---|---------|
| 368 | Barrel bracket gracked or broken at proof | | | 1 | | | | 1 | |
| BC-P | Blows cases at proof | | | | | | | | |
| BEB-P | Barrel extension broken at proof | | | | | | | | |
| BLP-P | Blanked primer at proof | | 325. | | | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | | | | | |
| BP-P | Blown primer at proof | | | | | | | | |
| BS-P | Barrel split at proof | | | | | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | | | | | |
| ESB-P | Ejector sticks back at proof | | | | | | | | |
| FCB-P | Fore-end cracked at proof | ~~~ | | | | | | | |
| FESO-P | Fore-end shot off at proof | | | | | 11 | 886. | | |
| FF-P | Fails to fire at proof | | | | | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | in in the second se | | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | | | | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | | | | | |
| PP-P | Pierced primer at proof | | | | - ** | | | | |
| SCB-P | Stock cracked or broken at proof | | | | | | | | Witten. |
| UNCM-P | Uncoded proof malfunctions | | 1 | | | | | | |


| | | Test Date: | | | | | totals | |
|---|----------|------------|-----------|-----------------------|-----------------------|------------|-----------|---|
| ľ | 25 | | 56 | | | 30 | 854 | |
| L | 0 | 0 | | 0 ///// | 0 | 1 | 2 | 1 |
| | 0.0 | | 0.0 | 0.0 | | 3.3 | 0.2 | |
| [| 11 | | 23 | | | 31 | 768 |] |
| | 1 9.1 | 2 18.2 | 4 17.4 | 0 | 0 | 13 41 9 | 71 9.2 | |
| [| 2 | 1 | 3 | | | | 104 |] |
| _ | 0 0.0 | 0 0.0 | 0 0.0 | 0 | | 0 | 0 0.0 | |
| | 7400 | 7500 | 7600 | 7400 Weathermaster | 7600 Weathermaster | Rimfire | totals | |
| ļ | | | | | | | | |
| | | | | | | | | |
| | | | | | | | 4 | |
| | | | | | | | - | |
| ľ | | | | | | | 7 | 1 |
| [| | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| - | | | | | | | | 4 |
| | | | | | | | | |
| } | | | | | | | | |
| | | | | | | | | |
| l | | | | | | | | |


MAE00015466

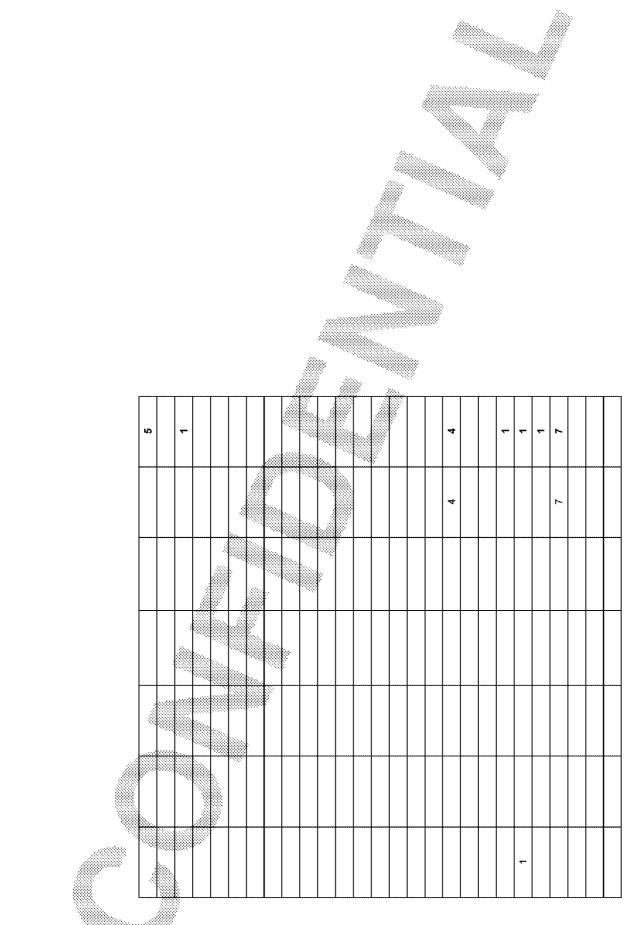

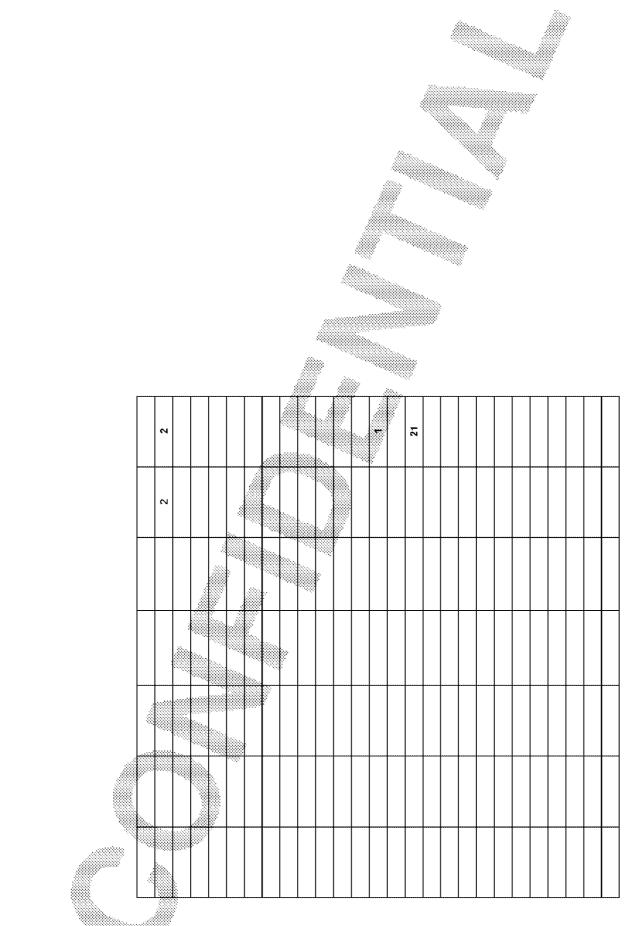

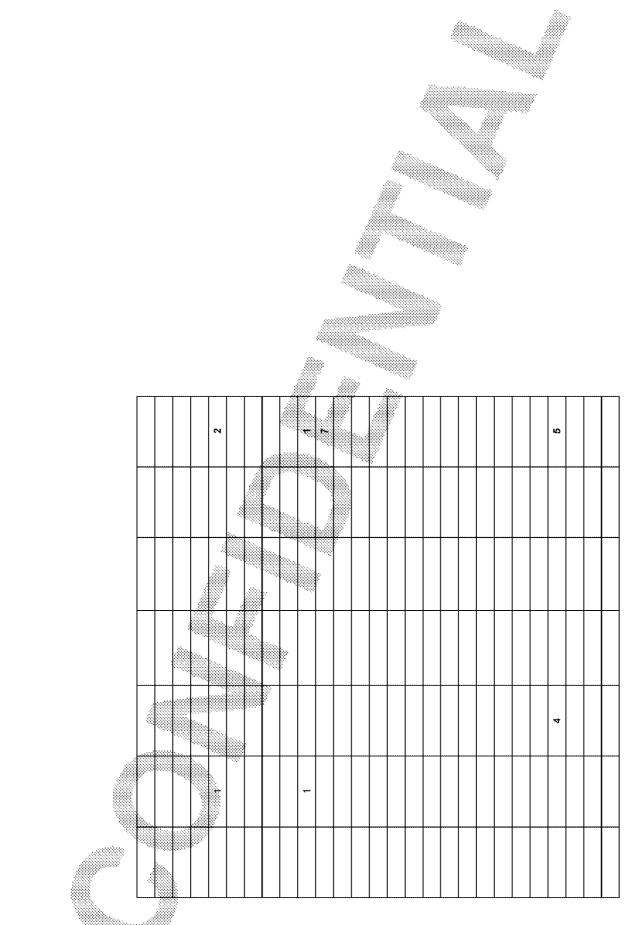

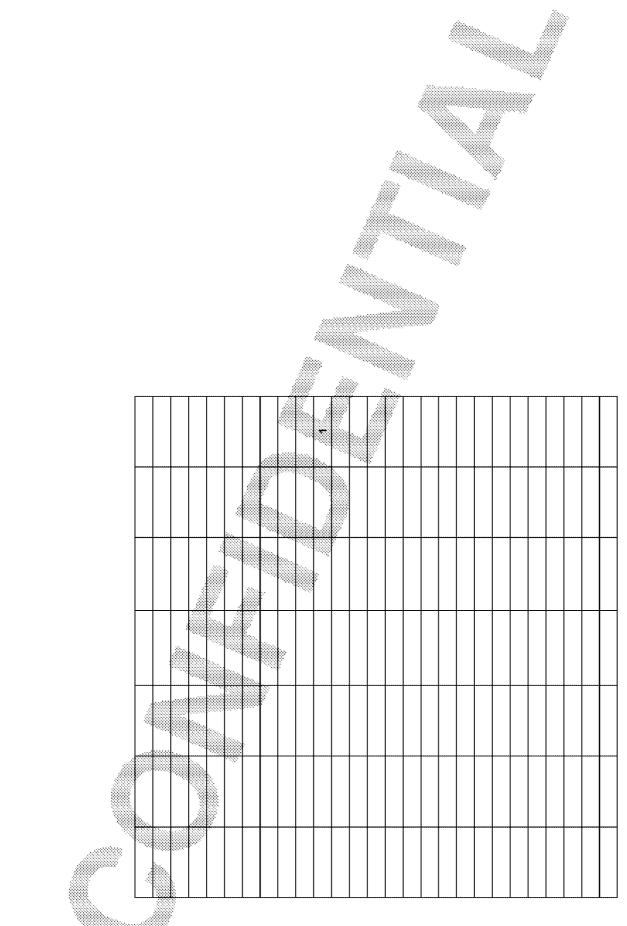

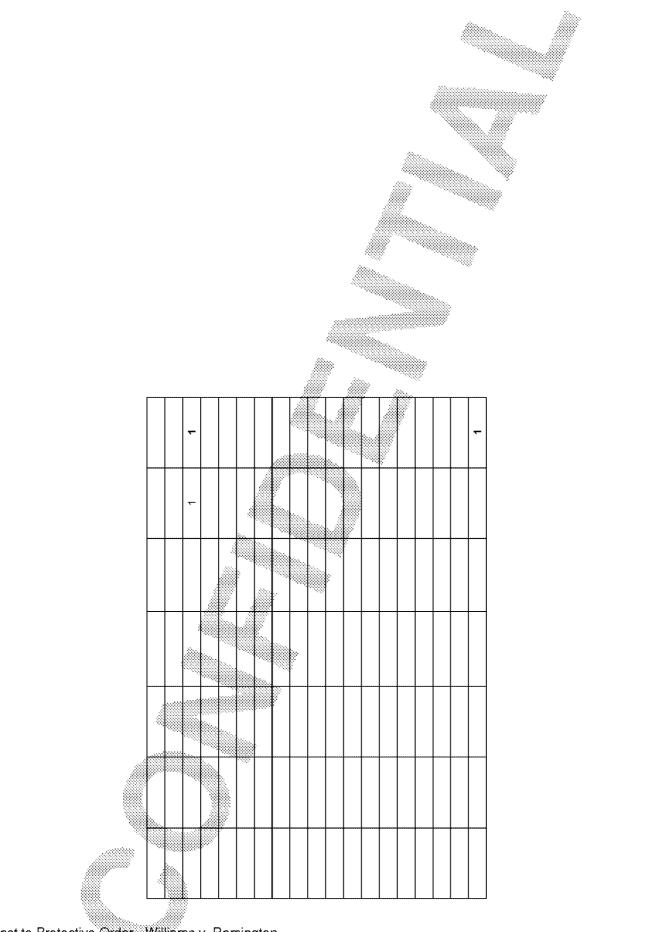

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|--|----------|----------|--------|------------|--------|---------|-----------|-----|
| Summary | Total Rejected | d: 0 | | | | | | | |
| | Overall Reject Rate | | | | | | | | = |
| | Sho Proof Rejecte Percei | | 0 | 0 | 0 | 0 | 0 | 0 | |
| | | t [d | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Target Rejecte | t: d: | <u> </u> | 0 | | 0 | 0 | 0 | |
| | Percer | | | L | | allin. | | Model 7 | 1 |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Stainless | |
| | | | | | | | | | 1 |
| AB | Action binds | | | | | | | | - |
| BABS | Bulge at body shoulder | _ | | *** | | | | | - |
| BAC | Burr at chamber | | **** | | | | | | - |
| BBMA | BBL-to-bolt misalignment | | | | | | | | - |
| BB | Bolt binds/catches | | | | | | | | |
| BCOBS | Bolt catches on bolt stop | - | | | | | | | |
| BCOF | Bolt catches on follower | | | | | | | | |
| BC | Blows cases | | | | | | | | ┨▓▓ |
| BHR | Bolt hits receiver | | | | | | | | - |
| BHS | Bolt plug hits safety switch | | | | | | | | - |
| BLOP | Bar lock or disconnector out of position | | | | | | | | - |
| BLSO | Barrel lug shot off | | | | | | | | - |
| BPO | Bolt pulls out | | | | | | | | - |
| BSSM | Bolt stems shell in magazine | | | | | | | | 4 |
| BWCD | Bolt won't cam down | | | | | | | | |

| BWCFM | Bolt won't close over full magazine | | | | | 1 |
|-------|--------------------------------------|------|----------|---------------------------------------|---|-----|
| CD | Case dented | | | | | |
| СН | Closes hand | | | | | |
| CLM | Can't laod magazine | | | | | |
| со | Cut-off | 340. | | | | |
| CR | Cuts rim | | | | | |
| CS | Cases swell | | . | | | |
| CTOG | Chamber tom or gouged | | | | | |
| СТР | Creepy trigger pull | | | | | |
| CWSB | Carns wrong side of action bar | | | | | |
| DBB | Doesn't blow back | | | · · · · · · · · · · · · · · · · · · · | | |
| DCS | Double click in safety switch | | | | | |
| DCT | Double click in trigger | | | | | |
| DCU | Doesn't close-up | | | | | |
| DE | Doesn't eject | | | | | |
| DEL | Doesn't eject live round | | | | | |
| DFB | Doesn't feed back | | | | |] . |
| DFU | Doesn't feed up | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | P |
| DLU | Doesn't lock-up | | | | á | |
| DS | Dead safe | | | | | |
| DX | Doesn't extract | | | | | |
| DXL | Doesn't extract live round | | | | | |
| EDS | Extractor drops shell | | | | | |
| ESB | Ejector sticks back | | | | | |
| ESCR | Empty shell catches receiver | | | | | |
| ESS | Extractor stems shell | | | | | |




| FA | FA. | FA FB FC | Subject to Protective Order | |
|--|----------------------|--|-----------------------------|-----|
| | ₽ ₽ | B FB FC FC | | FA |
| G FC C FCB | FCB | | ien | FD |
| FC FCB FD FD | P FCB | FD FD | inc | FF |
| FC B FC B FC FC F | N FCB FD FD FF | eming FD | , tor | FFP |
| F F F F F | 7. Remingtor | FD FF F | - | FOS |
| BEC CB FC FCB FD FF FF S FF FF FF FOS | - Remington | Remington | | |

| FA | Fires automatically | | | | |
|------|-----------------------------------|------|---------------------------------------|------|-----|
| FB | Follower binds | | | | 1 |
| FC | Fails to connect | | | | 1 |
| FCB | Fore-end cracked or broken | | | | |
| FD | Follows-down | 322. | | | |
| FF | Fails to fire | | | | |
| FFP | Flat firing pin | | | | |
| FOS | Fires on safe | | | | |
| FPHB | Firing pin hits bbl | | | | |
| FPHI | Firing pin hits inside rim | | | | |
| FPO | Floor plate opens | | · · · · · · · · · · · · · · · · · · · | | |
| FPOH | Floor plate opens hard | | | tes. | |
| FSR | Fires when safe is released | | | | |
| FT | Follower tips | | | | |
| GCSO | Gas cyl shot off | | | | |
| HBL | Heavy bolt lift | | | | |
| HMSC | Heading mismatch-steps on case | | | | |
| HPA | High pressure ammo | | | | |
| HUR | Hard under rail | | | | Ø |
| JCS | Jumps cartridge | | | 2 | 掺 |
| JM | Jumps magazin e | | | | l.« |
| OL | Jars off | | | | |
| LВ | Light blow | | | | |
| MAH | Magazine assembles hard | | | | |
| MCW | Magazine capacity wrong | | | | |
| MFA | Misfires (ammo) | | | | |
| MFOP | Magazine follower out of position | | | | |



| Subject to Protective Order | |
|-----------------------------|-----|
| | ML |
| ē | MLH |
| 10 TS | MRH |
| <u>ج</u> | он |
| len | OR |
| nin | PH |
| ams v. Remington | PSI |
| ت_ | PSM |
| | |


| ML | Magazine lõose | | | | | |
|------|-------------------------------|-------|--------|--|------|---|
| MALH | Magazine loads hard | | | | | |
| MRH | Magazine removes hard | | **** | | | |
| он | Opens hard | | | | | |
| OR | Over-indes | | 240 | | | |
| РН | Pulls hard | | | | | |
| PSI | Proof stamp illegible | | | | | |
| PSM | Proof stamp missing | | | | | |
| RBOC | Rings and bulges on case | | | | | |
| RDW | (Action) release doesn't work | | | | | |
| RIC | Rings in chamber | · *** | | | | |
| RIS | Ring in sholder | | | | 800. | |
| RS | Rim srem | | | | | |
| SBC | Stems bottom chambers | | | | | |
| SBE | Stems bbl extension | | ****** | | | |
| SCB | Stock cracked or broken | | | | | |
| scx | Shell catches | | | | | |
| SHI | Short indent | | | | | Í |
| SI | Stems incline | | | | | Ø |
| SIC | Stems in chamber | | | | , | |
| SL | shaves lead | | | | | l |
| SLC | Stems left side of chamber | | | | | |
| SMOC | Stretch marks on case | | | | | |
| SOR | Stem over-ride | | | | | |
| SP | Stems port | | | | | |
| SR | Shoulder rough | | | | | |
| SRC | Stems right side of chamber | | | | | |




| Protective Order | |
|------------------|------|
| | SRIC |
| la la | SSOC |
| S S S | STC |
| <u>ج</u> ٦٦ | SWE |
| ams v. Remington | SWH |
| nin | sww |
| gtor | TD |
| د | τυ |
| | - |

Subject to

| SRIC | Specific rings in chamber | | | | |] |
|--------|---------------------------------|--------|------|--|---|-------|
| SSOC | Surface scratches on case | | | | | |
| STC | Stems top chamber | | | | | |
| SWE | Satety switch works too easily | | | | | |
| SWH | Safety switch works too hard | | | | | |
| sww | Safety ewitxh won't work | | | | | |
| ΤΟ | Tips down | | | | | |
| тυ | Tips up | | | | | |
| TWP | Trigger won't pull | | | | | |
| TWR | Trigger won't retract | | | | | |
| UNCN-T | Uncoded | | | | | |
| хн | Extracts hard | | | | | |
| | | | | | | |
| HI | High | | **** | | | |
| LO | Low | | | | | |
| LEFT | Left | | | | | |
| RIGHT | Right | | | | | |
| DG | Doesn't Group | | | | | |
| FSST | Front sight tipped | | | | | 1 |
| RSTT | Rear sight tipped | | | | 2 | |
| RSBR | Rear sight base raised | | | | | ľ |
| FSTR | Front sight raised | | | | | |
| FSTL | Front sight loose | | | | | |
| RSTL | Rear sight loose | *** | | | | |
| MGPT-G | Missing parts at target | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | |
| | | ****** | | | | |



| AI-P | Assembly incompleye at proof | | | | |
|-------------|---|--|--|-------|--|
| 368 · · · · | Barrel bracket gracked or broken at proof | | | | |
| вс-р | Blows cases at proof | | | | |
| вев-р 👋 | Barrel extension broken at proof | | | | |
| BLP-P | Blanked primer at proof | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | |
| BP-P | Blown primer at proof | | | | |
| BS-P | Barrel split at proof | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | |
| ESB-P | Ejector sticks back at proof | | | | |
| FCB-P | Fore-end cracked at proof | | | | |
| FESO-P | Fore-end shot off at proof | | | 1990. | |
| FF-P | Fails to fire at proof | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | |
| PP-P | Pierced primer at proof | | | | |
| SCB-P | Stock cracked or broken at proof | | | | |
| UNCM-P | Uncoded proof malfunctions | | | | |

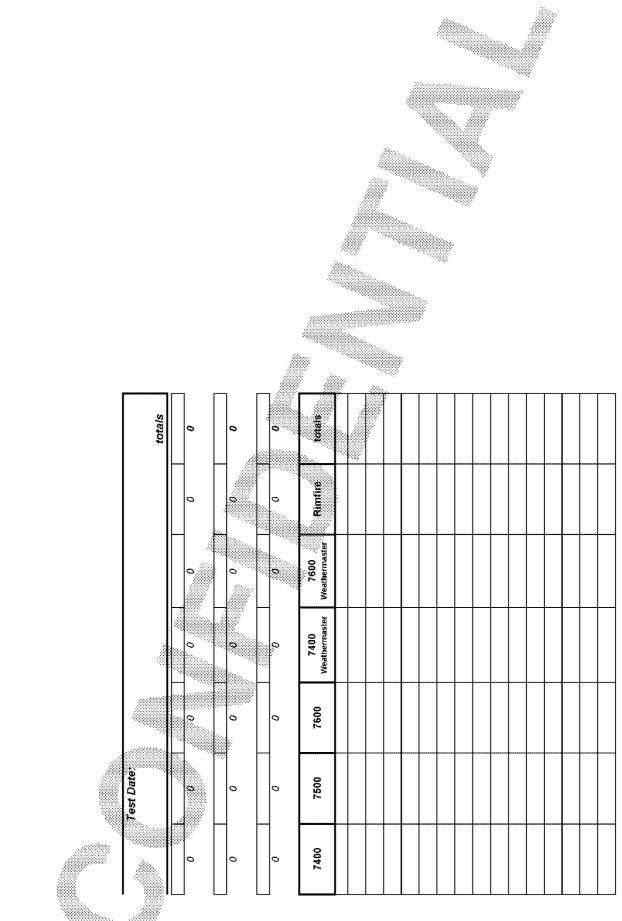


Subject to Protective Order - Williams v. Remington









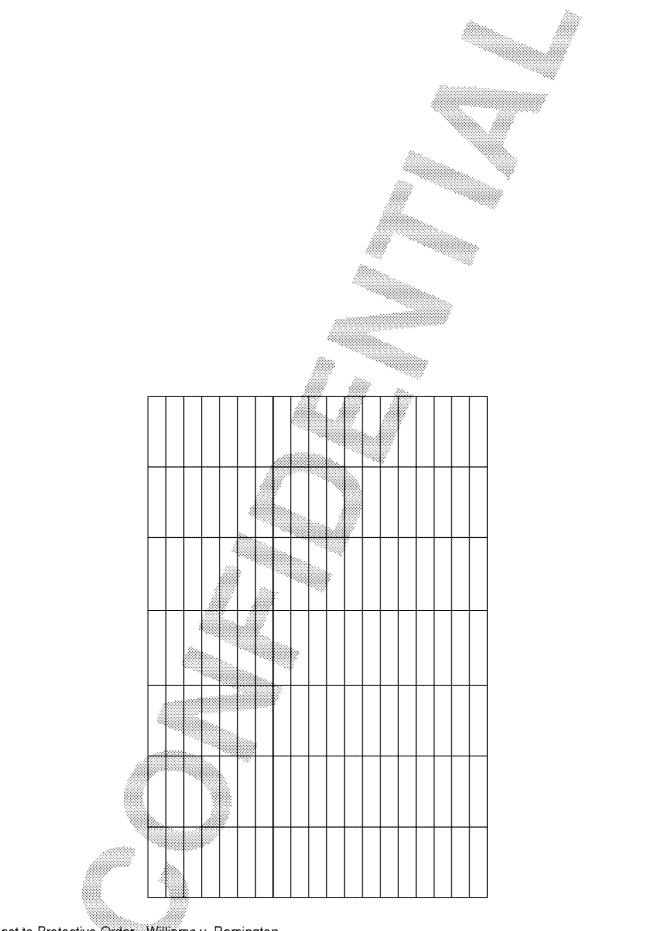

Subject to Protective Order Williams v. Remington


| Summar | ry Total Test + Proof Failures Total Rejected | | | | | | | | - |
|--------|--|---------|---------|--------|------------|--------|---------|----------------------|-----|
| | Overall Reject Rate | | | | | | | | |
| | Shot. Proof Rejected Percent | t | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Shot. Test Rejected Percent | t. 🗌 📿 | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Shot. Target Rejected Percent | t: 0 🎆 | 0 | 0 | 0 | 0 | 0 | 0 | |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| AB | Action binds | | | | | | | | |
| BABS | Bulge at body shoulder | | | | | | | | 1 |
| BAC | Burr at chamber | | | | | | | | 1 |
| BBMA | BBL-to-bolt misalignment | | | | | | | | 1 🔬 |
| BB | Bolt binds/catches | | | | | | | | 1 |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | | | | | | | |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | | 1 🚿 |
| BHS | Bolt plug hits safety switch | | | | | | | | 1 🚿 |
| BLOP | Bar lock or disconnector out of position | | | | | | | | 1 |
| BLSO | Barrel lug shot off | | | | | | | |] |
| BPO | Bolt pulls out | | | | | | | | |
| BSSM | Bolt stems shell in magazine | | | | | | | | |
| BWCD | Bolt won't cam down | | | | | | | | 1 |

| | | | 1 | I | 1 | 1 | - |
|------|--------------------------------------|--------|---|------------------|-------|---|------------|
| | Bolt won't close over full magazine | | | | | | |
| CD | Case dented | | | | | | |
| СН | Closes hand | | | | | | |
| CLM | Can't laod magazine | | | | | | |
| co | Cut-off | - 240. | | | | | |
| CR | Cuts rim | | | | | | |
| cs | Cases swell | | | | | | |
| стоб | Chamber torn or gouged | | | | | | |
| СТР | Creepy trigger pull | | | ann. Millionn | | | |
| CWSB | Cams wrong side of action bar | | | | | | |
| DBB | Doesn't blow back | | | | | | |
| DCS | Double click in safety switch | | | | 1990. | | |
| DCT | Double click in trigger | | | | | | |
| DCU | Doesn't close-up | | | | | | |
| DE | Doesn't eject | | | | | | |
| DEL | Doesn't eject live round | | | | | | |
| DFB | Doesn't feed back | | | | | | |
| DFU | Doesn't feed up | | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | | |
| DLU | Doesn't lock-up | | | | á | | |
| DS | Dead safe | | | | | | <u>~</u> ≪ |
| DX | Doesn't extract | | | | | | |
| DXL | Doesn't extract live round | | | | | | |
| EDS | Extractor drops shell | | | | | | |
| ESB | Ejector sticks back | | | | | | |
| ESCR | Empty shell catches receiver | | | | | | |
| ESS | Extractor stems shell | | | | | | |




| FA | FA B | Subject to Protective Order | |
|--|---|-----------------------------|------|
| | ē FB | N. | FA |
| S FC | | .< T | FCB |
| FC FC FCB | FCB | fen | FD |
| FC FC FC FC FC FC FC FC FC FC | FCB FCB PD FD | ning | FF |
| ns v. Remin | FCB FCB FD FF | ytor | FFP |
| ns v. Remingto | FCB FD FF FF FFP | <u>د</u> | FOS |
| Remingtor | FCB FD FF FF FFP FOS | | FPHB |

| FA | Fires automatically | | | | | |
|------|-----------------------------------|---------------------------------------|--------|--|-----|---|
| FB | Follower binds | | | | | |
| FC | Fails to connect | | | | | |
| FCB | Fore-end cracked or broken | | | | | |
| FD | Follows-down | | - 400. | | | |
| FF | Fails to fire | | | | | |
| FFP | Flat firing pin | | | | | |
| FOS | Fires on safe | | | | | |
| FPHB | Firing pin hits bbl | | | | | |
| FPHI | Firing pin hits inside rim | | | | | |
| FPO | Floor plate opens | · · · · · · · · · · · · · · · · · · · | | | | |
| FPOH | Floor plate opens hard | | | | 5m. | |
| FSR | Fires when safe is released | | | | | |
| FT | Follower tips | | | | | |
| GCSO | Gas cyl shot off | | | | | |
| HBL | Heavy bolt lift | | | ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~ | | |
| HMSC | Heading mismatch-steps on case | | | | | |
| HPA | High pressure ammo | | | | | |
| HUR | Hard under rail | | | | | |
| JCS | Jumps cartridge | | | | â | |
| JM | Jumps magazin e | | | | | ľ |
| OL | Jars off | | | | | |
| LB | Light blow | | | | | |
| MAH | Magazine assembles hard | | | | | |
| MCW | Magazine capacity wrong | | | | | |
| MFA | Misfires (ammo) | | | | | |
| MFOP | Magazine follower out of position | | | | | |



| Subject to Protective Order | |
|-----------------------------|------|
| 2 | ML |
| <u>a</u> | MALH |
| S. S. | MRH |
| <u>ج</u> | он |
| len | OR |
| nin | PH |
| ams v. Remington | PSI |
| <u>ب</u> | PSM |
| | 1 |


| ML 🥼 | Magazine loose | | | | | |] |
|------|-------------------------------|-----|---|-----|--|-------|------------|
| MLH | Magazine loads hard | | | | | | |
| MRH | Magazine removes hard | | | | | | 1 |
| он | Opens.hänt | | | | | | |
| OR | Over-ndes | | | | | | |
| PH | Pulls hard | | | | | | |
| PSI | Proof stamp illegible | | | | | | |
| PSM | Proof stamp missing | | | | | | |
| RBOC | Rings and bulges on case | | | | | | |
| RDW | (Action) release doesn't work | | | | | | |
| RIC | Rings in chamber | ~~~ | | | | | |
| RIS | Ring in sholder | | | | | 1990. | |
| RS | Rim srem | | | | | | |
| SBC | Stems bottom chambers | | | | | | |
| SBE | Stems bbl extension | | | 110 | | | |
| SCB | Stock cracked or broken | | | | | | |
| scx | Shell catches | | | | | | |
| SHI | Short indent | | | | | | |
| SI | Stems incline | | | | | | |
| SIC | Stems in chamber | | | | | à | |
| SL | shaves lead | | | | | | 1 ~ |
| SLC | Stems left side of chamber | | | | | | |
| SMOC | Stretch marks on case | | | | | | |
| SOR | Stem over-ride | | * | | | | |
| SP | Stems port | | | | | | |
| SR | Shoulder rough | | | | | | |
| SRC | Stems right side of chamber | | | | | | |




| Protective Order | | |
|---|------|---|
| W | SRIC | |
| T I I I I I I I I I I I I I I I I I I I | SSOC | |
| ns ~ | STC | |
| T | SWE | 1 |
| ìen | SWH | |
| juir | sww | |
| lams v. Remington | TD | |
| د | ΤU | |
| | TIME | |

Subject to

| SRIC | Specific rings in champer | | | | | |
|--------|---------------------------------|---------------------------------------|-----|--|------|------------|
| SSOC | Surface scratches on case | | | | | |
| STC | Stems top chamber | | | | | |
| SWE | Safety switch works too easily | | | | | |
| SWH | Safety switch works too hard | | àn. | | | |
| sww | Safety ewitxh won't work | | | | | |
| TD | Tips down | | | | | |
| TU | Tips up | | | | | |
| TWP | Trigger won't pull | | | | | |
| TWR | Trigger won't retract | | | | | |
| UNCN-T | Uncoded | · · · · · · · · · · · · · · · · · · · | | | | |
| хн | Extracts hard | | | | See. | |
| | | | | | | |
| HI | High | | | | | |
| LO | Low | | | | | |
| LEFT | Left | | | | | |
| RIGHT | Right | | | | | |
| DG | Doesn't Group | | | | | |
| FSST | Front sight tipped | | | | | 1 |
| RSTT | Rear sight tipped | | | | ž | |
| RSBR | Rear sight base raised | | | | | <u>r</u> ∝ |
| FSTR | Front sight raised | | | | | |
| FSTL | Front sight loose | | | | | |
| RSTL | Rear sight loose | | | | | |
| MGPT-G | Missing parts at target | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | |
| | | | | | | |




| AI-P | Assembly incompleye at proof | | | | |
|-------------|---|--|--|-------|--|
| 368 · · · · | Barrel bracket gracked or broken at proof | | | | |
| вс-р | Blows cases at proof | | | | |
| вев-р 👋 | Barrel extension broken at proof | | | | |
| BLP-P | Blanked primer at proof | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | |
| BP-P | Blown primer at proof | | | | |
| BS-P | Barrel split at proof | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | |
| ESB-P | Ejector sticks back at proof | | | | |
| FCB-P | Fore-end cracked at proof | | | | |
| FESO-P | Fore-end shot off at proof | | | 1990. | |
| FF-P | Fails to fire at proof | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | |
| PP-P | Pierced primer at proof | | | | |
| SCB-P | Stock cracked or broken at proof | | | | |
| UNCM-P | Uncoded proof malfunctions | | | | |

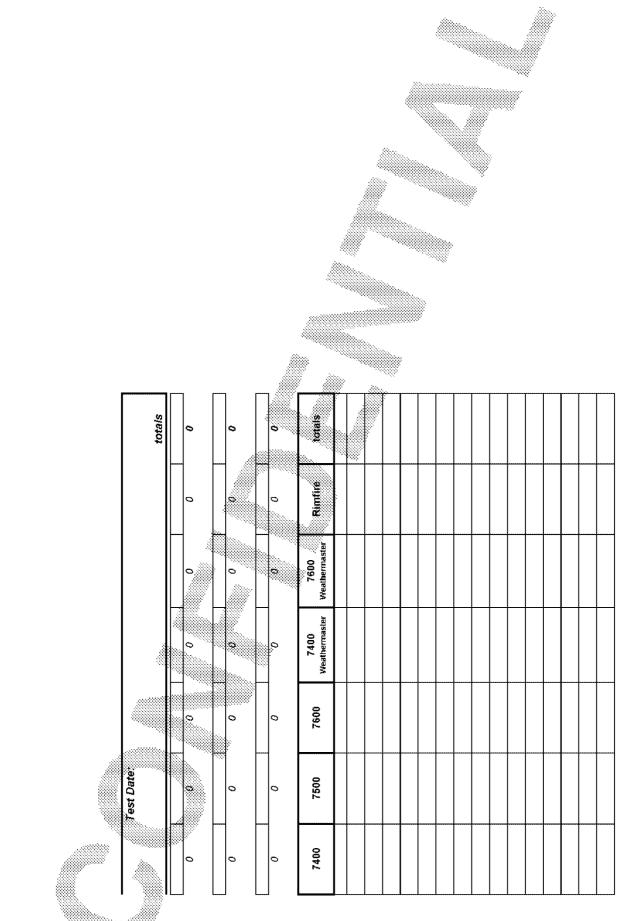


Subject to Protective Order - Williams v. Remington





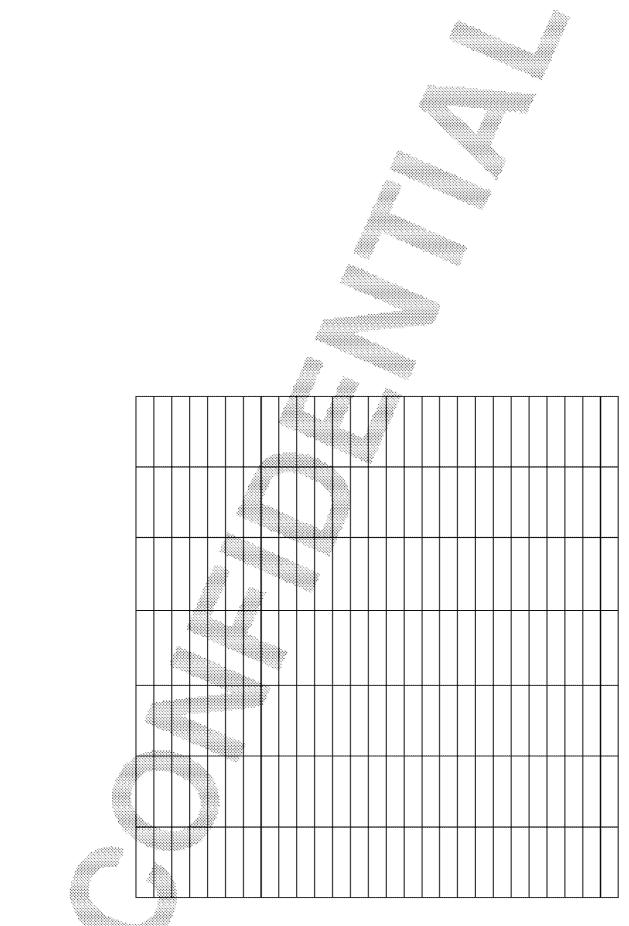



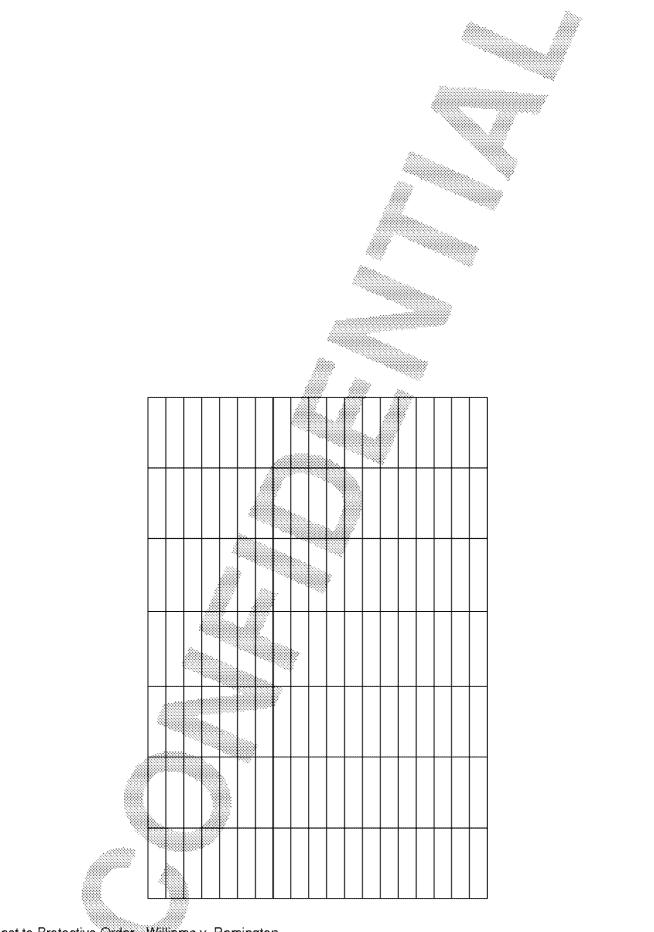

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|--|---------|---------|--------|------------|--------|---------|----------------------|-------|
| Summary | Y Total Test + Proof Failure Total Rejected | | | | | | | | |
| | Overall Reject Rate | | | | | | | | |
| | Sho Proof Rejecte Percei | | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Test Rejecte Percer | | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Target Rejecte Percer | d: 0 🎆 | 0 | 0 | 0 | 0 | 0 | 0 |] |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| AB | Action binds | | | | | | | | |
| BABS | Bulge at body shoulder | | | | | | | | |
| BAC | Burr at chamber | | | | | | | | |
| BBMA | BBL-to-bolt misalignment | | | | | | | | 1 🚕 |
| BB | Bolt binds/catches | | | | | | | | 1//// |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | * | | | | | | I. I |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | 1 | 1 🖉 |
| BHS | Bolt plug hits safety switch | | | | | | | | 1 🎕 |
| BLOP | Bar lock or disconnector out of position | | - | | | | | | |
| BLSO | Barrel lug shot off | | | | | | | | |
| BPO | Bolt pulis out | | | | | | | | |
| BSSM | Bolt stems shell in magazine | | | | | | | | |
| BWCD | Bolt won't cam down | | | | | | | | 1 |

| BWCFM | Bolt won't close over full magazine | | | | | 1 |
|-------|--------------------------------------|------|----------|---------------------------------------|---|-----|
| CD | Case dented | | | | | |
| СН | Closes hand | | | | | |
| CLM | Can't laod magazine | | | | | |
| со | Cut-off | 340. | | | | |
| CR | Cuts rim | | | | | |
| CS | Cases swell | | . | | | |
| CTOG | Chamber tom or gouged | | | | | |
| СТР | Creepy trigger pull | | | | | |
| CWSB | Carns wrong side of action bar | | | | | |
| DBB | Doesn't blow back | | | · · · · · · · · · · · · · · · · · · · | | |
| DCS | Double click in safety switch | | | | | |
| DCT | Double click in trigger | | | | | |
| DCU | Doesn't close-up | | | | | |
| DE | Doesn't eject | | | | | |
| DEL | Doesn't eject live round | | | | | |
| DFB | Doesn't feed back | | | | |] . |
| DFU | Doesn't feed up | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | P |
| DLU | Doesn't lock-up | | | | á | |
| DS | Dead safe | | | | | |
| DX | Doesn't extract | | | | | |
| DXL | Doesn't extract live round | | | | | |
| EDS | Extractor drops shell | | | | | |
| ESB | Ejector sticks back | | | | | |
| ESCR | Empty shell catches receiver | | | | | |
| ESS | Extractor stems shell | | | | | |




| Subject to Protective Order | |
|-----------------------------|------|
| X | FA |
| <u>ē</u> | FB |
| ams v. Remington | FC |
| .< T | FCB |
| ien | FD |
| ning | FF |
| ytor | FFP |
| <u>د</u> | FOS |
| | ЕРНВ |

| | | | | | | _ |
|---------|-----------------------------------|--|------|------------------|-------|-------------|
| 1////// | Fires automatically | | | | | |
| FB | Follower binds | | | | | |
| FC | Fails to connect | | | | | |
| FCB | Fore-end cracked or broken | | | | | |
| FD | Follows-down | | | | | |
| FF | Fails to fire | | | | | |
| FFP | Flat firing pin | | | | | |
| FOS | Fires on safe | | | | | |
| FPHB | Firing pin hits bbl | | | ann. Millionn | | |
| FPHI | Firing pin hits inside rim | | | | | |
| FPO | Floor plate opens | | | | | |
| FPOH | Floor plate opens hard | | | | 1990. | |
| FSR | Fires when safe is released | | | | | |
| FT | Follower tips | | | | | |
| GCSO | Gas cyl shot off | | 1.04 | | | |
| HBL | Heavy bolt lift | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | |
| HPA | High pressure ammo | | | | | |
| HUR | Hard under rail | | | | | Ø |
| JCS | Jumps cartridge | | | | 8 | |
| JM | Jumps magazin e | | | | | _ ~~ |
| JO | Jars off | | | | | |
| LB | Light blow | | | | | |
| MAH | Magazine assembles hard | | | | | |
| MCW | Magazine capacity wrong | | | | | |
| MFA | Misfires (ammo) | | | | | |
| MFOP | Magazine follower out of position | | | | | |



| Subject to Protective Order | |
|-----------------------------|-------|
| | ML |
| Ē | MIH |
| 0 0 | MRH 🛞 |
| TI | он |
| ien | OR |
| ning | РН |
| ams v. Remingtor | PSI |
| L | PSM |
| | |

| ML | Magazine loose | | | | |
|------|-------------------------------|--------|---|---|-----|
| MALH | Magazine loads hard | | | | |
| MRH | Magazine removes hard | | | | 1 |
| он | Opens hand | | | | |
| OR | Over-moles | - 200. | | | |
| РН | Pulls hard | | | | |
| PSI | Proof stamp illegible | | | | |
| PSM | Proof stamp missing | | | | |
| RBOC | Rings and bulges on case | | 8 | | |
| RDW | (Action) release doesn't work | | | | |
| RIC | Rings in chamber | | | | |
| RIS | Ring in sholder | | | | |
| RS | Rim srem | | | | |
| SBC | Stems bottom chambers | | | | |
| SBE | Stems bbl extension | | | | |
| SCB | Stock cracked or broken | | | | |
| SCX | Shell catches | | | | |
| SHI | Short indent | | | | |
| SI | Stems incline | | | | ø |
| SIC | Stems in chamber | | | ž | |
| SL | shaves lead | | | | ľ∞; |
| SLC | Stems left side of chamber | | | | |
| SMOC | Stretch marks on case | | | | |
| SOR | Stem over-ride | | | | |
| SP | Stems port | | | | |
| SR | Shoulder rough | | | | |
| SRC | Stems right side of chamber | | | | |




MAE00015499


| Protective Order | |
|------------------|------|
| X | SRIC |
| Ĩ | 8500 |
| ns ' | STC |
| <u>ج</u> | SWE |
| len | SWH |
| nin | sww |
| ams v. Remington | TD |
| <u>د</u> | ΤU |
| | TIMD |

Subject to

| SRIC | Specific rings in chamber | | | | | 1 |
|--------|---------------------------------|------|-----|--|-----|----------------|
| SSOC | Surface scratches on case | | | | | 1 |
| STC | Stems top chamber | | | | | |
| SWE | Safety switch works too easily | | | | | |
| SWH | Safety switch works too hard | | | | | |
| sww | Safety ewitxh won't work | | | | | |
| TD | Tips down | | | | | |
| TU | Tips up | | | | | |
| TWP | Trigger won't pull | | | | | |
| TWR | Trigger won't retract | | | | | |
| UNCN-T | Uncoded | · ** | | | | |
| хн | Extracts hard | | | | àc. | |
| | | | | | | |
| HI | High | | | | | |
| LO | Low | | 110 | | | |
| LEFT | Left | | | | | |
| RIGHT | Right | | | | | |
| DG | Doesn't Group | | | | | |
| FSST | Front sight tipped | | | | | 17 |
| RSTT | Rear sight tipped | | | | - | |
| RSBR | Rear sight base raised | | | | | 1 % |
| FSTR | Front sight raised | | | | | |
| FSTL | Front sight loose | | | | | |
| RSTL | Rear sight loose | | | | | |
| MGPT-G | Missing parts at target | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | |
| | | | | | | |



| AI- <u>P</u> | Assembly incompleye at proof | | | | | |
|--------------|---|-------|------|----|------|--|
| 368 | Barrel bracket stacked or broken at proof | | | | | |
| 3C-P | Blows cases at proof | | | | | |
| BEB-P | Barrel extension broken at proof | | | | | |
| 3LP-P | Blanked primer at proof | | ása. | | | |
| BLSO-P | Barrel lug shot off at proof | | | | | |
| 3P-P | Blown primer at proof | | | | | |
| 3S-P | Barrel split at proof | | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | 58 | | |
| ESB-P | Ejector sticks back at proof | | | | | |
| FCB-P | Fore-end cracked at proof | - ××; | | | | |
| ESO-P | Fore-end shot off at proof | | | | 889. | |
| F-P | Fails to fire at proof | | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | | |
| PP-P | Pierced primer at proof | | | | | |
| SCB-P | Stock cracked or broken at proof | | | | | |
| JNCM-P | Uncoded proof malfunctions | | *** | | | |

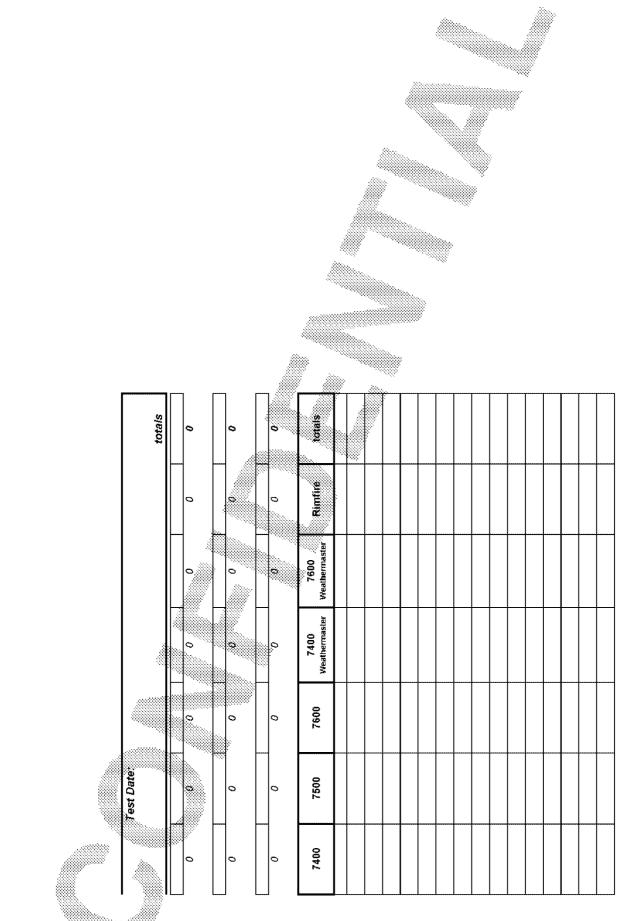


Subject to Protective Order - Williams v. Remington









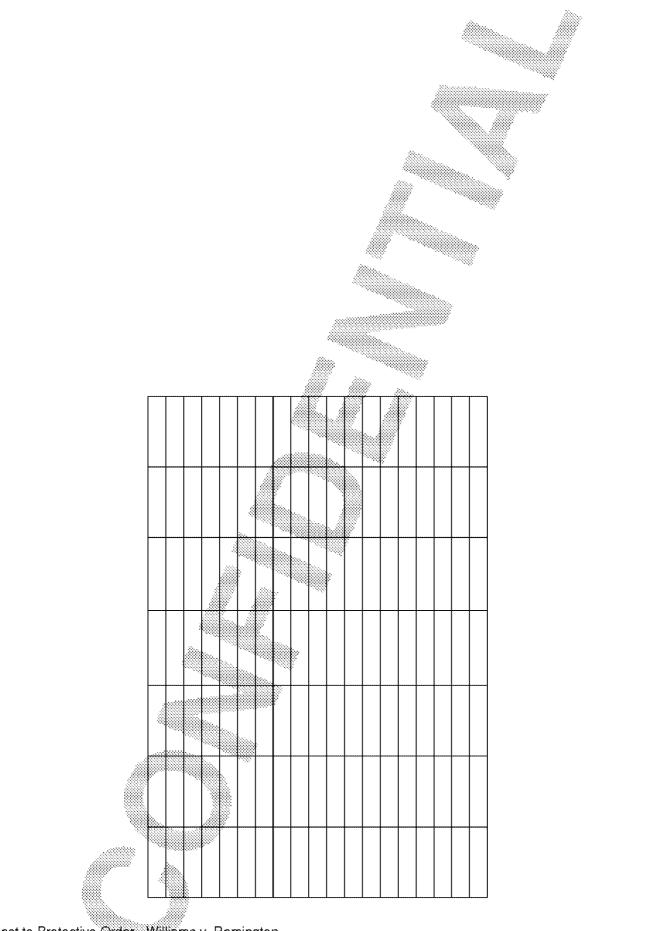

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|--|----------|----------|--------|------------|--------|---------|-----------|-----|
| Summary | Total Rejected | d: 0 | | | | | | | |
| | Overall Reject Rate | | | | | | | | = |
| | Sho Proof Rejecte Percei | | 0 | 0 | 0 | 0 | 0 | 0 | |
| | | t [d | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Target Rejecte | t: d: | <u> </u> | 0 | | 0 | 0 | 0 | |
| | Percer | | | L | | allin. | | Model 7 | 1 |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Stainless | |
| | | | | | | | | | 1 |
| AB | Action binds | | | | | | | | - |
| BABS | Bulge at body shoulder | _ | | *** | | | | | - |
| BAC | Burr at chamber | | **** | | | | | | - |
| BBMA | BBL-to-bolt misalignment | | | | | | | | - |
| BB | Bolt binds/catches | | | | | | | | |
| BCOBS | Bolt catches on bolt stop | - | | | | | | | |
| BCOF | Bolt catches on follower | | | | | | | | |
| BC | Blows cases | | | | | | | | ┨▓▓ |
| BHR | Bolt hits receiver | | | | | | | | - |
| BHS | Bolt plug hits safety switch | | | | | | | | - |
| BLOP | Bar lock or disconnector out of position | | | | | | | | - |
| BLSO | Barrel lug shot off | | | | | | | | - |
| BPO | Bolt pulls out | | | | | | | | - |
| BSSM | Bolt stems shell in magazine | | | | | | | | 4 |
| BWCD | Bolt won't cam down | | | | | | | | |

| | <i></i> | | | | | | |
|------|---------------------------------------|-----|------|-----|---|------|-------|
| | Bolt won't close over full magazine | 1 | | | 1 | | 1 |
| | · · · · · · · · · · · · · · · · · · · | | | | | | - |
| CD | Case dented | | | | | | 4 |
| СН | Closes hand | | | | | | _ |
| CLM | eant race madarate. | | | | | | - |
| со | Cut-off | | 1000 | | | | - |
| CR | Cuts rim | | | | | | _ |
| cs | Cases swell | | | | | | |
| CTOG | Chamber tom or gouged | | | | | | |
| СТР | Creepy trigger puil | | | | | | |
| CWSB | Carns wrong side of action bar | | | | | | |
| DBB | Doesn't blow back | *** | | | | | |
| DCS | Double click in safety switch | | | | | 880. | |
| DCT | Double click in trigger | | | | | | |
| DCU | Doesn't close-up | | | | | | |
| DE | Doesn't eject | | | 108 | | | |
| DEL | Doesn't eject live round | | | | | |] |
| DFB | Doesn't feed back | | | | | | |
| DFU | Doesn't feed up | | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | | |
| DLU | Doesn't lock-up | | | | | ż | |
| DS | Dead safe | | | | | | 1** |
| DX | Doesn't extract | | | | | | |
| DXL | Doesn't extract live round | | | | | |] |
| EDS | Extractor drops shell | | | | | | |
| ESB | Ejector sticks back | | | | | | 1 |
| ESCR | Empty shell catches receiver | | | | | | 1 |
| ESS | Extractor sterns shell | | | | | | 1 |




| Subject to Protective Order | |
|-----------------------------|------|
| | FA |
| <u>a</u> | FB |
| n su | FC |
| | FCB |
| Ren | FD |
| nin | FF |
| ams v. Remingtor | FFP |
| ب | FOS |
| | FPHB |

| 1999) | | | | | |
|-----------|-----------------------------------|-------|--|------|---|
| FA 🥼 | Fires automatically | | | |] |
| FB | Follower binds | | | | 1 |
| FC | Fails to connect | | | | 1 |
| FCB | Fore-end cracked of broken | | | | 1 |
| FD | Follows-down | -300. | | | 1 |
| FF | Fails to fire | | | | 1 |
| FFP | Flat firing pin | | | | 1 |
| FOS | Fires on safe | | | | 1 |
| FPHB | Firing pin hits bbl | | | | |
| FPHI | Firing pin hits inside rim | | | | |
| FPO | Floor plate opens | | | |] |
| FPOH | Floor plate opens hard | | | Sec. | 1 |
| FSR | Fires when safe is released | | | |] |
| FT | Follower tips | **** | | | |
| GCSO | Gas cyl shot off | | | |] |
| HBL | Heavy bolt lift | | | | |
| HMSC | Heading mismatch-steps on case | | | | |
| HPA | High pressure ammo | | | | |
| HUR | Hard under rail | | | | |
| JCS | Jumps cartridge | | | ž | |
| JM | Jumps magazin e | | | | ľ |
| JO | Jars off | | | | |
| LB | Light blow | | | | |
| MAH | Magazine assembles hard | | | | |
| MCW | Magazine capacity wrong | | | | |
| MFA | Misfires (ammo) | | | | |
| MFOP | Magazine follower out of position | | | |] |



| Subject to Protective Order | |
|-----------------------------|-----|
| | ML |
| la la | MLH |
| S No. | MRH |
| - | он |
| len | OR |
| ņir | PH |
| ams v. Remingtor | PSI |
| د | PSM |
| | |


| ML | Magazine lööse | | | | 1 |
|------|-------------------------------|--------|--|---|----|
| MILH | Magazine loads hard | | | | 1 |
| MRH | Magazine removes hard | | | | 1 |
| он | Opens hard | | | | 1 |
| OR | Overandes | - A.D. | | | 1 |
| РН | Pulls hard | | | | 1 |
| PSI | Proof stamp illegible | | | |] |
| PSM | Proof stamp missing | | | | |
| RBOC | Rings and bulges on case | | | | |
| RDW | (Action) release doesn't work | | | | |
| RIC | Rings in chamber | | | | |
| RIS | Ring in sholder | | | |] |
| RS | Rim srem | | | | |
| SBC | Stems bottom chambers | | | | |
| SBE | Stems bbl extension | | | | |
| SCB | Stock cracked or broken | | | | |
| scx | Shell catches | | | | |
| SHI | Short indent | | | | |
| SI | Stems incline | | | | ø |
| SIC | Stems in chamber | | | á | |
| SL | shaves lead | | | | 1. |
| SLC | Stems left side of chamber | | | | |
| SMOC | Stretch marks on case | | | | |
| SOR | Stem over-ride | | | | |
| SP | Stems port | | | | |
| SR | Shoulder rough | | | | |
| SRC | Stems right side of chamber | | | | |




| Protective Order | |
|------------------|-------|
| N. | SRIC |
| la n | 8500 |
| איי אר | STC 🕺 |
| דו | SWE |
| len | SWH |
| in | sww |
| ams v. Remington | TD |
| L | ΤU |
| | |

Subject to

| SRIC | Specific rings in champer | | | | | 1 |
|--------|---------------------------------|------|--------|------|-----|-----|
| SSOC | Surface scratches on case | | | | | 1 |
| STC | Stems top chamber | | | | | |
| SWE | Safety switch works too easily | | | | | |
| SWH | Safety switch works too hard | àre. | | | | 1 |
| sww | Safety ewitxh won't work | | | | | 1 |
| TD | Tips down | | | | | |
| τυ | Tips up | | | | | |
| TWP | Trigger won't pull | | | | | |
| TWR | Trigger won't retract | | | | | |
| UNCN-T | Uncoded | | | | | |
| хн | Extracts hard | | | | 80. | |
| | | | | | | |
| HI | High | | ****** | | | |
| LO | Low | | | | | |
| LEFT | Left | | | | | |
| RIGHT | Right | | | | | |
| DG | Doesn't Group | | | | | |
| FSST | Front sight tipped | | | | | 1 |
| RSTT | Rear sight tipped | | | | 2 | |
| RSBR | Rear sight base raised | | | | | T.« |
| FSTR | Front sight raised | | | | | |
| FSTL | Front sight loose | | | | | |
| RSTL | Rear sight loose | | | | | |
| MGPT-G | Missing parts at target | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | |
| | | | | | | |



| AI-P | Assembly incompleye at proof | | | | | | 1 |
|---------|---|--|------|----|---|------|---|
| 368 | Barrel bracket gracked or broken at proof | | | | | | |
| BC-P | Blows cases at proof | | | | | | |
| зев-р 🚿 | Barrel extension broken at proof | | | | | | |
| BLP-P | Blanked primer at proof | | ása. | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | | | |
| BP-P | Blown primer at proof | | | | | | |
| BS-P | Barrel split at proof | | | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | : | | |
| ESB-P | Ejector sticks back at proof | | | | | | |
| FCB-P | Fore-end cracked at proof | | | | | | |
| ESO-P | Fore-end shot off at proof | | | | | 8eo. | |
| FF-P | Fails to fire at proof | | | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | 10 | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | | | |
| PP-P | Pierced primer at proof | | | | | | |
| SCB-P | Stock cracked or broken at proof | | | | | | |
| UNCM-P | Uncoded proof malfunctions | | *** | | | | |

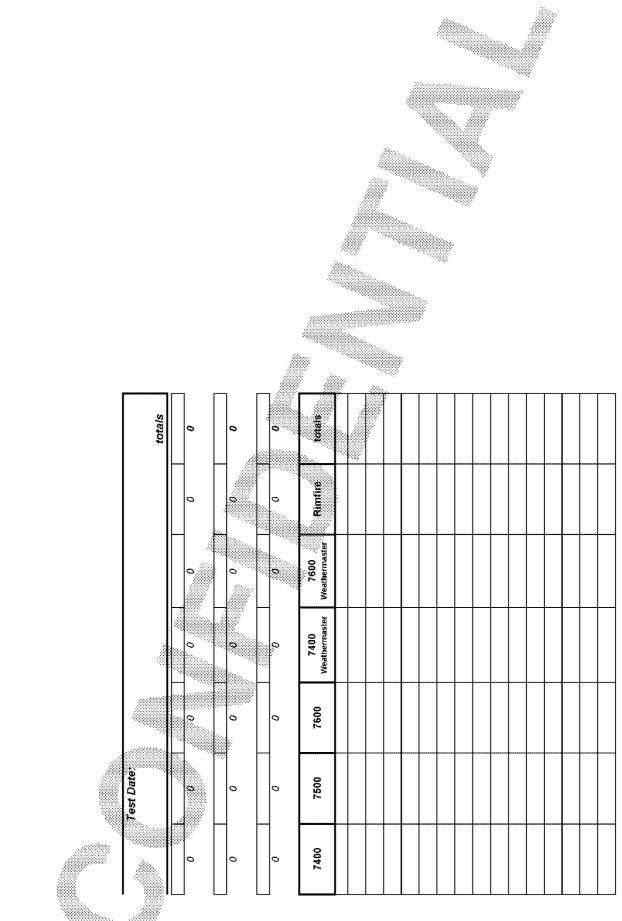


Subject to Protective Order - Williams v. Remington









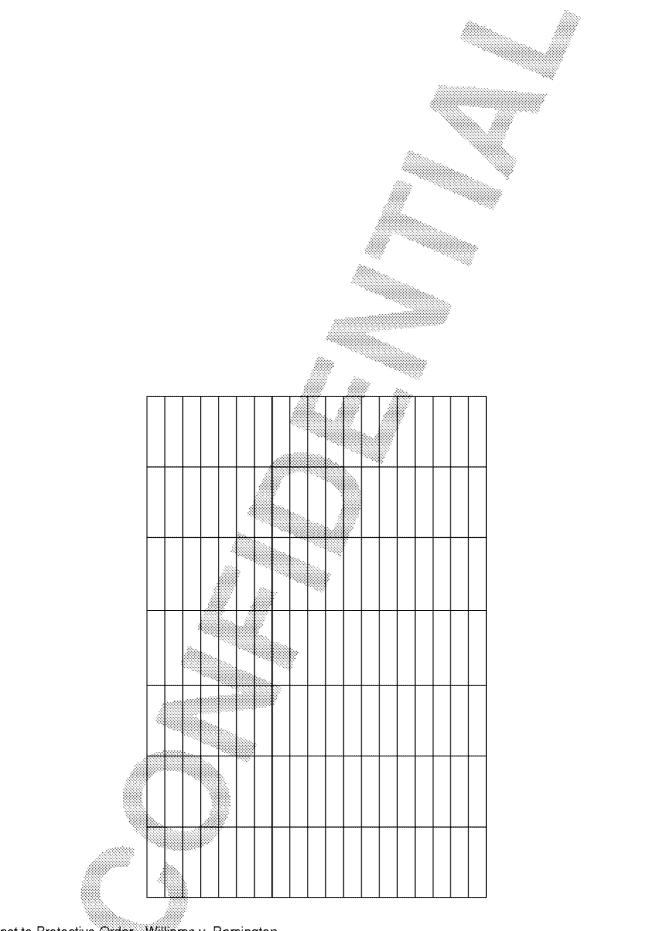

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|--|---------|---------|--|------------|--------|---------|----------------------|-----|
| Summary | Total Test + Proof Failures Total Rejected: | | | | | | | | |
| | Overall Reject Rate: | | | | | | | | _ |
| | Shot: Proof Rejected: Percent. | 0 | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Shot Test Rejected Percent | Q | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Shot. Target Rejected. Percent. | · 0 🎆 | 0 | 0 | 0 | 0 | 0 | 0 | |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| AB | Action binds | | | | | | | | - |
| BABS | Bulge at body shoulder | | 2 | ************************************** | | | | | - |
| BAC | Burr at chamber | | | | | | | | 1 |
| BBMA | BBL-to-bolt misalignment | | | | | | | | 1 |
| BB | Bolt binds/catches | | | | | | | | 1 |
| BCOBS | Bolt catches on bolt stop | | | | | | | | 1 |
| BCOF | Bolt catches on follower | | | | | | 197 | | |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | ***** | 1 |
| BHS | Bolt plug hits safety switch | | | | | | | | 1 🕺 |
| BLOP | Bar lock or disconnector out of position | | | | | | | | 1 |
| BLSO | Barrel lug shot off | | | | | | | | 1 |
| BPO | Bolt pulls out | | | | | | | | 1 |
| BSSM | Bolt stems shell in magazine | | | | | | | |] |
| BWCD | Bolt won't cam down | | - | | | | | | 1 |

| BWCFM | Bolt won't close over full magazine | | | | | 1 |
|-------|--------------------------------------|------|----------|---------------------------------------|---|-----|
| CD | Case dented | | | | | |
| СН | Closes hand | | | | | |
| CLM | Can't laod magazine | | | | | |
| со | Cut-off | 340. | | | | |
| CR | Cuts rim | | | | | |
| CS | Cases swell | | . | | | |
| CTOG | Chamber tom or gouged | | | | | |
| СТР | Creepy trigger pull | | | | | |
| CWSB | Carns wrong side of action bar | | | | | |
| DBB | Doesn't blow back | | | · · · · · · · · · · · · · · · · · · · | | |
| DCS | Double click in safety switch | | | | | |
| DCT | Double click in trigger | | | | | |
| DCU | Doesn't close-up | | | | | |
| DE | Doesn't eject | | | | | |
| DEL | Doesn't eject live round | | | | | |
| DFB | Doesn't feed back | | | | |] . |
| DFU | Doesn't feed up | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | P |
| DLU | Doesn't lock-up | | | | á | |
| DS | Dead safe | | | | | |
| DX | Doesn't extract | | | | | |
| DXL | Doesn't extract live round | | | | | |
| EDS | Extractor drops shell | | | | | |
| ESB | Ejector sticks back | | | | | |
| ESCR | Empty shell catches receiver | | | | | |
| ESS | Extractor stems shell | | | | | |




| Subject to Protective Order | |
|-----------------------------|-------|
| | FA |
| <u>a</u> | FB |
| 3 S | FC |
| liams v. Remington | FCB |
| fen | FD |
| ņir | FF |
| ytor | FFP |
| L | FOS |
| | COLLO |

| FA. | Fires automatically | | | | | |
|------|-----------------------------------|-----|-----|--|-------|----|
| FB | Follower binds | | | | | |
| FC | Fails to connect | | | | | |
| FCB | Fore-end cracked or broken | | | | | |
| FD | Follows-down | | àn. | | | |
| FF | Fails to fire | | | | | |
| FFP | Flat firing pin | | | | | |
| FOS | Fires on safe | | | | | |
| FPHB | Firing pin hits bbl | | | | | |
| FPHI | Firing pin hits inside rim | | | | | |
| FPO | Floor plate opens | ~~~ | | | | |
| FPOH | Floor plate opens hard | | | | àine. | |
| FSR | Fires when safe is released | | | | | |
| FT | Follower tips | | | | | |
| GCSO | Gas cyl shot off | | | | | |
| HBL | Heavy bolt lift | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | |
| HPA | High pressure ammo | | | | | |
| HUR | Hard under rail | | | | | |
| JCS | Jumps cartridge | | | | ž. | |
| JM | Jumps magazin e | | | | | 14 |
| JO | Jars off | | | | | |
| ĽВ | Light blow | | | | | |
| MAH | Magazine assembles hard | | | | | |
| MCW | Magazine capacity wrong | | | | | |
| MFA | Misfires (ammo) | | | | | |
| MFOP | Magazine follower out of position | | | | | |




| Subject to Protective Order | |
|-----------------------------|-----|
| | ML |
| B | MLH |
| 2 n | MRH |
| | он |
| fen | OR |
| ning | РН |
| ams v. Remingtor | PSI |
| <u>ب</u> | PSM |
| | |

| ML Magazine loads hard Image of the set of the se | |
|---|--|
| MRH Magazine removes faird Image: Construction of the second of the | |
| OH Opens hand Image: Anti-Sector of the sector of the | |
| OR Över-indes Image: Constraint of the second | |
| PH Pulls hard Image: Sector Sect | |
| PSI Proof stamp illegible Image: Stamp missing Image: Stamp mi | |
| PSMProof stamp missingImage: stamp missingImage: stamp missingRBOCRings and bulges on caseImage: stamp missingImage: stamp missingRDW(Action) release doesn't workImage: stamp missingImage: stamp missingRICRings in chamberImage: stamp missingImage: stamp missingRISRing in sholderImage: stamp missingImage: stamp missingRISRing in sholderImage: stamp missingImage: stamp missingRSRing in sholderImage: stamp missingImage: stamp missingRSRing sremImage: stamp missingImage: stamp missingSBCStems bottom chambersImage: stamp missingImage: stamp missingSBEStems bibl extensionImage: stamp missingImage: stamp missingSCBStock cracked or brokenImage: stamp missingImage: stamp missingSCXShell catchesImage: stamp missingImage: stamp missingSHIShort indentImage: stamp missingImage: stamp missingSICStems in chamberImage: stamp missingImage: stamp missingSLshaves leadImage: stamp missingImage: stamp missing | |
| Proof stanlp missing Image: Constraint of the stanlp missing Image: Constraint of the stanlp missing RBOC Rings and bulges on case Image: Constraint of the stanlp missing Image: Constraint of the stanl | |
| RBOC Rings and buiges on case | |
| RICRings in chamberAAAARISRing in sholderImage: Second Stems bottom chambersImage: Second Stems bottom chamberImage: Second Stems bottom chamberIm | |
| RIS Ring in sholder Image: Constraint of the state of the sta | |
| RS Rim srem RS Rim srem SBC Stems bottom chambers Image: Stems bottom chambers Image: Stems bottom chambers SBE Stems bbl extension Image: Stems bottom chambers Image: Stems bottom chambers SCB Stock cracked or broken Image: Stems bottom chambers Image: Stems bottom chambers SCB Stock cracked or broken Image: Stems bottom chambers Image: Stems incline SHI Short indent Image: Stems in chamber Image: Stems in chamber SIC Stems in chamber Image: Stems in chamber Image: Stems in chamber SL shaves lead Image: Stems in chamber Image: Stems in chamber | |
| RS Rtm stem C <thc< th=""> C <thc< th=""> <thc< t<="" td=""><td></td></thc<></thc<></thc<> | |
| SBE Stems bbl extension SCB Stock cracked or broken SCX Shell catches SHI Short indent SI Stems incline SIC Stems in chamber SL shaves lead | |
| SCB Stock cracked or broken Image: Constraint of the second | |
| SCX Shell catches Image: Shell catches SHI Short indent Image: Shell catches SHI Short indent Image: Shell catches SI Stems incline Image: Shell catches SIC Stems in chamber Image: Shell catches SL shaves lead Image: Shell catches | |
| SHI Short indent Image: Constraint of the state of the stateo | |
| Shirt indent Sile Sile Sile SI Stems in chamber Sile Sile SL shaves lead Sile Sile | |
| Sitems include Sitems in chamber SIC Stems in chamber SL shaves lead | |
| SL shaves lead | |
| | |
| | |
| SLC Stems left side of chamber | |
| SMOC Stretch marks on case | |
| SOR Stem over-ride | |
| SP Stems port | |
| SR Shoulder rough | |
| SRC Stems right side of chamber | |




| Subject to Protective Order | |
|-----------------------------|------|
| X | SRIC |
| ā | SSOC |
| ns ' | STC |
| 5 TI | SWE |
| len | SWH |
| ing | sww |
| lams v. Remingtor | TD |
| <u>ب</u> | TU |
| | - |

| SRIC | Specific rings in chamber | | | | | |] |
|--------|---------------------------------|-----|--------|------|--|------|---|
| SSOC | Surface scratches on case | | | | | | |
| STC | Stems top chamber | | | | | | |
| SWE | Satety switch works too easily | | | | | | |
| SWH | Safety switch works too hard | | - Ato. | | | | |
| sww | Safety ewitxh won't work | | | | | | |
| то | Tips down | | | | | | |
| TU | Tips up | | | | | | |
| TWP | Trigger won't pull | | | | | | |
| TWR | Trigger won't retract | | | | | | |
| UNCN-T | Uncoded | ~~~ | | | | | |
| хн | Extracts hard | | | | | 886. | |
| | | | | | | | |
| HI | High | | | **** | | | |
| LO | Low | | | | | | |
| LEFT | Left | | | | | | |
| RIGHT | Right | | | | | | |
| DG | Doesn't Group | | | | | | |
| FSST | Front sight tipped | | | | | | P |
| RSTT | Rear sight tipped | | | | | 8 | |
| RSBR | Rear sight base raised | | | | | | |
| FSTR | Front sight raised | | | | | | |
| FSTL | Front sight loose | | | | | | |
| RSTL | Rear sight loose | | | | | | |
| MGPT-G | Missing parts at target | | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | | |
| | | | | | | | |



| AI-P | Assembly incompleye at proof | | | | |
|-------------|---|--|--|-------|--|
| 368 · · · · | Barrel bracket gracked or broken at proof | | | | |
| вс-р | Blows cases at proof | | | | |
| вев-р 👋 | Barrel extension broken at proof | | | | |
| BLP-P | Blanked primer at proof | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | |
| BP-P | Blown primer at proof | | | | |
| BS-P | Barrel split at proof | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | |
| ESB-P | Ejector sticks back at proof | | | | |
| FCB-P | Fore-end cracked at proof | | | | |
| FESO-P | Fore-end shot off at proof | | | 1990. | |
| FF-P | Fails to fire at proof | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | |
| PP-P | Pierced primer at proof | | | | |
| SCB-P | Stock cracked or broken at proof | | | | |
| UNCM-P | Uncoded proof malfunctions | | | | |

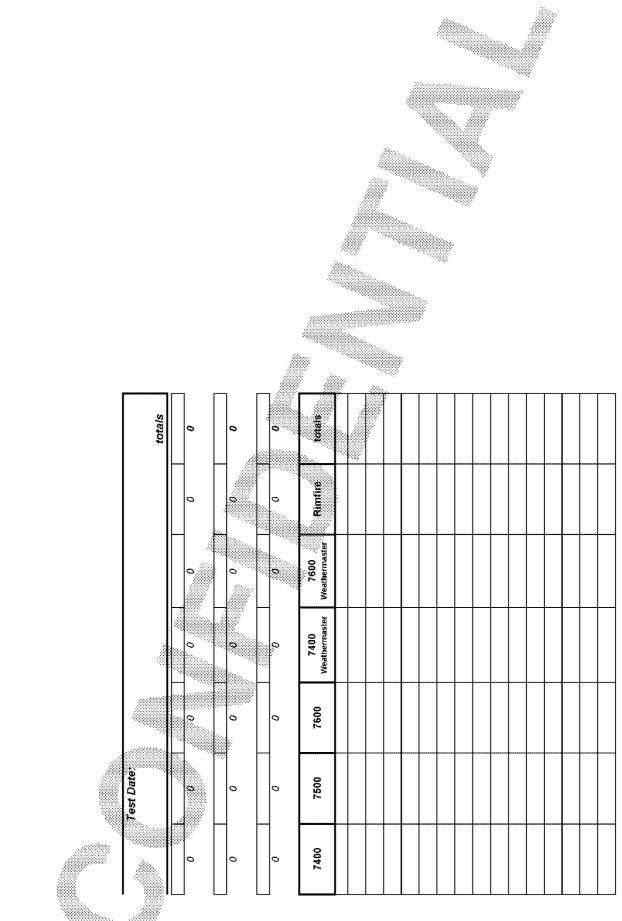


Subject to Protective Order - Williams v. Remington









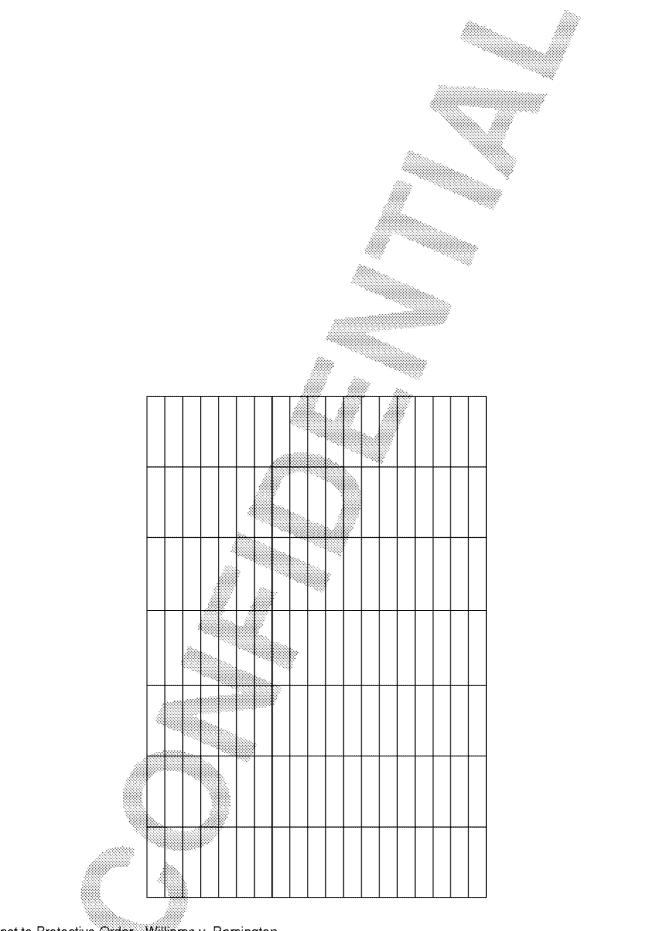

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|--|----------|----------|--------|------------|--------|---------|-----------|-----|
| Summary | Total Rejected | d: 0 | | | | | | | |
| | Overall Reject Rate | | | | | | | | = |
| | Sho Proof Rejecte Percei | | 0 | 0 | 0 | 0 | 0 | 0 | |
| | | t [d | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Target Rejecte | t: d: | <u> </u> | 0 | | 0 | 0 | 0 | |
| | Percer | | | L | | allin. | | Model 7 | 1 |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Stainless | |
| | | | | | | | | | 1 |
| AB | Action binds | | | | | | | | - |
| BABS | Bulge at body shoulder | _ | | *** | | | | | - |
| BAC | Burr at chamber | | **** | | | | | | - |
| BBMA | BBL-to-bolt misalignment | | | | | | | | - |
| BB | Bolt binds/catches | | | | | | | | |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | | | | | | | |
| BC | Blows cases | | | | | | | | ┨▓▓ |
| BHR | Bolt hits receiver | | | | | | | | - |
| BHS | Bolt plug hits safety switch | | | | | | | | - |
| BLOP | Bar lock or disconnector out of position | | | | | | | | - |
| BLSO | Barrel lug shot off | | | | | | | | - |
| BPO | Bolt pulls out | | | | | | | | - |
| BSSM | Bolt stems shell in magazine | | | | | | | | 4 |
| BWCD | Bolt won't cam down | | | | | | | | |

| BWCFM | Bolt won't close over full magazine | | | | | 1 |
|-------|--------------------------------------|------|----------|---------------------------------------|---|-----|
| CD | Case dented | | | | | |
| СН | Closes hand | | | | | |
| CLM | Can't laod magazine | | | | | |
| со | Cut-off | 340. | | | | |
| CR | Cuts rim | | | | | |
| CS | Cases swell | | . | | | |
| CTOG | Chamber tom or gouged | | | | | |
| СТР | Creepy trigger pull | | | | | |
| CWSB | Carns wrong side of action bar | | | | | |
| DBB | Doesn't blow back | | | · · · · · · · · · · · · · · · · · · · | | |
| DCS | Double click in safety switch | | | | | |
| DCT | Double click in trigger | | | | | |
| DCU | Doesn't close-up | | | | | |
| DE | Doesn't eject | | | | | |
| DEL | Doesn't eject live round | | | | | |
| DFB | Doesn't feed back | | | | |] . |
| DFU | Doesn't feed up | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | P |
| DLU | Doesn't lock-up | | | | á | |
| DS | Dead safe | | | | | |
| DX | Doesn't extract | | | | | |
| DXL | Doesn't extract live round | | | | | |
| EDS | Extractor drops shell | | | | | |
| ESB | Ejector sticks back | | | | | |
| ESCR | Empty shell catches receiver | | | | | |
| ESS | Extractor stems shell | | | | | |




| Subject to Protective Order | |
|--|-----|
| N | FA |
| la l | FB |
| ns / | FC |
| ר דו | FCB |
| len | FD |
| inc | FF |
| liams v. Remington | FFP |
| ب | FOS |
| | |

| FA. | Fires automatically | | | | | 1 |
|------|-----------------------------------|---------|-------|--|------|----|
| FB | Follower binds | | | | | |
| FC | Fails to connect | | | | | |
| FCB | Fore-end cracked or broken | | | | | |
| FD | Follows-down | | -240. | | | |
| FF | Fails to fire | | | | | |
| FFP | Flat firing pin | | | | | |
| FOS | Fires on safe | ··· /// | | | | |
| FPHB | Firing pin hits bbl | | | | | |
| FPHI | Firing pin hits inside rim | | | | | |
| FPO | Floor plate opens | ~~~ | | | | |
| FPOH | Floor plate opens hard | | | | Sec. | |
| FSR | Fires when safe is released | | | | | |
| FT | Follower tips | | | | | |
| GCSO | Gas cyl shot off | | | | | |
| HBL | Heavy bolt lift | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | |
| HPA | High pressure ammo | | | | | |
| HUR | Hard under rail | | | | | 1 |
| JCS | Jumps cartridge | | | | ź | |
| JM | Jumps magazin e | | | | | ľ× |
| JO | Jars off | | | | | |
| LB | Light blow | | | | | |
| MAH | Magazine assembles hard | | | | | |
| MCW | Magazine capacity wrong | | | | | |
| MFA | Misfires (ammo) | | | | | |
| MFOP | Magazine follower out of position | | | | | |



| Subject to Protective Order | |
|-----------------------------|-----|
| | ML |
| Ĩ | MLH |
| S. S. | MRH |
| <u>ج</u> | он |
| len | OR |
| ing | PH |
| ams v. Remington | PSI |
| ت_ | PSM |
| | 1 |


| ML | Magazine loose | | | | |] |
|------|-------------------------------|------|------|--|---|------------|
| MALH | Magazine loads hard | | | | | 1 |
| MRH | Magazine temoves hard | | | | | |
| он | Opens hant | | | | | |
| OR | Overandes | àre. | | | | |
| РН | Pulls hard | | | | |] |
| PSI | Proof stamp illegible | | | | | |
| PSM | Proof stamp missing | | | | | |
| RBOC | Rings and bulges on case | | | | | |
| RDW | (Action) release doesn't work | | | | | |
| RIC | Rings in chamber | | | | | |
| RIS | Ring in sholder | | | | | |
| RS | Rim srem | | | | | |
| SBC | Stems bottom chambers | | | | | |
| SBE | Stems bbl extension | | 1100 | | | |
| SCB | Stock cracked or broken | | | | | |
| SCX | Shell catches | | | | |]. |
| SHI | Short indent | | | | | Í |
| SI | Stems incline | | | | | Þ |
| SIC | Stems in chamber | | | | ž | 瀫 |
| SL | shaves lead | | | | | <u>I</u> ∞ |
| SLC | Stems left side of chamber | | | | | |
| SMOC | Stretch marks on case | | | | | |
| SOR | Stem over-ride | | | | | |
| SP | Stems port | | | | | |
| SR | Shoulder rough | | | | | |
| SRC | Stems right side of chamber | | | | | |




| Protective Order | |
|--|------|
| | SRIC |
| a la | SSOC |
| 0 | STC |
| .< TI | SWE |
| lams v. Remington | SWH |
| ŋir | sww |
| gtor | TD |
| | TU |
| | 740 |

Subject to


| SRIC | Specific rings in chamber | | | | |] |
|--------|---------------------------------|--|-----|-------------|------|-----|
| SSOC | Surface scratches on case | | | | |] |
| STC | Stems top chamber | | | | | |
| SWE | Satety switch works too easily | | | | | |
| SWH | Safety switch works too hard | | | | | |
| sww | Safety ewitxh won't work | | | | |] |
| TD | Tips down | | | | | |
| TU | Tips up | | | | | |
| TWP | Trigger won't pull | | | | | |
| TWR | Trigger won't retract | | | | | |
| UNCN-T | Uncoded | | | | | |
| хн | Extracts hard | | | | 900. | |
| | | | | | | |
| HI | High | | | Million III | | |
| LO | Low | | 110 | | | |
| LEFT | Left | | | | | |
| RIGHT | Right | | | | | |
| DG | Doesn't Group | | | | | |
| FSST | Front sight tipped | | | | | Þ |
| RSTT | Rear sight tipped | | | | ž. | |
| RSBR | Rear sight base raised | | | | | T.« |
| FSTR | Front sight raised | | | | | |
| FSTL | Front sight loose | | | | | |
| RSTL | Rear sight loose | | | | | |
| MGPT-G | Missing parts at target | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | |
| | | | | | | |



| AI-P | Assembly incompleye at proof | | | | | | |
|--------|---|-------|-----|------|----------------------------|---------|--|
| | Barrel bracket cracked or broken at proof | | | | | | |
| BC-P | Blows cases at proof | | | | | | |
| BEB-P | Barrel extension broken at proof | | | | | | |
| BLP-P | Blanked primer at proof | | àn. | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | | | |
| BP-P | Blown primer at proof | | | | | | |
| BS-P | Barrel split at proof | | | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | 1200 1997 - Maria Maria | | |
| ESB-P | Ejector sticks back at proof | | | | | | |
| FCB-P | Fore-end cracked at proof | · *** | | | | | |
| FESO-P | Fore-end shot off at proof | | | | | Sec. | |
| FF-P | Fails to fire at proof | | | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | **** | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | | | |
| PP-P | Pierced primer at proof | | | | | | |
| SCB-P | Stock cracked or broken at proof | | | | | | |
| UNCM-P | Uncoded proof malfunctions | | | | | and the | |

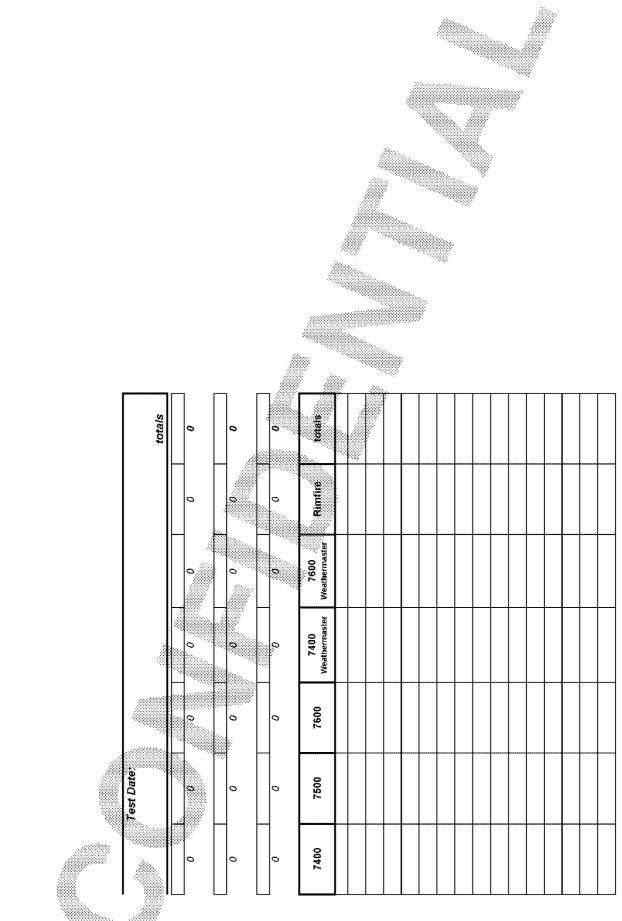


Subject to Protective Order - Williams v. Remington

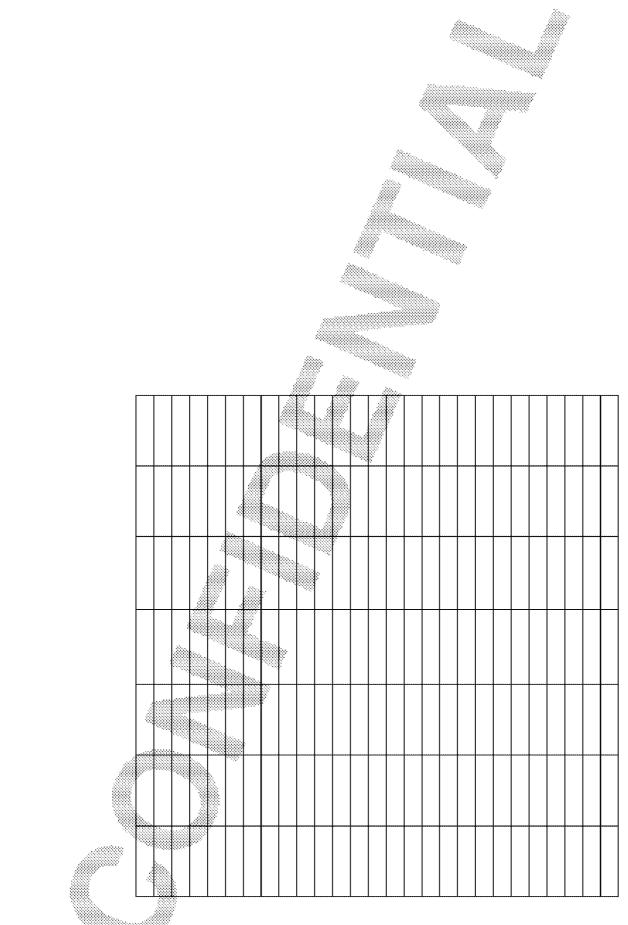







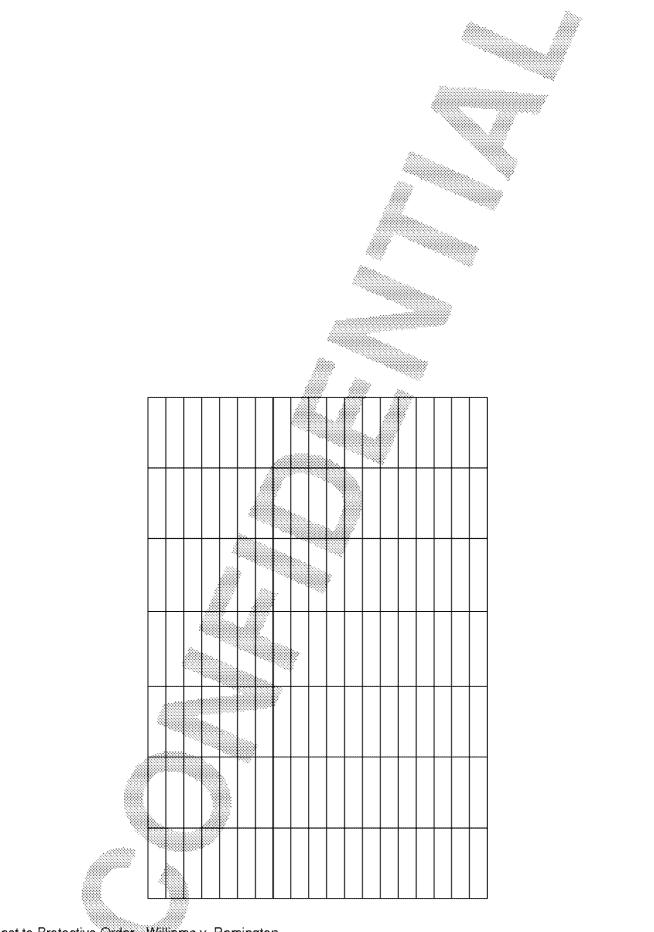

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|--|---------|---------|--------|------------|--------|---------|----------------------|---|
| Summary | Total Test + Proof Failure | | | | | | | | |
| | Total Rejected Overall Reject Rate | | | | | | | | |
| | The second construction of the second s | · · | 1 | | | | | | 1 |
| ÷. | Proof Rejected | 1 0 | 0 | 0 | 0 | 0 | 0 | 0 | J |
| | Perceri | 2008 | | I | I | 1 | 1 | 1 | Ъ |
| | Shoi Test Rejected | 1 Q | 0 | L | 0 | 0 | 0 | 0 | 1 |
| | Percen | | | | | | | | |
| | Shot | | | | | | | |] |
| | Target Rejected Percen | | 0 | | 0 | 0 | 0 | 0 | |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 SS | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| | | | | | | | | | 4 |
| AB | Action binds | | | | | | | | 4 |
| BABS | Bulge at body shoulder | | | *** | | | | | 4 |
| BAC | Burr at chamber | | | | | | | | _ |
| BBMA | BBL-to-bolt misalignment | | | | | | | | |
| BB | Bolt binds/catches | | | | | | | | |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | | | | | | | |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | | 🌋 |
| BHS | Bolt plug hits safety switch | | | | | | | | - |
| BLOP | Bar lock or disconnector out of position | | | | | | | | _ |
| BLSO | Barrel lug shot off | | | | | | | | 4 |
| BPO | Bolt pulls out | | | | | | | | 4 |
| BSSM | Bolt stems shell in magazine | | | | | | | | _ |
| BWCD | Bolt won't cam down | | *** | | | | | | |

| BWCFM | Bolt won't close over full magazine | | | | |] |
|-------|--------------------------------------|------|----------|--|---------|---|
| CD | Case dented | | | | | |
| СН | Closes hand | | | | | |
| CLM | Can't laod magazine | | | | | |
| со | Cut-off | dan. | | | | |
| CR | Cuts rim | | | | | 1 |
| CS | Cases swell | | . | | | |
| стоб | Chamber tom or gouged | | | | | |
| СТР | Creepy trigger pull | | | | | |
| CWSB | Carns wrong side of action bar | | | | | |
| DBB | Doesn't blow back | | | | | |
| DCS | Double click in safety switch | | | | tes. | |
| DCT | Double click in trigger | | | | | |
| DCU | Doesn't close-up | | | | | |
| DE | Doesn't eject | | | | | |
| DEL | Doesn't eject live round | | | | | |
| DFB | Doesn't feed back | | | | | |
| DFU | Doesn't feed up | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | and the | |
| DLU | Doesn't lock-up | | | | á | |
| DS | Dead safe | | | | | ľ |
| DX | Doesn't extract | | | | | |
| DXL | Doesn't extract live round | | | | | |
| EDS | Extractor drops shell | | | | | |
| ESB | Ejector sticks back | | | | | |
| ESCR | Empty shell catches receiver | | | | | |
| ESS | Extractor stems shell | | | | | |




| FA | Subject to Protective Order | |
|---|-----------------------------|----------|
| | | FA FB |
| | 20 C | FC |
| TS FC | א. דד | FCB |
| FC FC FCB | len | FD |
| FC FCB FD FD | in | FF |
| FC FCB FD FD FF | ytor | FFP |
| FC FCB FD FF | ب | FOS |
| S FCB D FD | | |

| FA | Fires automatically | | | | | | |
|------|-----------------------------------|-------|------|------|--|-----|---|
| FB | Follower binds | | | | | | |
| FC | Fails to connect | | | | | | |
| FCB | Fore-end cracked or broken | | | | | | |
| FD | Follows-down | | 340. | | | | |
| FF | Fails to fire | | | | | | |
| FFP | Flat firing pin | | | | | | |
| FOS | Fires on safe | | | | | | |
| FPHB | Firing pin hits bbl | | | | | | |
| FPHI | Firing pin hits inside rim | | | | | | |
| FPO | Floor plate opens | · *** | | | | | |
| FPOH | Floor plate opens hard | | | | | XX. | |
| FSR | Fires when safe is released | | | | | | |
| FT | Follower tips | | | | | | |
| GCSO | Gas cyl shot off | | | 1165 | | | |
| HBL | Heavy bolt lift | | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | | |
| HPA | High pressure ammo | | | | | | |
| HUR | Hard under rail | | | | | | Ø |
| JCS | Jumps cartridge | | | | | ; | |
| JM | Jumps magazin e | | | | | | |
| JO | Jars off | | | | | | |
| LB | Light blow | | | | | | |
| MAH | Magazine assembles hard | | | | | | |
| MCW | Magazine capacity wrong | | | | | | |
| MFA | Misfires (ammo) | | | | | | |
| MFOP | Magazine follower out of position | | | | | | |



| Subject to Protective Order | |
|-----------------------------|-----|
| | ML |
| ă L | MLH |
| S S S | MRH |
| .< T | он |
| len | OR |
| ŋiŋ | PH |
| ams v. Remingtor | PSI |
| <u>ب</u> | PSM |
| | |


| ML Magazine loads hard Image of the set of the se | |
|---|--|
| MRH Magazine removes faird Image: Construction of the second of the | |
| OH Opens hand Image: Anti-Sector of the sector of the | |
| OR Över-indes Image: Constraint of the second | |
| PH Pulls hard Image: Sector Sect | |
| PSI Proof stamp illegible Image: Stamp missing Image: Stamp mi | |
| PSMProof stamp missingImage: stamp missingImage: stamp missingRBOCRings and bulges on caseImage: stamp missingImage: stamp missingRDW(Action) release doesn't workImage: stamp missingImage: stamp missingRICRings in chamberImage: stamp missingImage: stamp missingRISRing in sholderImage: stamp missingImage: stamp missingRISRing in sholderImage: stamp missingImage: stamp missingRSRing in sholderImage: stamp missingImage: stamp missingRSRing sremImage: stamp missingImage: stamp missingSBCStems bottom chambersImage: stamp missingImage: stamp missingSBEStems bibl extensionImage: stamp missingImage: stamp missingSCBStock cracked or brokenImage: stamp missingImage: stamp missingSCXShell catchesImage: stamp missingImage: stamp missingSHIShort indentImage: stamp missingImage: stamp missingSICStems in chamberImage: stamp missingImage: stamp missingSLshaves leadImage: stamp missingImage: stamp missing | |
| Proof stanlp missing Image: Constraint of the stanlp missing Image: Constraint of the stanlp missing RBOC Rings and bulges on case Image: Constraint of the stanlp missing Image: Constraint of the stanl | |
| RBOC Rings and buiges on case | |
| RICRings in chamberAAAARISRing in sholderImage: Second Stems bottom chambersImage: Second Stems bottom chamberImage: Second Stems bottom chamberIm | |
| RIS Ring in sholder Image: Constraint of the state of the sta | |
| RS Rim srem RS Rim srem SBC Stems bottom chambers Image: Stems bottom chambers Image: Stems bottom chambers SBE Stems bbl extension Image: Stems bottom chambers Image: Stems bottom chambers SCB Stock cracked or broken Image: Stems bottom chambers Image: Stems bottom chambers SCB Stock cracked or broken Image: Stems bottom chambers Image: Stems incline SHI Short indent Image: Stems in chamber Image: Stems in chamber SIC Stems in chamber Image: Stems in chamber Image: Stems in chamber SL shaves lead Image: Stems in chamber Image: Stems in chamber | |
| RS Rtm stem C <thc< th=""> C <thc< th=""> <thc< t<="" td=""><td></td></thc<></thc<></thc<> | |
| SBE Stems bbl extension SCB Stock cracked or broken SCX Shell catches SHI Short indent SI Stems incline SIC Stems in chamber SL shaves lead | |
| SCB Stock cracked or broken Image: Constraint of the second | |
| SCX Shell catches Image: Shell catches SHI Short indent Image: Shell catches SHI Short indent Image: Shell catches SI Stems incline Image: Shell catches SIC Stems in chamber Image: Shell catches SL shaves lead Image: Shell catches | |
| SHI Short indent Image: Constraint of the state of the stateo | |
| Shirt indent Sile Sile Sile SI Stems in chamber Sile Sile SL shaves lead Sile Sile | |
| Sitems include Sitems in chamber SIC Stems in chamber SL shaves lead | |
| SL shaves lead | |
| | |
| | |
| SLC Stems left side of chamber | |
| SMOC Stretch marks on case | |
| SOR Stem over-ride | |
| SP Stems port | |
| SR Shoulder rough | |
| SRC Stems right side of chamber | |




| Protective Order | |
|------------------|-------|
| W | SRIC |
| ē | SSOC |
| ns 🐄 | STC 🛞 |
| <u>ج</u> | SWE |
| ams v. Remington | SWH |
| nin | sww |
| gtor | TD |
| <u>د</u> | τu |
| | 1140 |

Subject to

| SRIC | Specific rings in chamber | | | |] |
|--------|---------------------------------|------|-------------|------|---|
| SSOC | Surface scratches on case | | | | |
| STC | Stems top chamber | | | | |
| SWE | Satety switch works too easily | | | | |
| SWH | Safety switch works too hard | àre. | | | |
| sww | Safety ewitxh won't work | | | |] |
| TD | Tips down | | | | |
| TU | Tips up | | | | |
| TWP | Trigger won't pull | | | | |
| TWR | Trigger won't retract | | | | |
| UNCN-T | Uncoded | | | | |
| хн | Extracts hard | | | 900. | |
| | | | | | |
| HI | High | | Million III | | |
| LO | Low | | | | |
| LEFT | Left | | | | |
| RIGHT | Right | | | | |
| DG | Doesn't Group | | | | |
| FSST | Front sight tipped | | | | Þ |
| RSTT | Rear sight tipped | | | â | |
| RSBR | Rear sight base raised | | | | ľ |
| FSTR | Front sight raised | | | | |
| FSTL | Front sight loose | | | | |
| RSTL | Rear sight loose | | | | |
| MGPT-G | Missing parts at target | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | |
| | | | | | |



| AI-P | Assembly incompleye at proof | | | | |
|-------------|---|--|--|-------|--|
| 368 · · · · | Barrel bracket gracked or broken at proof | | | | |
| вс-р | Blows cases at proof | | | | |
| вев-р 👋 | Barrel extension broken at proof | | | | |
| BLP-P | Blanked primer at proof | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | |
| BP-P | Blown primer at proof | | | | |
| BS-P | Barrel split at proof | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | |
| ESB-P | Ejector sticks back at proof | | | | |
| FCB-P | Fore-end cracked at proof | | | | |
| FESO-P | Fore-end shot off at proof | | | 1990. | |
| FF-P | Fails to fire at proof | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | |
| PP-P | Pierced primer at proof | | | | |
| SCB-P | Stock cracked or broken at proof | | | | |
| UNCM-P | Uncoded proof malfunctions | | | | |

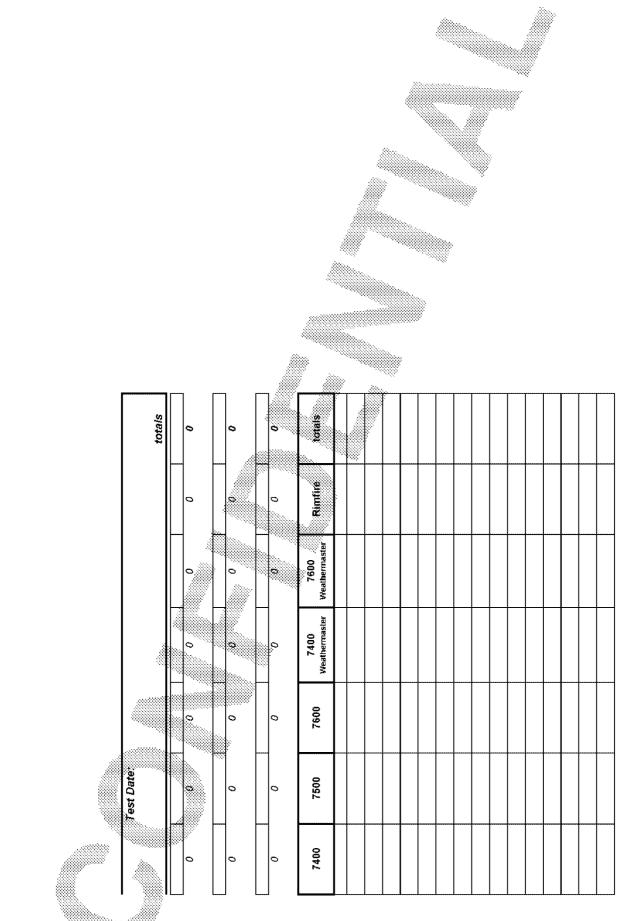


Subject to Protective Order - Williams v. Remington









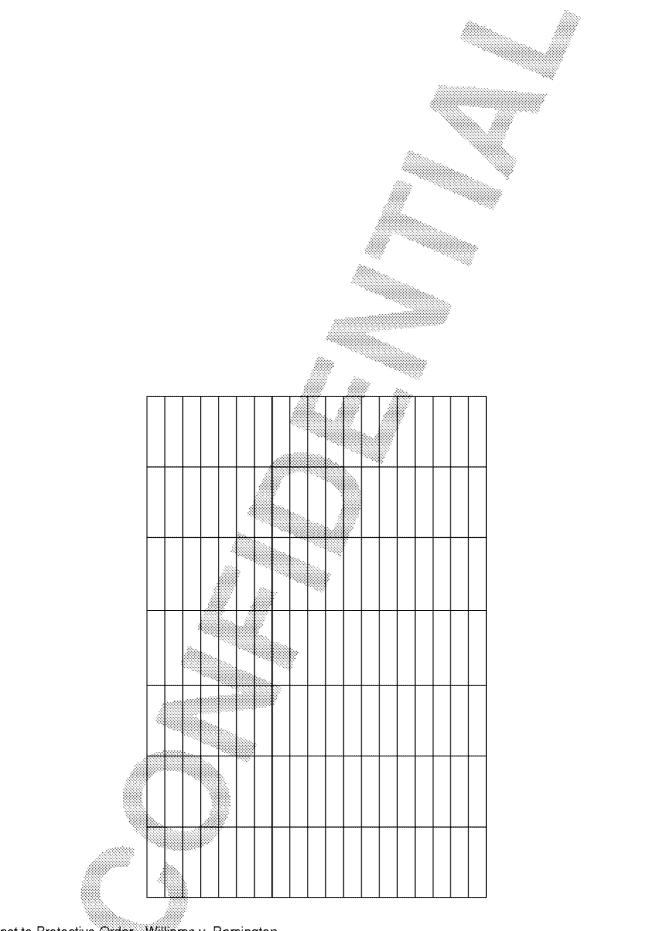

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|--|----------|----------|--------|------------|--------|---------|-----------|-----|
| Summary | Total Rejected | d: 0 | | | | | | | |
| | Overall Reject Rate | | | | | | | | = |
| | Sho Proof Rejecte Percei | | 0 | 0 | 0 | 0 | 0 | 0 | |
| | | t [d | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Target Rejecte | t: d: | <u> </u> | 0 | | 0 | 0 | 0 | |
| | Percer | | | L | | allin. | | Model 7 | 1 |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Stainless | |
| | | | | | | | | | 1 |
| AB | Action binds | | | | | | | | - |
| BABS | Bulge at body shoulder | _ | | *** | | | | | - |
| BAC | Burr at chamber | | **** | | | | | | - |
| BBMA | BBL-to-bolt misalignment | | | | | | | | - |
| BB | Bolt binds/catches | | | | | | | | |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | | | | | | | |
| BC | Blows cases | | | | | | | | ┨▓▓ |
| BHR | Bolt hits receiver | | | | | | | | - |
| BHS | Bolt plug hits safety switch | | | | | | | | - |
| BLOP | Bar lock or disconnector out of position | | | | | | | | - |
| BLSO | Barrel lug shot off | | | | | | | | - |
| BPO | Bolt pulls out | | | | | | | | - |
| BSSM | Bolt stems shell in magazine | | | | | | | | 4 |
| BWCD | Bolt won't cam down | | | | | | | | |

| BWCFM | Bolt won't close over full magazine | | | | | 1 |
|-------|--------------------------------------|------|----------|---------------------------------------|---|-----|
| CD | Case dented | | | | | |
| СН | Closes hand | | | | | |
| CLM | Can't laod magazine | | | | | |
| со | Cut-off | 340. | | | | |
| CR | Cuts rim | | | | | |
| CS | Cases swell | | . | | | |
| CTOG | Chamber tom or gouged | | | | | |
| СТР | Creepy trigger pull | | | | | |
| CWSB | Carns wrong side of action bar | | | | | |
| DBB | Doesn't blow back | | | · · · · · · · · · · · · · · · · · · · | | |
| DCS | Double click in safety switch | | | | | |
| DCT | Double click in trigger | | | | | |
| DCU | Doesn't close-up | | | | | |
| DE | Doesn't eject | | | | | |
| DEL | Doesn't eject live round | | | | | |
| DFB | Doesn't feed back | | | | |] . |
| DFU | Doesn't feed up | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | P |
| DLU | Doesn't lock-up | | | | á | |
| DS | Dead safe | | | | | |
| DX | Doesn't extract | | | | | |
| DXL | Doesn't extract live round | | | | | |
| EDS | Extractor drops shell | | | | | |
| ESB | Ejector sticks back | | | | | |
| ESCR | Empty shell catches receiver | | | | | |
| ESS | Extractor stems shell | | | | | |




| Subject to Protective Order | |
|-----------------------------|------|
| | FA |
| <u>a</u> | FB |
| 3 S | FC |
| .< דו | FCB |
| ۲en | FD |
| ŋiŋ | FF |
| liams v. Remington | FFP |
| ر | FOS |
| | FPHR |

| FA. | Fires automatically | | | | | |] |
|------|-----------------------------------|-----|---------|-----|-----------------------|------|---|
| FB | Follower binds | | | | | | 1 |
| FC | Fails to connect | | | | | | 1 |
| FCB | Fore-end cracked or broken | | | | | | |
| FD | Follows-down | | -texts. | | | | 1 |
| FF | Fails to fire | | | | | | 1 |
| FFP | Flat firing pin | | | | | | 1 |
| FOS | Fires on safe | | | | | | 1 |
| FPHB | Firing pin hits bbl | | | | 22.5. 2011/10-10-1 | | |
| FPHI | Firing pin hits inside rim | | | | | | |
| FPO | Floor plate opens | ~~~ | | | | | |
| FPOH | Floor plate opens hard | | | | | Sec. | 1 |
| FSR | Fires when safe is released | | | | | |] |
| FT | Follower tips | | | *** | | | |
| GCSO | Gas cyl shot off | | | | | | |
| HBL | Heavy bolt lift | | | | | | 1 |
| HMSC | Heading mismatch-steps on case | | | | | | |
| HPA | High pressure ammo | | | | | | |
| HUR | Hard under rail | | | | | | |
| JCS | Jumps cartridge | | | | | ż | |
| JM | Jumps magazin e | | | | | | ľ |
| OL | Jars off | | | | | | 1 |
| LB | Light blow | | | | | | |
| MAH | Magazine assembles hard | | | | | | |
| MCW | Magazine capacity wrong | | | | | | |
| MFA | Misfires (ammo) | | | | | | |
| MFOP | Magazine follower out of position | | | | | | 1 |



| Subject to Protective Order | |
|-----------------------------|------|
| | ML |
| ā s | MALH |
| 10 T 1000 | MRH |
| | ОН |
| ren | OR |
| ning | PH |
| ams v. Remingtor | PSI |
| L | PSM |
| | 1 |


| ML. | Magazine loose | | | | 1 |
|------|-------------------------------|--------|-----------|-------|------|
| MLH | Magazine loads hard | | | | |
| MRH | Magazine removes hard | | | | 1 |
| он | Opens hand | | | | 1 |
| OR | Over-indes | - 200. | | | |
| РН | Pulls hard | | | | 1 |
| PSI | Proof stamp illegible | | | | |
| PSM | Proof stamp missing | | | | |
| RBOC | Rings and bulges on case | | 2005. | | |
| RDW | (Action) release doesn't work | | | | |
| RIC | Rings in chamber | | | | |
| RIS | Ring in sholder | | | 1990. | |
| RS | Rim srem | | | | |
| SBC | Stems bottom chambers | **** | | | |
| SBE | Stems bbl extension | | | | |
| SCB | Stock cracked or broken | | | | |
| scx | Shell catches | | | |] _ |
| SHI | Short indent | | | |]@ |
| SI | Stems incline | | | | |
| SIC | Stems in chamber | | | ; | |
| SL | shaves lead | | | | 1000 |
| SLC | Stems left side of chamber | | | | |
| SMOC | Stretch marks on case | | | | |
| SOR | Stem over-ride | | | | |
| SP | Stems port | | | | |
| SR | Shoulder rough | | | | |
| SRC | Stems right side of chamber | | | | |




| Protective Order | | |
|-------------------|------|--------------|
| V | SRIC | |
| lams v. Remington | SSOC | |
| ns. | STC | |
| .< T | SWE | 1997 1997 |
| fen | SWH | |
| ning | sww | |
| gto | TD | |
| د د | TU | |
| | TIME | |

Subject to

| SRIC | Specific rings in chamber | | | |] |
|--------|---------------------------------|-------|--|------|--------|
| SSOC | Surface scratches on case | | | | |
| STC | Stems top chamber | | | |] |
| SWE | Satety switch works too essily | ***** | | | |
| SWH | Safety switch works too hard | | | | |
| sww | Safety ewitxh won't work | | | | |
| TD | Tips down | | | | |
| TU | Tips up | | | | |
| TWP | Trigger won't pull | | | | |
| TWR | Trigger won't retract | | | | |
| UNCN-T | Uncoded | l | | | |
| хн | Extracts hard | | | 80x. | |
| | | | | | |
| HI | High | | | | |
| LO | Low | | | | |
| LEFT | Left | | | | |
| RIGHT | Right | | | | ╡. |
| DG | Doesn't Group | | | | 4 |
| FSST | Front sight tipped | | | | |
| RSTT | Rear sight tipped | | | 2 | |
| RSBR | Rear sight base raised | ***** | | | l. |
| FSTR | Front sight raised | | | | |
| FSTL | Front sight loose | | | | |
| RSTL | Rear sight loose | | | | |
| MGPT-G | Missing parts at target | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | |
| | | | | | |



| AI-P | Assembly incompleye at proof | | | | | |
|--------|---|------|-----|--|------|--|
| 368 | Barrel bracket gracked or broken at proof | | | | | |
| 3С-Р | Blows cases at proof | | | | | |
| 3EB-P | Barrel extension broken at proof | | | | | |
| 3LP-P | Blanked primer at proof | Att. | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | | |
| BP-P | Blown primer at proof | | • | | | |
| BS-P | Barrel split at proof | | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | | |
| ESB-P | Ejector sticks back at proof | | | | | |
| FCB-P | Fore-end cracked at proof | | | | | |
| FESO-P | Fore-end shot off at proof | | | | 900. | |
| FF-P | Fails to fire at proof | | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | 110 | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | | |
| PP-P | Pierced primer at proof | | | | | |
| SCB-P | Stock cracked or broken at proof | | | | | |
| UNCM-P | Uncoded proof malfunctions | | | | | |

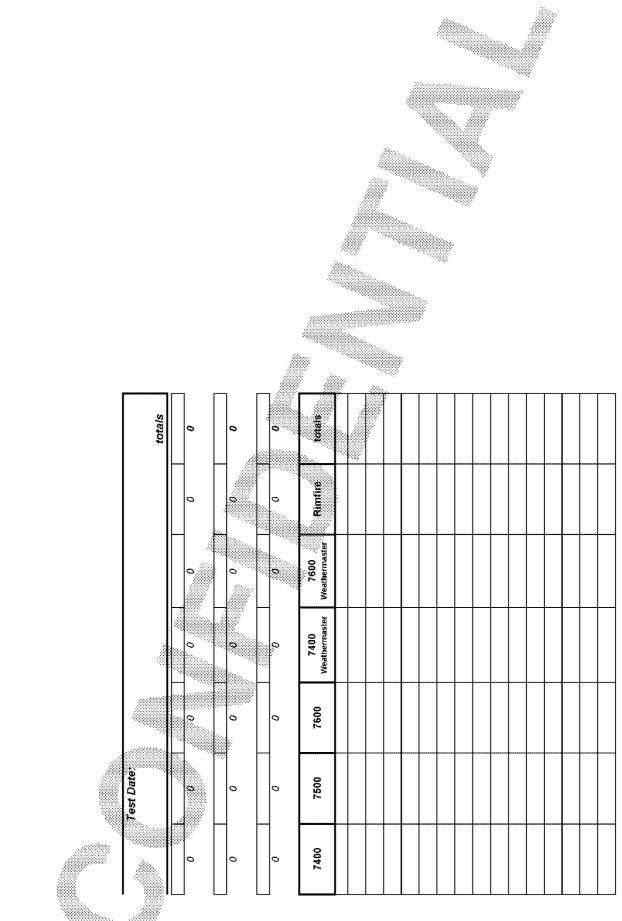


Subject to Protective Order - Williams v. Remington









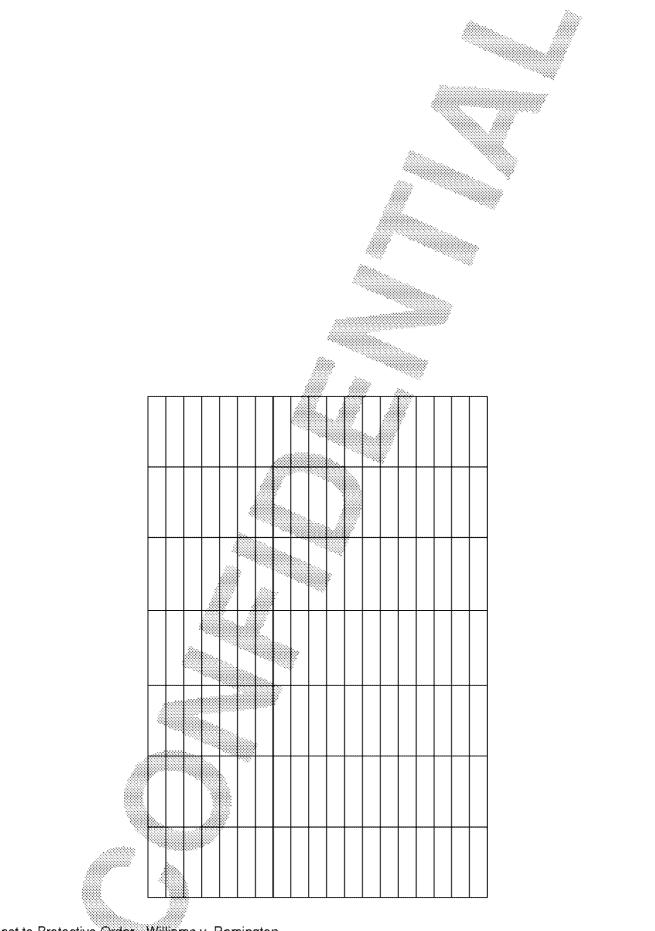

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|--|---------|---------|--------|------------|--------|---------|----------------------|-------|
| Summary | Y Total Test + Proof Failure Total Rejected | | | | | | | | |
| | Overall Reject Rate | | | | | | | | |
| | Sho Proof Rejecte Percei | | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Test Rejecte Percer | | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Target Rejecte Percer | d: 0 🎆 | 0 | 0 | 0 | 0 | 0 | 0 |] |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| AB | Action binds | | | | | | | | |
| BABS | Bulge at body shoulder | | | | | | | | |
| BAC | Burr at chamber | | | | | | | | |
| BBMA | BBL-to-bolt misalignment | | | | | | | | 1 🚕 |
| BB | Bolt binds/catches | | | | | | | | 1//// |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | * | | | | | | |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | 1 | 1 🖉 |
| BHS | Bolt plug hits safety switch | | | | | | | | 1 🎕 |
| BLOP | Bar lock or disconnector out of position | | - | | | | | | |
| BLSO | Barrel lug shot off | | | | | | | | |
| BPO | Bolt pulis out | | | | | | | | |
| BSSM | Bolt stems shell in magazine | | | | | | | | |
| BWCD | Bolt won't cam down | | | | | | | | 1 |

| BWCFM | Bolt won't close over full magazine | | | |] |
|-------|--------------------------------------|-------|--|----|---|
| CD | Case dented | | | | 1 |
| СН | Closes hand | | | | 1 |
| CLM | Can't laod magazine | | | | 1 |
| со | Cut-off | -5-x- | | | |
| CR | Cuts rim | | | | 1 |
| CS | Cases swell | | | | |
| CTOG | Chamber tom or gouged | | | | |
| СТР | Creepy trigger pull | | | | |
| CWSB | Carns wrong side of action bar | | | | |
| DBB | Doesn't blow back | | | | |
| DCS | Double click in safety switch | | | XX | |
| DCT | Double click in trigger | | | | |
| DCU | Doesn't close-up | | | | |
| DE | Doesn't eject | | | | |
| DEL | Doesn't eject live round | | | | |
| DFB | Doesn't feed back | | | | |
| DFU | Doesn't feed up | | | | |
| DLO | Doesn't lock open (after last shell) | | | | Þ |
| DLU | Doesn't lock-up | | | à | |
| DS | Dead safe | | | | |
| DX | Doesn't extract | | | | |
| DXL | Doesn't extract live round | | | | |
| EDS | Extractor drops shell | | | | |
| ESB | Ejector sticks back | | | | |
| ESCR | Empty shell catches receiver | | | | |
| ESS | Extractor stems shell | | | | |




| o Protective Orde | | |
|----------------------------|-----------------|---|
| er - Williams v. Remington | FA. FB FC | |
| .< TI | FCB | ÷ |
| len | FD | |
| ing | FF | |
| ,tor | FFP | |
| ب | FOS | |
| | FPHB | |

| FA | Fires automatically | | | | 1 |
|------|-----------------------------------|--------|--|------|---|
| FB | Follower binds | | | | 1 |
| FC 🐘 | Fails to connect | | | | 1 |
| FCB | Fore-end cracked or broken | | | | |
| FD | Follows-down | - 420. | | | |
| FF | Fails to fire | | | | |
| FFP | Flat firing pin | | | | |
| FOS | Fires on safe | | | | |
| FPHB | Firing pin hits bbl | | | | |
| FPHI | Firing pin hits inside rim | | | | |
| FPO | Floor plate opens | | | | |
| FPOH | Floor plate opens hard | | | See. | |
| FSR | Fires when safe is released | | | | |
| FT | Follower tips | | | | |
| GCSO | Gas cyl shot off | | | | |
| HBL | Heavy bolt lift | | | | |
| HMSC | Heading mismatch-steps on case | | | | |
| HPA | High pressure ammo | | | | |
| HUR | Hard under rail | | | | ø |
| JCS | Jumps cartridge | | | â | |
| JM | Jumps magazin e | | | | |
| JO | Jars off | | | | |
| LB | Light blow | | | | |
| MAH | Magazine assembles hard | | | | |
| MCW | Magazine capacity wrong | | | | |
| MFA | Misfires (ammo) | | | | |
| MFOP | Magazine follower out of position | | | | |



| Subject to Protective Order | |
|-----------------------------|------|
| | ML |
| lan . | MILH |
| ns . | MRH |
| .< TI | он |
| len | OR |
| nin | PH |
| ams v. Remingtor | PSI |
| <u>د</u> | PSM |
| | 1 |


| ML. | Magazine loose | | | | 1 |
|------|-------------------------------|------|--|------|---|
| MLH | Magazine loads hard | | | | 1 |
| MRH | Magazine removes hard | | | | 1 |
| он | Opens hard | | | | |
| OR | Over-indes | 322. | | | 1 |
| РН | Pulls hard | | | | 1 |
| PSI | Proof stamp illegible | | | |] |
| PSM | Proof stamp missing | | | | 1 |
| RBOC | Rings and bulges on case | | | | |
| RDW | (Action) release doesn't work | | | | |
| RIC | Rings in chamber | | | | |
| RIS | Ring in sholder | | | 5eo. |] |
| RS | Rim srem | | | | |
| SBC | Stems bottom chambers | | | | |
| SBE | Stems bbl extension | | | | |
| SCB | Stock cracked or broken | | | | |
| scx | Shell catches | | | | |
| SHI | Short indent | | | | 1 |
| SI | Stems incline | | | | |
| SIC | Stems in chamber | | | ź | |
| SL | shaves lead | | | | |
| SLC | Stems left side of chamber | | | | |
| SMOC | Stretch marks on case | | | | |
| SOR | Stem over-ride | | | | |
| SP | Stems port | | | | |
| SR | Shoulder rough | | | | |
| SRC | Stems right side of chamber | | | | |




| Protective Order | |
|-------------------|------|
| | SRIC |
| ē | 8500 |
| ີ ເ | STC |
| iams v. Remington | SWE |
| len | SWH |
| ning | sww |
| yto | TD |
| J | TU |
| | |

Subject to

| SRIC | Specific rin gs in chamber | | | | |] |
|--------|-----------------------------------|-----|--|--|------|----|
| SSOC | Surface scratches on case | | | | | |
| STC | Stems top chamber | | | | | |
| SWE | Safety switch works too easily | | | | | |
| SWH | Safety switch works too hard | | | | | |
| sww | Safety ewitxh won't work | | | | | |
| ΤD | Tips down | | | | | |
| тυ | Tips up | | | | | |
| TWP | Trigger won't pull | | | | | |
| TWR | Trigger won't retract | | | | | |
| UNCN-T | Uncoded | ~~~ | | | | |
| хн | Extracts hard | | | | 100. | |
| | | | | | | |
| HI | High | | | | | |
| LO | Low | | | | | |
| LEFT | Left | | | | | |
| RIGHT | Right | | | | | ╡. |
| DG | Doesn't Group | | | | | |
| FSST | Front sight tipped | | | | | 1 |
| RSTT | Rear sight tipped | | | | ä | |
| RSBR | Rear sight base raised | | | | | |
| FSTR | Front sight raised | | | | | |
| FSTL | Front sight loose | | | | | |
| RSTL | Rear sight loose | | | | | |
| MGPT-G | Missing parts at target | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | |
| | | | | | | |



| AI-P | Assembly incompleye at proof | 1 | | | | | 1 |
|---------|---|-------|------|----|---|------|---|
| 368 | Barrel bracket gracked or broken at proof | | | | | | |
| 3C-P | Blows cases at proof | | | | | | |
| зев-р 🚿 | Barrel extension broken at proof | | | | | | |
| BLP-P | Blanked primer at proof | | ása. | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | | | |
| BP-P | Blown primer at proof | | | | | | |
| BS-P | Barrel split at proof | | | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | : | | |
| ESB-P | Ejector sticks back at proof | | | | | | |
| FCB-P | Fore-end cracked at proof | · *** | | | | | |
| ESO-P | Fore-end shot off at proof | | | | | 8eo. | |
| FF-P | Fails to fire at proof | | | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | 10 | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | | | |
| PP-P | Pierced primer at proof | | | | | | |
| SCB-P | Stock cracked or broken at proof | | | | | | |
| UNCM-P | Uncoded proof malfunctions | | *** | | | | |

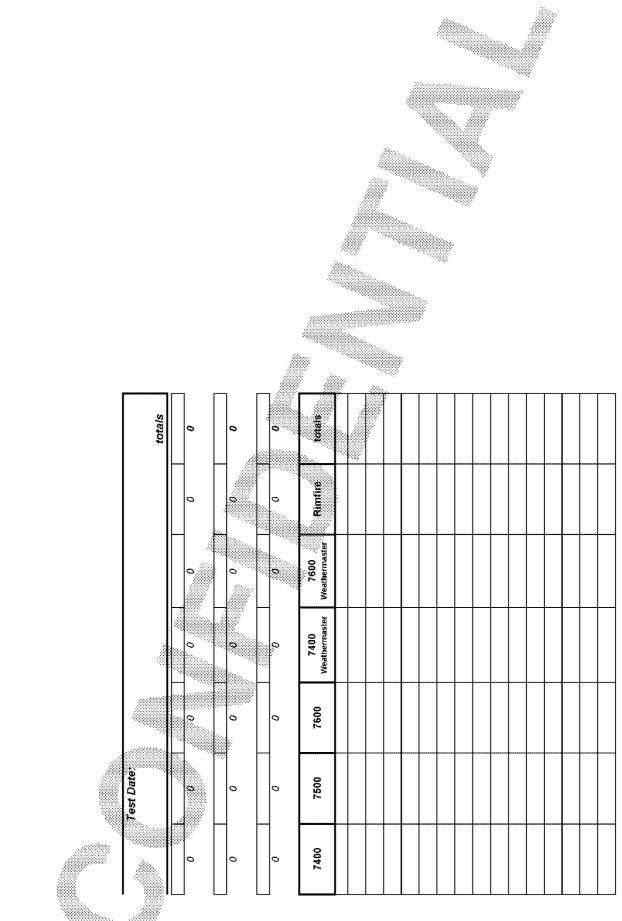



Subject to Protective Order - Williams v. Remington







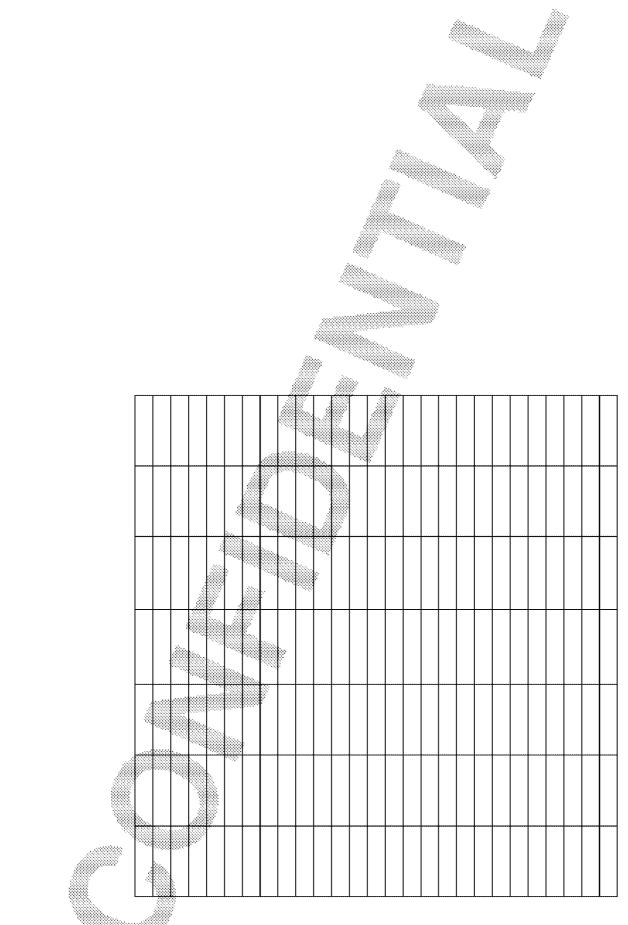

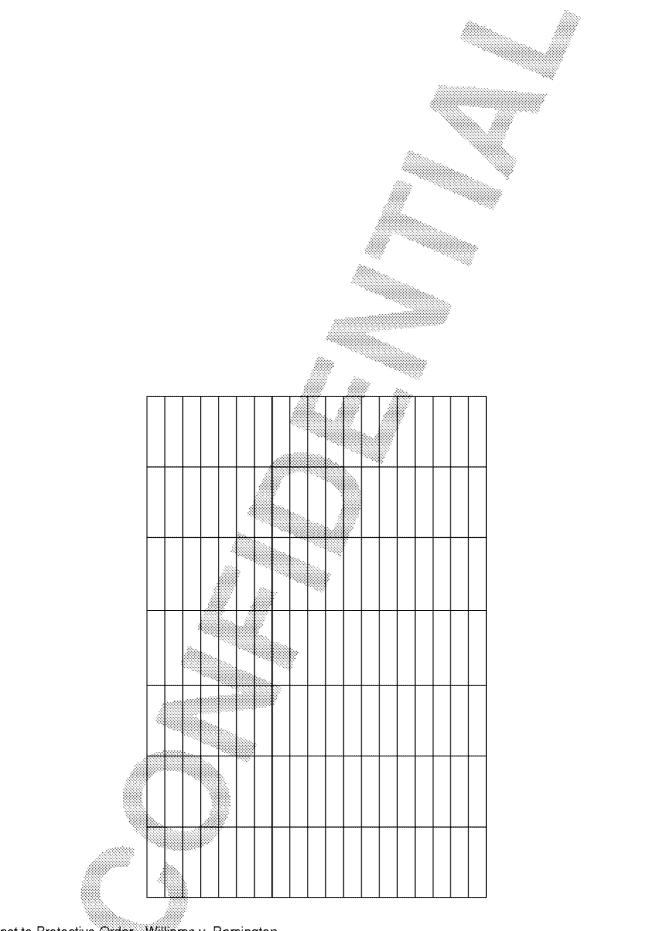

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|---|----------|---------|--------|------------|--------|---------|----------------------|-----|
| Summary | Total Test + Proof Failures Total Rejected | | | | | | | | |
| | Overall Reject Rate | | | | | | | | |
| | Shot: Proof Rejected Percent | <u> </u> | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Shot. Test Rejected Percent | Q. | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Shot: Target Rejected Percent | : 0 | 0 | 0 | 0 | 0 | 0 | 0 |] |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| AB | Action binds | | | | | | | | |
| BABS | Bulge at body shoulder | | | | | | | | - |
| BAC | Burr at chamber | | | | | | | | 1 |
| BBMA | BBL-to-bolt misalignment | | | | | | | | 1 🧥 |
| BB | Bolt binds/catches | | | | | | | | 1 |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | | | | | 197 | | t i |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | | 1 |
| BHS | Bolt plug hits safety switch | | | | | | | | 1 🍭 |
| BLOP | Bar lock or disconnector out of position | | | | | | | | 1 |
| BLSO | Barrel lug shot off | | | | | | | | 1 |
| BPO | Bolt pulls out | | | | | | | | |
| BSSM | Bolt stems shell in magazine | | | | | | | | |
| BWCD | Bolt won't cam down | | | | | | | | 1 |

| BWCFM | Bolt won't close over full magazine | | | | | |
|-------|--------------------------------------|------|-----|--|------|---|
| CD | Case dented | | | | | |
| СН | Closes hand | | | | | |
| CLM | Can't laod magazine | **** | | | | |
| со | Cut-off | | | | | |
| CR | Cuts rim | | | | | |
| cs | Cases swell | | | | | |
| СТОБ | Chamber tom or gouged | | | | | |
| СТР | Creepy trigger pull | | | | | |
| CWSB | Cams wrong side of action bar | | | | | |
| DBB | Doesn't blow back | | | | | |
| DCS | Double click in safety switch | | | | 500. | |
| DCT | Double click in trigger | | | | | |
| DCU | Doesn't close-up | | | | | |
| DE | Doesn't eject | | 110 | | | |
| DEL | Doesn't eject live round | | | | | |
| DFB | Doesn't feed back | | | | | |
| DFU | Doesn't feed up | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | ø |
| DLU | Doesn't lock-up | | | | á | |
| DS | Dead safe | | | | | |
| DX | Doesn't extract | | | | | |
| DXL | Doesn't extract live round | | | | | |
| EDS | Extractor drops shell | | | | | |
| ESB | Ejector sticks back | | | | | |
| ESCR | Empty shell catches receiver | | | | | |
| ESS | Extractor sterns shell | | | | | |




| Subject to Protective Order | |
|-----------------------------|------|
| ×. | FA |
| <u>a</u> | FB |
| 2 T S | FC |
| T | FCB |
| len | FD |
| nin | FF |
| ams v. Remington | FFP |
| ر | FOS |
| | FPHR |

| FA | Fires automatically | | | | | | |
|------|-----------------------------------|-----|------|------|--|------|----|
| FB | Follower binds | | | | | |] |
| FC | Fails to connect | | | | | | |
| FCB | Fore-end cracked or broken | | | | | | |
| FD | Follows-down | | áto. | | | | |
| FF | Fails to fire | | | | | |] |
| FFP | Flat firing pin | | | | | | |
| FOS | Fires on safe | | | | | | |
| FPHB | Firing pin hits bbl | | | | | | |
| FPHI | Firing pin hits inside rim | | | | | | |
| FPO | Floor plate opens | ~~~ | | | | | |
| FPOH | Floor plate opens hard | | | | | 889. | |
| FSR | Fires when safe is released | | | | | | |
| FT | Follower tips | | | | | | |
| GCSO | Gas cyl shot off | | | 1168 | | | |
| HBL | Heavy bolt lift | | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | | |
| HPA | High pressure ammo | | | | | | |
| HUR | Hard under rail | | | | | | ø |
| JCS | Jumps cartridge | | | | | ; | |
| JM | Jumps magazin e | | | | | | ľ« |
| JO | Jars off | | | | | | |
| LB | Light blow | | | | | | |
| MAH | Magazine assembles hard | | | | | | |
| MCW | Magazine capacity wrong | | | | | | |
| MFA | Misfires (ammo) | | | | | | |
| MFOP | Magazine follower out of position | | | | | | |



| Subject to Protective Order | |
|-----------------------------|-------|
| | ML |
| Ē | MIH |
| 0 0 | MRH 🛞 |
| TI | он |
| ien | OR |
| ning | РН |
| ams v. Remingtor | PSI |
| L | PSM |
| | |


| ML 🥼 | Magazine loose | | | | | |] |
|------|-------------------------------|-------|--------|--------|--|---|-----|
| MALH | Magazine loads hard | | | | | | 1 |
| MRH | Magazine removes hard | | **** | | | | 1 |
| он | Opens hant | | | | | |] |
| OR | Overindes | | 240 | | | |] |
| PH | Pulls hard | | | | | | |
| PSI | Proof stamp illegible | | | • • | | | |
| PSM | Proof stamp missing | | | | | | |
| RBOC | Rings and bulges on case | | | | 8999 1999 - Maria Mariana, 1999 - 1999 - 1999 - 1999 - 1999 - 1999 - 1999 - 1999 - 1999 - 1999 - 1999 - 1999 - 1999 | | |
| RDW | (Action) release doesn't work | | | | | | |
| RIC | Rings in chamber | · *** | | | | | |
| RIS | Ring in sholder | | | | | | |
| RS | Rim srem | | ***** | | | | |
| SBC | Stems bottom chambers | | **** | | | | |
| SBE | Stems bbl extension | | ****** | | | | |
| SCB | Stock cracked or broken | | | | | | |
| SCX | Shell catches | | | | | |] . |
| SHI | Short indent | | | | | | |
| SI | Stems incline | | | | | | |
| SIC | Stems in chamber | | | | | á | |
| SL | shaves lead | | | | | | |
| SLC | Stems left side of chamber | | | | | | |
| SMOC | Stretch marks on case | | | | | | |
| SOR | Stem over-ride | | | | | | |
| SP | Stems port | | | | | | |
| SR | Shoulder rough | | | | | | |
| SRC | Stems right side of chamber | | | | | | |




| Protective Order | |
|--|---------------------------|
| N. | SRIC |
| a la | SSOC |
| ר <u>מ</u> | STC |
| TI | SWE |
| ien | SWH |
| nin | sww |
| iams v. Remington | TD |
| | TU |
| | T) ((D) |

Subject to

| SRIC | Specific rings in chamber | | | |] |
|--------|---------------------------------|------|-------------|------|---|
| SSOC | Surface scratches on case | | | | |
| STC | Stems top chamber | | | | |
| SWE | Satety switch works too easily | | | | |
| SWH | Safety switch works too hard | àre. | | | |
| sww | Safety ewitxh won't work | | | |] |
| TD | Tips down | | | | |
| TU | Tips up | | | | |
| TWP | Trigger won't pull | | | | |
| TWR | Trigger won't retract | | | | |
| UNCN-T | Uncoded | | | | |
| хн | Extracts hard | | | 900. | |
| | | | | | |
| HI | High | | Million III | | |
| LO | Low | | | | |
| LEFT | Left | | | | |
| RIGHT | Right | | | | |
| DG | Doesn't Group | | | | |
| FSST | Front sight tipped | | | | Þ |
| RSTT | Rear sight tipped | | | â | |
| RSBR | Rear sight base raised | | | | ľ |
| FSTR | Front sight raised | | | | |
| FSTL | Front sight loose | | | | |
| RSTL | Rear sight loose | | | | |
| MGPT-G | Missing parts at target | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | |
| | | | | | |



| AI-P | Assembly incompleye at proof | | | | |
|-------------|---|--|--|-------|--|
| 368 · · · · | Barrel bracket gracked or broken at proof | | | | |
| вс-р | Blows cases at proof | | | | |
| вев-р 👋 | Barrel extension broken at proof | | | | |
| BLP-P | Blanked primer at proof | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | |
| BP-P | Blown primer at proof | | | | |
| BS-P | Barrel split at proof | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | |
| ESB-P | Ejector sticks back at proof | | | | |
| FCB-P | Fore-end cracked at proof | | | | |
| FESO-P | Fore-end shot off at proof | | | 1990. | |
| FF-P | Fails to fire at proof | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | |
| PP-P | Pierced primer at proof | | | | |
| SCB-P | Stock cracked or broken at proof | | | | |
| UNCM-P | Uncoded proof malfunctions | | | | |

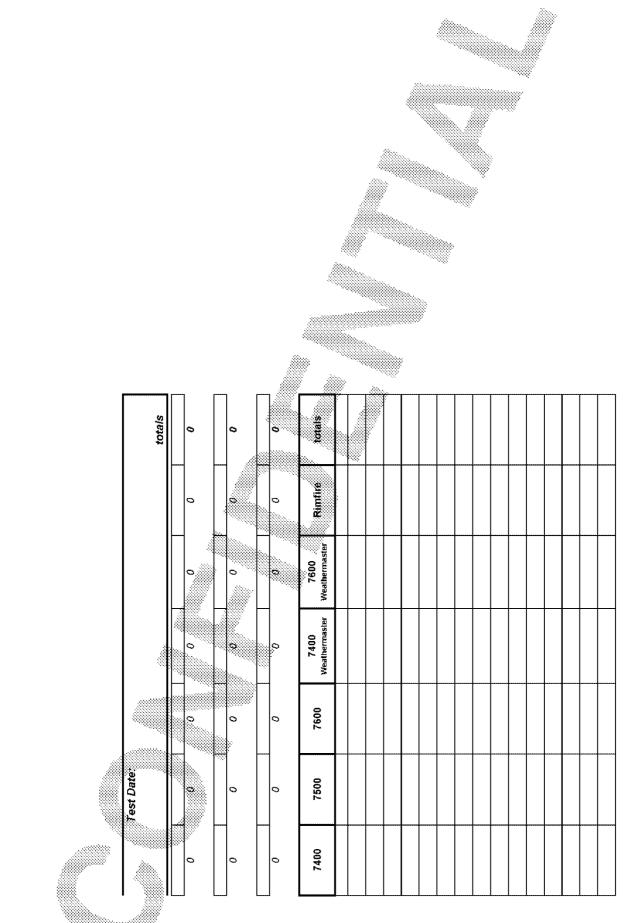



Subject to Protective Order - Williams v. Remington







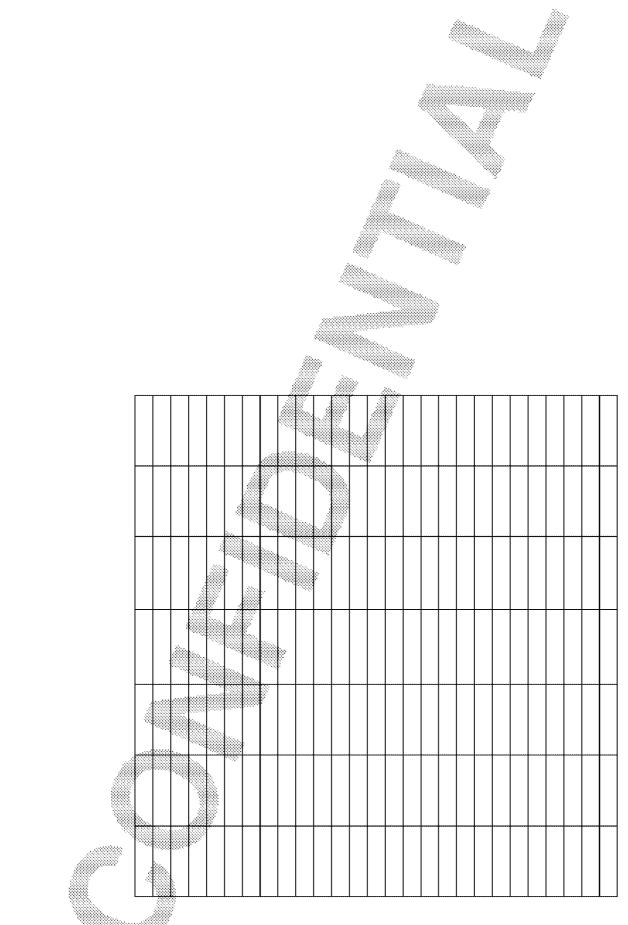

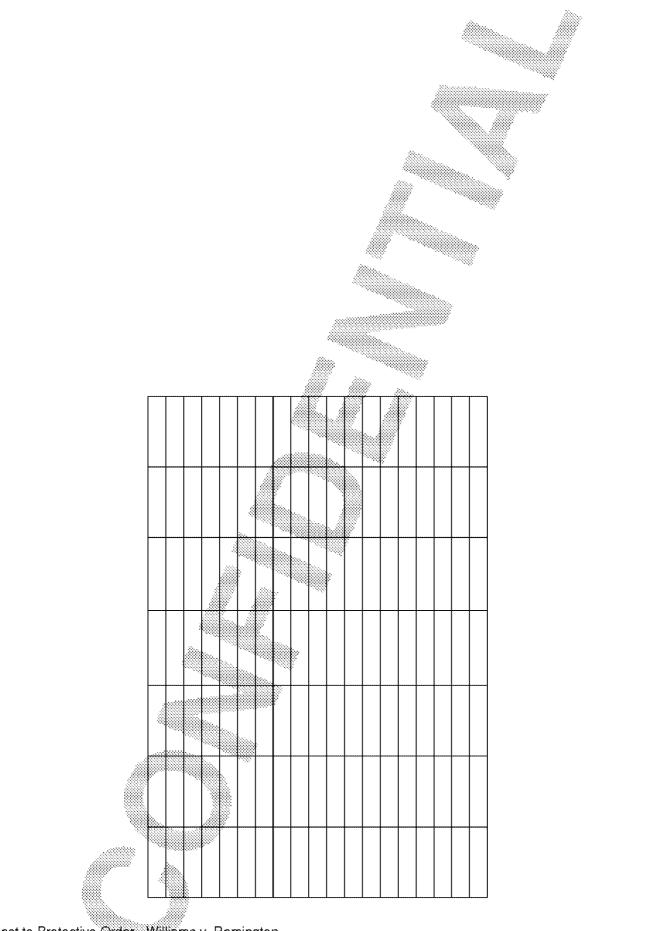

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|--|---------|---------|--------|------------|--------|---------|----------------------|-------|
| Summary | Y Total Test + Proof Failure Total Rejected | | | | | | | | |
| | Overall Reject Rate | | | | | | | | |
| | Sho Proof Rejecte Percei | | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Test Rejecte Percer | | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Target Rejecte Percer | d: 0 🎆 | 0 | 0 | 0 | 0 | 0 | 0 |] |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| AB | Action binds | | | | | | | | |
| BABS | Bulge at body shoulder | | | | | | | | |
| BAC | Burr at chamber | | | | | | | | |
| BBMA | BBL-to-bolt misalignment | | | | | | | | 1 🚕 |
| BB | Bolt binds/catches | | | | | | | | 1//// |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | * | | | | | | |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | 1 | 1 🖉 |
| BHS | Bolt plug hits safety switch | | | | | | | | 1 🎕 |
| BLOP | Bar lock or disconnector out of position | | - | | | | | | |
| BLSO | Barrel lug shot off | | | | | | | | |
| BPO | Bolt pulis out | | | | | | | | |
| BSSM | Bolt stems shell in magazine | | | | | | | | |
| BWCD | Bolt won't cam down | | | | | | | | 1 |

| BWCFM | Bolt won't close over full magazine | | | | | 1 |
|-------|--------------------------------------|------|----------|---------------------------------------|---|-----|
| CD | Case dented | | | | | |
| СН | Closes hand | | | | | |
| CLM | Can't laod magazine | | | | | |
| со | Cut-off | 340. | | | | |
| CR | Cuts rim | | | | | |
| CS | Cases swell | | . | | | |
| CTOG | Chamber tom or gouged | | | | | |
| СТР | Creepy trigger pull | | | | | |
| CWSB | Carns wrong side of action bar | | | | | |
| DBB | Doesn't blow back | | | · · · · · · · · · · · · · · · · · · · | | |
| DCS | Double click in safety switch | | | | | |
| DCT | Double click in trigger | | | | | |
| DCU | Doesn't close-up | | | | | |
| DE | Doesn't eject | | | | | |
| DEL | Doesn't eject live round | | | | | |
| DFB | Doesn't feed back | | | | |] . |
| DFU | Doesn't feed up | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | P |
| DLU | Doesn't lock-up | | | | á | |
| DS | Dead safe | | | | | |
| DX | Doesn't extract | | | | | |
| DXL | Doesn't extract live round | | | | | |
| EDS | Extractor drops shell | | | | | |
| ESB | Ejector sticks back | | | | | |
| ESCR | Empty shell catches receiver | | | | | |
| ESS | Extractor stems shell | | | | | |




| Subject to Protective Order | |
|-----------------------------|-----|
| N. | FA |
| Ē | FB |
| Soor S | FC |
| TI | FCB |
| fen | FD |
| jing | FF |
| lams v. Remington | FFP |
| ب | FOS |
| | |

| FA | Fires automatically | | | | | 1 |
|------|-----------------------------------|-----|--|--|-----|---|
| FB | Follower binds | | | | | |
| FC | Fails to connect | | | | | |
| FCB | Fore-end cracked or broken | | | | | |
| FD | Follows-down | | | | | |
| FF | Fails to fire | | | | | 1 |
| FFP | Flat firing pin | | | | | 1 |
| FOS | Fires on safe | | | | | |
| FPHB | Firing pin hits bbl | | | | | |
| FPHI | Firing pin hits inside rim | | | | | |
| FPO | Floor plate opens | ~~~ | | | | |
| FPOH | Floor plate opens hard | | | | io. | |
| FSR | Fires when safe is released | | | | | |
| FT | Follower tips | | | | | |
| GCSO | Gas cyl shot off | | | | | |
| HBL | Heavy bolt lift | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | |
| HPA | High pressure ammo | | | | | |
| HUR | Hard under rail | | | | | ø |
| JCS | Jumps cartridge | | | | ; | |
| JM | Jumps magazin e | | | | | ľ |
| JO | Jars off | | | | | |
| LB | Light blow | | | | | |
| MAH | Magazine assembles hard | | | | | |
| MCW | Magazine capacity wrong | | | | | |
| MFA | Misfires (ammo) | | | | | |
| MFOP | Magazine follower out of position | | | | | |



| Subject to Protective Order | |
|-----------------------------|-----|
| | ML |
| Ĩ | MLH |
| S. S. | MRH |
| <u>ج</u> | он |
| len | OR |
| nin | PH |
| ams v. Remington | PSI |
| ت_ | PSM |
| | 1 |


| ML | Magazine loose | | | | | |
|------|-------------------------------|--------|---|--|---|---|
| MALH | Magazine lo ads hard | | | | | |
| MRH | Magazine removes hard | | | | | |
| он | Opens:hard | | | | | |
| OR | Overandes | - A.D. | | | | |
| PH | Pulls hard | | | | | |
| PSI | Proof stamp illegible | | • | | | |
| PSM | Proof stamp missing | | | | | |
| RBOC | Rings and bulges on case | | | | | |
| RDW | (Action) release doesn't work | | | | | |
| RIC | Rings in chamber | | | | | |
| RIS | Ring in sholder | | | | | |
| RS | Rim srem | | | | | |
| SBC | Stems bottom chambers | | | | | |
| SBE | Stems bbl extension | | | | | |
| SCB | Stock cracked or broken | | | | | |
| scx | Shell catches | | | | | |
| SHI | Short indent | | | | | |
| SI | Stems incline | | | | | ø |
| SIC | Stems in chamber | | | | ž | |
| SL | shaves lead | | | | | l |
| SLC | Stems left side of chamber | | | | | |
| SMOC | Stretch marks on case | | | | | |
| SOR | Stem over-ride | | | | | |
| SP | Stems port | | | | | |
| SR | Shoulder rough | | | | | |
| SRC | Stems right side of chamber | | | | | |




| Protective Order | |
|-------------------|------|
| N. | SRIC |
| a n | 8506 |
| 0 | STC |
| TI | SWE |
| ien | SWH |
| ŋiŋ | sww |
| iams v. Remington | TD |
| د | TU |
| | - |

Subject to

| SRIC | Specific rings in chamber | | | | |] |
|--------|---------------------------------|--|-----|-------------|------|-----|
| SSOC | Surface scratches on case | | | | |] |
| STC | Stems top chamber | | | | | |
| SWE | Satety switch works too easily | | | | | |
| SWH | Safety switch works too hard | | | | | |
| sww | Safety ewitxh won't work | | | | |] |
| TD | Tips down | | | | | |
| TU | Tips up | | | | | |
| TWP | Trigger won't pull | | | | | |
| TWR | Trigger won't retract | | | | | |
| UNCN-T | Uncoded | | | | | |
| хн | Extracts hard | | | | 900. | |
| | | | | | | |
| HI | High | | | Million III | | |
| LO | Low | | 110 | | | |
| LEFT | Left | | | | | |
| RIGHT | Right | | | | | |
| DG | Doesn't Group | | | | | |
| FSST | Front sight tipped | | | | | Þ |
| RSTT | Rear sight tipped | | | | â | |
| RSBR | Rear sight base raised | | | | | T.« |
| FSTR | Front sight raised | | | | | |
| FSTL | Front sight loose | | | | | |
| RSTL | Rear sight loose | | | | | |
| MGPT-G | Missing parts at target | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | |
| | | | | | | |




| AI-P | Assembly incompleye at proof | | | | |
|-------------|---|--|--|-------|--|
| 368 · · · · | Barrel bracket gracked or broken at proof | | | | |
| вс-р | Blows cases at proof | | | | |
| вев-р 👋 | Barrel extension broken at proof | | | | |
| BLP-P | Blanked primer at proof | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | |
| BP-P | Blown primer at proof | | | | |
| BS-P | Barrel split at proof | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | |
| ESB-P | Ejector sticks back at proof | | | | |
| FCB-P | Fore-end cracked at proof | | | | |
| FESO-P | Fore-end shot off at proof | | | 1990. | |
| FF-P | Fails to fire at proof | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | |
| PP-P | Pierced primer at proof | | | | |
| SCB-P | Stock cracked or broken at proof | | | | |
| UNCM-P | Uncoded proof malfunctions | | | | |

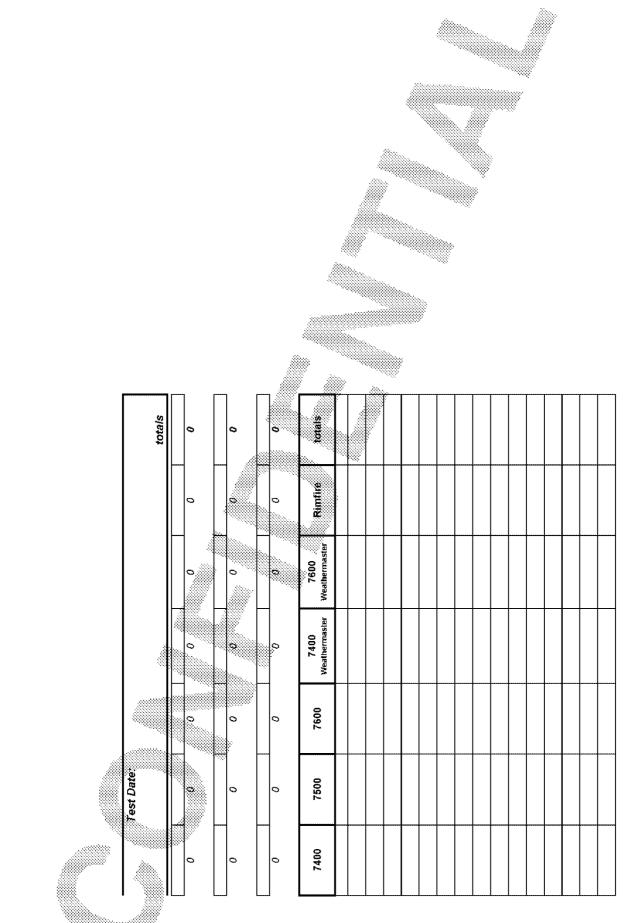


Subject to Protective Order - Williams v. Remington



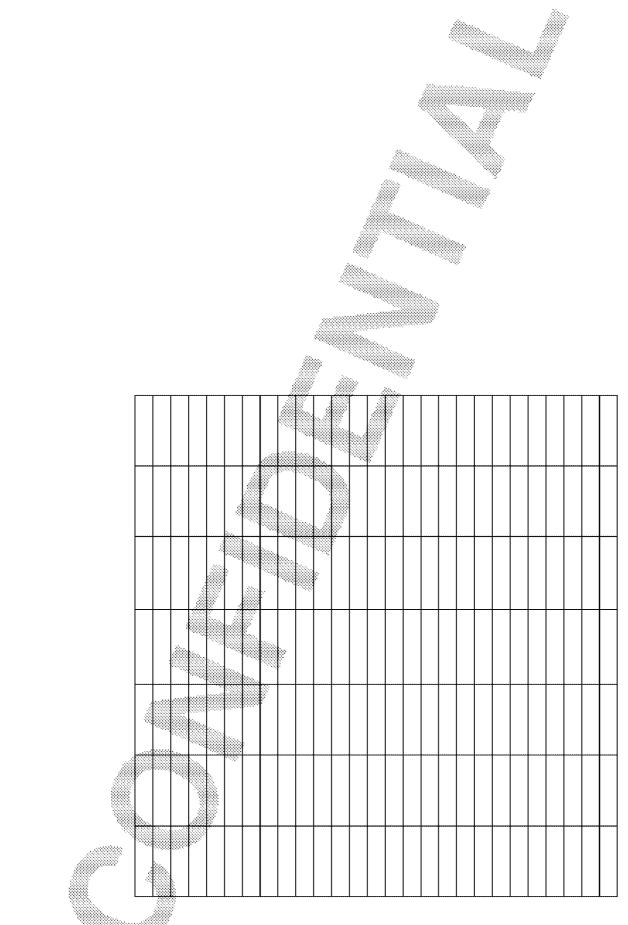





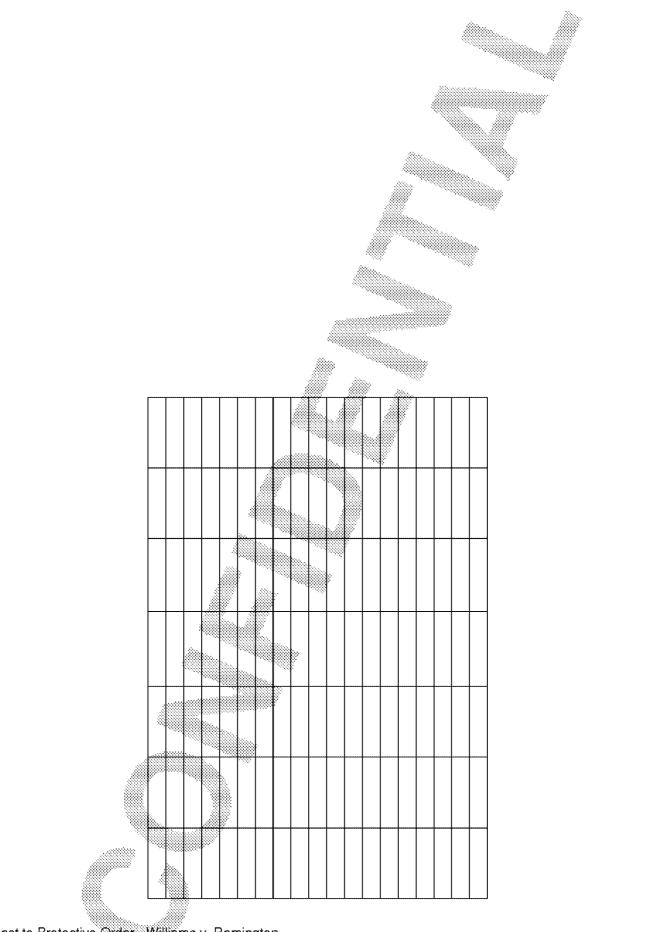

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|--|---------|---------|--------|------------|--------|---------|----------------------|-------|
| Summary | Y Total Test + Proof Failure Total Rejected | | | | | | | | |
| | Overall Reject Rate | | | | | | | | |
| | Sho Proof Rejecte Percei | | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Test Rejecte Percer | | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Target Rejecte Percer | d: 0 🎆 | 0 | 0 | 0 | 0 | 0 | 0 |] |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| AB | Action binds | | | | | | | | |
| BABS | Bulge at body shoulder | | | | | | | | |
| BAC | Burr at chamber | | | | | | | | |
| BBMA | BBL-to-bolt misalignment | | | | | | | | 1 🚕 |
| BB | Bolt binds/catches | | | | | | | | 1//// |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | * | | | | | | I. I |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | 1 | 1 🖉 |
| BHS | Bolt plug hits safety switch | | | | | | | | 1 🎕 |
| BLOP | Bar lock or disconnector out of position | | - | | | | | | |
| BLSO | Barrel lug shot off | | | | | | | | |
| BPO | Bolt pulls out | | | | | | | | |
| BSSM | Bolt stems shell in magazine | | | | | | | | |
| BWCD | Bolt won't cam down | | | | | | | | 1 |

| BWCFM | Bolt won't close over full magazine | | | |] |
|-------|--------------------------------------|---------|--|---|----|
| CD | Case dented | | | | 1 |
| СН | Closes hand | | | | |
| CLM | Can't laod magazine | | | | |
| со | Cut-off | - 2000. | | | |
| CR | Cuts rim | | | |] |
| cs | Cases swell | | | | |
| стод | Chamber tom or gouged | | | | |
| СТР | Creepy trigger pull | | | | |
| CWSB | Cams wrong side of action bar | | | | |
| DBB | Doesn't blow back | | | | |
| DCS | Double click in safety switch | | | | |
| рст | Double click in trigger | | | | |
| DCU | Doesn't close-up | | | | |
| DE | Doesn't eject | | | | |
| DEL | Doesn't eject live round | | | | |
| DFB | Doesn't feed back | | | | ╡. |
| DFU | Doesn't feed up | | | | |
| DLO | Doesn't lock open (after last shell) | | | | |
| DLU | Doesn't lock-up | | | 2 | |
| DS | Dead safe | | | | ľ |
| DX | Doesn't extract | | | | |
| DXL | Doesn't extract live round | | | | |
| EDS | Extractor drops shell | | | | |
| ESB | Ejector sticks back | | | | |
| ESCR | Empty shell catches receiver | | | | |
| ESS | Extractor stems shell | | | | |




| Subject to Protective Order | |
|-----------------------------|------|
| | FA |
| <u>a</u> | FB |
| S L | FC |
| lams v. Remington | FCB |
| len | FD |
| ing | FF |
| ytor | FFP |
| <u>ب</u> | FOS |
| | FPHB |

| FA | Fires automatically | | | | | |
|------|-----------------------------------|---------------------------------------|------|--|-----|---|
| FB | Follower binds | | | | | |
| FC | Fails to connect | | | | | |
| FCB | Fore-end cracked or broken | | | | | |
| FD | Follows-down | | | | | |
| FF | Fails to fire | · · · · · · · · · · · · · · · · · · · | | | | |
| FFP | Flat firing pin | | | | | |
| FOS | Fires on safe | | | | | |
| FPHB | Firing pin hits bbl | | | | | |
| FPHI | Firing pin hits inside rim | | | | | |
| FPO | Floor plate opens | | | | | |
| FPOH | Floor plate opens hard | | | | 5m. | |
| FSR | Fires when safe is released | | | | | |
| FT | Follower tips | | **** | | | |
| GCSO | Gas cyl shot off | | | | | |
| HBL | Heavy bolt lift | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | |
| HPA | High pressure ammo | | | | | |
| HUR | Hard under rail | | | | | |
| JCS | Jumps cartridge | | | | ž | |
| JM | Jumps magazin e | | | | | ľ |
| JO | Jars off | | | | | |
| LB | Light blow | | | | | |
| MAH | Magazine assembles hard | | | | | |
| MCW | Magazine capacity wrong | | | | | |
| MFA | Misfires (ammo) | | | | | |
| MFOP | Magazine follower out of position | | | | | |



| Subject to Protective Order | |
|-----------------------------|------|
| | ML |
| lan . | MILH |
| ns | MRH |
| .< TI | он |
| len | OR |
| nin | PH |
| ams v. Remingtor | PSI |
| د | PSM |
| | |


| ML | Magazine loose | | | | | |] |
|------|-------------------------------|-----|--------|------|--|----|---|
| RALH | Magazine loads hard | | | | | | 1 |
| MRH | Magazine temoves hard | | | | | | |
| он | Opens hard | | | | | |] |
| OR | Over-indes | | - A.D. | | | | |
| PH | Pulls hard | | | | | | |
| PSI | Proof stamp illegible | | | | | | |
| PSM | Proof stamp missing | | | | | | |
| RBOC | Rings and bulges on case | | | | | | |
| RDW | (Action) release doesn't work | | | | | | |
| RIC | Rings in chamber | ~~~ | | | | | |
| RIS | Ring in sholder | | | | | XX | |
| RS | Rim srem | | | | | | |
| SBC | Stems bottom chambers | | | | | | |
| SBE | Stems bbl extension | | | 1165 | | | |
| SCB | Stock cracked or broken | | | | | | |
| SCX | Shell catches | | | | | | |
| SHI | Short indent | | | | | | |
| SI | Stems incline | | | | | | ₽ |
| SIC | Stems in chamber | | | | | à | |
| SL | shaves lead | | | | | | |
| SLC | Stems left side of chamber | | | | | | |
| SMOC | Stretch marks on case | | | | | | |
| SOR | Stem over-ride | | | | | | |
| SP | Stems port | | | | | | |
| SR | Shoulder rough | | | | | | |
| SRC | Stems right side of chamber | | | | | | |




| Protective Order | | |
|---|------|---|
| W | SRIC | |
| T I I I I I I I I I I I I I I I I I I I | SSOC | |
| ns ~ | STC | |
| T | SWE | 1 |
| ìen | SWH | |
| juir | sww | |
| lams v. Remington | TD | |
| د | ΤU | |
| | TIME | |

Subject to

| SRIC | Specific rings in chamber | | | | | 1 |
|--------|---------------------------------|----|------|------|-----|---|
| SSOC | Surface scratches on case | | | | | |
| STC | Stems top chamber | | | | | |
| SWE | Satety switch works too easily | | **** | | | |
| SWH | Safety switch works too hard | | | | | |
| sww | Safety ewitxh won't work | | | | | |
| σт | Tips down | | | | | |
| τυ | Tips up | | | | | |
| TWP | Trigger won't pull | | | | | |
| TWR | Trigger won't retract | | | | | |
| UNCN-T | Uncoded | ** | | | | |
| хн | Extracts hard | | | | Sec | |
| | | | | | | |
| н | High | | | | | |
| LO | Low | | | | | |
| LEFT | Left | | | | | |
| RIGHT | Right | | | | | |
| DG | Doesn't Group | | | | | |
| FSST | Front sight tipped | | | | | 1 |
| RSTT | Rear sight tipped | | | | 2 | |
| RSBR | Rear sight base raised | | | | | ľ |
| FSTR | Front sight raised | | | | | |
| FSTL | Front sight loose | | | | | |
| RSTL | Rear sight loose | | | | | |
| MGPT-G | Missing parts at target | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | |
| | | | | | | |



| AI-P | Assembly incompleye at proof | | | | |
|-------------|---|--|--|-------|--|
| 368 · · · · | Barrel bracket gracked or broken at proof | | | | |
| вс-р | Blows cases at proof | | | | |
| вев-р 👋 | Barrel extension broken at proof | | | | |
| BLP-P | Blanked primer at proof | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | |
| BP-P | Blown primer at proof | | | | |
| BS-P | Barrel split at proof | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | |
| ESB-P | Ejector sticks back at proof | | | | |
| FCB-P | Fore-end cracked at proof | | | | |
| FESO-P | Fore-end shot off at proof | | | 1990. | |
| FF-P | Fails to fire at proof | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | |
| PP-P | Pierced primer at proof | | | | |
| SCB-P | Stock cracked or broken at proof | | | | |
| UNCM-P | Uncoded proof malfunctions | | | | |

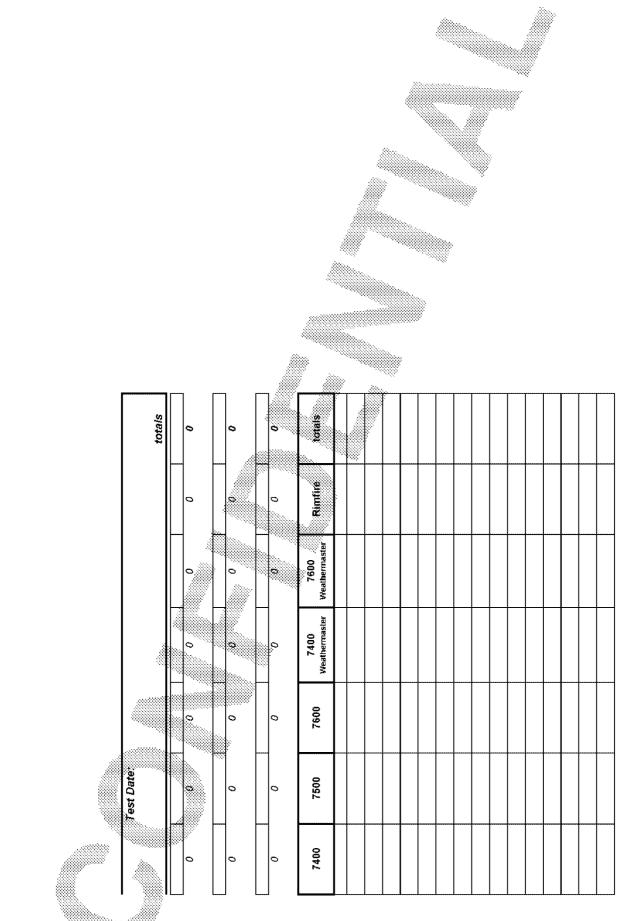










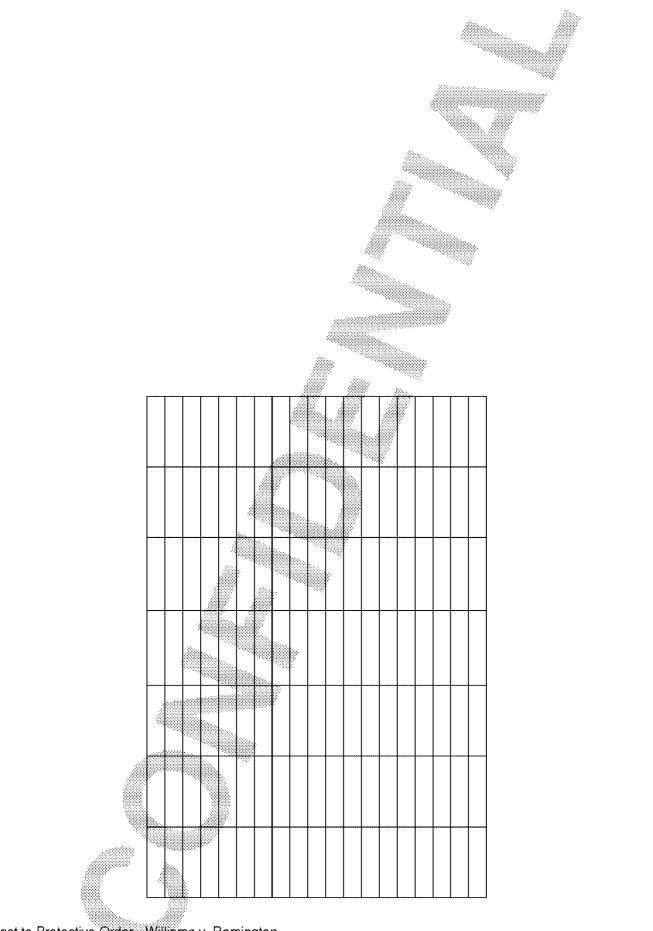

Subject to Protective Order - Williams v. Remington


| | | | | | | | | | _ |
|---------|--|---------|---------|--|------------|--------|----------|----------------------|-----|
| Summary | Total Test + Proof Failures Total Rejected: | | | | | | | | |
| | Overall Reject Rate: | | | | | | | | _ |
| | Shot: Proof Rejected: Percent. | 0 | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Shot Test Rejected Percent | Q | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Shot. Target Rejected. Percent. | · 0 🎆 | 0 | 0 | 0 | 0 | 0 | 0 | |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| AB | Action binds | | | | | | | | - |
| BABS | Bulge at body shoulder | | 2 | ************************************** | | | | | - |
| BAC | Burr at chamber | | | | | | | | 1 |
| BBMA | BBL-to-bolt misalignment | | | | | | | | 1 |
| BB | Bolt binds/catches | | | | | | | | 1 |
| BCOBS | Bolt catches on bolt stop | | | | | | | | 1 |
| BCOF | Bolt catches on follower | | | | | | 197 1 | | |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | ***** | 1 |
| BHS | Bolt plug hits safety switch | | | | | | | | 1 🕺 |
| BLOP | Bar lock or disconnector out of position | | | | | | | | 1 |
| BLSO | Barrel lug shot off | | | | | | | | 1 |
| BPO | Bolt pulls out | | | | | | | | 1 |
| BSSM | Bolt stems shell in magazine | | | | | | | |] |
| BWCD | Bolt won't cam down | | - | | | | | | 1 |

| | <i></i> | | | | | | |
|------|---------------------------------------|-----|------|------|---|------|-------|
| | Bolt won't close over full magazine | 1 | | | 1 | | 1 |
| | · · · · · · · · · · · · · · · · · · · | | | | | | - |
| CD | Case dented | | | | | | 4 |
| СН | Closes hand | | | | | | _ |
| CLM | eant race madarate. | | | | | | - |
| со | Cut-off | | 1000 | | | | - |
| CR | Cuts rim | | | | | | _ |
| cs | Cases swell | | | | | | |
| CTOG | Chamber tom or gouged | | | | | | |
| СТР | Creepy trigger puil | | | | | | |
| CWSB | Carns wrong side of action bar | | | | | | |
| DBB | Doesn't blow back | *** | | | | | |
| DCS | Double click in safety switch | | | | | 880. | |
| DCT | Double click in trigger | | | | | | |
| DCU | Doesn't close-up | | | | | | |
| DE | Doesn't eject | | | 1168 | | | |
| DEL | Doesn't eject live round | | | | | |] |
| DFB | Doesn't feed back | | | | | | |
| DFU | Doesn't feed up | | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | | |
| DLU | Doesn't lock-up | | | | | ż | |
| DS | Dead safe | | | | | | 1** |
| DX | Doesn't extract | | | | | | |
| DXL | Doesn't extract live round | | | | | |] |
| EDS | Extractor drops shell | | | | | | |
| ESB | Ejector sticks back | | | | | | 1 |
| ESCR | Empty shell catches receiver | | | | | | 1 |
| ESS | Extractor sterns shell | | | | | | 1 |




| Subject to Protective Order | |
|-----------------------------|----------|
| V | FA |
| ğ | FB |
| 3 S L | FD FC |
| T | FCB |
| fen | FD |
| jnir | FF |
| lams v. Remington | FFP |
| ر | FOS |
| | |

| FA | Fires automatically | | | | | | |
|------|-----------------------------------|----------|----------|-----|------------------|------|---|
| FB | Follower binds | | | | | | |
| FC | Fails to connect | | | | | | |
| FCB | Fore-end cracked or broken | | • | | | | |
| FD | Follows-down | | dan. | | | | |
| FF | Fails to fire | | illi in. | | | | |
| FFP | Flat firing pin | | | | | | |
| FOS | Fires on safe | ···· /// | | | | | |
| FPHB | Firing pin hits bbl | | | | 800. 2007/000 | | |
| FPHI | Firing pin hits inside rim | | | | | | |
| FPO | Floor plate opens | ~~~ | | | ····· | | |
| FPOH | Floor plate opens hard | | | | | See. | |
| FSR | Fires when safe is released | | ***** | | | | |
| FT | Follower tips | | **** | | | | |
| GCSO | Gas cyl shot off | | ****** | 198 | | | |
| HBL | Heavy bolt lift | | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | | |
| HPA | High pressure ammo | | | | | | Ś |
| HUR | Hard under rail | | | | | | ø |
| JCS | Jumps cartridge | | | | | ; | |
| JM | Jumps magazin e | | | | | | |
| OL | Jars off | | | | | | |
| LB | Light blow | | | | | | |
| MAH | Magazine assembles hard | | | | | | |
| MCW | Magazine capacity wrong | | | | | | |
| MFA | Misfires (ammo) | | | | | | |
| MFOP | Magazine follower out of position | | | | | | |



| Subject to Protective Order | |
|-----------------------------|-----|
| | ML |
| B | MLH |
| 2 n | MRH |
| ams v. Remingtor | он |
| fen | OR |
| ŋiŋ | PH |
| ytor | PSI |
| <u>ر</u> | PSM |
| | |


| ML 🥼 | Magazine loose | | | | |] |
|------|-------------------------------|-------|------|--|---------|----|
| MALH | Magazine loads hard | | | | | 1 |
| MRH | Magazine temoves hard | | | | | 1 |
| он | Opens hant | | | | | |
| OR | Overandes | | àre. | | | 1 |
| РН | Pulls hard | | | | | 1 |
| PSI | Proof stamp illegible | | | | | |
| PSM | Proof stamp missing | | | | |] |
| RBOC | Rings and bulges on case | | | | | |
| RDW | (Action) release doesn't work | | | | | |
| RIC | Rings in chamber | · *** | | | | |
| RIS | Ring in sholder | | | | teo. | |
| RS | Rim srem | | | | | |
| SBC | Stems bottom chambers | | | | | |
| SBE | Stems bbl extension | | | | | |
| SCB | Stock cracked or broken | | | | | |
| SCX | Shell catches | | | | |]. |
| SHI | Short indent | | | | | 1 |
| SI | Stems incline | | | | and the | 1 |
| SIC | Stems in chamber | | | | á | |
| SL | shaves lead | | | | |]∞ |
| SLC | Stems left side of chamber | | | | | |
| SMOC | Stretch marks on case | | | | |] |
| SOR | Stem over-ride | | | | | |
| SP | Stems port | | | | | |
| SR | Shoulder rough | | | | | |
| SRC | Stems right side of chamber | | | | | |




| Protective Order | |
|--|------|
| N. | SRIC |
| a la | SSOC |
| 0 | STC |
| .< TI | SWE |
| ien | SWH |
| ŋir | sww |
| lams v. Remington | TD |
| L | TU |
| | 7140 |

Subject to


| | | | | | | _ |
|--------|---------------------------------|-----------|-------|--|--------------|---|
| SRIC | Specific rings in chamber | | | | | |
| 8500 | Surface scratches on case | | | | | |
| STC | Stems top chamber | | | | | |
| SWE | Safety switch works too essily | | **** | | | |
| SWH | Safety switch works too hard | | | | | |
| sww | Safety ewitxh won't work | | | | | |
| TD | Tips down | | | | | |
| ΤU | Tips up | | | | | |
| TWP | Trigger won't pull | | | | | |
| TWR | Trigger won't retract | | | | | |
| UNCN-T | Uncoded | · · · · · | | | | |
| хн | Extracts hard | | | | XX | |
| | | | | | | |
| HI | High | | **** | | | |
| LO | Low | | ***** | | | |
| LEFT | Left | | | | | |
| RIGHT | Right | | | | | |
| DG | Doesn't Group | | | | | |
| FSST | Front sight tipped | | ***** | | 200 4 | Ø |
| RSTT | Rear sight tipped | | ***** | | ž | |
| RSBR | Rear sight base raised | | | | | |
| FSTR | Front sight raised | | | | | |
| FSTL | Front sight loose | | | | | |
| RSTL | Rear sight loose | | | | | |
| MGPT-G | Missing parts at target | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | |
| | | | | | | |




| AI-P | Assembly incompleye at proof | | | | | |
|--------|---|------|-----|--|------|--|
| 368 | Barrel bracket gracked or broken at proof | | | | | |
| 3С-Р | Blows cases at proof | | | | | |
| 3EB-P | Barrel extension broken at proof | | | | | |
| 3LP-P | Blanked primer at proof | Att. | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | | |
| BP-P | Blown primer at proof | | • | | | |
| BS-P | Barrel split at proof | | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | | |
| ESB-P | Ejector sticks back at proof | | | | | |
| FCB-P | Fore-end cracked at proof | | | | | |
| FESO-P | Fore-end shot off at proof | | | | 900. | |
| FF-P | Fails to fire at proof | | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | 110 | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | | |
| PP-P | Pierced primer at proof | | | | | |
| SCB-P | Stock cracked or broken at proof | | | | | |
| UNCM-P | Uncoded proof malfunctions | | | | | |

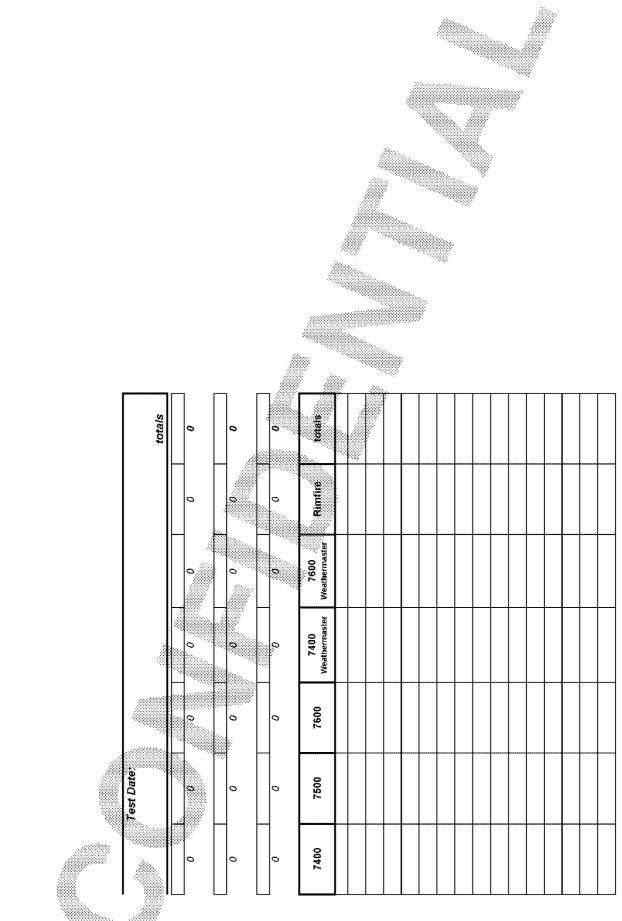


Subject to Protective Order - Williams v. Remington

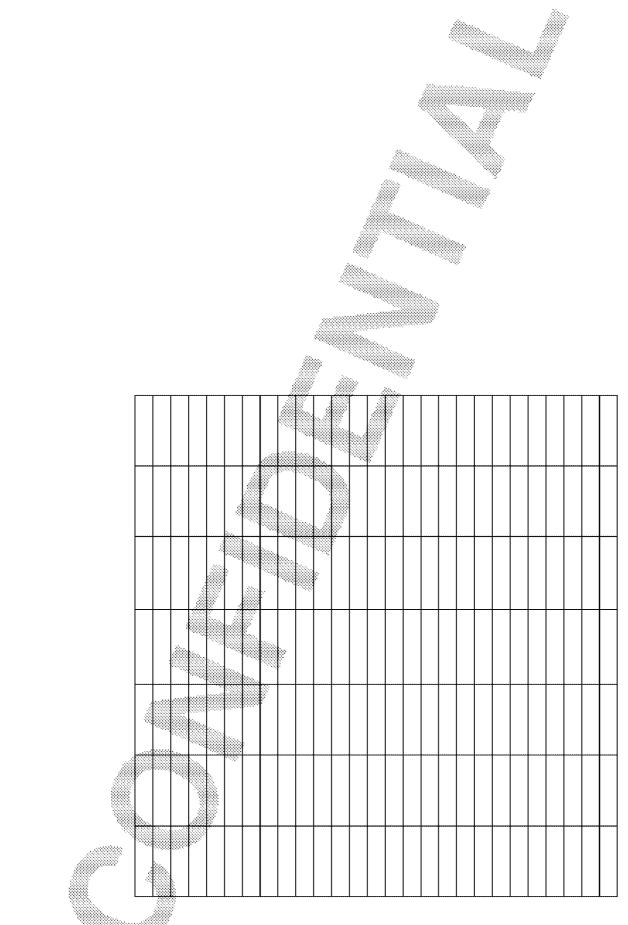

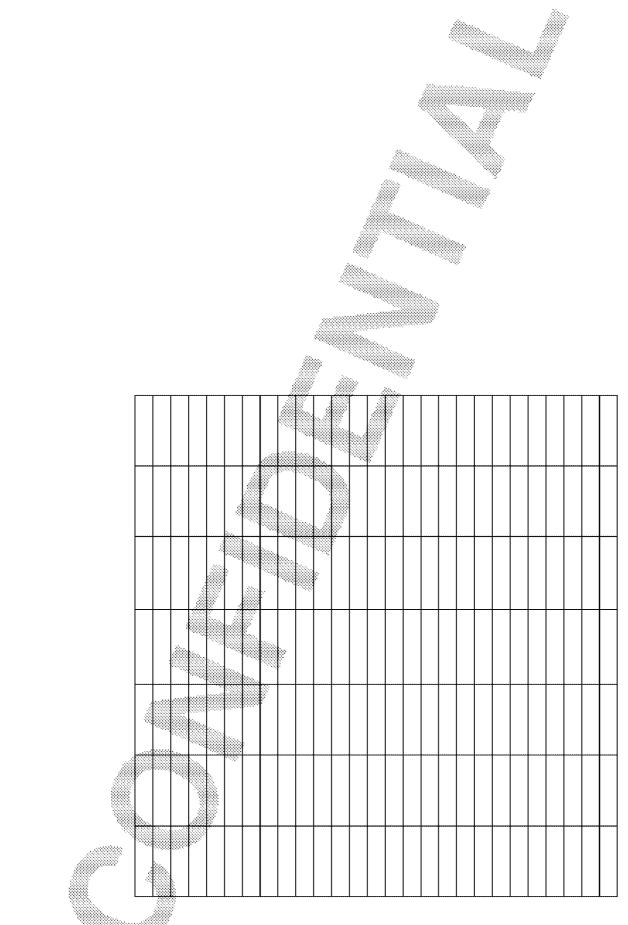





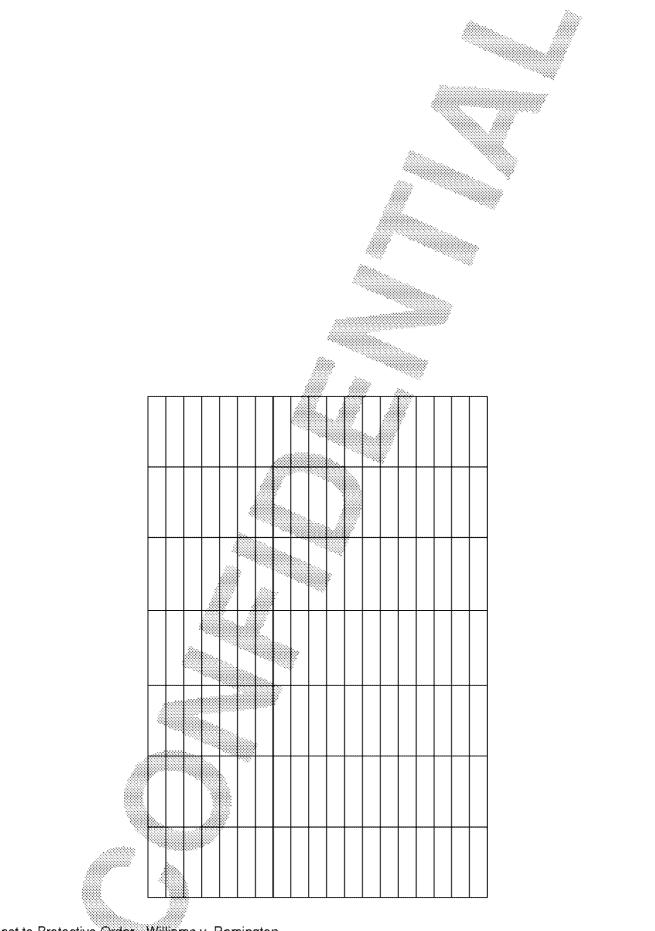

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|--|---------|---------|--------|------------|--------|---------|----------------------|---|
| Summary | Total Test + Proof Failure | | | | | | | | |
| | Total Rejected Overall Reject Rate | | | | | | | | |
| | The second construction of the second | · · | 1 | | | | | | 1 |
| ÷. | Proof Rejected | 1 0 | 0 | 0 | 0 | 0 | 0 | 0 | J |
| | Perceri | 2008 | | I | I | 1 | 1 | 1 | Ъ |
| | Shoi Test Rejected | 1 Q | 0 | L | 0 | 0 | 0 | 0 | 1 |
| | Percen | | | | | | | | |
| | Shot | | | | | | | |] |
| | Target Rejected Percen | | · | U U | 0 | 0 | 0 | 0 | |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 SS | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| | | | | | | | | | 4 |
| AB | Action binds | | | | | | | | 4 |
| BABS | Bulge at body shoulder | | | *** | | | | | 4 |
| BAC | Burr at chamber | | | | | | | | _ |
| BBMA | BBL-to-bolt misalignment | | | | | | | | |
| BB | Bolt binds/catches | | | | | | | | |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | | | | | | | |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | | 🌋 |
| BHS | Bolt plug hits safety switch | | | | | | | | - |
| BLOP | Bar lock or disconnector out of position | | | | | | | | _ |
| BLSO | Barrel lug shot off | | | | | | | | 4 |
| BPO | Bolt pulls out | | | | | | | | 4 |
| BSSM | Bolt stems shell in magazine | | | | | | | | _ |
| BWCD | Bolt won't cam down | | ** | | | | | | |

| BWCFM | Bolt won't close over full magazine | | | | | 1 |
|-------|--------------------------------------|------|-----|--|----|------------|
| CD | Case dented | | | | | 1 |
| СН | Closes hap | | | | | |
| CLM | Can't laod magazine | | | | | |
| со | Cut-off | áto. | | | | 1 |
| CR | Cuts rim | | | | | 1 |
| cs | Cases swell | | | | | |
| CTOG | Chamber tom or gouged | | | | | |
| CTP | Creepy trigger pull | | | | | |
| CWSB | Cams wrong side of action bar | | | | | |
| DBB | Doesn't blow back | | | | | |
| DCS | Double click in safety switch | | | | XX | |
| DCT | Double click in trigger | | | | | |
| DCU | Doesn't close-up | | | | | |
| DE | Doesn't eject | | 198 | | | |
| DEL | Doesn't eject live round | | | | | |
| DFB | Doesn't feed back | | | | | |
| DFU | Doesn't feed up | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | 1 |
| DLU | Doesn't lock-up | | | | à | |
| DS | Dead safe | | | | | <u>I</u> ∞ |
| DX | Doesn't extract | | | | | |
| DXL | Doesn't extract live round | | | | | |
| EDS | Extractor drops shell | | | | | |
| ESB | Ejector sticks back | | | | | |
| ESCR | Empty shell catches receiver | | | | | |
| ESS | Extractor stems shell | | | | | |




| Subject to Protective Order | |
|-----------------------------|------|
| X | FA |
| <u>ē</u> | FB |
| ams v. Remington | FC |
| .< T | FCB |
| ien | FD |
| ning | FF |
| ytor | FFP |
| <u>د</u> | FOS |
| | ЕРНВ |

| FA | Fires automatically | | | | | |
|------|-----------------------------------|-----------|--|--|----|------------|
| FB | Follower binds | | | | | 1 |
| FC | Fails to connect | | | | |] |
| FCB | Fore-end cracked of broken | | | | | |
| FD | Follows-down | | | | | |
| FF | Fails to fire | | | | |] |
| FFP | Flat firing pin | | | | | |
| FOS | Fires on safe | | | | | |
| FPHB | Firing pin hits bbl | | | | | |
| FPHI | Firing pin hits inside rim | | | | | |
| FPO | Floor plate opens | · · · · · | | | | |
| FPOH | Floor plate opens hard | | | | XX | |
| FSR | Fires when safe is released | | | | | |
| FT | Follower tips | | | | | |
| GCSO | Gas cyl shot off | | | | | |
| HBL | Heavy bolt lift | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | |
| HPA | High pressure ammo | | | | | |
| HUR | Hard under rail | | | | | 1 |
| JCS | Jumps cartridge | | | | á | 1 |
| JM | Jumps magazin e | | | | | _ ~ |
| JO | Jars off | | | | | |
| LB | Light blow | | | | | |
| MAH | Magazine assembles hard | | | | | |
| MCW | Magazine capacity wrong | | | | | |
| MFA | Misfires (ammo) | | | | | |
| MFOP | Magazine follower out of position | | | | |] |



| Subject to Protective Order | |
|-----------------------------|------|
| | ML |
| lan . | MILH |
| ns | MRH |
| .< TI | он |
| len | OR |
| nin | PH |
| ams v. Remingtor | PSI |
| د | PSM |
| | |


| | | | | | _ |
|------|-------------------------------|-----|--|------|----|
| ML | Magazine lögse | | | | |
| MLH | Magazine loads hard | | | | |
| MRH | Magazine removes hard | | | | |
| он | Opens hard | | | | 1 |
| OR | Over-indes | án. | | | |
| PH | Pulls hard | | | | |
| PSI | Proof stamp illegible | | | | |
| PSM | Proof stamp missing | | | | |
| RBOC | Rings and bulges on case | | | | |
| RDW | (Action) release doesn't work | | | | |
| RIC | Rings in chamber | | | | |
| RIS | Ring in sholder | | | 800. | |
| RS | Rim srem | | | | |
| SBC | Stems bottom chambers | | | | |
| SBE | Stems bbl extension | | | | |
| SCB | Stock cracked or broken | | | | |
| scx | Shell catches | | | |]. |
| SHI | Short indent | | | | |
| SI | Stems incline | | | | |
| SIC | Stems in chamber | | | ä | 1 |
| SL | shaves lead | | | |]% |
| SLC | Stems left side of chamber | | | |] |
| SMOC | Stretch marks on case | | | | 1 |
| SOR | Stem over-ride | | | | |
| SP | Stems port | | | | |
| SR | Shoulder rough | | | | |
| SRC | Stems right side of chamber | | | | |




| Protective Order | |
|---------------------------------------|-------|
| | SRIC |
| a a a a a a a a a a a a a a a a a a a | SSOC |
| ີ | STC 📎 |
| TI | SWE |
| ien | SWH |
| nin | sww |
| iams v. Remington | TD |
| <u>د</u> | TU |
| | |

Subject to

| SRIC | Specific rings in chamber | | | | | 1 |
|--------|---------------------------------|------|------|--|------|-------|
| SSOC | Surface scratches on case | | | | | 1 |
| STC | Stems top chamber | | | | | 1 |
| SWE | Safety switch works too easily | | | | | |
| SWH | Safety switch works too hard | àre. | | | | |
| sww | Safety ewitxh won't work | | | | | |
| TD | Tips down | | | | | |
| τυ | Tips up | | | | | |
| TWP | Trigger won't pull | | | | | |
| TWR | Trigger won't retract | | | | | |
| UNCN-T | Uncoded | | | | | |
| хн | Extracts hard | | | | àte. | |
| | | | | | | |
| HI | High | | **** | | | |
| LO | Low | | | | | |
| LEFT | Left | | | | | |
| RIGHT | Right | | | | | |
| DG | Doesn't Group | | | | | |
| FSST | Front sight tipped | | | | | 1 |
| RSTT | Rear sight tipped | | | | 2 | |
| RSBR | Rear sight base raised | | | | | ſ |
| FSTR | Front sight raised | | | | | |
| FSTL | Front sight loose | | | | | |
| RSTL | Rear sight loose | | | | | |
| MGPT-G | Missing parts at target | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | |
| | | **** | | | | |



| AI-P | Assembly incompleye at proof | | | | |
|-------------|---|--|--|-------|--|
| 368 · · · · | Barrel bracket gracked or broken at proof | | | | |
| вс-р | Blows cases at proof | | | | |
| вев-р 👋 | Barrel extension broken at proof | | | | |
| BLP-P | Blanked primer at proof | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | |
| BP-P | Blown primer at proof | | | | |
| BS-P | Barrel split at proof | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | |
| ESB-P | Ejector sticks back at proof | | | | |
| FCB-P | Fore-end cracked at proof | | | | |
| FESO-P | Fore-end shot off at proof | | | 1990. | |
| FF-P | Fails to fire at proof | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | |
| PP-P | Pierced primer at proof | | | | |
| SCB-P | Stock cracked or broken at proof | | | | |
| UNCM-P | Uncoded proof malfunctions | | | | |

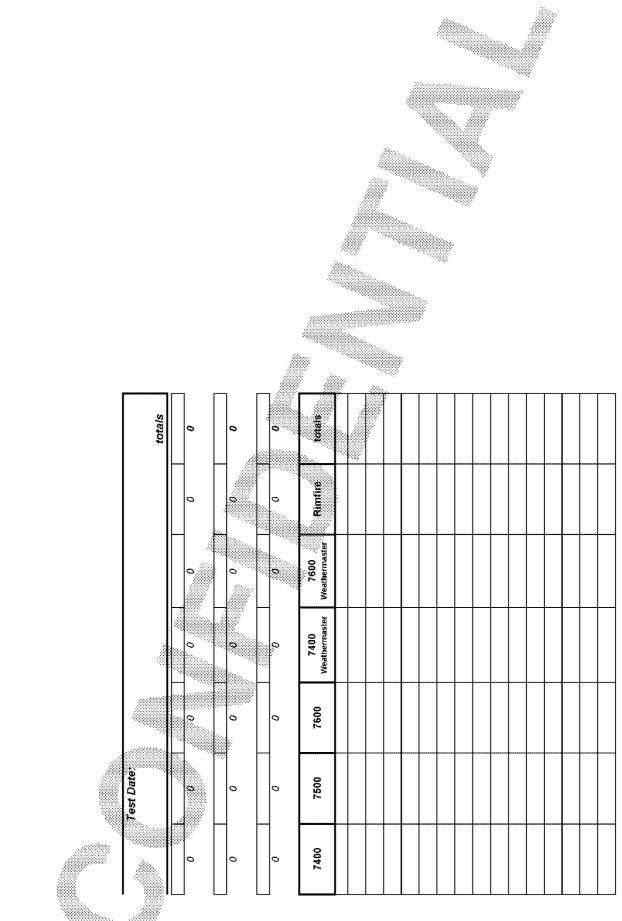


Subject to Protective Order - Williams v. Remington









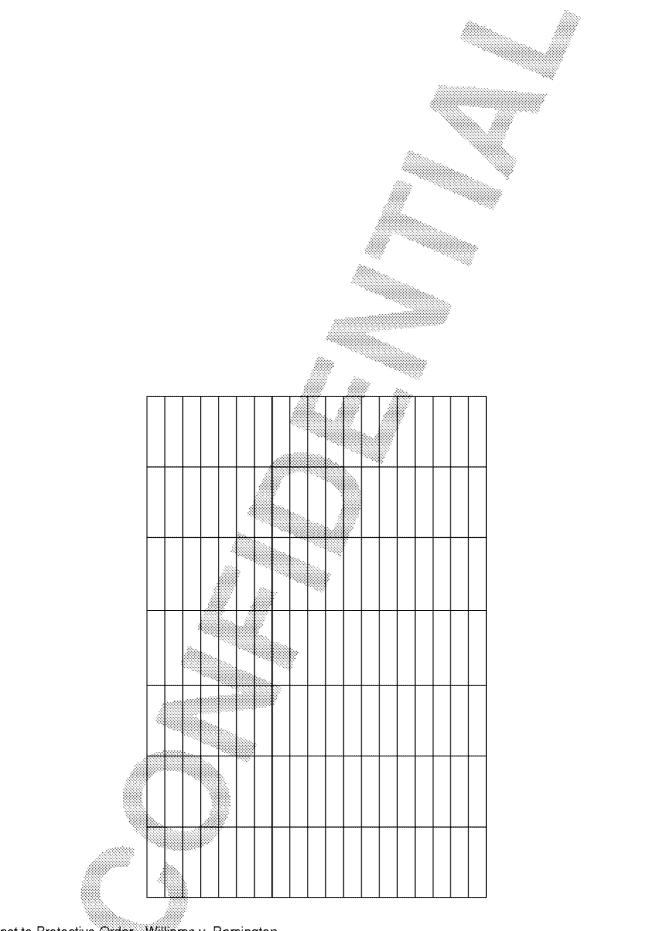

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|--|---------|---------|--|------------|--------|---------|----------------------|-----|
| Summary | Total Test + Proof Failures Total Rejected: | | | | | | | | |
| | Overall Reject Rate: | | | | | | | | _ |
| | Shot: Proof Rejected: Percent. | 0 | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Shot Test Rejected Percent | Q | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Shot. Target Rejected. Percent. | · 0 🎆 | 0 | 0 | 0 | 0 | 0 | 0 | |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| AB | Action binds | | | | | | | | - |
| BABS | Bulge at body shoulder | | 2 | ************************************** | | | | | - |
| BAC | Burr at chamber | | | | | | | | 1 |
| BBMA | BBL-to-bolt misalignment | | | | | | | | 1 |
| BB | Bolt binds/catches | | | | | | | | 1 |
| BCOBS | Bolt catches on bolt stop | | | | | | | | 1 |
| BCOF | Bolt catches on follower | | | | | | 197 | | |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | ***** | 1 |
| BHS | Bolt plug hits safety switch | | | | | | | | 1 🕺 |
| BLOP | Bar lock or disconnector out of position | | | | | | | | 1 |
| BLSO | Barrel lug shot off | | | | | | | | 1 |
| BPO | Bolt pulls out | | | | | | | | 1 |
| BSSM | Bolt stems shell in magazine | | | | | | | |] |
| BWCD | Bolt won't cam down | | - | | | | | | 1 |

| BWCFM | Bolt won't close over full magazine | | | | | |
|-------|--------------------------------------|-----|-----|--|--------------|---|
| CD | Case dented | | | | | |
| СН | Closes hand | | | | | |
| CLM | Can't laod magazine | | | | | |
| со | Cut-off | | | | | |
| CR | Cuts rim | | | | | |
| cs | Cases swell | | | | | |
| стоб | Chamber tom or gouged | | | | | |
| СТР | Creepy trigger pull | | | | | |
| CWSB | Cams wrong side of action bar | | | | | |
| DBB | Doesn't blow back | ~~~ | | | | |
| DCS | Double click in safety switch | | | | 500. | |
| DCT | Double click in trigger | | | | | |
| DCU | Doesn't close-up | | | | | |
| DE | Doesn't eject | | 110 | | | |
| DEL | Doesn't eject live round | | | | | |
| DFB | Doesn't feed back | | | | | |
| DFU | Doesn't feed up | | | | | Ś |
| DLO | Doesn't lock open (after last shell) | | | | 200 4 | Ø |
| DLU | Doesn't lock-up | | | | ź | |
| DS | Dead safe | | | | | |
| DX | Doesn't extract | | | | | |
| DXL | Doesn't extract live round | | | | | |
| EDS | Extractor drops shell | | | | | |
| ESB | Ejector sticks back | | | | | |
| ESCR | Empty shell catches receiver | | | | | |
| ESS | Extractor stems shell | | | | | |




| FA FB FC FC FC FD FF FF FF FF FF FF | Subject to Protective Order | |
|--|-----------------------------|----------|
| S FCB | Williams | FA FB |
| | | FCB |
| | ing | FD FF |
| | ytor | FFP |
| ningtor | ت. | FOS |
| nington | | EDUD |

| | | | 1 | 1 | 1 | 1 | - |
|------|-----------------------------------|-----|---|---|---|------|-----|
| 1 | Fires automatically | | | | | | |
| | Follower binds | | | | | | |
| | Fails to connect | ÷ | | | | | |
| FCB | Fore-end cracked or broken | | | | | | |
| FD | Follows-down | | | | | | |
| FF | Fails to fire | ··· | | | | | |
| FFP | Flat firing pin | | | | | | |
| FOS | Fires on safe | | | | | | |
| FPHB | Firing pin hits bbl | | | | 8 | | |
| FPHI | Firing pin hits inside rim | | | | | | |
| FPO | Floor plate opens | ~~~ | | | | | |
| FPOH | Floor plate opens hard | | | | | 500. | |
| FSR | Fires when safe is released | | | | | | |
| FT | Follower tips | | | | | | |
| GCSO | Gas cyl shot off | | | | | | |
| HBL | Heavy bolt lift | | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | | |
| HPA | High pressure ammo | | | | | | |
| HUR | Hard under rail | | | | | | |
| JCS | Jumps cartridge | | | | | ä | |
| JM | Jumps magazin e | | | | | |]*× |
| JO | Jars off | | | | | | |
| LB | Light blow | | | | | | |
| MAH | Magazine assembles hard | | | | | | |
| MCW | Magazine capacity wrong | | | | | | |
| MFA | Misfires (ammo) | | | | | | |
| MFOP | Magazine follower out of position | | | | | | ٦ |



| Subject to Protective Order | |
|-----------------------------|-----|
| | ML |
| ă L | MLH |
| S S S | MRH |
| .< T | он |
| len | OR |
| ŋiŋ | PH |
| ams v. Remingtor | PSI |
| <u>ب</u> | PSM |
| | |


| ML Magazine loads hard Image of the set of the se | |
|---|--|
| MRH Magazine removes faird Image: Construction of the second of the | |
| OH Opens hand Image: Anti-Sector of the sector of the | |
| OR Över-indes Image: Constraint of the second | |
| PH Pulls hard Image: Sector Sect | |
| PSI Proof stamp illegible Image: Stamp missing Image: Stamp mi | |
| PSMProof stamp missingImage: stamp missingImage: stamp missingRBOCRings and bulges on caseImage: stamp missingImage: stamp missingRDW(Action) release doesn't workImage: stamp missingImage: stamp missingRICRings in chamberImage: stamp missingImage: stamp missingRISRing in sholderImage: stamp missingImage: stamp missingRSRing in sholderImage: stamp missingImage: stamp missingRSStems bottom chambersImage: stamp missingImage: stamp missingSESteel catchesImage: stamp missingImage: stamp missingSCAShell catchesImage: stamp missingImage: stamp missingSHIShort indentImage: stamp missingImage: stamp missingSICStems in chamberImage: stamp missingImage: stamp missingSLshaves leadImage: stamp missingImage: stamp missing | |
| Proof stanlp missing Image: Constraint of the stanlp missing Image: Constraint of the stanlp missing RBOC Rings and bulges on case Image: Constraint of the stanlp missing Image: Constraint of the stanl | |
| RBOC Rings and buiges on case | |
| RICRings in chamberAAAARISRing in sholderImage: Second Stems bottom chambersImage: Second Stems bottom chamberImage: Second Stems bottom chamberIm | |
| RIS Ring in sholder Image: Constraint of the state of the sta | |
| RS Rim srem RS Rim srem SBC Stems bottom chambers Image: Stems bottom chambers Image: Stems bottom chambers SBE Stems bbl extension Image: Stems bottom chambers Image: Stems bottom chambers SCB Stock cracked or broken Image: Stems bottom chambers Image: Stems bottom chambers SCB Stock cracked or broken Image: Stems bottom chambers Image: Stems incline SHI Short indent Image: Stems in chamber Image: Stems in chamber SIC Stems in chamber Image: Stems in chamber Image: Stems in chamber SL shaves lead Image: Stems in chamber Image: Stems in chamber | |
| RS Rtm stem C <thc< th=""> C <thc< th=""> <thc< t<="" td=""><td></td></thc<></thc<></thc<> | |
| SBE Stems bbl extension SCB Stock cracked or broken SCX Shell catches SHI Short indent SI Stems incline SIC Stems in chamber SL shaves lead | |
| SCB Stock cracked or broken Image: Constraint of the second | |
| SCX Shell catches Image: Shell catches SHI Short indent Image: Shell catches SHI Short indent Image: Shell catches SI Stems incline Image: Shell catches SIC Stems in chamber Image: Shell catches SL shaves lead Image: Shell catches | |
| SHI Short indent Image: Constraint of the state of the stateo | |
| Shirt indent Sile Sile Sile SI Stems in chamber Sile Sile SL shaves lead Sile Sile | |
| Sitems include Sitems in chamber SIC Stems in chamber SL shaves lead | |
| SL shaves lead | |
| | |
| | |
| SLC Stems left side of chamber | |
| SMOC Stretch marks on case | |
| SOR Stem over-ride | |
| SP Stems port | |
| SR Shoulder rough | |
| SRC Stems right side of chamber | |




| Protective Order | |
|--|---------------------------|
| N. | SRIC |
| a la | SSOC |
| ອີ | STC |
| TI | SWE |
| ien | SWH |
| ning | sww |
| iams v. Remington | TD |
| | TU |
| | T) ((D) |

Subject to

| SRIC | Specific rings in chamber | | | | |] |
|--------|---------------------------------|--|-----|-------------|------|----|
| SSOC | Surface scratches on case | | | | |] |
| STC | Stems top chamber | | | | | |
| SWE | Satety switch works too easily | | | | | |
| SWH | Safety switch works too hard | | | | | |
| sww | Safety ewitxh won't work | | | | |] |
| TD | Tips down | | | | | |
| TU | Tips up | | | | | |
| TWP | Trigger won't pull | | | | | |
| TWR | Trigger won't retract | | | | | |
| UNCN-T | Uncoded | | | | | |
| хн | Extracts hard | | | | 900. | |
| | | | | | | |
| HI | High | | | Million III | | |
| LO | Low | | 110 | | | |
| LEFT | Left | | | | | |
| RIGHT | Right | | | | | |
| DG | Doesn't Group | | | | | |
| FSST | Front sight tipped | | | | | Þ |
| RSTT | Rear sight tipped | | | | ž. | |
| RSBR | Rear sight base raised | | | | |]~ |
| FSTR | Front sight raised | | | | | |
| FSTL | Front sight loose | | | | | |
| RSTL | Rear sight loose | | | | | |
| MGPT-G | Missing parts at target | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | |
| | | | | | | |



| AI-P | Assembly incompleye at proof | 1 | | | | | 1 |
|---------|---|---|------|----|---|------|---|
| 368 | Barrel bracket gracked or broken at proof | | | | | | |
| 3C-P | Blows cases at proof | | | | | | |
| зев-р 🚿 | Barrel extension broken at proof | | | | | | |
| BLP-P | Blanked primer at proof | | ása. | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | | | |
| BP-P | Blown primer at proof | | | | | | |
| BS-P | Barrel split at proof | | | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | : | | |
| ESB-P | Ejector sticks back at proof | | | | | | |
| FCB-P | Fore-end cracked at proof | | | | | | |
| ESO-P | Fore-end shot off at proof | | | | | 8eo. | |
| FF-P | Fails to fire at proof | | | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | 10 | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | | | |
| PP-P | Pierced primer at proof | | | | | | |
| SCB-P | Stock cracked or broken at proof | | | | | | |
| UNCM-P | Uncoded proof malfunctions | | *** | | | | |

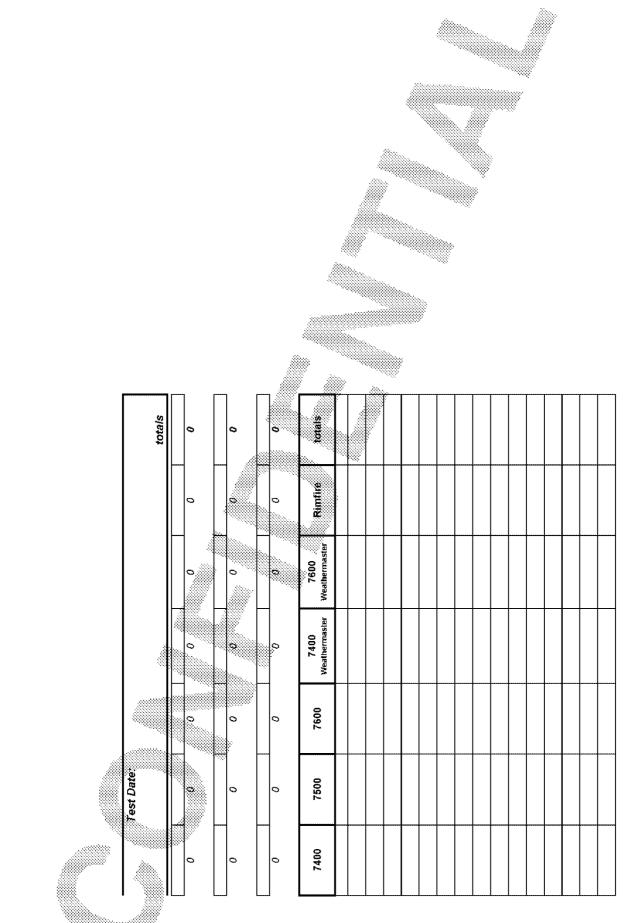


Subject to Protective Order - Williams v. Remington









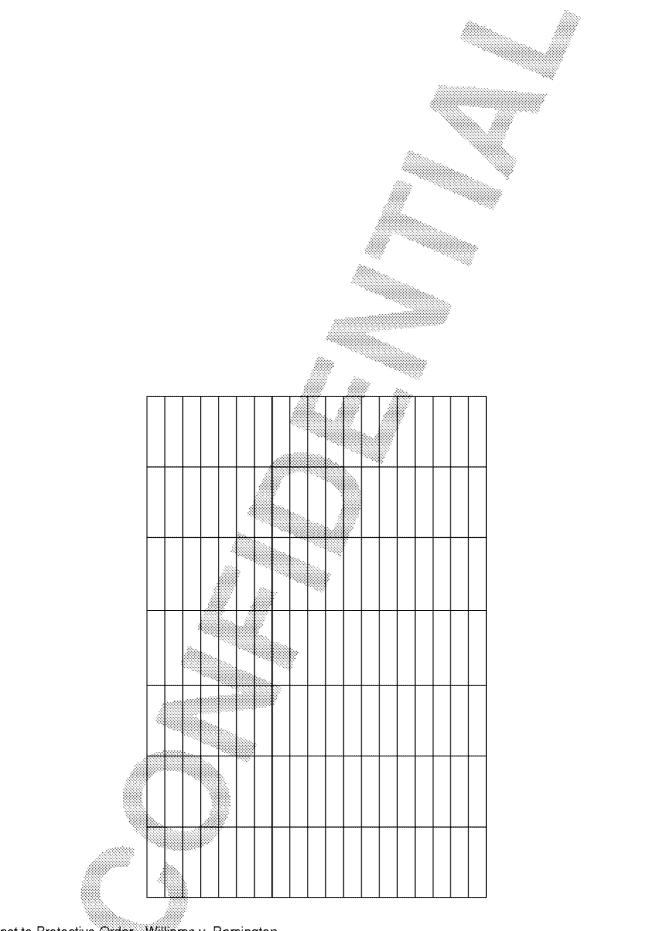

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|--|---------|---------|--------|------------|--------|---------|----------------------|-------|
| Summary | Y Total Test + Proof Failure Total Rejected | | | | | | | | |
| | Overall Reject Rate | | | | | | | | |
| | Sho Proof Rejecte Percei | | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Test Rejecte Percer | | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Target Rejecte Percer | d: 0 🎆 | 0 | 0 | 0 | 0 | 0 | 0 |] |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| AB | Action binds | | | | | | | | |
| BABS | Bulge at body shoulder | | | | | | | | |
| BAC | Burr at chamber | | | | | | | | |
| BBMA | BBL-to-bolt misalignment | | | | | | | | 1 🚕 |
| BB | Bolt binds/catches | | | | | | | | 1//// |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | * | | | | | | I. I |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | 1 | 1 🖉 |
| BHS | Bolt plug hits safety switch | | | | | | | | 1 🎕 |
| BLOP | Bar lock or disconnector out of position | | - | | | | | | |
| BLSO | Barrel lug shot off | | | | | | | | |
| BPO | Bolt pulis out | | | | | | | | |
| BSSM | Bolt stems shell in magazine | | | | | | | | |
| BWCD | Bolt won't cam down | | | | | | | | 1 |

| BWCFM | Bolt won't close over full magazine | | | |] |
|-------|--------------------------------------|------|-------|---------|------------|
| CD | Case dented | | | | 1 |
| СН | Closes hand | | | | 1 |
| CLM | Can't laod magazine | | | | |
| со | Cut-off | Att. | | | |
| CR | Cuts rim | | | | |
| CS | Cases swell | | | | |
| CTOG | Chamber torn or gouged | | | | |
| СТР | Creepy trigger pull | | | | |
| CWSB | Cams wrong side of action bar | | | | |
| DBB | Doesn't blow back | | | | |
| DCS | Double click in safety switch | | | Sec. | |
| DCT | Double click in trigger | | | | |
| DCU | Doesn't close-up | | | | |
| DE | Doesn't eject | | | | |
| DEL | Doesn't eject live round | | 20000 | | |
| DFB | Doesn't feed back | | | |]. |
| DFU | Doesn't feed up | | | | |
| DLO | Doesn't lock open (after last shell) | | | and the | |
| DLU | Doesn't lock-up | | | á | |
| DS | Dead safe | | | | <u>I</u> ∾ |
| XD | Doesn't extract | | | | |
| DXL | Doesn't extract live round | | | | |
| EDS | Extractor drops shell | | | | |
| ESB | Ejector sticks back | | | | |
| ESCR | Empty shell catches receiver | | | | |
| ESS | Extractor stems shell | | | | |




| FA. | FA. | Subject to Protective Order | |
|--------------------------|--------------------------|-----------------------------|-----|
| | ත් (FB | VIII | FA |
| TS FC | | <u>ר</u> | FCB |
| FC FC FCB | т FCB | len | FD |
| ns FC FC FCB FD | S. FCB D. FD FD | jing | FF |
| ns v. Reming | Y. FCB FD FD FF | ytor | FFP |
| ns v. Remingtor | Y. Remingtor | ب | FOS |
| ns v. Remingtor | V. Remington | | |

| FA | Fires automatically | | | | |
|------|-----------------------------------|------|---------------------------------------|------|-----|
| FB | Follower binds | | | | 1 |
| FC | Fails to connect | | | | 1 |
| FCB | Fore-end cracked or broken | | | | |
| FD | Follows-down | 322. | | | |
| FF | Fails to fire | | | | |
| FFP | Flat firing pin | | | | |
| FOS | Fires on safe | | | | |
| FPHB | Firing pin hits bbl | | | | |
| FPHI | Firing pin hits inside rim | | | | |
| FPO | Floor plate opens | | · · · · · · · · · · · · · · · · · · · | | |
| FPOH | Floor plate opens hard | | | tes. | |
| FSR | Fires when safe is released | | | | |
| FT | Follower tips | | | | |
| GCSO | Gas cyl shot off | | | | |
| HBL | Heavy bolt lift | | | | |
| HMSC | Heading mismatch-steps on case | | | | |
| HPA | High pressure ammo | | | | |
| HUR | Hard under rail | | | | Ø |
| JCS | Jumps cartridge | | | 2 | 掺 |
| JM | Jumps magazin e | | | | l.« |
| OL | Jars off | | | | |
| LВ | Light blow | | | | |
| MAH | Magazine assembles hard | | | | |
| MCW | Magazine capacity wrong | | | | |
| MFA | Misfires (ammo) | | | | |
| MFOP | Magazine follower out of position | | | | |



| Subject to Protective Order | |
|-----------------------------|------|
| | ML |
| lan . | MILH |
| ns ' | MRH |
| .> דו | он |
| len | OR |
| nin | PH |
| ams v. Remingtor | PSI |
| <u>د</u> | PSM |
| | 1 |


| ML | Magazine loose | | | | |
|------|-------------------------------|--------|---|---|-----|
| MALH | Magazine loads hard | | | | |
| MRH | Magazine removes hard | | | | 1 |
| он | Opens hand | | | | |
| OR | Over-moles | - 200. | | | |
| РН | Pulls hard | | | | |
| PSI | Proof stamp illegible | | | | |
| PSM | Proof stamp missing | | | | |
| RBOC | Rings and bulges on case | | 8 | | |
| RDW | (Action) release doesn't work | | | | |
| RIC | Rings in chamber | | | | |
| RIS | Ring in sholder | | | | |
| RS | Rim srem | | | | |
| SBC | Stems bottom chambers | | | | |
| SBE | Stems bbl extension | | | | |
| SCB | Stock cracked or broken | | | | |
| SCX | Shell catches | | | | |
| SHI | Short indent | | | | |
| SI | Stems incline | | | | ø |
| SIC | Stems in chamber | | | ž | |
| SL | shaves lead | | | | ľ∞; |
| SLC | Stems left side of chamber | | | | |
| SMOC | Stretch marks on case | | | | |
| SOR | Stem over-ride | | | | |
| SP | Stems port | | | | |
| SR | Shoulder rough | | | | |
| SRC | Stems right side of chamber | | | | |




| Protective Order | |
|--------------------|------|
| X | SRIC |
| B | SSOC |
| n s | STC |
| ТП | SWE |
| len | SWH |
| jnir | sww |
| llams v. Remington | TD |
| L | τu |
| | |

Subject to

| SRIC | Specific rings in chamber | | | | |] |
|--------|---------------------------------|------|-----|--|-------|-------|
| SSOC | Surface scratches on case | | | | | 1 |
| STC 👘 | Stems top chamber | | | | | 1 |
| SWE | Safety switch works too easily | | | | | 1 |
| SWH | Safety switch works too hard | 220. | | | | |
| sww | Safety ewitxh won't work | | | | | |
| D | Tips down | | | | | |
| ΤU | Tips up | | | | | |
| TWP | Trigger won't pull | | | | | |
| TWR | Trigger won't retract | | | | | |
| UNCN-T | Uncoded | | | | | |
| хн | Extracts hard | | | | àine. | |
| | | | | | | |
| HI | High | | | | | |
| LO | Low | | 110 | | | |
| LEFT | Left | | | | | |
| RIGHT | Right | | | | | |
| DG | Doesn't Group | | | | | |
| FSST | Front sight tipped | | | | | 1 |
| RSTT | Rear sight tipped | | | | | |
| RSBR | Rear sight base raised | | | | | ľ |
| FSTR | Front sight raised | | | | | |
| FSTL | Front sight loose | | | | | |
| RSTL | Rear sight loose | **** | | | | |
| MGPT-G | Missing parts at target | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | |
| | | | | | | |



| AI-P | Assembly incompleye at proof | | | | | | 1 |
|---------|---|-------|------|----|---|------|---|
| 368 | Barrel bracket gracked or broken at proof | | | | | | |
| BC-P | Blows cases at proof | | | | | | |
| зев-р 🚿 | Barrel extension broken at proof | | | | | | |
| BLP-P | Blanked primer at proof | | ása. | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | | | |
| BP-P | Blown primer at proof | | | | | | |
| BS-P | Barrel split at proof | | | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | : | | |
| ESB-P | Ejector sticks back at proof | | | | | | |
| FCB-P | Fore-end cracked at proof | · *** | | | | | |
| ESO-P | Fore-end shot off at proof | | | | | 8eo. | |
| FF-P | Fails to fire at proof | | | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | 10 | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | | | |
| PP-P | Pierced primer at proof | | | | | | |
| SCB-P | Stock cracked or broken at proof | | | | | | |
| UNCM-P | Uncoded proof malfunctions | | *** | | | | |

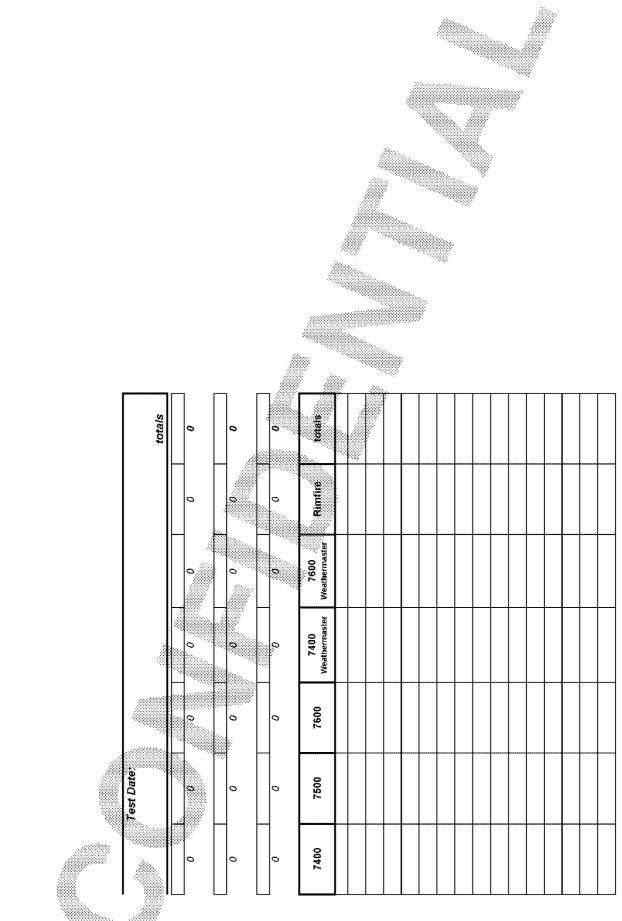


Subject to Protective Order - Williams v. Remington









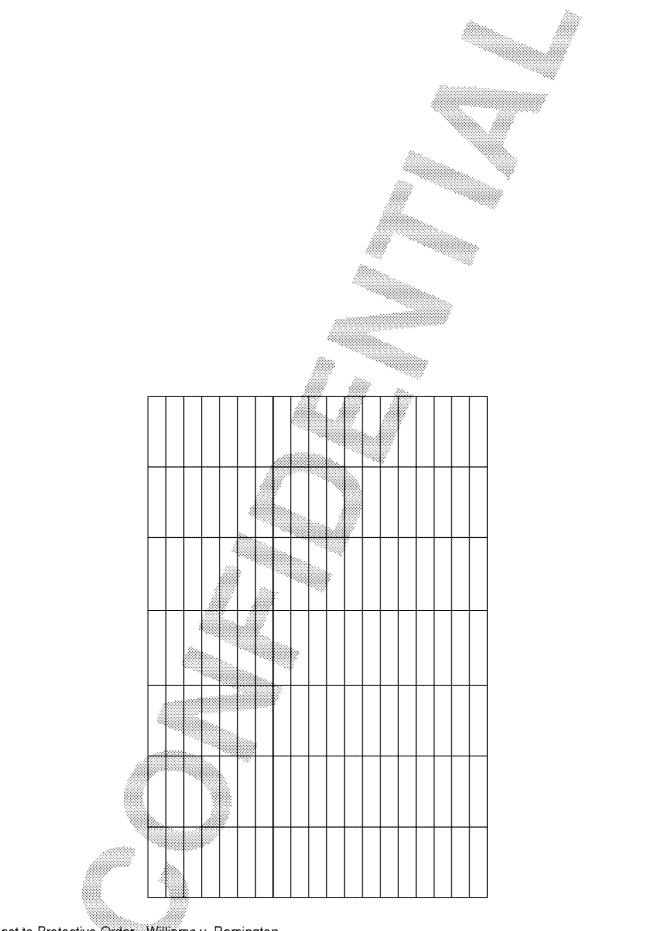

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|--|---------|---------|--|------------|--------|---------|----------------------|-----|
| Summary | Total Test + Proof Failures Total Rejected: | | | | | | | | |
| | Overall Reject Rate: | | | | | | | | _ |
| | Shot: Proof Rejected: Percent. | 0 | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Shot Test Rejected Percent | Q | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Shot. Target Rejected. Percent. | · 0 🎆 | 0 | 0 | 0 | 0 | 0 | 0 | |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| AB | Action binds | | | | | | | | - |
| BABS | Bulge at body shoulder | | 2 | ************************************** | | | | | - |
| BAC | Burr at chamber | | | | | | | | 1 |
| BBMA | BBL-to-bolt misalignment | | | | | | | | 1 |
| BB | Bolt binds/catches | | | | | | | | 1 |
| BCOBS | Bolt catches on bolt stop | | | | | | | | 1 |
| BCOF | Bolt catches on follower | | | | | | 197 | | |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | ***** | 1 |
| BHS | Bolt plug hits safety switch | | | | | | | | 1 🕺 |
| BLOP | Bar lock or disconnector out of position | | | | | | | | 1 |
| BLSO | Barrel lug shot off | | | | | | | | 1 |
| BPO | Bolt pulls out | | | | | | | | 1 |
| BSSM | Bolt stems shell in magazine | | | | | | | |] |
| BWCD | Bolt won't cam down | | - | | | | | | 1 |

| BWCFM | Bolt won't close over full magazine | | | | | 1 |
|-------|--------------------------------------|------|----------|---------------------------------------|---|-----|
| CD | Case dented | | | | | |
| СН | Closes hand | | | | | |
| CLM | Can't laod magazine | | | | | |
| со | Cut-off | 340. | | | | |
| CR | Cuts rim | | | | | |
| CS | Cases swell | | . | | | |
| CTOG | Chamber tom or gouged | | | | | |
| СТР | Creepy trigger pull | | | | | |
| CWSB | Carns wrong side of action bar | | | | | |
| DBB | Doesn't blow back | | | · · · · · · · · · · · · · · · · · · · | | |
| DCS | Double click in safety switch | | | | | |
| DCT | Double click in trigger | | | | | |
| DCU | Doesn't close-up | | | | | |
| DE | Doesn't eject | | | | | |
| DEL | Doesn't eject live round | | | | | |
| DFB | Doesn't feed back | | | | |] . |
| DFU | Doesn't feed up | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | P |
| DLU | Doesn't lock-up | | | | á | |
| DS | Dead safe | | | | | |
| DX | Doesn't extract | | | | | |
| DXL | Doesn't extract live round | | | | | |
| EDS | Extractor drops shell | | | | | |
| ESB | Ejector sticks back | | | | | |
| ESCR | Empty shell catches receiver | | | | | |
| ESS | Extractor stems shell | | | | | |




| FA FB | FA FB FC FC FCB | Subject to Protective Order | |
|----------------|-----------------------------|-----------------------------|----------|
| | < FCB | Williams | FA FB |
| en FD | | ninç | FF |
| Perming | Jing FF | ytor | FFP |
| Remingtor | ningtor | - | FOS |
| fp FD FF | nington | | |

| FA | Fires automatically | | | | | |
|--------|-----------------------------------|-----|------|--|---------|----|
| FB | Follower binds | | | | | |
| 1000 C | Fails to connect | ×. | | | | |
| FCB | Fore-end cracked or broken | | | | | |
| FD | Follows-down | | | | | |
| FF | Fails to fire | ··· | | | | |
| FFP | Flat firing pin | | | | | |
| FOS | Fires on safe | | | | | |
| FPHB | Firing pin hits bbl | | | | | |
| FPHI | Firing pin hits inside rim | | | | | |
| FPO | Floor plate opens | ** | | | | |
| FPOH | Floor plate opens hard | | | | XX., | |
| FSR | Fires when safe is released | | | | | |
| FT | Follower tips | | | | | |
| GCSO | Gas cyl shot off | | 1168 | | | |
| HBL | Heavy bolt lift | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | |
| HPA | High pressure ammo | | | | | 1 |
| HUR | Hard under rail | | | | and the | 17 |
| JCS | Jumps cartridge | | | | á | 12 |
| JM | Jumps magazin e | | | | | |
| JO | Jars off | | | | | |
| LB | Light blow | | | | | |
| MAH | Magazine assembles hard | | | | | |
| MCW | Magazine capacity wrong | | | | | |
| MFA | Misfires (ammo) | | | | | |
| MFOP | Magazine follower out of position | | | | | |



| Subject to Protective Order | |
|-----------------------------|------|
| | ML |
| ā s | MALH |
| 10 T 1000 | MRH |
| | ОН |
| ren | OR |
| ning | PH |
| ams v. Remingtor | PSI |
| L | PSM |
| | 1 |


| ML. | Magazine loose | | | | 1 |
|------|-------------------------------|--------|-----------|-------|------|
| MLH | Magazine loads hard | | | | |
| MRH | Magazine removes hard | | | | 1 |
| он | Opens hand | | | | 1 |
| OR | Over-indes | - 200. | | | |
| РН | Pulls hard | | | | 1 |
| PSI | Proof stamp illegible | | | | |
| PSM | Proof stamp missing | | | | |
| RBOC | Rings and bulges on case | | 2005. | | |
| RDW | (Action) release doesn't work | | | | |
| RIC | Rings in chamber | | | | |
| RIS | Ring in sholder | | | 1990. | |
| RS | Rim srem | | | | |
| SBC | Stems bottom chambers | **** | | | |
| SBE | Stems bbl extension | | | | |
| SCB | Stock cracked or broken | | | | |
| scx | Shell catches | | | |] _ |
| SHI | Short indent | | | |]@ |
| SI | Stems incline | | | | |
| SIC | Stems in chamber | | | ; | |
| SL | shaves lead | | | | 1000 |
| SLC | Stems left side of chamber | | | | |
| SMOC | Stretch marks on case | | | | |
| SOR | Stem over-ride | | | | |
| SP | Stems port | | | | |
| SR | Shoulder rough | | | | |
| SRC | Stems right side of chamber | | | | |




| Protective Order | | |
|---|------|---|
| W | SRIC | |
| T I I I I I I I I I I I I I I I I I I I | SSOC | |
| ns ~ | STC | |
| T | SWE | 1 |
| ìen | SWH | |
| juir | sww | |
| lams v. Remington | TD | |
| د | ΤU | |
| | TIME | |

Subject to

| SRIC | Specific rings in champer | | | | | |
|--------|---------------------------------|---------------------------------------|-----|--|------|------------|
| SSOC | Surface scratches on case | | | | | |
| STC | Stems top chamber | | | | | |
| SWE | Safety switch works too easily | | | | | |
| SWH | Safety switch works too hard | | àn. | | | |
| sww | Safety ewitxh won't work | | | | | |
| TD | Tips down | | | | | |
| TU | Tips up | | | | | |
| TWP | Trigger won't pull | | | | | |
| TWR | Trigger won't retract | | | | | |
| UNCN-T | Uncoded | · · · · · · · · · · · · · · · · · · · | | | | |
| хн | Extracts hard | | | | See. | |
| | | | | | | |
| HI | High | | | | | |
| LO | Low | | | | | |
| LEFT | Left | | | | | |
| RIGHT | Right | | | | | |
| DG | Doesn't Group | | | | | |
| FSST | Front sight tipped | | | | | 1 |
| RSTT | Rear sight tipped | | | | ž | |
| RSBR | Rear sight base raised | | | | | <u>r</u> ∝ |
| FSTR | Front sight raised | | | | | |
| FSTL | Front sight loose | | | | | |
| RSTL | Rear sight loose | | | | | |
| MGPT-G | Missing parts at target | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | |
| | | | | | | |




| AI-P | Assembly incompleye at proof | 1 | | | | | 1 |
|---------|---|-------|------|----|---|------|---|
| 368 | Barrel bracket gracked or broken at proof | | | | | | |
| 3C-P | Blows cases at proof | | | | | | |
| зев-р 🚿 | Barrel extension broken at proof | | | | | | |
| BLP-P | Blanked primer at proof | | ása. | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | | | |
| BP-P | Blown primer at proof | | | | | | |
| BS-P | Barrel split at proof | | | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | : | | |
| ESB-P | Ejector sticks back at proof | | | | | | |
| FCB-P | Fore-end cracked at proof | · *** | | | | | |
| ESO-P | Fore-end shot off at proof | | | | | 8eo. | |
| FF-P | Fails to fire at proof | | | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | 10 | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | | | |
| PP-P | Pierced primer at proof | | | | | | |
| SCB-P | Stock cracked or broken at proof | | | | | | |
| UNCM-P | Uncoded proof malfunctions | | *** | | | | |

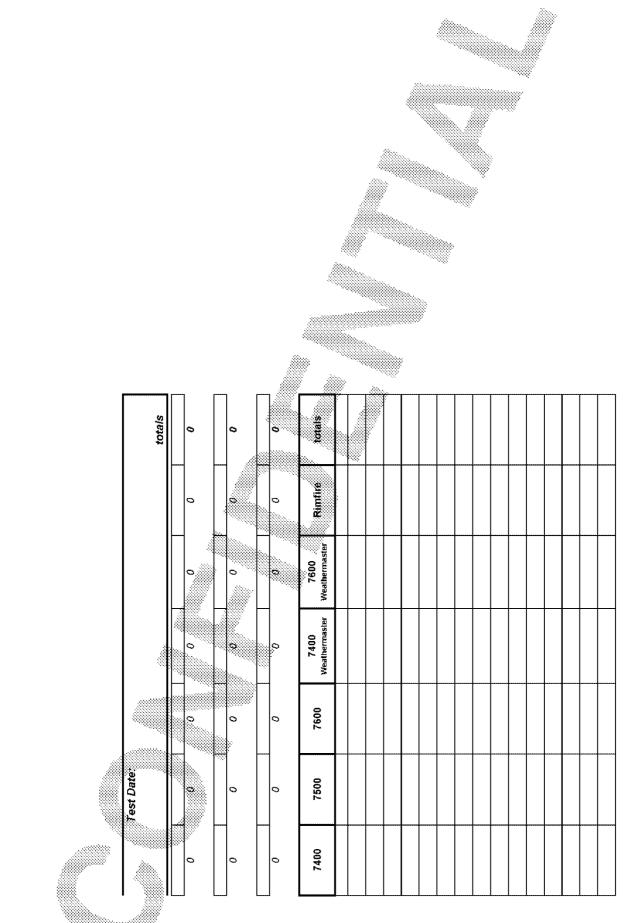



Subject to Protective Order - Williams v. Remington





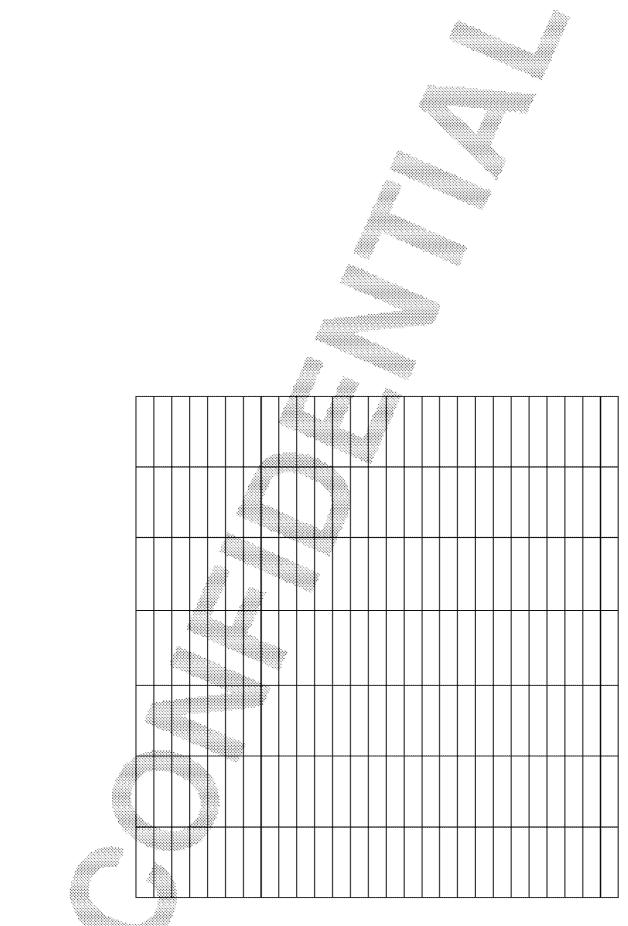

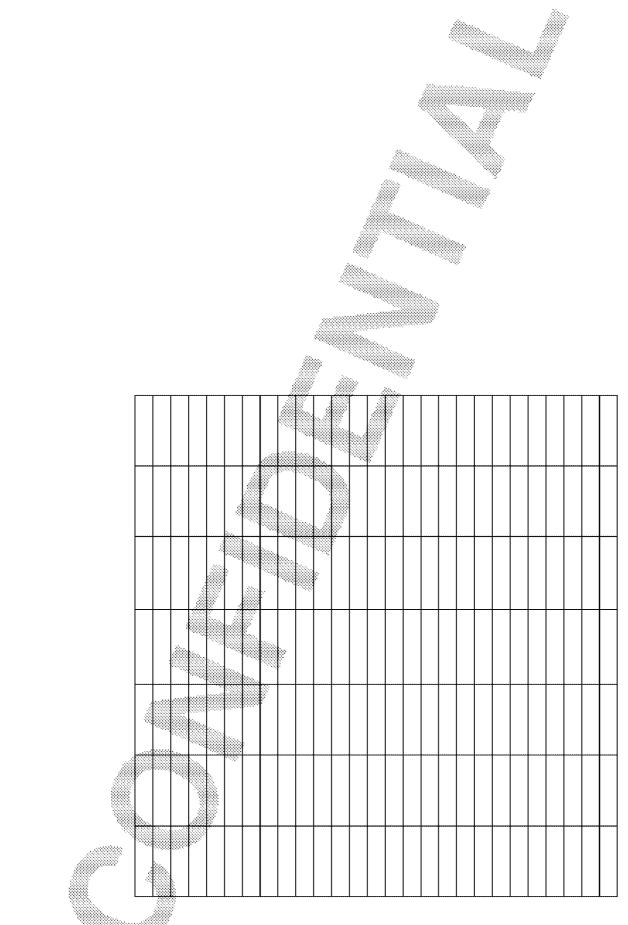

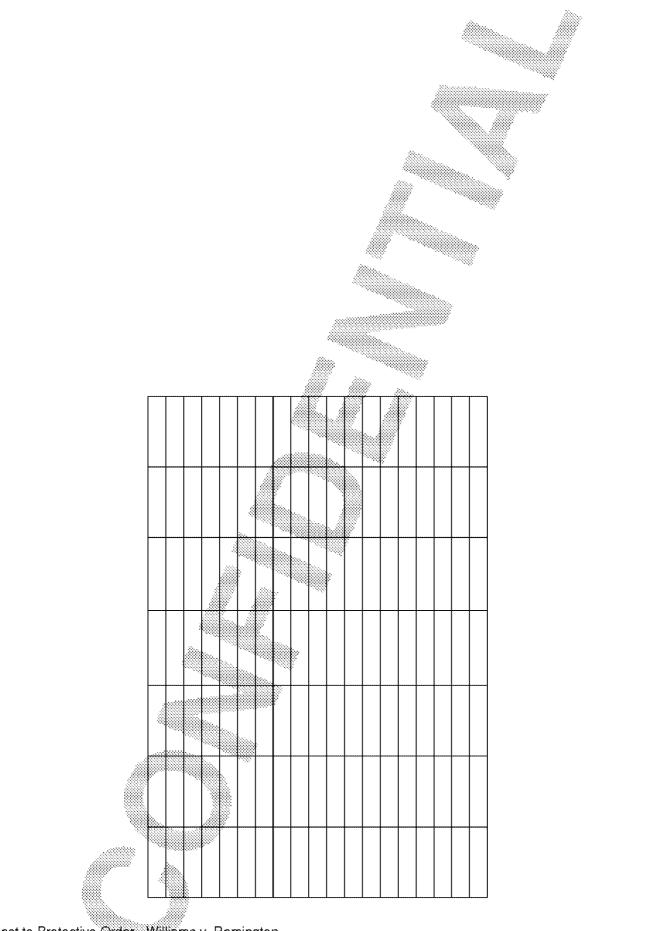

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|--|---------|---------|--------|------------|--------|---------|----------------------|-------|
| Summary | Y Total Test + Proof Failure Total Rejected | | | | | | | | |
| | Overall Reject Rate | | | | | | | | |
| | Sho Proof Rejecte Percei | | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Test Rejecte Percer | | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Target Rejecte Percer | d: 0 🎆 | 0 | 0 | 0 | 0 | 0 | 0 |] |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| AB | Action binds | | | | | | | | |
| BABS | Bulge at body shoulder | | | | | | | | |
| BAC | Burr at chamber | | | | | | | | |
| BBMA | BBL-to-bolt misalignment | | | | | | | | 1 🚕 |
| BB | Bolt binds/catches | | | | | | | | 1//// |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | * | | | | | | |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | 1 | 1 🖉 |
| BHS | Bolt plug hits safety switch | | | | | | | | 1 🎕 |
| BLOP | Bar lock or disconnector out of position | | - | | | | | | |
| BLSO | Barrel lug shot off | | | | | | | | |
| BPO | Bolt pulis out | | | | | | | | |
| BSSM | Bolt stems shell in magazine | | | | | | | | |
| BWCD | Bolt won't cam down | | | | | | | | 1 |

| BWCFM | Bolt won't close over full magazine | | | | | 1 |
|-------|--------------------------------------|------|----------|---------------------------------------|---|-----|
| CD | Case dented | | | | | |
| СН | Closes hand | | | | | |
| CLM | Can't laod magazine | | | | | |
| со | Cut-off | 340. | | | | |
| CR | Cuts rim | | | | | |
| CS | Cases swell | | . | | | |
| CTOG | Chamber tom or gouged | | | | | |
| СТР | Creepy trigger pull | | | | | |
| CWSB | Carns wrong side of action bar | | | | | |
| DBB | Doesn't blow back | | | · · · · · · · · · · · · · · · · · · · | | |
| DCS | Double click in safety switch | | | | | |
| DCT | Double click in trigger | | | | | |
| DCU | Doesn't close-up | | | | | |
| DE | Doesn't eject | | | | | |
| DEL | Doesn't eject live round | | | | | |
| DFB | Doesn't feed back | | | | |] . |
| DFU | Doesn't feed up | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | P |
| DLU | Doesn't lock-up | | | | á | |
| DS | Dead safe | | | | | |
| DX | Doesn't extract | | | | | |
| DXL | Doesn't extract live round | | | | | |
| EDS | Extractor drops shell | | | | | |
| ESB | Ejector sticks back | | | | | |
| ESCR | Empty shell catches receiver | | | | | |
| ESS | Extractor stems shell | | | | | |




| FA | FA. | FA FB FC | Subject to Protective Order | |
|--|---|----------------|-----------------------------|-----|
| | й FB | FB FC FC | | FA |
| FC V. FCB | FCB | | ren | FD |
| ns V. Ren | Y. FCB | fD FD | jnir | FF |
| FC FCB FD FF | Y. Reming | fD FD FF | ytor | FFP |
| ns v. Remingtor | FCB FD FD FF FF FF | FD FF FF FF | L | FOS |
| FD FF F | Y. Remington | Remington | | |

| FA. | Fires automatically | | | | | 1 |
|------|-----------------------------------|-----|-----|--|------|---|
| FB | Follower binds | | | | | |
| FC | Fails to connect | | | | | |
| FCB | Fore-end cracked or broken | | | | | |
| FD | Follows-down | in. | | | | |
| FF | Fails to fire | | | | | |
| FFP | Flat firing pin | | | | | |
| FOS | Fires on safe | | | | | |
| FPHB | Firing pin hits bbl | | | | | |
| FPHI | Firing pin hits inside rim | | | | | |
| FPO | Floor plate opens | | | | | |
| FPOH | Floor plate opens hard | | | | 500. | |
| FSR | Fires when safe is released | | | | | |
| FT | Follower tips | | | | | |
| GCSO | Gas cyl shot off | | 100 | | | |
| HBL | Heavy bolt lift | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | |
| HPA | High pressure ammo | | | | | |
| HUR | Hard under rail | | | | | Þ |
| JCS | Jumps cartridge | | | | ; | |
| JM | Jumps magazin e | | | | | |
| JO | Jars off | | | | | |
| LB | Light blow | | | | | |
| MAH | Magazine assembles hard | | | | | |
| MCW | Magazine capacity wrong | | | | | |
| MFA | Misfires (ammo) | | | | | |
| MFOP | Magazine follower out of position | | | | | |



| Subject to Protective Order 1 | |
|-------------------------------|-----|
| | ML |
| B | MLH |
| ມ ເ | MRH |
| ams v. Remingto | он |
| fen | OR |
| ning | PH |
| ytor | PSI |
| 3 | PSM |
| | |


| влі — | Magazine loose | | | | | | 1 |
|-------|---------------------------------------|----------|-------|-----------|------|---|------|
| ML. | Magazine loads hard | | | | | | |
| MRH | Magazine removes hard | | | | | | |
| | | | | | | | |
| OR 0R | Opens hard Over-indes | | | | | | |
| | CVerHudes | | | | | | |
| PH | Pulls hard Proof stamp illegible | | • | | | | |
| PSI | · · · · · · · · · · · · · · · · · · · | | | | 1 | | |
| PSM | Proof stamp missing | | | ···· | | | |
| RBOC | Rings and buiges on case | | | | | | |
| RDW | (Action) release doesn't work | | | | | | |
| RIC | Rings in chamber | | | · · · · · | | | |
| RIS | Ring in sholder | | | | | | |
| RS | Rim srem | | | | | | |
| SBC | Stems bottom chambers | | | | | | |
| SBE | Stems bbl extension | | · · · | | | | |
| SCB | Stock cracked or broken | | | | | | |
| scx | Shell catches | | | | | | |
| SHI | Short indent | | | | | | |
| SI | Stems incline | | | | | | Ĩ |
| SIC | Stems in chamber | | | | a a | | |
| SL | shaves lead | | | | | | r ee |
| SLC | Stems left side of chamber | | | | | | |
| SMOC | Stretch marks on case | | | | | | |
| SOR | Stem over-ride | | | | | | |
| SP | Stems port | | | | | | |
| SR | Shoulder rough | | | | | | |
| SRC | Stems right side of chamber | | | | | | |
| | 1 | <u>,</u> | 1 | 1 | 1 | · | 1 |




| Protective Order | |
|--------------------|-------|
| V | SRIC |
| liams v. Remington | SSOC |
| n s | STC 🛞 |
| | SWE |
| ren | SWH |
| ning | sww |
| gto | TD |
| | ΤU |
| | TIME |

Subject to

| SRIC | Specific rings in chamber | | | |] |
|--------|---------------------------------|-------|--|------|--------|
| SSOC | Surface scratches on case | | | | |
| STC | Stems top chamber | | | |] |
| SWE | Satety switch works too essily | ***** | | | |
| SWH | Safety switch works too hard | | | | |
| sww | Safety ewitxh won't work | | | | |
| TD | Tips down | | | | |
| TU | Tips up | | | | |
| TWP | Trigger won't pull | | | | |
| TWR | Trigger won't retract | | | | |
| UNCN-T | Uncoded | I | | | |
| хн | Extracts hard | | | 80x. | |
| | | | | | |
| HI | High | | | | |
| LO | Low | | | | |
| LEFT | Left | | | | |
| RIGHT | Right | | | | ╡. |
| DG | Doesn't Group | | | | 4 |
| FSST | Front sight tipped | | | | |
| RSTT | Rear sight tipped | | | 2 | |
| RSBR | Rear sight base raised | ***** | | | l. |
| FSTR | Front sight raised | | | | |
| FSTL | Front sight loose | | | | |
| RSTL | Rear sight loose | | | | |
| MGPT-G | Missing parts at target | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | |
| | | | | | |





| AI-P | Assembly incompleye at proof | | | | |
|-------------|---|--|--|-------|--|
| 368 · · · · | Barrel bracket gracked or broken at proof | | | | |
| вс-р | Blows cases at proof | | | | |
| вев-р 👋 | Barrel extension broken at proof | | | | |
| BLP-P | Blanked primer at proof | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | |
| BP-P | Blown primer at proof | | | | |
| BS-P | Barrel split at proof | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | |
| ESB-P | Ejector sticks back at proof | | | | |
| FCB-P | Fore-end cracked at proof | | | | |
| FESO-P | Fore-end shot off at proof | | | 1990. | |
| FF-P | Fails to fire at proof | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | |
| PP-P | Pierced primer at proof | | | | |
| SCB-P | Stock cracked or broken at proof | | | | |
| UNCM-P | Uncoded proof malfunctions | | | | |

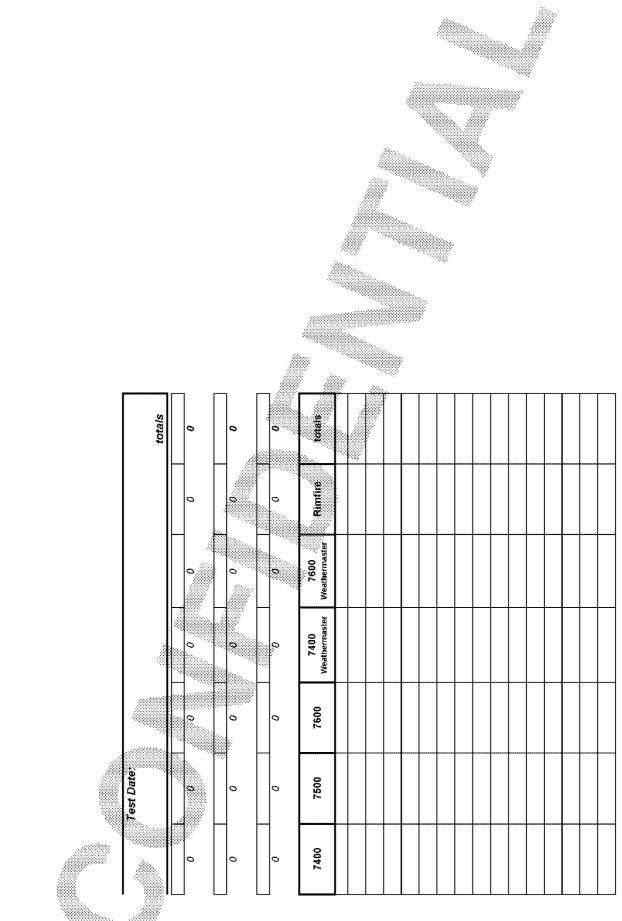


Subject to Protective Order - Williams v. Remington



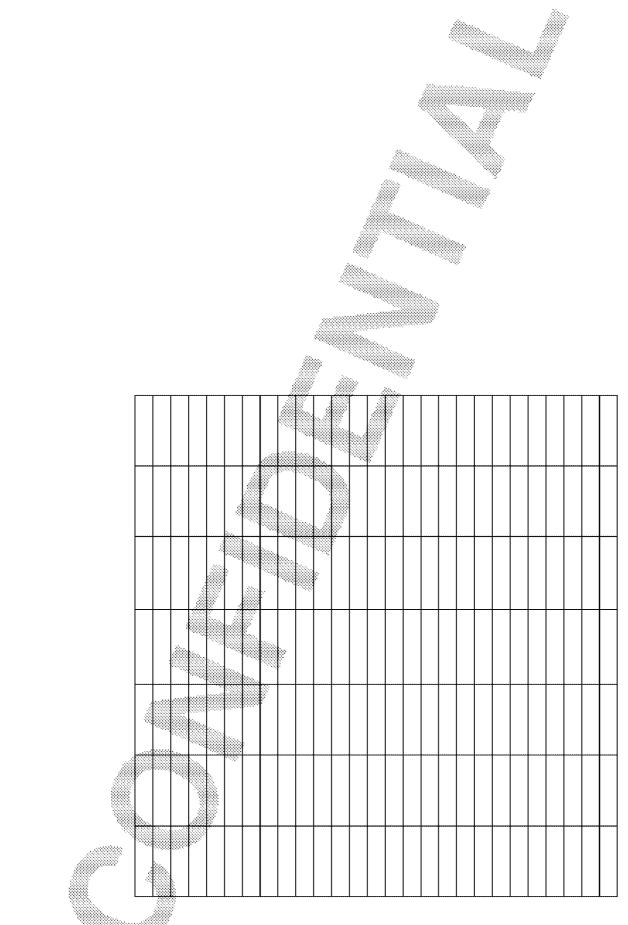

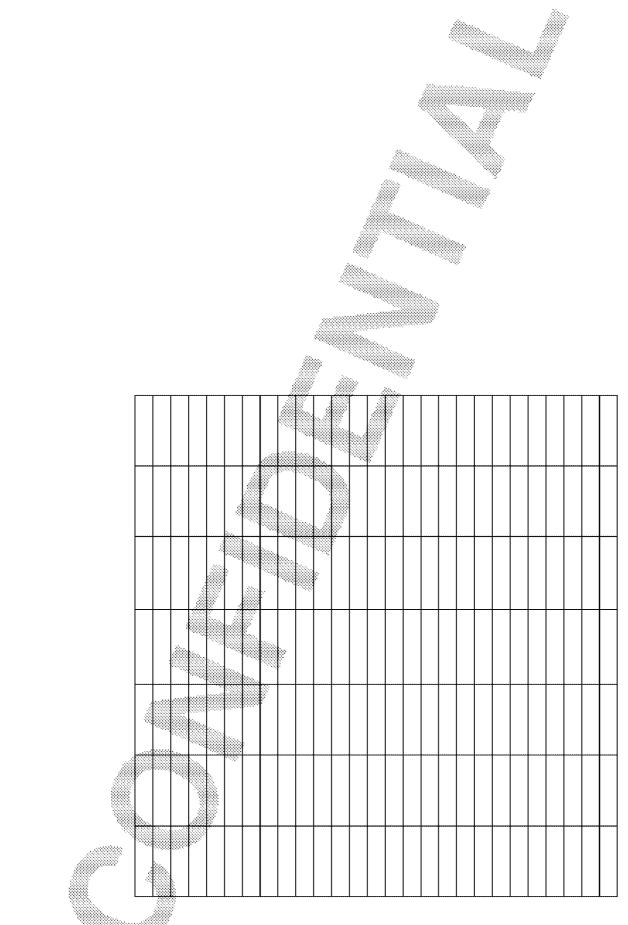



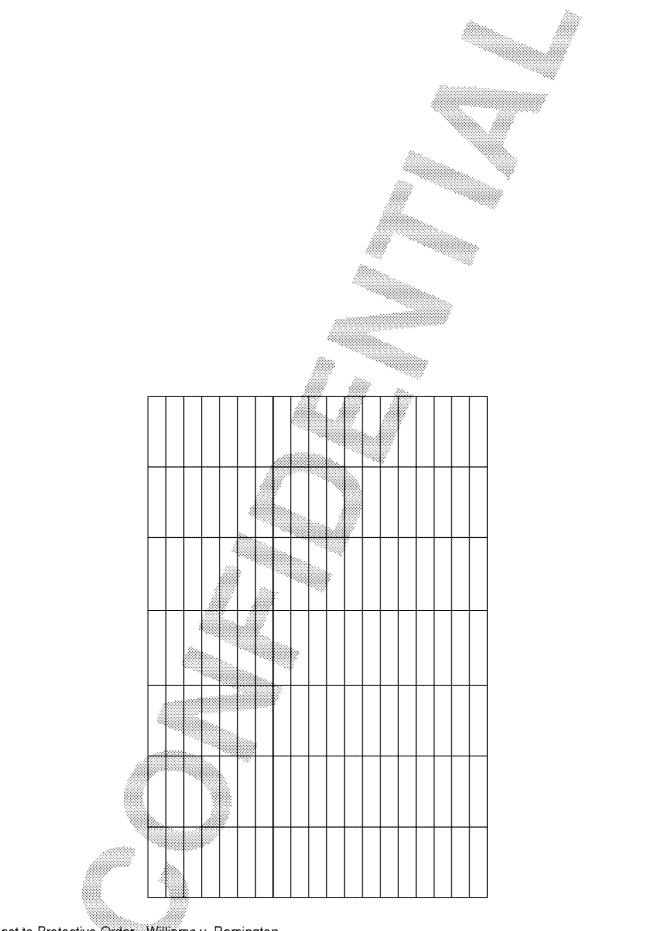

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|--|---------|---------|--------|------------|--------|---------|----------------------|-------|
| Summary | Y Total Test + Proof Failure Total Rejected | | | | | | | | |
| | Overall Reject Rate | | | | | | | | |
| | Sho Proof Rejecte Percei | | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Test Rejecte Percer | | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Target Rejecte Percer | d: 0 🎆 | 0 | 0 | 0 | 0 | 0 | 0 |] |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| AB | Action binds | | | | | | | | |
| BABS | Bulge at body shoulder | | | | | | | | |
| BAC | Burr at chamber | | | | | | | | |
| BBMA | BBL-to-bolt misalignment | | | | | | | | 1 🚕 |
| BB | Bolt binds/catches | | | | | | | | 1//// |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | * | | | | | | |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | 1 | 1 🖉 |
| BHS | Bolt plug hits safety switch | | | | | | | | 1 🎕 |
| BLOP | Bar lock or disconnector out of position | | - | | | | | | |
| BLSO | Barrel lug shot off | | | | | | | | |
| BPO | Bolt pulls out | | | | | | | | |
| BSSM | Bolt stems shell in magazine | | | | | | | | |
| BWCD | Bolt won't cam down | | | | | | | | 1 |

| BWCFM | Bolt won't close over full magazine | | | | | 1 |
|-------|--------------------------------------|------|----------|---------------------------------------|---|-----|
| CD | Case dented | | | | | |
| СН | Closes hand | | | | | |
| CLM | Can't laod magazine | | | | | |
| со | Cut-off | 340. | | | | |
| CR | Cuts rim | | | | | |
| CS | Cases swell | | . | | | |
| CTOG | Chamber tom or gouged | | | | | |
| СТР | Creepy trigger pull | | | | | |
| CWSB | Carns wrong side of action bar | | | | | |
| DBB | Doesn't blow back | | | · · · · · · · · · · · · · · · · · · · | | |
| DCS | Double click in safety switch | | | | | |
| DCT | Double click in trigger | | | | | |
| DCU | Doesn't close-up | | | | | |
| DE | Doesn't eject | | | | | |
| DEL | Doesn't eject live round | | | | | |
| DFB | Doesn't feed back | | | | |] . |
| DFU | Doesn't feed up | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | P |
| DLU | Doesn't lock-up | | | | á | |
| DS | Dead safe | | | | | |
| DX | Doesn't extract | | | | | |
| DXL | Doesn't extract live round | | | | | |
| EDS | Extractor drops shell | | | | | |
| ESB | Ejector sticks back | | | | | |
| ESCR | Empty shell catches receiver | | | | | |
| ESS | Extractor stems shell | | | | | |




| FA FB FB | | Subject to Protective Order | |
|----------------|---------|-----------------------------|----------|
| | S FCB | Williams | FA FB |
| en FD | | ning | FF |
| Reming | | ytor | FFP |
| Remingtor | ningtor | <u>ب</u> | FOS |
| FD FF FF FF | nington | | COUD |

| FA | Fires automatically | | | | |] |
|------|-----------------------------------|-------|------|---|------|---|
| FB | Follower binds | | | | | |
| FC | Fails to connect | | | | | |
| FCB | Fore-end cracked or broken | | | | | |
| FD | Follows-down | | | | | |
| FF | Fails to fire | | | | | |
| FFP | Flat firing pin | | | | | |
| FOS | Fires on safe | | | | | |
| FPHB | Firing pin hits bbl | | | 8 | | |
| FPHI | Firing pin hits inside rim | | | | | |
| FPO | Floor plate opens | · *** | | | | |
| FPOH | Floor plate opens hard | | | | 800. | |
| FSR | Fires when safe is released | | | | | |
| FT | Follower tips | | | | | |
| GCSO | Gas cyl shot off | | 1.64 | | | |
| HBL | Heavy bolt lift | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | |
| HPA | High pressure ammo | | | | | |
| HUR | Hard under rail | | | | | 1 |
| JCS | Jumps cartridge | | | | ; | |
| JM | Jumps magazin e | | | | | ſ |
| JO | Jars off | | | | | |
| LВ | Light blow | | | | | |
| MAH | Magazine assembles hard | | | | | |
| MCW | Magazine capacity wrong | | | | | |
| MFA | Misfires (ammo) | | | | | |
| MFOP | Magazine follower out of position | | | | | |



| Subject to Protective Order | |
|-----------------------------|------|
| | ML |
| lan . | MILH |
| ns ' | MRH |
| .> דו | он |
| len | OR |
| nin | PH |
| ams v. Remingtor | PSI |
| <u>د</u> | PSM |
| | 1 |


| ML | Magazine loose | | | | |
|------|-------------------------------|--------|---|---|-----|
| MALH | Magazine loads hard | | | | |
| MRH | Magazine removes hard | | | | 1 |
| он | Opens hand | | | | |
| OR | Over-moles | - 200. | | | |
| РН | Pulls hard | | | | |
| PSI | Proof stamp illegible | | | | |
| PSM | Proof stamp missing | | | | |
| RBOC | Rings and bulges on case | | 8 | | |
| RDW | (Action) release doesn't work | | | | |
| RIC | Rings in chamber | | | | |
| RIS | Ring in sholder | | | | |
| RS | Rim srem | | | | |
| SBC | Stems bottom chambers | | | | |
| SBE | Stems bbl extension | | | | |
| SCB | Stock cracked or broken | | | | |
| SCX | Shell catches | | | | |
| SHI | Short indent | | | | |
| SI | Stems incline | | | | ø |
| SIC | Stems in chamber | | | ž | |
| SL | shaves lead | | | | ľ∞; |
| SLC | Stems left side of chamber | | | | |
| SMOC | Stretch marks on case | | | | |
| SOR | Stem over-ride | | | | |
| SP | Stems port | | | | |
| SR | Shoulder rough | | | | |
| SRC | Stems right side of chamber | | | | |




| Protective Order | |
|---------------------------------------|-------|
| X | SRIC |
| a a a a a a a a a a a a a a a a a a a | SSOC |
| ີ | STC 🛞 |
| | SWE |
| ien | SWH |
| ning | sww |
| iams v. Remington | TD |
| | TU |
| | 740 |

Subject to

| SRIC | Specific rings in champer | | | | | |] |
|--------|---------------------------------|------|-------|----------|-------|-------|---|
| SSOC | Surface scratches on case | | | | | | |
| STC | Stems top chamber | | | | | | |
| SWE | Safety switch works too easily | | | | | | |
| SWH | Safety switch works too hard | | itte. | | | | |
| sww | Safety ewitxh won't work | | | | | | |
| TD | Tips down | | | | | | |
| τυ | Tips up | | | | | | |
| TWP | Trigger won't pull | | | | | | |
| TWR | Trigger won't retract | | | | | | |
| UNCN-T | Uncoded | · ** | | | | | |
| хн | Extracts hard | | | | 889. | | |
| | | | | | | | |
| HI | High | | | . | | | |
| LO | Low | | | | | | |
| LEFT | Left | | | | | | |
| RIGHT | Right | | | | | | |
| DG | Doesn't Group | | | | | | |
| FSST | Front sight tipped | | | | | | 1 |
| RSTT | Rear sight tipped | | | | ž | | |
| RSBR | Rear sight base raised | | | | | ****/ | |
| FSTR | Front sight raised | | | | | | |
| FSTL | Front sight loose | | | | | | |
| RSTL | Rear sight loose | | | | | | |
| MGPT-G | Missing parts at target | | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | | |
| | | | | | | | |



| AI-P | Assembly incompleye at proof | | | | | |
|--------|---|------|-----|--|------|--|
| 368 | Barrel bracket gracked or broken at proof | | | | | |
| 3С-Р | Blows cases at proof | | | | | |
| 3EB-P | Barrel extension broken at proof | | | | | |
| 3LP-P | Blanked primer at proof | Att. | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | | |
| BP-P | Blown primer at proof | | • | | | |
| BS-P | Barrel split at proof | | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | | |
| ESB-P | Ejector sticks back at proof | | | | | |
| FCB-P | Fore-end cracked at proof | | | | | |
| FESO-P | Fore-end shot off at proof | | | | 900. | |
| FF-P | Fails to fire at proof | | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | 110 | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | | |
| PP-P | Pierced primer at proof | | | | | |
| SCB-P | Stock cracked or broken at proof | | | | | |
| UNCM-P | Uncoded proof malfunctions | | | | | |

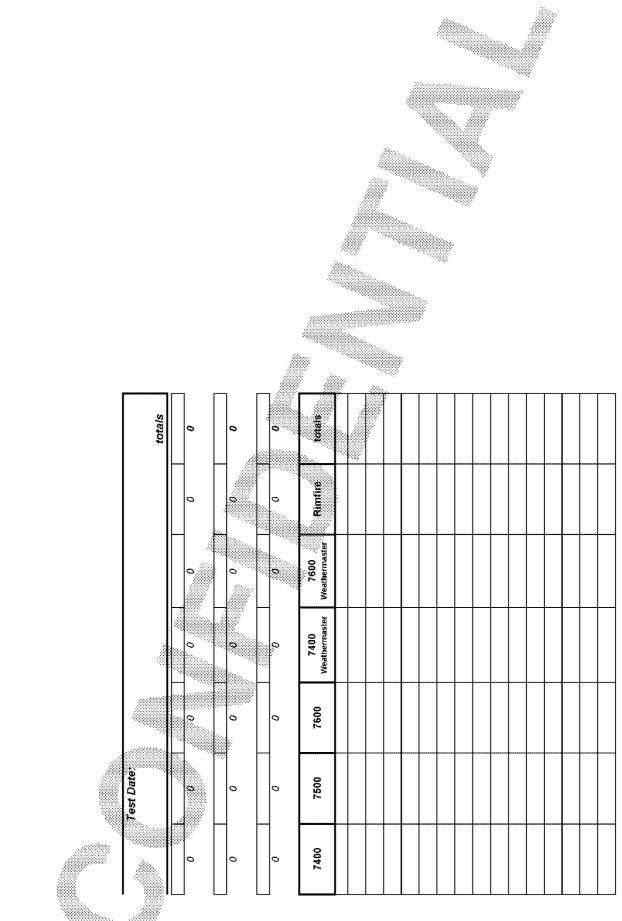


Subject to Protective Order - Williams v. Remington









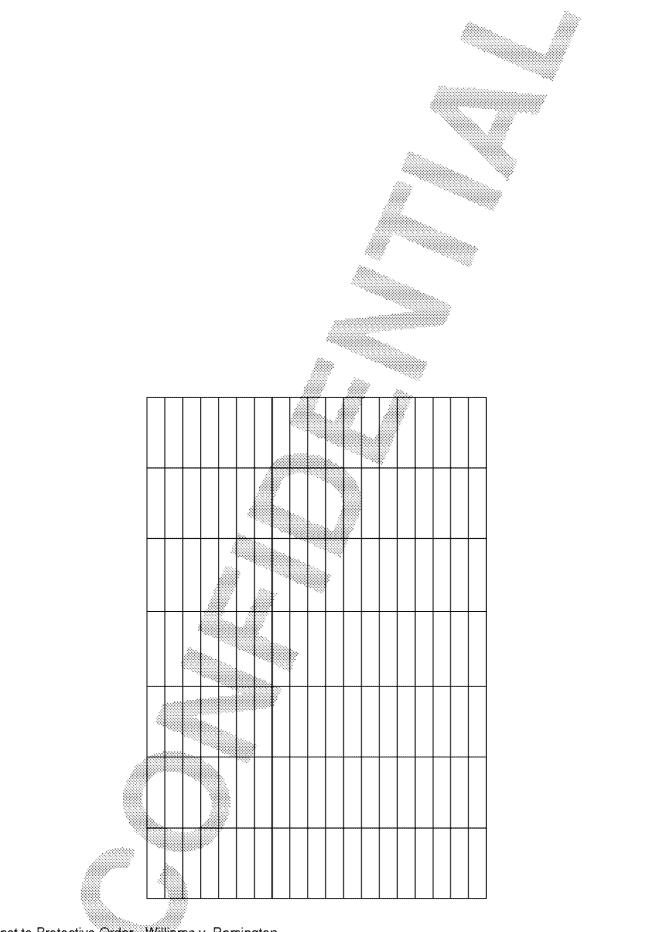

Subject to Protective Order Williams v. Remington

| | | | | | | | | | _ |
|---------|--|---------|---------|--------|------------|--------|---------|----------------------|------|
| Summary | Total Test + Proof Failure Total Rejected | | | | | | | | |
| | Overall Reject Rate | | | | | | | | _ |
| | Shot. Proof Rejected Percent | | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Shot. Test Rejepted Percent | 1 | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Shot Target Rejected Percen | t: 0 🛒 | 0 | 0 | 0 | 0 | 0 | 0 |] |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 SS | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| AB | Action binds | | | | | | | | |
| BABS | Bulge at body shoulder | | | | | | | | |
| BAC | Burr at chamber | | | | | | | | |
| BBMA | BBL-to-bolt misalignment | | | | | | | | |
| вв | Bolt binds/catches | | | | | | | | 1 |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | | | | | | | K. 🏼 |
| вс | Blows cases | | 1 | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | - <u>***</u> | 1 |
| BHS | Bolt plug hits safety switch | | | | | | | | 1 🔍 |
| BLOP | Bar lock or disconnector out of position | | | | | | | | 1 |
| BLSO | Barrel lug shot off | | | | | | | | 1 |
| BPO | Bolt pulls out | | | | | | | | 1 |
| BSSM | Bolt stems shell in magazine | | | | | | | | 1 |
| BWCD | Bolt won't cam down | | | | | | | | 1 |

| BWCFM | Bolt won't close over full magazine | | | | | | |
|-------|--------------------------------------|-----|------|-----|--|------|-----|
| CD | Case dented | | | | | | |
| СН | Closes hand | | | | | | |
| CLM | Can't laod magazine | | **** | | | | |
| со | Cut-off | | | | | | |
| CR | Cuts rim | | | | | | |
| cs | Cases swell | | | | | | |
| стоб | Chamber torn or gouged | | | | | | |
| CTP | Creepy trigger pull | | | | | | |
| CWSB | Cams wrong side of action bar | | | | | | |
| DBB | Doesn't blow back | ~~~ | | | | | |
| DCS | Double click in safety switch | | | | | 800. | |
| DCT | Double click in trigger | | | | | | |
| DCU | Doesn't close-up | | * | | | | |
| DE | Doesn't eject | | | 110 | | | |
| DEL | Doesn't eject live round | | | | | | |
| DFB | Doesn't feed back | | | | | | |
| DFU | Doesn't feed up | | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | | P |
| DLU | Doesn't lock-up | | | | | â | |
| DS | Dead safe | | | | | | I.« |
| DX | Doesn't extract | | | | | | |
| DXL | Doesn't extract live round | | | | | | |
| EDS | Extractor drops shell | | | | | | |
| ESB | Ejector sticks back | | | | | | |
| ESCR | Empty shell catches receiver | | | | | | |
| ESS | Extractor stems shell | | | | | | |




| FA | Subject to Protective Order | |
|--|-----------------------------|------|
| | N. | FA |
| | n s | FC |
| FC | .< T | FCB |
| FC S FC FCB | len | |
| FC FC T T FC FC FC FD | jnir | |
| ms v. Reming | ytor | |
| ns v. Remingto | <u>ر</u> | FOS |
| ns v. Remin | | FPHB |

| | | | | | | | _ |
|------|-----------------------------------|-----|-------|------|--|------|-------|
| FA | Fires automatically | | | | | | |
| FB | Follower binds | | | | | | |
| FC | Fails to connect | | ***** | | | | |
| FCB | Fore-end cracked of broken | | **** | | | | |
| FD | Follows-down | | | | | | |
| FF | Fails to fire | | | | | | |
| FFP | Flat firing pin | | | | | | |
| FOS | Fires on safe | | | | | | |
| FPHB | Firing pin hits bbl | | | | | | |
| FPHI | Firing pin hits inside rim | | | | | | |
| FPO | Floor plate opens | ~~~ | | | | | |
| FPOH | Floor plate opens hard | | | | | See. | |
| FSR | Fires when safe is released | | **** | | | | |
| FT | Follower tips | | ***** | | | | |
| GCSO | Gas cyl shot off | | ***** | 1.48 | | | |
| HBL | Heavy bolt lift | | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | | |
| HPA | High pressure ammo | | **** | | | | |
| HUR | Hard under rail | | | | | | ø |
| JCS | Jumps cartridge | | | | | 12 | |
| JM | Jumps magazin e | | | | | | |
| JO | Jars off | | | | | | |
| LB | Light blow | | | | | | |
| MAH | Magazine assembles hard | | | | | | |
| MCW | Magazine capacity wrong | | | | | | |
| MFA | Misfires (ammo) | | | | | | |
| MFOP | Magazine follower out of position | | | | | | |



| Subject to Protective Order | |
|-----------------------------|-----|
| | ML |
| la la | MLH |
| S No. | MRH |
| - | он |
| len | OR |
| ņir | PH |
| ams v. Remingtor | PSI |
| د | PSM |
| | |


| ML | Magazine loose | | | | | |] |
|------|-------------------------------|----------|-------|------|--|---|----|
| MALH | Magazine loads hard | | | | | | 1 |
| MRH | Magazine temoves hard | | | | | | 1 |
| он | Opens hand | | | | | | |
| OR | Overandes | | itte. | | | |] |
| PH | Pulls hard | | | | | |] |
| PSI | Proof stamp illegible | | | | | | |
| PSM | Proof stamp missing | ··· //// | | | | | |
| RBOC | Rings and bulges on case | | | | | | |
| RDW | (Action) release doesn't work | | | | | | |
| RIC | Rings in chamber | | | | | | |
| RIS | Ring in sholder | | | | | | |
| RS | Rim srem | | | | | | |
| SBC | Stems bottom chambers | | | | | | |
| SBE | Stems bbl extension | | | 1165 | | | |
| SCB | Stock cracked or broken | | | | | | |
| scx | Shell catches | | | | | | |
| SHI | Short indent | | | | | | |
| SI | Stems incline | | | | | | 1 |
| SIC | Stems in chamber | | | | | á | |
| SL | shaves lead | | | | | | 1. |
| SLC | Stems left side of chamber | | | | | | |
| SMOC | Stretch marks on case | | | | | | |
| SOR | Stem over-ride | | | | | | |
| SP | Stems port | | | | | | |
| SR | Shoulder rough | | | | | | |
| SRC | Stems right side of chamber | | | | | |] |




| Protective Order | |
|--------------------|------|
| | SRIC |
| ā s | SSOC |
| ns | STC |
| T | SWE |
| ien | SWH |
| ŋiŋ | sww |
| liams v. Remington | TD |
| <u>ر</u> | ΤU |
| | TIME |

Subject to

| SRIC | Specific rings in chamber | | | | | | 1 |
|--------|---------------------------------|-----|------|---|--|------|-------|
| SSOC | Surface scratches on case | | | | | | |
| STC 💮 | Stems top chamber | | | | | | |
| SWE | Satety switch works too easily | | | | | | |
| SWH | Safety switch works too hard | | | | | | |
| sww | Safety ewitxh won't work | | | | | | |
| TD | Tips down | | | | | | |
| TU | Tips up | | | | | | |
| TWP | Trigger won't pull | | | | | | |
| TWR | Trigger won't retract | | | | | | |
| UNCN-T | Uncoded | *** | | | | | |
| хн | Extracts hard | | | | | See. | |
| | | | | | | | |
| HI | High | | | | | | |
| LO | Low | | | ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~ | | | |
| LEFT | Left | | | | | | |
| RIGHT | Right | | | | | | 1 |
| DG | Doesn't Group | | | | | | 4 |
| FSST | Front sight tipped | | | | | | 1 |
| RSTT | Rear sight tipped | | | | | à | 1 |
| RSBR | Rear sight base raised | | | | | | ľ |
| FSTR | Front sight raised | | | | | | |
| FSTL | Front sight loose | | | | | | |
| RSTL | Rear sight loose | | | | | | |
| MGPT-G | Missing parts at target | | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | | |
| | | | **** | | | | |



| AI-P | Assembly incompleye at proof | 1 | | | | | 1 |
|---------|---|-------|------|----|---|------|---|
| 368 | Barrel bracket gracked or broken at proof | | | | | | |
| 3C-P | Blows cases at proof | | | | | | |
| зев-р 🚿 | Barrel extension broken at proof | | | | | | |
| BLP-P | Blanked primer at proof | | ása. | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | | | |
| BP-P | Blown primer at proof | | | | | | |
| BS-P | Barrel split at proof | | | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | : | | |
| ESB-P | Ejector sticks back at proof | | | | | | |
| FCB-P | Fore-end cracked at proof | · *** | | | | | |
| ESO-P | Fore-end shot off at proof | | | | | 8eo. | |
| FF-P | Fails to fire at proof | | | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | 10 | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | | | |
| PP-P | Pierced primer at proof | | | | | | |
| SCB-P | Stock cracked or broken at proof | | | | | | |
| UNCM-P | Uncoded proof malfunctions | | *** | | | | |

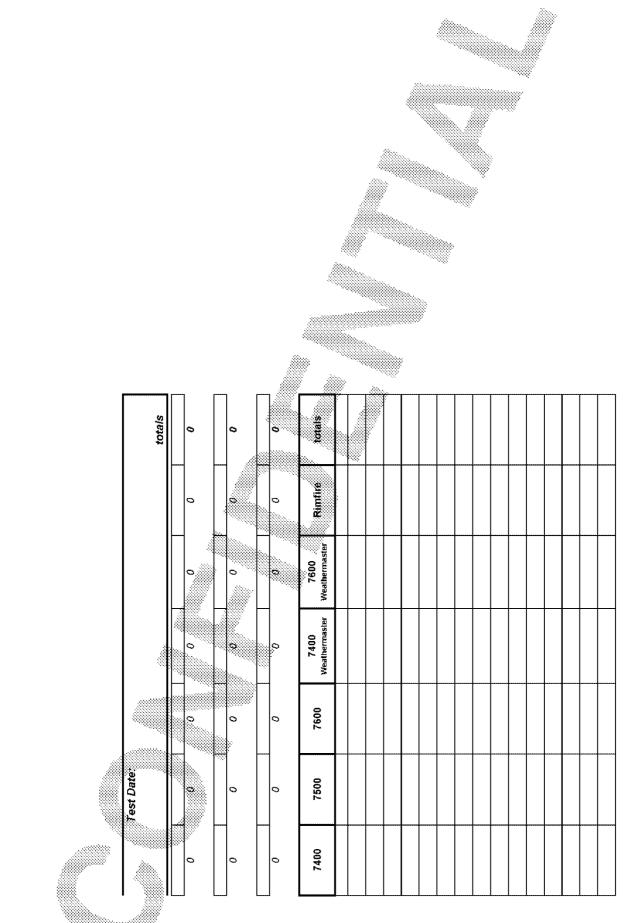


Subject to Protective Order - Williams v. Remington









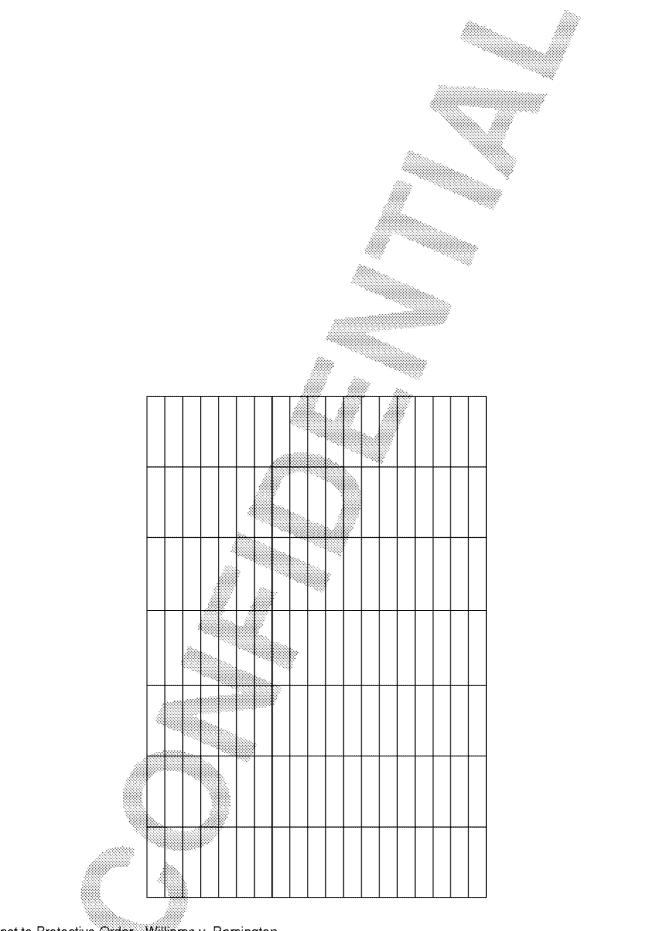

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|--|---------|---------|--------|------------|--------|---------|----------------------|-------|
| Summary | Y Total Test + Proof Failure Total Rejected | | | | | | | | |
| | Overall Reject Rate | | | | | | | | |
| | Sho Proof Rejecte Percei | | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Test Rejecte Percer | | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Target Rejecte Percer | d: 0 🎆 | 0 | 0 | 0 | 0 | 0 | 0 |] |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| AB | Action binds | | | | | | | | |
| BABS | Bulge at body shoulder | | | | | | | | |
| BAC | Burr at chamber | | | | | | | | |
| BBMA | BBL-to-bolt misalignment | | | | | | | | 1 🚕 |
| BB | Bolt binds/catches | | | | | | | | 1//// |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | * | | | | | | I. I |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | 1 | 1 🖉 |
| BHS | Bolt plug hits safety switch | | | | | | | | 1 🎕 |
| BLOP | Bar lock or disconnector out of position | | - | | | | | | |
| BLSO | Barrel lug shot off | | | | | | | | |
| BPO | Bolt pulls out | | | | | | | | |
| BSSM | Bolt stems shell in magazine | | | | | | | | |
| BWCD | Bolt won't cam down | | | | | | | | 1 |

| BWCFM | Bolt won't close over full magazine | | | | | 1 |
|-------|--------------------------------------|------|----------|---------------------------------------|---|-----|
| CD | Case dented | | | | | |
| СН | Closes hand | | | | | |
| CLM | Can't laod magazine | | | | | |
| со | Cut-off | 340. | | | | |
| CR | Cuts rim | | | | | |
| CS | Cases swell | | . | | | |
| CTOG | Chamber tom or gouged | | | | | |
| СТР | Creepy trigger pull | | | | | |
| CWSB | Carns wrong side of action bar | | | | | |
| DBB | Doesn't blow back | | | · · · · · · · · · · · · · · · · · · · | | |
| DCS | Double click in safety switch | | | | | |
| DCT | Double click in trigger | | | | | |
| DCU | Doesn't close-up | | | | | |
| DE | Doesn't eject | | | | | |
| DEL | Doesn't eject live round | | | | | |
| DFB | Doesn't feed back | | | | |] . |
| DFU | Doesn't feed up | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | P |
| DLU | Doesn't lock-up | | | | á | |
| DS | Dead safe | | | | | |
| DX | Doesn't extract | | | | | |
| DXL | Doesn't extract live round | | | | | |
| EDS | Extractor drops shell | | | | | |
| ESB | Ejector sticks back | | | | | |
| ESCR | Empty shell catches receiver | | | | | |
| ESS | Extractor stems shell | | | | | |




| Subject to Protective Order | |
|-----------------------------|-----|
| | FA |
| ă n | FB |
| S S | FC |
| т | FCB |
| len | FD |
| ning | FF |
| liams v. Remington | FFP |
| - | FOS |
| | |

| FA. | Fires automatically | | | | | | 1 |
|------|-----------------------------------|---------------------------------------|-------|-----|--|---|----|
| FB | Follower binds | | | | | | 1 |
| FC | Fails to connect | | | | | | |
| FCB | Fore-end cracked or broken | | | | | | |
| FD | Follows-down | | itte. | | | | |
| FF | Fails to fire | | | | | |] |
| FFP | Flat firing pin | | | | | | |
| FOS | Fires on safe | | | | | | |
| FPHB | Firing pin hits bbl | | | | | | |
| FPHI | Firing pin hits inside rim | | | | | | |
| FPO | Floor plate opens | · · · · · · · · · · · · · · · · · · · | | | | | |
| FPOH | Floor plate opens hard | | | | | | |
| FSR | Fires when safe is released | | | | | | |
| FT | Follower tips | | | | | | |
| GCSO | Gas cyl shot off | | | 110 | | | |
| HBL | Heavy bolt lift | | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | | |
| HPA | High pressure ammo | | | | | | |
| HUR | Hard under rail | | | | | | P |
| JCS | Jumps cartridge | | | | | á | |
| JM | Jumps magazin e | | | | | | I. |
| JO | Jars off | | | | | | |
| LB | Light blow | | | | | | |
| МАН | Magazine assembles hard | | | | | | |
| MCW | Magazine capacity wrong | | | | | | |
| MFA | Misfires (ammo) | | | | | | |
| MFOP | Magazine follower out of position | | | | | | |



| Subject to Protective Order | |
|-----------------------------|-----|
| | ML |
| ğ | MLH |
| s . | MRH |
| .> TI | он |
| len | OR |
| ing | PH |
| ams v. Remington | PSI |
| ت. | PSM |
| | |


| ML | Magazine loose | | | | |] |
|------|-------------------------------|-----|------|------------------|------|---|
| MALH | Magazine loads hard | | | | | |
| MRH | Magazine removes hard | | | | | |
| он | Opens hard | | | | | |
| OR | Over-rides | | | | | |
| РН | Pulls hard | | | | |] |
| PSI | Proof stamp illegible | | | | | |
| PSM | Proof stamp missing | | | | | |
| RBOC | Rings and bulges on case | | | inn. Millionn | | |
| RDW | (Action) release doesn't work | | | | | |
| RIC | Rings in chamber | ~~~ | | | | |
| RIS | Ring in sholder | | | | 500. | |
| RS | Rim srem | | | | | |
| SBC | Stems bottom chambers | | | | | |
| SBE | Stems bbl extension | | 1.64 | | | |
| SCB | Stock cracked or broken | | | | | |
| SCX | Shell catches | | | | | |
| SHI | Short indent | | | | | 4 |
| SI | Stems incline | | | | | P |
| SIC | Stems in chamber | | | | ä | |
| SL | shaves lead | | | | | |
| SLC | Stems left side of chamber | | | | | |
| SMOC | Stretch marks on case | | | | | |
| SOR | Stem over-ride | | | | | |
| SP | Stems port | | | | | |
| SR | Shoulder rough | | | | | |
| SRC | Stems right side of chamber | | | | | |




| Protective Order | |
|------------------|------|
| W | SRIC |
| Ĩ | SSOC |
| ns 🌕 | STC |
| - | SWE |
| len | SWH |
| nin | sww |
| ams v. Remington | TD |
| <u>د</u> | τυ |
| | |

Subject to

| SRIC | Specific rings in chamber | | | | |] |
|--------|---------------------------------|--|-----|-------------|------|-----|
| SSOC | Surface scratches on case | | | | |] |
| STC | Stems top chamber | | | | | |
| SWE | Satety switch works too easily | | | | | |
| SWH | Safety switch works too hard | | | | | |
| sww | Safety ewitxh won't work | | | | |] |
| TD | Tips down | | | | | |
| TU | Tips up | | | | | |
| TWP | Trigger won't pull | | | | | |
| TWR | Trigger won't retract | | | | | |
| UNCN-T | Uncoded | | | | | |
| хн | Extracts hard | | | | 900. | |
| | | | | | | |
| HI | High | | | Million III | | |
| LO | Low | | 110 | | | |
| LEFT | Left | | | | | |
| RIGHT | Right | | | | | |
| DG | Doesn't Group | | | | | |
| FSST | Front sight tipped | | | | | Þ |
| RSTT | Rear sight tipped | | | | â | |
| RSBR | Rear sight base raised | | | | | T.« |
| FSTR | Front sight raised | | | | | |
| FSTL | Front sight loose | | | | | |
| RSTL | Rear sight loose | | | | | |
| MGPT-G | Missing parts at target | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | |
| | | | | | | |




| AI-P | Assembly incompleye at proof | | | | | |
|--------|---|------|-----|--|------|--|
| 368 | Barrel bracket gracked or broken at proof | | | | | |
| 3С-Р | Blows cases at proof | | | | | |
| 3EB-P | Barrel extension broken at proof | | | | | |
| 3LP-P | Blanked primer at proof | Att. | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | | |
| BP-P | Blown primer at proof | | • | | | |
| BS-P | Barrel split at proof | | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | | |
| ESB-P | Ejector sticks back at proof | | | | | |
| FCB-P | Fore-end cracked at proof | | | | | |
| FESO-P | Fore-end shot off at proof | | | | 900. | |
| FF-P | Fails to fire at proof | | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | 110 | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | | |
| PP-P | Pierced primer at proof | | | | | |
| SCB-P | Stock cracked or broken at proof | | | | | |
| UNCM-P | Uncoded proof malfunctions | | | | | |

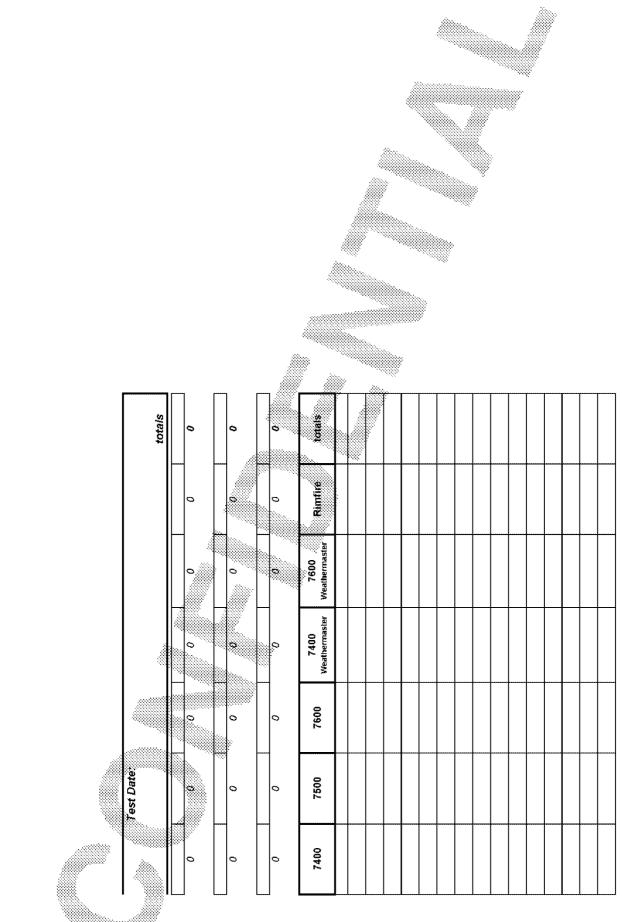








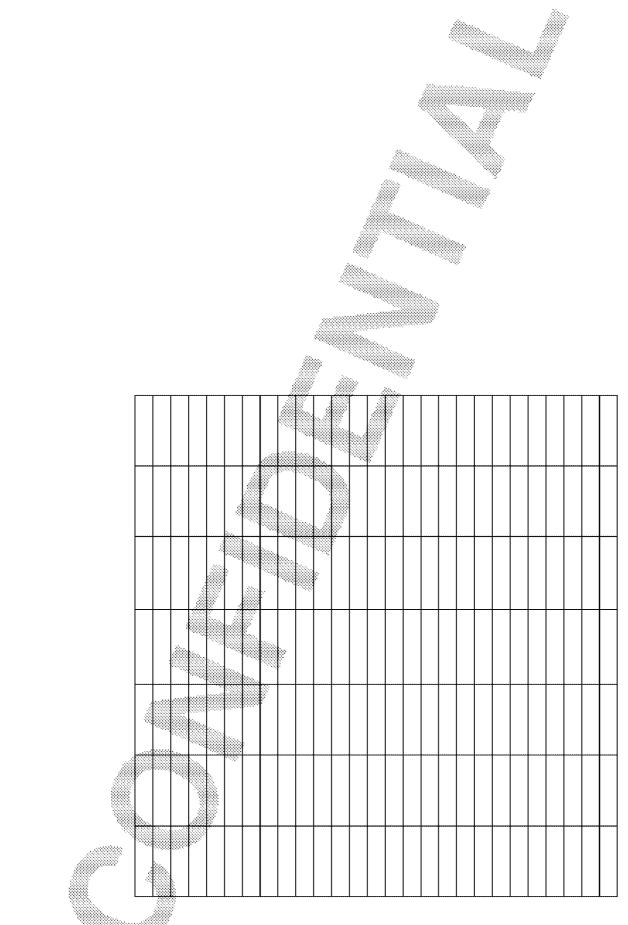

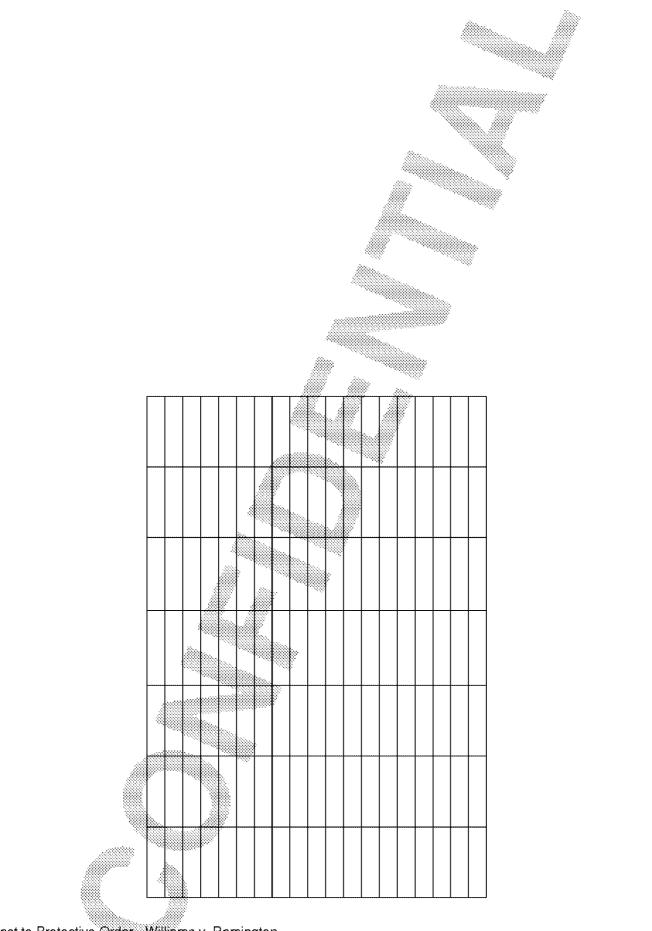

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|--|---------|---------|--------|------------|--------|---------|----------------------|---|
| Summary | Total Test + Proof Failure | | | | | | | | |
| | Total Rejected Overall Reject Rate | | | | | | | | |
| | The second construction of the second s | · · | 1 | | | | | | 1 |
| ÷. | Proof Rejected | 1 0 | 0 | 0 | 0 | 0 | 0 | 0 | J |
| | Perceri | 2008 | | I | I | 1 | 1 | 1 | Ъ |
| | Shoi Test Rejected | 1 Q | 0 | L | 0 | 0 | 0 | 0 | 1 |
| | Percen | | | | | | | | |
| | Shot | | | | | | | |] |
| | Target Rejected Percen | | 0 | | 0 | 0 | 0 | 0 | |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 SS | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| | | | | | | | | | 4 |
| AB | Action binds | | | | | | | | 4 |
| BABS | Bulge at body shoulder | | | *** | | | | | 4 |
| BAC | Burr at chamber | | | | | | | | _ |
| BBMA | BBL-to-bolt misalignment | | | | | | | | |
| BB | Bolt binds/catches | | | | | | | | |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | | | | | | | |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | | 🌋 |
| BHS | Bolt plug hits safety switch | | | | | | | | - |
| BLOP | Bar lock or disconnector out of position | | | | | | | | _ |
| BLSO | Barrel lug shot off | | | | | | | | 4 |
| BPO | Bolt pulls out | | | | | | | | 4 |
| BSSM | Bolt stems shell in magazine | | | | | | | | _ |
| BWCD | Bolt won't cam down | | *** | | | | | | |

| | | | 1 | I | 1 | 1 | - |
|------|--------------------------------------|--------|---|------------------|-------|---|------------|
| | Bolt won't close over full magazine | | | | | | |
| CD | Case dented | | | | | | |
| СН | Closes hand | | | | | | |
| CLM | Can't laod magazine | | | | | | |
| co | Cut-off | - 240. | | | | | |
| CR | Cuts rim | | | | | | |
| cs | Cases swell | | | | | | |
| стоб | Chamber torn or gouged | | | | | | |
| СТР | Creepy trigger pull | | | ann. Millionn | | | |
| CWSB | Cams wrong side of action bar | | | | | | |
| DBB | Doesn't blow back | | | | | | |
| DCS | Double click in safety switch | | | | 1990. | | |
| DCT | Double click in trigger | | | | | | |
| DCU | Doesn't close-up | | | | | | |
| DE | Doesn't eject | | | | | | |
| DEL | Doesn't eject live round | | | | | | |
| DFB | Doesn't feed back | | | | | | |
| DFU | Doesn't feed up | | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | | |
| DLU | Doesn't lock-up | | | | á | | |
| DS | Dead safe | | | | | | <u>~</u> ≪ |
| DX | Doesn't extract | | | | | | |
| DXL | Doesn't extract live round | | | | | | |
| EDS | Extractor drops shell | | | | | | |
| ESB | Ejector sticks back | | | | | | |
| ESCR | Empty shell catches receiver | | | | | | |
| ESS | Extractor stems shell | | | | | | |




| Subject to Protective Order | |
|--|-----|
| N | FA |
| la l | FB |
| ns / | FC |
| ר. רד | FCB |
| len | FD |
| inc | FF |
| ams v. Remington | FFP |
| ب | FOS |
| | |

| FA. | Fires automatically | | | | | 1 |
|------|-----------------------------------|---------|-------|--|------|----|
| FB | Follower binds | | | | | |
| FC | Fails to connect | | | | | |
| FCB | Fore-end cracked or broken | | | | | |
| FD | Follows-down | | -240. | | | |
| FF | Fails to fire | | | | | |
| FFP | Flat firing pin | | | | | |
| FOS | Fires on safe | ··· /// | | | | |
| FPHB | Firing pin hits bbl | | | 1200. 1997 - June - | | |
| FPHI | Firing pin hits inside rim | | | | | |
| FPO | Floor plate opens | ~~~ | | | | |
| FPOH | Floor plate opens hard | | | | Sec. | |
| FSR | Fires when safe is released | | | | | |
| FT | Follower tips | | | | | |
| GCSO | Gas cyl shot off | | | | | |
| HBL | Heavy bolt lift | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | |
| HPA | High pressure ammo | | | | | |
| HUR | Hard under rail | | | | | 1 |
| JCS | Jumps cartridge | | | | ź | |
| JM | Jumps magazin e | | | | | ľ× |
| JO | Jars off | | | | | |
| LB | Light blow | | | | | |
| MAH | Magazine assembles hard | | | | | |
| MCW | Magazine capacity wrong | | | | | |
| MFA | Misfires (ammo) | | | | | |
| MFOP | Magazine follower out of position | | | | | |



| Subject to Protective Order | |
|-----------------------------|------|
| | ML |
| lan . | MILH |
| S No. | MRH |
| .> דו | он |
| len | OR |
| nin | PH |
| ams v. Remingtor | PSI |
| <u>د</u> | PSM |
| | 1 |


| ML | Magazine loose | | | | |] |
|------|-------------------------------|-----|-------|--|---|-----|
| MALH | Magazine loads hard | | | | |] |
| MRH | Magazine removes hard | | | | | |
| он | Opens hant | | | | | |
| OR | Overandes | | 340. | | |] |
| РН | Pulls hard | | | | |] |
| PSI | Proof stamp illegible | | | | | |
| PSM | Proof stamp missing | | | | | |
| RBOC | Rings and bulges on case | | | | | |
| RDW | (Action) release doesn't work | | | | | |
| RIC | Rings in chamber | ~~~ | | | | |
| RIS | Ring in sholder | | | | | |
| RS | Rim srem | | | | | |
| SBC | Stems bottom chambers | | | | | |
| SBE | Stems bbl extension | | ***** | | | |
| SCB | Stock cracked or broken | | | | | |
| SCX | Shell catches | | | | |]. |
| SHI | Short indent | | **** | | | |
| SI | Stems incline | | | | | Ø |
| SIC | Stems in chamber | | | | á | |
| SL | shaves lead | | | | | T 💥 |
| SLC | Stems left side of chamber | | | | | |
| SMOC | Stretch marks on case | | | | | |
| SOR | Stem over-ride | | | | | |
| SP | Stems port | | | | | |
| SR | Shoulder rough | | | | | |
| SRC | Stems right side of chamber | | | | | |




| Protective Order | |
|------------------|-------|
| X | SRIC |
| Ē | SSOC |
| ns 🐄 | STC 🛞 |
| ams v. Remington | SWE |
| len | SWH |
| jnir | sww |
| gtoj | TD |
| Э | ΤU |
| | |

Subject to

| SRIC | Specific rin gs in chamber | | | | | 1 |
|--------|-----------------------------------|-------|-------|--|---|---|
| 8500 | Surface scratches on case | | | | | 1 |
| STC | Stems top chamber | | | | | |
| SWE | Satety switch works too easily | | | | | |
| SWH | Safety switch works too hard | | -240. | | | |
| sww | Safety ewitxh work | | | | | 1 |
| TD | Tips down | | | | | |
| TU | Tips up | | | | | |
| TWP | Trigger won't pull | | | | | |
| TWR | Trigger won't retract | | | | | |
| UNCN-T | Uncoded | · *** | | | | |
| хн | Extracts hard | | | | à | |
| | | | | | | |
| H | High | | | | | |
| LO | Low | | | | | |
| LEFT | Left | | | | | |
| RIGHT | Right | | | | | |
| DG | Doesn't Group | | | | | |
| FSST | Front sight tipped | | | | | 1 |
| RSTT | Rear sight tipped | | | | Ŕ | |
| RSBR | Rear sight base raised | | | | | |
| FSTR | Front sight raised | | | | | |
| FSTL | Front sight loose | | | | | |
| RSTL | Rear sight loose | | | | | |
| MGPT-G | Missing parts at target | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | |
| | | | | | | |




| AI-P | Assembly incompleye at proof | | | | |
|-------------|---|--|--|-------|--|
| 368 · · · · | Barrel bracket gracked or broken at proof | | | | |
| вс-р | Blows cases at proof | | | | |
| вев-р 👋 | Barrel extension broken at proof | | | | |
| BLP-P | Blanked primer at proof | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | |
| BP-P | Blown primer at proof | | | | |
| BS-P | Barrel split at proof | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | |
| ESB-P | Ejector sticks back at proof | | | | |
| FCB-P | Fore-end cracked at proof | | | | |
| FESO-P | Fore-end shot off at proof | | | 1990. | |
| FF-P | Fails to fire at proof | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | |
| PP-P | Pierced primer at proof | | | | |
| SCB-P | Stock cracked or broken at proof | | | | |
| UNCM-P | Uncoded proof malfunctions | | | | |

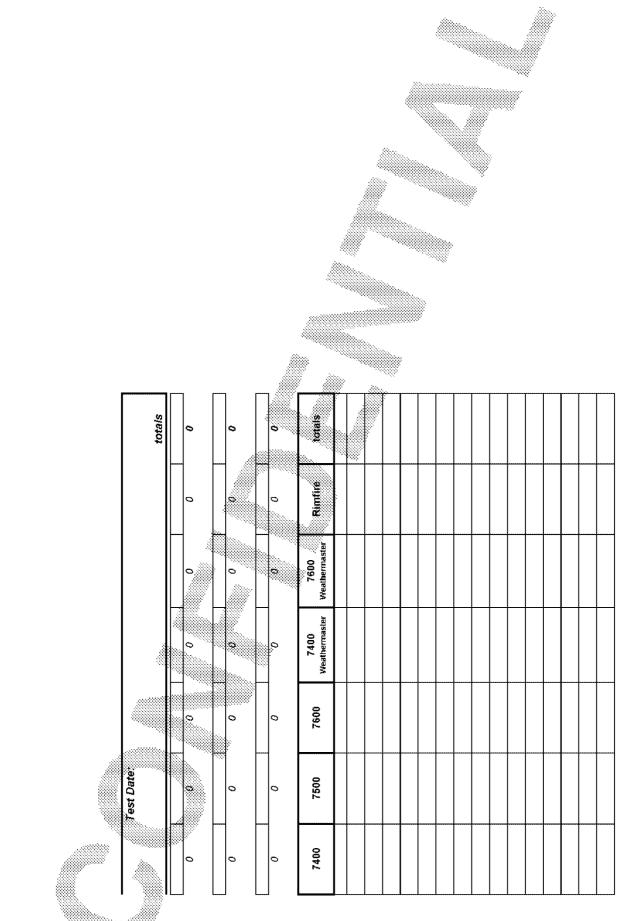



Subject to Protective Order - Williams v. Remington



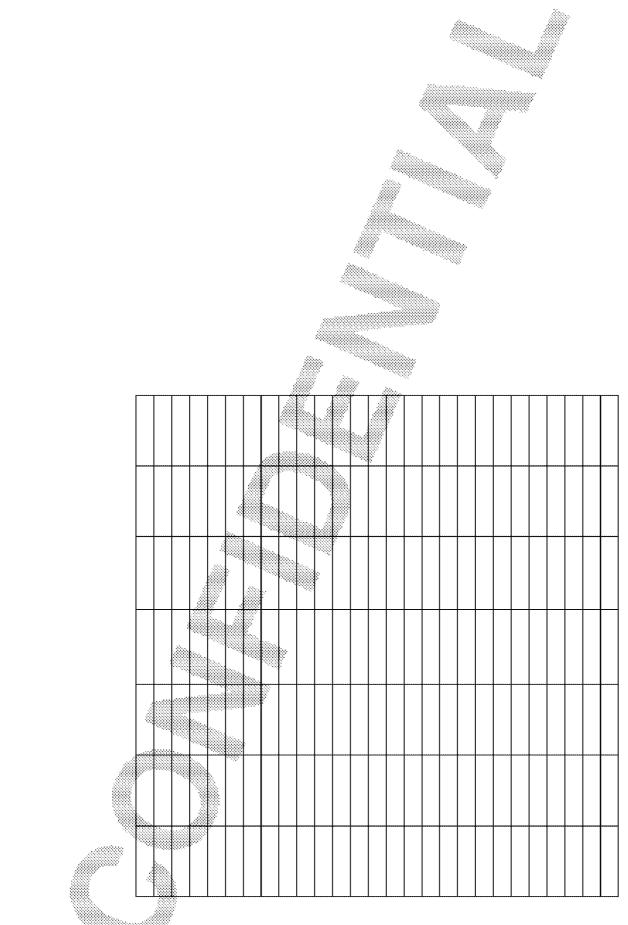



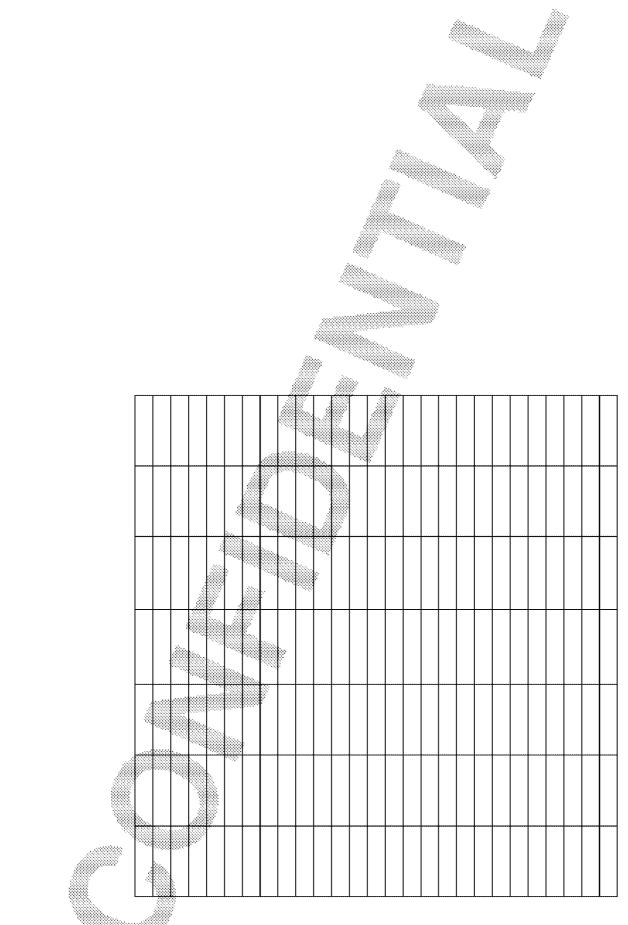

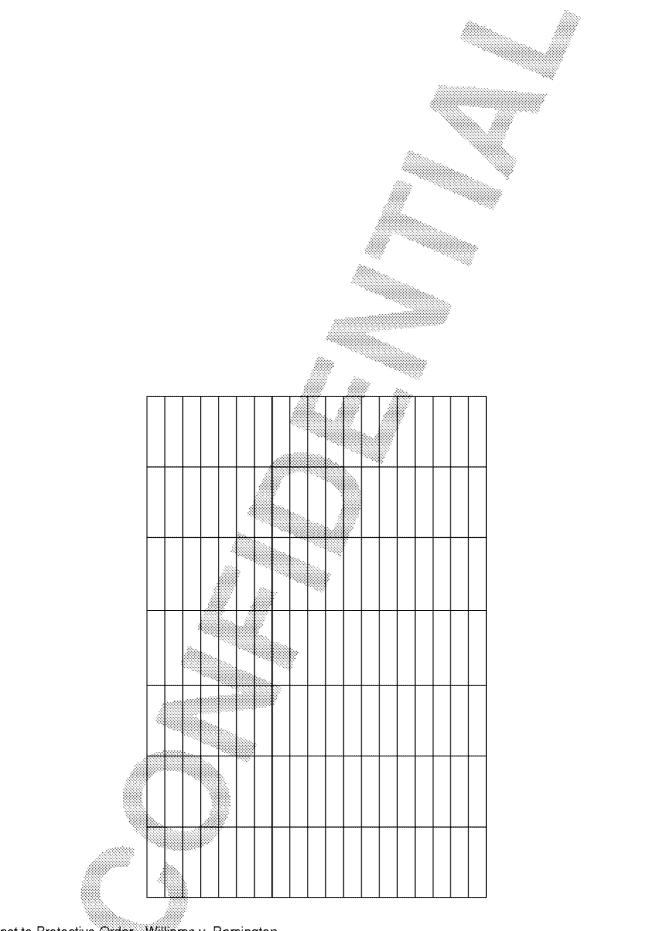

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|---|----------|---------|--------|------------|--------|---------|----------------------|-----|
| Summary | Total Test + Proof Failures Total Rejected | | | | | | | | |
| | Overall Reject Rate | | | | | | | | |
| | Shot: Proof Rejected Percent | <u> </u> | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Shot. Test Rejected Pergent | Q. | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Shot: Target Rejected Percent | : 0 | 0 | 0 | 0 | 0 | 0 | 0 |] |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| AB | Action binds | | | | | | | | |
| BABS | Bulge at body shoulder | | | | | | | | - |
| BAC | Burr at chamber | | | | | | | | 1 |
| BBMA | BBL-to-bolt misalignment | | | | | | | | 1 🧥 |
| BB | Bolt binds/catches | | | | | | | | 1 |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | | | | | 197 | | t i |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | | 1 |
| BHS | Bolt plug hits safety switch | | | | | | | | 1 🍭 |
| BLOP | Bar lock or disconnector out of position | | | | | | | | 1 |
| BLSO | Barrel lug shot off | | | | | | | | 1 |
| BPO | Bolt pulls out | | | | | | | | |
| BSSM | Bolt stems shell in magazine | | | | | | | | |
| BWCD | Bolt won't cam down | | | | | | | | 1 |

| BWCFM | Bolt won't close over full magazine | | | | | | |
|-------|--------------------------------------|--|-----|------------------|------|---------|---|
| CD | Case dented | | | | | | |
| СН | Closes hand | | | | | | |
| CLM | Can't laod magazine | | | | | | |
| со | Cut-off | | | | | | |
| CR | Cuts rim | | | | | | |
| cs | Cases swell | | | | | | |
| стоб | Chamber tom or gouged | | | | | | |
| СТР | Creepy trigger pull | | | ann. Millionn | | | |
| CWSB | Carns wrong side of action bar | | | | | | |
| DBB | Doesn't blow back | | | | | | |
| DCS | Double click in safety switch | | | | àte. | | |
| DCT | Double click in trigger | | | | | | |
| DCU | Doesn't close-up | | | | | | |
| DE | Doesn't eject | | 100 | | | | |
| DEL | Doesn't eject live round | | | | | | |
| DFB | Doesn't feed back | | | | | | |
| DFU | Doesn't feed up | | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | | Ø |
| DLU | Doesn't lock-up | | | | | | |
| DS | Dead safe | | | | | ****/// | |
| DX | Doesn't extract | | | | | | |
| DXL | Doesn't extract live round | | | | | | |
| EDS | Extractor drops shell | | | | | | |
| ESB | Ejector sticks back | | | | | | |
| ESCR | Empty shell catches receiver | | | | | | |
| ESS | Extractor sterns shell | | | | | | |




| FA | FA. | FA FB FC | Subject to Protective Order | |
|---------------------|---|----------------|-----------------------------|-----|
| | ē FB | B FB FC FC | | FA |
| FC V. FCB | FCB | | fen | FD |
| ns V. Ren | Y. FCB | en FD | jnir | FF |
| FC FCB FCB FD FF | Y. Reming | feming | ytor | FFP |
| ns v. Remingtor | FCB FD FD FF FF FF | FD FF FF FF | Ĺ | FOS |
| FD FF FF FF | Y. Remington | Remington | | |

| FA. | Fires automatically | | | | | |
|------|-----------------------------------|------|-------|--|------|---|
| FB | Follower binds | | | | | |
| FC | Fails to comment | | | | | |
| FCB | Fore-end cracked or broken | | | | | |
| FD | Follows-down | 322. | | | | |
| FF | Fails to fire | | | | | |
| FFP | Flat firing pin | | - | | | |
| FOS | Fires on safe | | | | | |
| FPHB | Firing pin hits bbl | | | | | |
| FPHI | Firing pin hits inside rim | | | | | |
| FPO | Floor plate opens | | | | | |
| FPOH | Floor plate opens hard | | | | 500. | |
| FSR | Fires when safe is released | | | | | |
| FT | Follower tips | | | | | |
| GCSO | Gas cyl shot off | | 1.03 | | | |
| HBL | Heavy bolt lift | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | |
| HPA | High pressure ammo | | | | | |
| HUR | Hard under rail | | | | | Ø |
| JCS | Jumps cartridge | | | | ; | |
| JM | Jumps magazin e | | | | | |
| OL | Jars off | | | | | |
| LB | Light blow | | | | | |
| MAH | Magazine assembles hard | | | | | |
| MCW | Magazine capacity wrong | | | | | |
| MFA | Misfires (ammo) | | | | | |
| MFOP | Magazine follower out of position | | | | | |



| Subject to Protective Order | |
|-----------------------------|-----|
| | ML |
| B | MLH |
| . | MRH |
| .< T | он |
| fen | OR |
| ŋiŋ | PH |
| ams v. Remingtor | PSI |
| <u>ر</u> | PSM |
| | |


| , | | | 1 | | L | | 1 | - |
|------|-------------------------------|---------------------------------------|---|-----|---|---|------|---|
| | Magazine lõose | | | | | | | |
| MALH | Magazine loads hard | | | | | | | |
| MRH | Magazine removes hard | | | | | | | |
| он | Opens hand | | | | | | | |
| OR | Over-ndes | | | | | | | |
| PH | Pulls hard | | | | | | | |
| PSI | Proof stamp illegible | | | | | | | |
| PSM | Proof stamp missing | | | | | | | |
| RBOC | Rings and bulges on case | | | | | | | |
| RDW | (Action) release doesn't work | | | | | | | |
| RIC | Rings in chamber | · · · · · · · · · · · · · · · · · · · | | | | | | |
| RIS | Ring in sholder | | | | | | 500. | |
| RS | Rim srem | | | | | | | |
| SBC | Stems bottom chambers | | | | | | | |
| SBE | Stems bbl extension | | | 100 | | | | |
| SCB | Stock cracked or broken | | | | | | | |
| scx | Shell catches | | | | | | | |
| SHI | Short indent | | | | | | | |
| SI | Stems incline | | | | | | | |
| SIC | Stems in chamber | | | | | | ; | |
| SL | shaves lead | | | | | | | ľ |
| SLC | Stems left side of chamber | | | | | | | |
| SMOC | Stretch marks on case | | | | | | | |
| SOR | Stem over-ride | | | | | | | |
| SP | Stems port | | | | | | | |
| SR | Shoulder rough | | | | | _ | | |
| SRC | Stems right side of chamber | | | | | | | |




| Protective Order | | |
|-------------------|------|--------------|
| V | SRIC | |
| lams v. Remington | SSOC | |
| ns. | STC | |
| .< T | SWE | 1997 1997 |
| fen | SWH | |
| ning | sww | |
| gto | TD | |
| د د | TU | |
| | TIME | |

Subject to

| SRIC | Specific rings in chamber | | | |] |
|--------|---------------------------------|-------|--|------|--------|
| SSOC | Surface scratches on case | | | | |
| STC | Stems top chamber | | | |] |
| SWE | Satety switch works too essily | ***** | | | |
| SWH | Safety switch works too hard | | | | |
| sww | Safety ewitxh won't work | | | | |
| TD | Tips down | | | | |
| TU | Tips up | | | | |
| TWP | Trigger won't pull | | | | |
| TWR | Trigger won't retract | | | | |
| UNCN-T | Uncoded | I | | | |
| хн | Extracts hard | | | 80x. | |
| | | | | | |
| HI | High | | | | |
| LO | Low | | | | |
| LEFT | Left | | | | |
| RIGHT | Right | | | | ╡. |
| DG | Doesn't Group | | | | 4 |
| FSST | Front sight tipped | | | | |
| RSTT | Rear sight tipped | | | 2 | |
| RSBR | Rear sight base raised | ***** | | | l. |
| FSTR | Front sight raised | | | | |
| FSTL | Front sight loose | | | | |
| RSTL | Rear sight loose | | | | |
| MGPT-G | Missing parts at target | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | |
| | | | | | |




| AI-P | Assembly incompleye at proof | 1 | | | | | 1 |
|---------|---|-------|------|----|---|------|---|
| 368 | Barrel bracket gracked or broken at proof | | | | | | |
| 3C-P | Blows cases at proof | | | | | | |
| зев-р 🚿 | Barrel extension broken at proof | | | | | | |
| BLP-P | Blanked primer at proof | | ása. | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | | | |
| BP-P | Blown primer at proof | | | | | | |
| BS-P | Barrel split at proof | | | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | : | | |
| ESB-P | Ejector sticks back at proof | | | | | | |
| FCB-P | Fore-end cracked at proof | · *** | | | | | |
| ESO-P | Fore-end shot off at proof | | | | | 8eo. | |
| FF-P | Fails to fire at proof | | | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | 10 | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | | | |
| PP-P | Pierced primer at proof | | | | | | |
| SCB-P | Stock cracked or broken at proof | | | | | | |
| UNCM-P | Uncoded proof malfunctions | | *** | | | | |

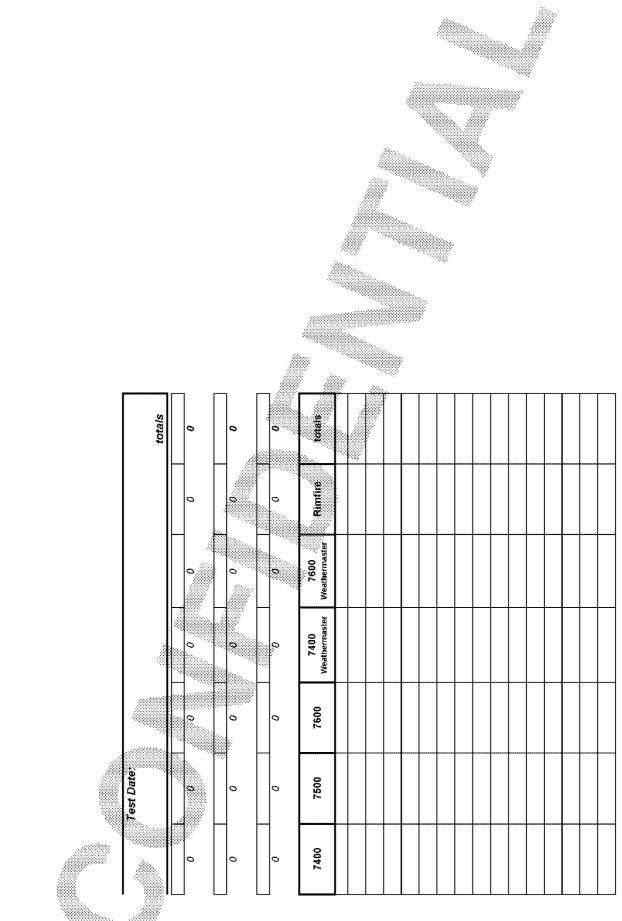


Subject to Protective Order - Williams v. Remington



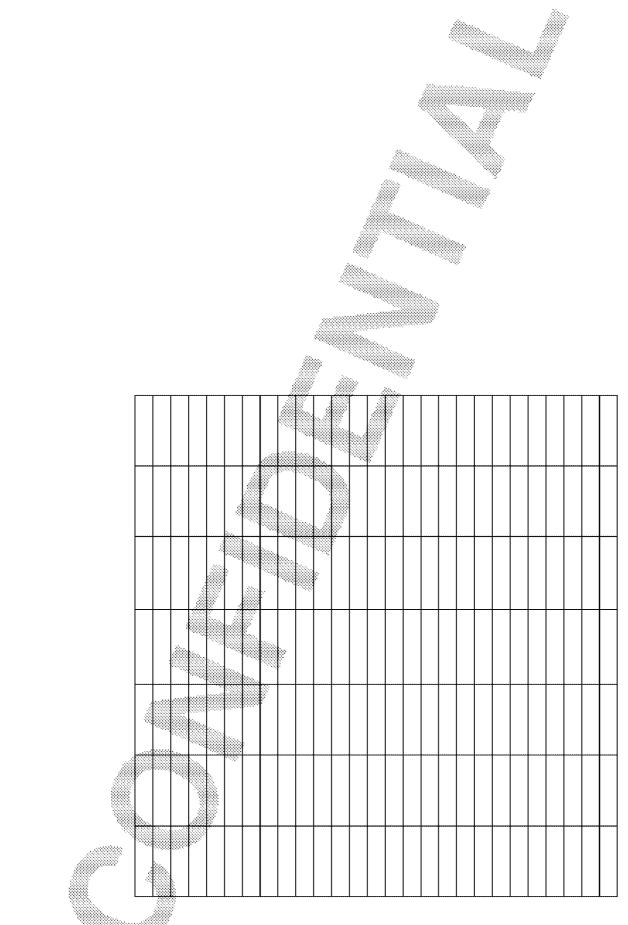





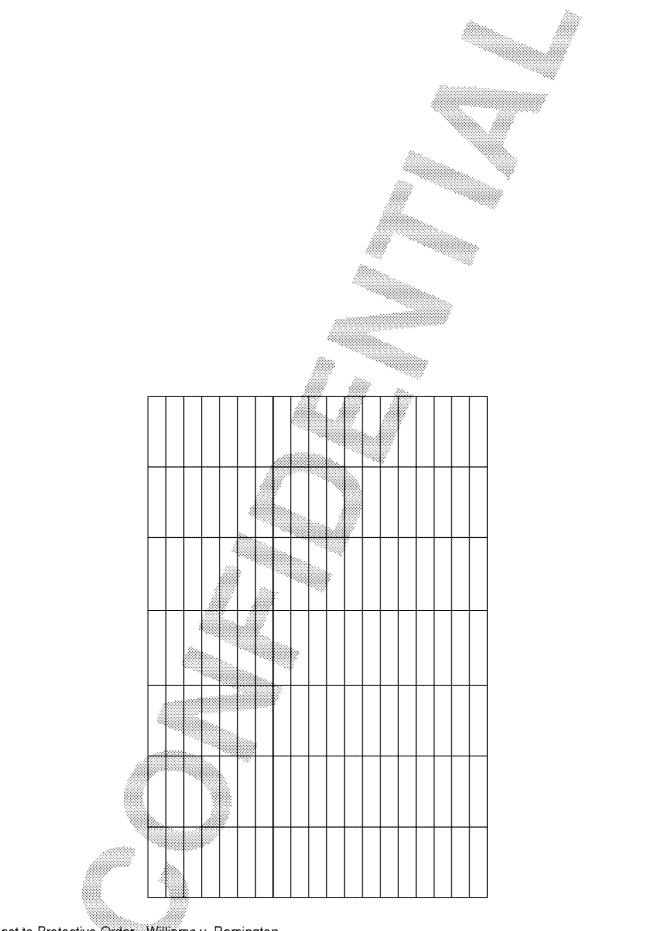

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|--|---------|---------|--------|------------|--------|---------|----------------------|---|
| Summary | Total Test + Proof Failure | | | | | | | | |
| | Total Rejected Overall Reject Rate | | | | | | | | |
| | The second contract of the second sec | · · | 1 | | | | | | 1 |
| ÷. | Proof Rejected | 1 0 | 0 | 0 | 0 | 0 | 0 | 0 | J |
| | Perceri | 2008 | | I | I | 1 | 1 | 1 | Ъ |
| | Shoi Test Rejected | 1 Q | 0 | L | 0 | 0 | 0 | 0 | 1 |
| | Percen | | | | | | | | |
| | Shot | | | | | | | |] |
| | Target Rejected Percen | | 0 | | 0 | 0 | 0 | 0 | |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 SS | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| | | | | | | | | | 4 |
| AB | Action binds | | | | | | | | 4 |
| BABS | Bulge at body shoulder | | | *** | | | | | 4 |
| BAC | Burr at chamber | | | | | | | | _ |
| BBMA | BBL-to-bolt misalignment | | | | | | | | |
| BB | Bolt binds/catches | | | | | | | | |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | | | | | | | |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | | 🌋 |
| BHS | Bolt plug hits safety switch | | | | | | | | - |
| BLOP | Bar lock or disconnector out of position | | | | | | | | _ |
| BLSO | Barrel lug shot off | | | | | | | | 4 |
| BPO | Bolt pulls out | | | | | | | | 4 |
| BSSM | Bolt stems shell in magazine | | | | | | | | _ |
| BWCD | Bolt won't cam down | | *** | | | | | | |

| | <i></i> | | | | | | | |
|--------|---|--------|------|----------|---|-----------|---|---|
| | R. h | 1 | | I | | 1 | 1 | 1 |
| | Bolt won't close over full magazine Case dented | | | | | | | |
| СР | | | | | | | | |
| | Closes hard | Milion | | | | | | |
| CLM CO | Can'i laod magazine Cut-off | | | | | | | |
| CR | Cute-out | | | | | | | |
| CS | | | | . | | | | |
| стоб | | | | | | | | |
| | Chamber form of gouged | | | | × | | | |
| CTP | Creepy mgger puil | | | | | | | |
| CWSB | Carns wrong side of action bar | | | | | 1 | | |
| DBB | Doesn't blow back | | | | | | | |
| DCS | Double click in safety switch | | | | | | | |
| DCT | Double click in trigger | | | | | | | |
| DCU | Doesn't close-up | | | | | | | |
| DE | Doesn't eject | | | | | | | |
| DEL | Doesn't eject live round | | | | | | | |
| DFB | Doesn't feed back | | | | | | | |
| DFU | Doesn't feed up | | | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | - and the | | P |
| DLU | Doesn't lock-up | | | | | ž | | |
| DS | Dead safe | | | | | | | |
| DX | Doesn't extract | | | | | | | |
| DXL | Doesn't extract live round | | | | | | | |
| EDS | Extractor drops shell | | | | | | | |
| ESB | Ejector sticks back | | | | | | | |
| ESCR | Empty shell catches receiver | | | | | | | |
| ESS | Extractor stems shell | | | | | | | |




| FA | FA B | Subject to Protective Order | |
|--|--|-----------------------------|------|
| | a FB | ×. | FA |
| S FC | | .< T | FCB |
| FC FC FCB | FCB | fen | FD |
| FC FC FC FC FC FC FD | FCB FD FD | ning | FF |
| ns v. Remin | FCB FCB FD FF | gtor | FFP |
| ns v. Remingtor | FCB FD FD FF FF FFP | ت_ | FOS |
| Remingtor | FCB FD FF FFP FOS | | FPHB |

| FA | Fires automatically | | | | | | |
|------|-----------------------------------|---------|---|------|--|------|----|
| FB | Follower binds | | | | | | |
| FC | Fails to connect | | | | | | |
| FCB | Fore-end cracked or broken | | | | | | |
| FD | Follows-down | | - 200. | | | | |
| FF | Fails to fire | | alla in the second s | | | | |
| FFP | Flat firing pin | | | | | | |
| FOS | Fires on safe | ··· /// | | | | | |
| FPHB | Firing pin hits bbl | | | | | | |
| FPHI | Firing pin hits inside rim | | | | | | |
| FPO | Floor plate opens | ~~~ | | | | | |
| FPOH | Floor plate opens hard | | | | | 8eo. | |
| FSR | Fires when safe is released | | | | | | |
| FT | Follower tips | | | **** | | | |
| GCSO | Gas cyl shot off | | | | | | |
| HBL | Heavy bolt lift | | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | | |
| HPA | High pressure ammo | | | | | | |
| HUR | Hard under rail | | | | | | Ø |
| JCS | Jumps cartridge | | | | | ; | |
| JM | Jumps magazin e | | | | | | Ľ. |
| JO | Jars off | | | | | | |
| LB | Light blow | | | | | | |
| MAH | Magazine assembles hard | | | | | | |
| MCW | Magazine capacity wrong | | | | | | |
| MFA | Misfires (ammo) | | | | | | |
| MFOP | Magazine follower out of position | | | | | | |



| Subject to Protective Order | |
|-----------------------------|-----|
| | ML |
| an s | MLH |
| 20 C | MRH |
| - | он |
| ien | OR |
| jnir | PH |
| ams v. Remingtor | PSI |
| L | PSM |
| | |


| ML. | Magazine loose | | | | | |] |
|------|-------------------------------|-----------|-----|------|--|--------------|----|
| MLH | Magazine loads hard | | | | | | 1 |
| MRH | Magazine removes hard | | | | | | |
| он | Opens hard | | | | | | |
| OR | Overandes | | àn. | | | | |
| PH | Pulls hard | | | | | | |
| PSI | Proof stamp illegible | | | | | | |
| PSM | Proof stamp missing | | | | | | |
| RBOC | Rings and bulges on case | | | | | | |
| RDW | (Action) release doesn't work | | | | | | |
| RIC | Rings in chamber | · · · · · | | | | | |
| RIS | Ring in sholder | | | | | XX | |
| RS | Rim srem | | | | | | |
| SBC | Stems bottom chambers | | | | | | |
| SBE | Stems bbl extension | | | 1165 | | | |
| SCB | Stock cracked or broken | | | | | | |
| scx | Shell catches | | | | | | |
| SHI | Short indent | | | | | | |
| SI | Stems incline | | | | | 200 4 | ø |
| SIC | Stems in chamber | | | | | ź | |
| SL | shaves lead | | | | | | 1. |
| SLC | Stems left side of chamber | | | | | | |
| SMOC | Stretch marks on case | | | | | | |
| SOR | Stem over-ride | | | | | | |
| SP | Stems port | | | | | | |
| SR | Shoulder rough | | | | | | |
| SRC | Stems right side of chamber | | | | | | |




| Protective Order- | |
|-------------------|-------|
| V | SRIC |
| ā s | SSOC |
| ns 🐃 | STC 🛞 |
| ams v. Remington | SWE |
| len | SWH |
| nin | sww |
| ytor | TD |
| | ΤU |
| | |

Subject to

| SRIC | Specific rings in chamber | | | | | |
|--------|---------------------------------|--------|------|--|------|-----|
| SSOC | Surface scratches on case | | | | | |
| STC | Stems top chamber | | | | | |
| SWE | Safety switch works too easily | | | | | |
| SWH | Safety switch works too hard | - AM-2 | | | | |
| sww | Safety ewitxh work | | | | | |
| TD | Tips down | | | | | |
| TU | Tips up | | | | | |
| TWP | Trigger won't pull | | | | | |
| TWR | Trigger won't retract | | | | | |
| UNCN-T | Uncoded | | | | | |
| хн | Extracts hard | | | | 800. | |
| | | | | | | |
| HI | High | | | | | |
| LO | Low | | 1100 | | | |
| LEFT | Left | | | | | |
| RIGHT | Right | | | | | |
| DG | Doesn't Group | | | | | |
| FSST | Front sight tipped | | | | | Ø |
| RSTT | Rear sight tipped | | | | â | |
| RSBR | Rear sight base raised | | | | | r « |
| FSTR | Front sight raised | | | | | |
| FSTL | Front sight loose | | | | | |
| RSTL | Rear sight loose | | | | | |
| MGPT-G | Missing parts at target | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | |
| | | | | | | |



| AI-P | Assembly incompleye at proof | | | | | |
|--------|---|--------|-----|--|------|--|
| 368 | Barrel bracket gracked or broken at proof | | | | | |
| 3С-Р | Blows cases at proof | | | | | |
| 3EB-P | Barrel extension broken at proof | | | | | |
| 3LP-P | Blanked primer at proof | - A.D. | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | | |
| BP-P | Blown primer at proof | | • | | | |
| BS-P | Barrel split at proof | | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | | |
| ESB-P | Ejector sticks back at proof | | | | | |
| FCB-P | Fore-end cracked at proof | | | | | |
| FESO-P | Fore-end shot off at proof | | | | 900. | |
| FF-P | Fails to fire at proof | | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | 110 | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | | |
| PP-P | Pierced primer at proof | | | | | |
| SCB-P | Stock cracked or broken at proof | | | | | |
| UNCM-P | Uncoded proof malfunctions | | | | | |

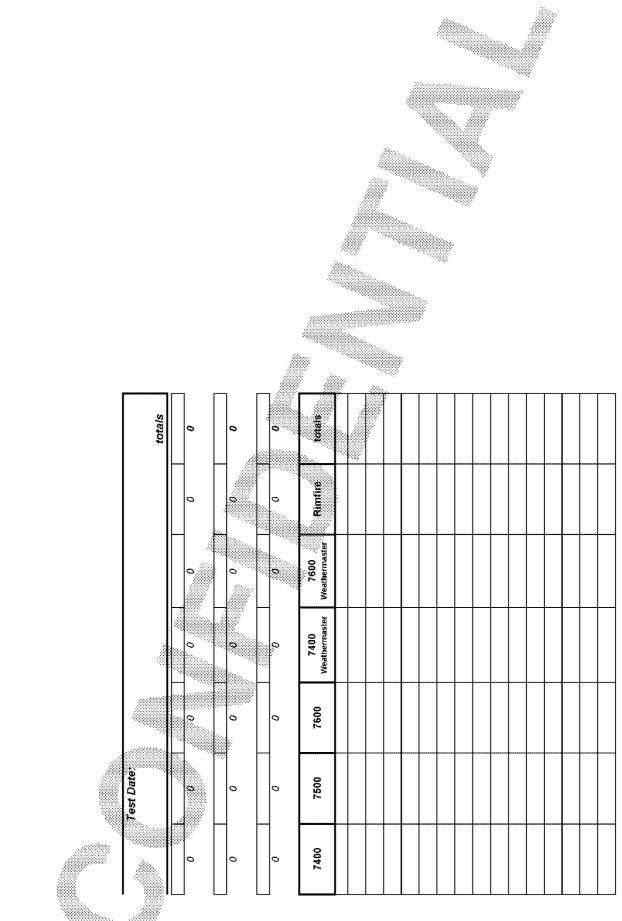


Subject to Protective Order - Williams v. Remington









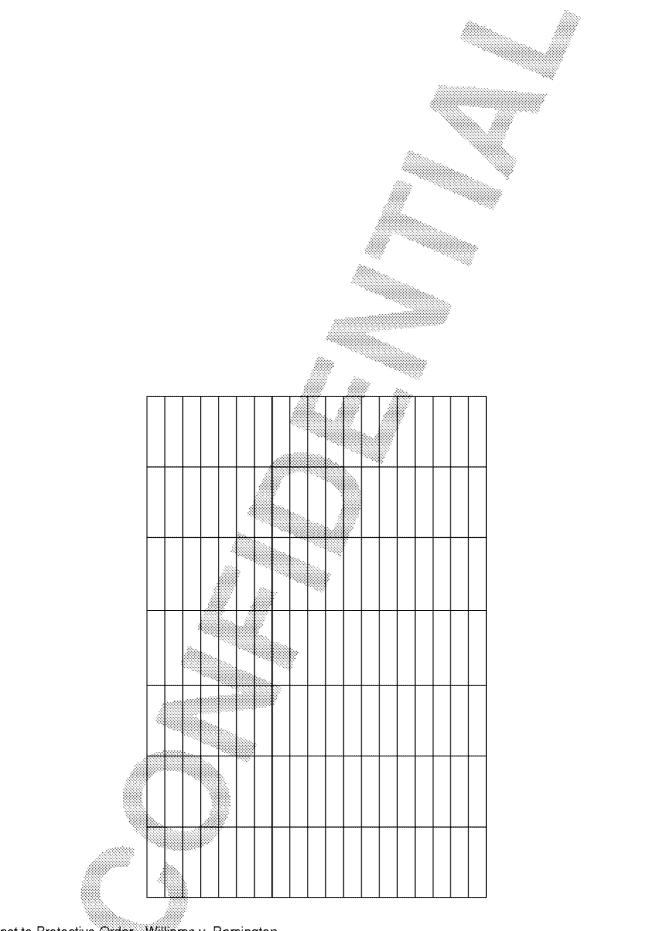

Subject to Protective Order Williams v. Remington


| | | | | | | | | | _ |
|---------|---|----------|---------|--------|------------|--------|---------|----------------------|-----|
| Summary | Total Test + Proof Failures Total Rejected | | | | | | | | |
| | Overall Reject Rate | | | | | | | | |
| | Shot: Proof Rejected Percent | <u> </u> | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Shot. Test Rejected Pergent | Q. | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Shot: Target Rejected Percent | : 0 | 0 | 0 | 0 | 0 | 0 | 0 |] |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| AB | Action binds | | | | | | | | |
| BABS | Bulge at body shoulder | | | | | | | | - |
| BAC | Burr at chamber | | | | | | | | 1 |
| BBMA | BBL-to-bolt misalignment | | | | | | | | 1 🧥 |
| BB | Bolt binds/catches | | | | | | | | 1 |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | | | | | 197 | | t i |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | | 1 |
| BHS | Bolt plug hits safety switch | | | | | | | | 1 🍭 |
| BLOP | Bar lock or disconnector out of position | | | | | | | | 1 |
| BLSO | Barrel lug shot off | | | | | | | | 1 |
| BPO | Bolt pulls out | | | | | | | | |
| BSSM | Bolt stems shell in magazine | | | | | | | | |
| BWCD | Bolt won't cam down | | | | | | | | 1 |

| BWCFM | Bolt won't close over full magazine | | | | |
|-------|--------------------------------------|--|--|------|-----------|
| CD | Case dented | | | | |
| СН | Closes hand | | | | |
| CLM | Can't laod magazine | | | | |
| со | Cut-off | | | | |
| CR | Cuts rim | | | | |
| cs | Cases swell | | | | |
| СТОБ | Chamber torn or gouged | | | | |
| СТР | Creepy trigger pull | | | | |
| CWSB | Cams wrong side of action bar | | | | |
| DBB | Doesn't blow back | | | | |
| DCS | Double click in safety switch | | | See. | |
| DCT | Double click in trigger | | | | |
| DCU | Doesn't close-up | | | | |
| DE | Doesn't eject | | | | |
| DEL | Doesn't eject live round | | | | |
| DFB | Doesn't feed back | | | | ▋. |
| DFU | Doesn't feed up | | | | |
| DLO | Doesn't lock open (after last shell) | | | | |
| DLU | Doesn't lock-up | | | | |
| DS | Dead safe | | | | <u>``</u> |
| DX | Doesn't extract | | | | |
| DXL | Doesn't extract live round | | | | |
| EDS | Extractor drops shell | | | | |
| ESB | Ejector sticks back | | | | |
| ESCR | Empty shell catches receiver | | | | |
| ESS | Extractor sterns shell | | | | |




| FA. | FA FB FB FC | FA FB FC FC FCB | FA FB FC FC FC FC FC FC FC FC FC FC FC FC FC | Subject to Protective Order | |
|---|----------------------|-----------------------------|--|-----------------------------|-----|
| | FC | л « Fc - FcB | FC FCB FD FD FF FF FOS FOS | Willia | FA. |
| FCB FD FD | fo FD | | for FFP FOS | juir | FF |
| FCB FD FF | FD FF | nin FF | FOS | ytor | FFP |
| V. Remingtor | Remingtor | Tingtor | | ب | FOS |

| FA | Fires automatically | | | | | |
|------|-----------------------------------|-----------|--------|--|------|--|
| FB | Follower binds | | | | | |
| FC | Fails to connect | | **** | | | |
| FCB | Fore-end cracked or broken | | **** | | | |
| FD | Follows-down | | | | | |
| FF | Fails to fire | | | | | |
| FFP | Flat firing pin | | | | | |
| FOS | Fires on safe | | | | | |
| FPHB | Firing pin hits bbl | | | | | |
| FPHI | Firing pin hits inside rim | | | | | |
| FPO | Floor plate opens | · · · · · | | | | |
| FPOH | Floor plate opens hard | | | | 880. | |
| FSR | Fires when safe is released | | ***** | | | |
| FT | Follower tips | | **** | | | |
| GCSO | Gas cyl shot off | | ****** | | | |
| HBL | Heavy bolt lift | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | |
| HPA | High pressure ammo | | | | | |
| HUR | Hard under rail | | | | | |
| JCS | Jumps cartridge | | | | ; | |
| JM | Jumps magazin e | | | | | |
| OL | Jars off | | | | | |
| LB | Light blow | | | | | |
| MAH | Magazine assembles hard | | | | | |
| MCW | Magazine capacity wrong | | | | | |
| MFA | Misfires (ammo) | | | | | |
| MFOP | Magazine follower out of position | | | | | |



| Subject to Protective Order | |
|-----------------------------|-----|
| | ML |
| ğ | MLH |
| s . | MRH |
| .> TI | он |
| len | OR |
| ing | PH |
| ams v. Remington | PSI |
| ت. | PSM |
| | |


| ML | Magazine loose | | | | | |
|------|-------------------------------|-------|--|--|---------|---|
| MALH | Magazine loads hard | | | | | |
| MRH | Magazine removes hard | | | | | |
| он | Opens hard | | | | | |
| OR | Overandes | | | | | |
| РН | Pulls hard | | | | | |
| PSI | Proof stamp illegible | | | | | |
| PSM | Proof stamp missing | | | | | |
| RBOC | Rings and bulges on case | | | | | |
| RDW | (Action) release doesn't work | | | | | |
| RIC | Rings in chamber | · *** | | | | |
| RIS | Ring in sholder | | | | teo. | |
| RS | Rim srem | | | | | |
| SBC | Stems bottom chambers | | | | | |
| SBE | Stems bbl extension | | | | | |
| SCB | Stock cracked or broken | | | | | |
| SCX | Shell catches | | | | | |
| SHI | Short indent | | | | | |
| SI | Stems incline | | | | and the | Ø |
| SIC | Stems in chamber | | | | á | |
| SL | shaves lead | | | | | r |
| SLC | Stems left side of chamber | | | | | |
| SMOC | Stretch marks on case | | | | | |
| SOR | Stem over-ride | | | | | |
| SP | Stems port | | | | | |
| SR | Shoulder rough | | | | | |
| SRC | Stems right side of chamber | | | | | |




| Protective Order | |
|--|---------------------------|
| N. | SRIC |
| a la | SSOC |
| ר <u>איי</u> | STC |
| TI | SWE |
| ien | SWH |
| ning | sww |
| iams v. Remington | TD |
| | TU |
| | T) ((D) |

Subject to

| SRIC | Specific rings in chamber | | | |] |
|--------|---------------------------------|------|-------------|------|---|
| SSOC | Surface scratches on case | | | | |
| STC | Stems top chamber | | | | |
| SWE | Satety switch works too easily | | | | |
| SWH | Safety switch works too hard | àre. | | | |
| sww | Safety ewitxh won't work | | | |] |
| TD | Tips down | | | | |
| TU | Tips up | | | | |
| TWP | Trigger won't pull | | | | |
| TWR | Trigger won't retract | | | | |
| UNCN-T | Uncoded | | | | |
| хн | Extracts hard | | | 900. | |
| | | | | | |
| HI | High | | Million III | | |
| LO | Low | | | | |
| LEFT | Left | | | | |
| RIGHT | Right | | | | |
| DG | Doesn't Group | | | | |
| FSST | Front sight tipped | | | | Þ |
| RSTT | Rear sight tipped | | | â | |
| RSBR | Rear sight base raised | | | | ľ |
| FSTR | Front sight raised | | | | |
| FSTL | Front sight loose | | | | |
| RSTL | Rear sight loose | | | | |
| MGPT-G | Missing parts at target | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | |
| | | | | | |



| AI- <u>P</u> | Assembly incompleye at proof | | | | | |
|--------------|---|-------|------|----|------|--|
| 368 | Barrel bracket stacked or broken at proof | | | | | |
| 3C-P | Blows cases at proof | | | | | |
| BEB-P | Barrel extension broken at proof | | | | | |
| 3LP-P | Blanked primer at proof | | ása. | | | |
| BLSO-P | Barrel lug shot off at proof | | | | | |
| 3P-P | Blown primer at proof | | | | | |
| 3S-P | Barrel split at proof | | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | 59 | | |
| ESB-P | Ejector sticks back at proof | | | | | |
| FCB-P | Fore-end cracked at proof | - ××; | | | | |
| ESO-P | Fore-end shot off at proof | | | | 889. | |
| F-P | Fails to fire at proof | | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | | |
| PP-P | Pierced primer at proof | | | | | |
| SCB-P | Stock cracked or broken at proof | | | | | |
| JNCM-P | Uncoded proof malfunctions | | *** | | | |

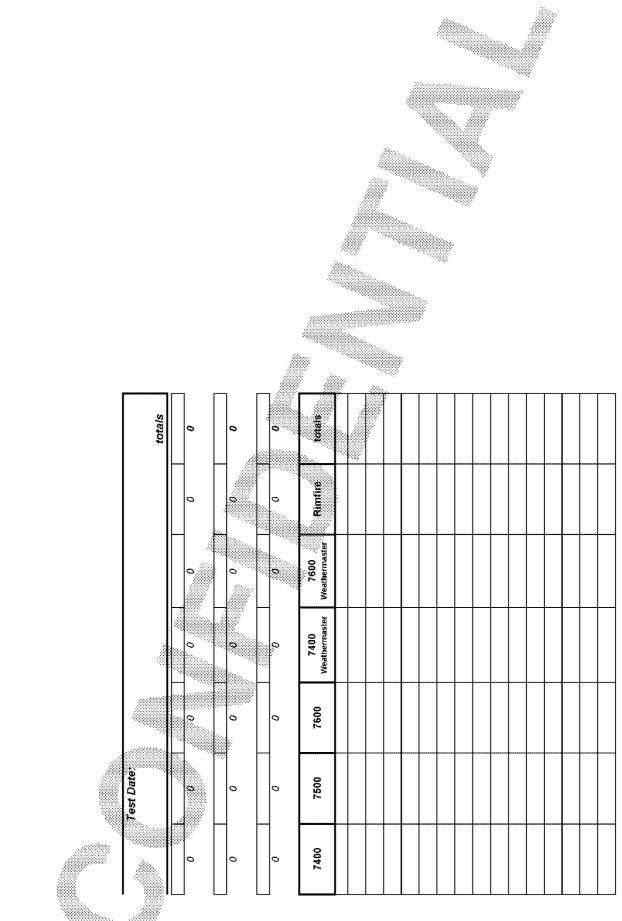


Subject to Protective Order - Williams v. Remington









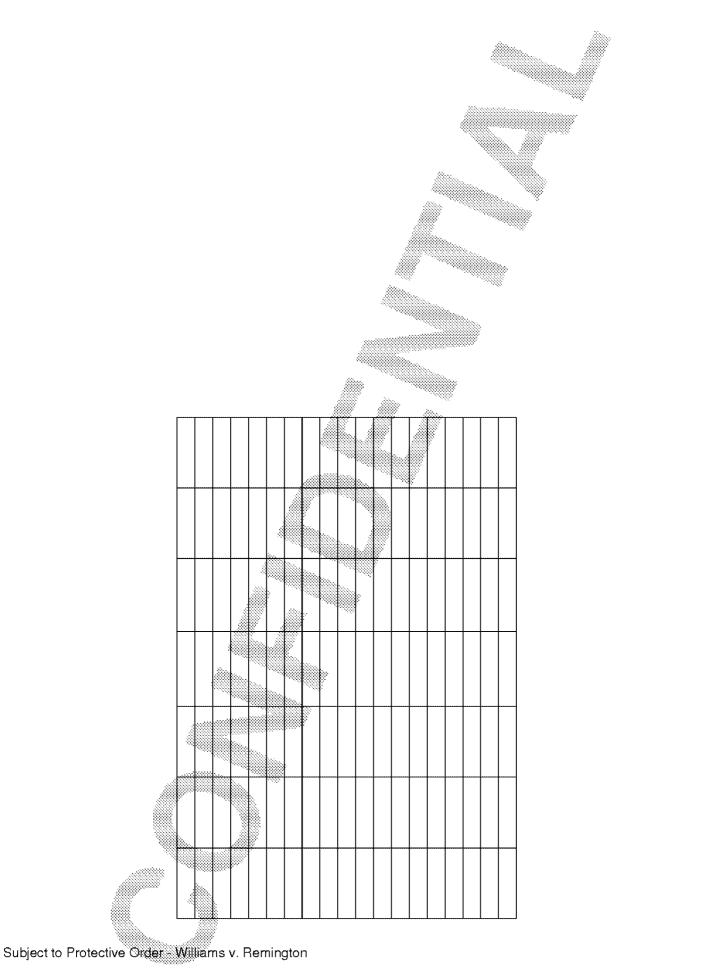


| | | | | | | | | | _ |
|---------|--|----------|----------|--------|------------|--------|---------|-----------|-----|
| Summary | Total Rejected | d: 0 | | | | | | | |
| | Overall Reject Rate | | | | | | | | = |
| | Sho Proof Rejecte Percei | | 0 | 0 | 0 | 0 | 0 | 0 | |
| | | t [d | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Target Rejecte | t: d: | <u> </u> | 0 | | 0 | 0 | 0 | |
| | Percer | | | L | | allin. | | Model 7 | 1 |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Stainless | |
| | | | | | | | | | 1 |
| AB | Action binds | | | | | | | | - |
| BABS | Bulge at body shoulder | _ | | *** | | | | | - |
| BAC | Burr at chamber | | **** | | | | | | - |
| BBMA | BBL-to-bolt misalignment | | | | | | | | - |
| BB | Bolt binds/catches | | | | | | | | |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | | | | | | | |
| BC | Blows cases | | | | | | | | ┨▓▓ |
| BHR | Bolt hits receiver | | | | | | | | - |
| BHS | Bolt plug hits safety switch | | | | | | | | - |
| BLOP | Bar lock or disconnector out of position | | | | | | | | - |
| BLSO | Barrel lug shot off | | | | | | | | - |
| BPO | Bolt pulls out | | | | | | | | - |
| BSSM | Bolt stems shell in magazine | | | | | | | | 4 |
| BWCD | Bolt won't cam down | | | | | | | | |

| BWCFM | Bolt won't close over full magazine | | | | | |
|-------|--------------------------------------|------|-----|--|------|---|
| CD | Case dented | | | | | |
| СН | Closes hand | | | | | |
| CLM | Can't laod magazine | **** | | | | |
| со | Cut-off | | | | | |
| CR | Cuts rim | | | | | |
| cs | Cases swell | | | | | |
| CTOG | Chamber tom or gouged | | | | | |
| СТР | Creepy trigger pull | | | | | |
| CWSB | Cams wrong side of action bar | | | | | |
| DBB | Doesn't blow back | | | | | |
| DCS | Double click in safety switch | | | | 500. | |
| DCT | Double click in trigger | | | | | |
| DCU | Doesn't close-up | | | | | |
| DE | Doesn't eject | | 110 | | | |
| DEL | Doesn't eject live round | | | | | |
| DFB | Doesn't feed back | | | | | |
| DFU | Doesn't feed up | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | ø |
| DLU | Doesn't lock-up | | | | á | |
| DS | Dead safe | | | | | |
| DX | Doesn't extract | | | | | |
| DXL | Doesn't extract live round | | | | | |
| EDS | Extractor drops shell | | | | | |
| ESB | Ejector sticks back | | | | | |
| ESCR | Empty shell catches receiver | | | | | |
| ESS | Extractor sterns shell | | | | | |




| FA. | FA FB FC | Subject to Protective Order | |
|--------------------------|--|-----------------------------|-----|
| ā FB | FB FC | W | FA |
| | TS FC | B | |
| т | | len | FD |
| | FD FD | ing | |
| Y. FCB FD FD FF | fD FD FF | itor | |
| Remingtor | FD FF F | | FOS |
| eming | FD FF FF FOS | | |

| FA | Fires automatically | | | | | | 1 |
|------|-----------------------------------|----------|-------|------|--|---|---|
| FB | Follower binds | | | | | | 1 |
| FC | Fails to connect | <i>.</i> | | | | | 1 |
| FCB | Fore-end cracked or broken | | | | | | |
| FD | Follows-down | | itte. | | | |] |
| FF | Fails to fire | | | | | |] |
| FFP | Flat firing pin | | | | | | |
| FOS | Fires on safe | | | | | | |
| FPHB | Firing pin hits bbl | | | | | | |
| FPHI | Firing pin hits inside rim | | | | | | |
| FPO | Floor plate opens | | | | | |] |
| FPOH | Floor plate opens hard | | | | | |] |
| FSR | Fires when safe is released | | | | | | |
| FT | Follower tips | | | | | | |
| GCSO | Gas cyl shot off | | | 1100 | | | |
| HBL | Heavy bolt lift | | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | | |
| HPA | High pressure ammo | | | | | | |
| HUR | Hard under rail | | | | | | 1 |
| JCS | Jumps cartridge | | | | | á | |
| JM | Jumps magazin e | | | | | | |
| JO | Jars off | | | | | | |
| LB | Light blow | | | | | | |
| MAH | Magazine assembles hard | | | | | | |
| MCW | Magazine capacity wrong | | | | | | |
| MFA | Misfires (ammo) | | | | | | |
| MFOP | Magazine follower out of position | | | | | | |



| Subject to Protective Order | |
|-----------------------------|-----|
| | ML |
| ē | MLH |
| n | MRH |
| .< TI | он |
| ien | OR |
| jnir | PH |
| ams v. Remingtor | PSI |
| <u>د</u> | PSM |
| | 1 |

| ML Magazine loose Image: Second | | |
|---|-------|---|
| Mill Magazine loads hard Image Image </th <th></th> <th></th> | | |
| MRH Magazine tempores hard Image: Company and tempores hard Image: Company and tempores hard OH Opens hard Image: Company and tempores hard Image: Company and temp | | |
| OH Opens hand Image and builder of the second of the | | |
| OR Over-rides Image: Constraint of the second | | |
| PH Pulls hard Image: Sector Sect | | |
| PSI Proof stamp illegible Image: Stamp illegiblegible Image: Stamp illegiblegiblegiblegiblegiblegiblegibleg | | |
| PSM Proof stamp missing Image: Stamp missing Image: Stamp missing RBOC Rings and bulges on case Image: Stamp missing Image: Stamp missing RDW (Action) release doesn't work Image: Stamp missing Image: Stamp missing Image: Stamp missing RIC Rings in chamber Image: Stamp missing I | | |
| RBOC Rings and bulges on case Image: Constraint of the set o | | |
| RBOC Rings and buildes on case Image: Cas | | |
| RIC Rings in chamber Image: Constraint of the system RIS Ring in sholder Image: Constraint of the system RS Rim srem Image: Constraint of the system SBC Stems bottom chambers Image: Constraint of the system SBE Stems bot extension Image: Constraint of the system SCB Stock cracked or broken Image: Constraint of the system SCX Shell catches Image: Constraint of the system | | |
| RIS Ring in sholder Image: Constraint of the state of the sta | | |
| RS Rim srem Image: Constraint of the state of th | | |
| RS Riff steff SBC Stems bottom chambers SBE Stems bbl extension SCB Stock cracked or broken SCX Shell catches | | |
| SBC Stems bit extension SBE Stems bit extension SCB Stock cracked or broken SCX Shell catches | | |
| SCB Stock cracked or broken SCX Shell catches | Steel | |
| SCX Shell catches | | |
| | | |
| | | |
| SHI Short indent | | â |
| SI Stems incline | | Ş |
| SIC Stems in chamber | | |
| SL shaves lead | | 1 |
| SLC Stems left side of chamber | | |
| SMOC Stretch marks on case | | |
| SOR Stem over-ride | | |
| SP Stems port | | |
| SR Shoulder rough | | |
| SRC Stems right side of chamber | | |




| Protective Order | |
|---------------------------------------|-------|
| | SRIC |
| a a a a a a a a a a a a a a a a a a a | SSOC |
| ີ | STC 📎 |
| TI | SWE |
| ien | SWH |
| nin | sww |
| iams v. Remington | TD |
| <u>د</u> | TU |
| | |

Subject to

| SRIC | Specific rings in chamber | | | | | |] |
|--------|---------------------------------|----|---|---|------|------|---|
| SSOC | Surface scratches on case | | | | | | 1 |
| STC | Stems top chamber | | | | | | 1 |
| SWE | Satety switch works too easily | | | | | | |
| SWH | Safety switch works too hard | | | | | | |
| sww | Safety ewitxh won't work | | | | | | |
| то | Tips down | | | | | | |
| τu | Tips up | | | | | | |
| TWP | Trigger won't pull | | | | | | |
| TWR | Trigger won't retract | | | | | | |
| UNCN-T | Uncoded | ~~ | | | | | |
| хн | Extracts hard | | | | | See. | |
| | | | | | | | |
| н | High | | | | | | |
| LO | Low | | | ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~ | | | |
| LEFT | Left | | | | | | |
| RIGHT | Right | | | | | | |
| DG | Doesn't Group | | | | | | |
| FSST | Front sight tipped | | | | | | 1 |
| RSTT | Rear sight tipped | | | | | à | 4 |
| RSBR | Rear sight base raised | | | | | | ľ |
| FSTR | Front sight raised | | | | | | |
| FSTL | Front sight loose | | * | | | | |
| RSTL | Rear sight loose | | | | | | |
| MGPT-G | Missing parts at target | | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | | |
| | | | | | | | |



| AI-P | Assembly incompleye at proof | | | | |
|-------------|---|--|--|-------|--|
| 368 · · · · | Barrel bracket gracked or broken at proof | | | | |
| вс-р | Blows cases at proof | | | | |
| вев-р 👋 | Barrel extension broken at proof | | | | |
| BLP-P | Blanked primer at proof | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | |
| BP-P | Blown primer at proof | | | | |
| BS-P | Barrel split at proof | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | |
| ESB-P | Ejector sticks back at proof | | | | |
| FCB-P | Fore-end cracked at proof | | | | |
| FESO-P | Fore-end shot off at proof | | | 1990. | |
| FF-P | Fails to fire at proof | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | |
| PP-P | Pierced primer at proof | | | | |
| SCB-P | Stock cracked or broken at proof | | | | |
| UNCM-P | Uncoded proof malfunctions | | | | |

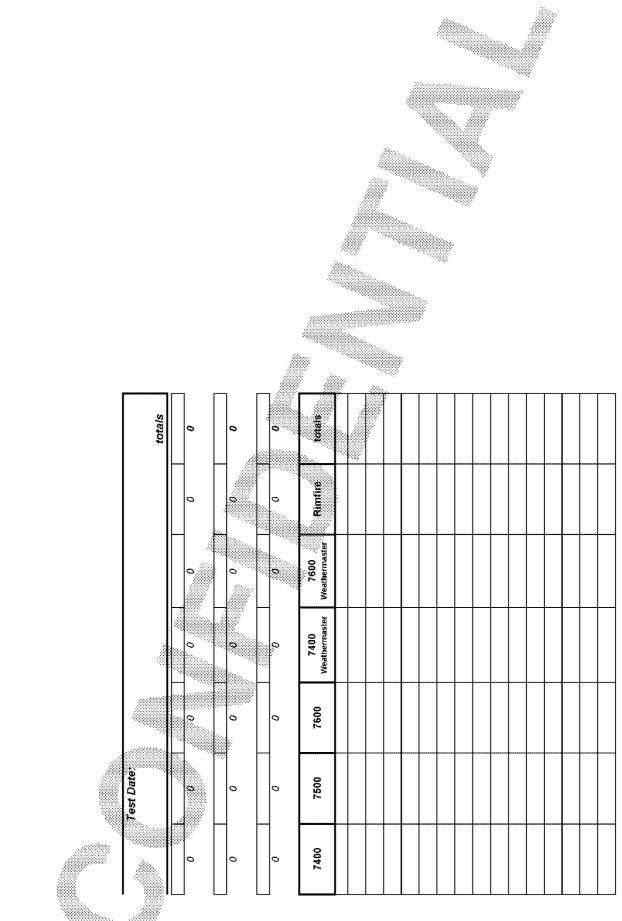


Subject to Protective Order - Williams v. Remington









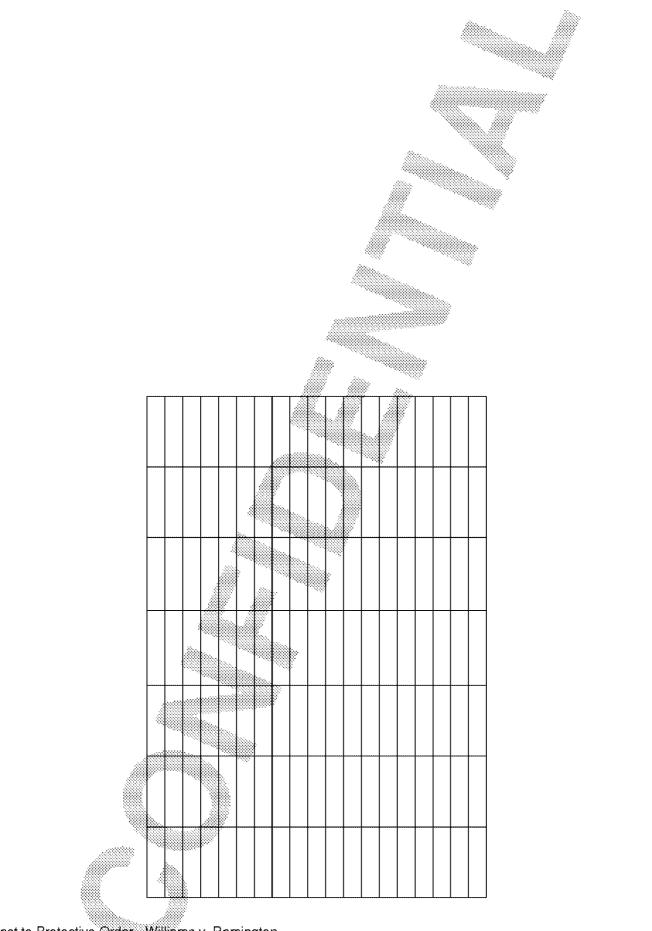

Subject to Protective Order - Williams v. Remington


| | | | | | | | | | _ |
|---------|--|---------|---------|--------|------------|--------|---------|----------------------|---|
| Summary | Total Test + Proof Failure | | | | | | | | |
| | Total Rejected Overall Reject Rate | | | | | | | | |
| | The second construction of the second | · · | 1 | | | | | | 1 |
| ÷. | Proof Rejected | 1 0 | 0 | 0 | 0 | 0 | 0 | 0 | J |
| | Perceri | 2008 | | I | I | 1 | 1 | 1 | Ъ |
| | Shoi Test Rejected | 1 Q | 0 | L | 0 | 0 | 0 | 0 | 1 |
| | Percen | | | | | | | | |
| | Shot | | | | | | | |] |
| | Target Rejected Percen | | 0 | | 0 | 0 | 0 | 0 | |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 SS | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| | | | | | | | | | 4 |
| AB | Action binds | | | | | | | | 4 |
| BABS | Bulge at body shoulder | | | *** | | | | | 4 |
| BAC | Burr at chamber | | | | | | | | _ |
| BBMA | BBL-to-bolt misalignment | | | | | | | | |
| BB | Bolt binds/catches | | | | | | | | |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | | | | | | | |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | | 🌋 |
| BHS | Bolt plug hits safety switch | | | | | | | | - |
| BLOP | Bar lock or disconnector out of position | | | | | | | | _ |
| BLSO | Barrel lug shot off | | | | | | | | 4 |
| BPO | Bolt pulls out | | | | | | | | 4 |
| BSSM | Bolt stems shell in magazine | | | | | | | | _ |
| BWCD | Bolt won't cam down | | *** | | | | | | |

| | <i></i> | | | | | | |
|------|---------------------------------------|-----|--------------|------|---|------|-------|
| | Bolt won't close over full magazine | 1 | | | 1 | | 1 |
| | · · · · · · · · · · · · · · · · · · · | | | | | | - |
| CD | Case dented | | | | | | 4 |
| СН | Closes hand | | | | | | _ |
| CLM | eant race madarate. | | | | | | - |
| со | Cut-off | | 1000 1000 | | | | - |
| CR | Cuts rim | | | | | | _ |
| cs | Cases swell | | | | | | |
| CTOG | Chamber tom or gouged | | | | | | |
| СТР | Creepy trigger puil | | | | | | |
| CWSB | Carns wrong side of action bar | | | | | | |
| DBB | Doesn't blow back | *** | | | | | |
| DCS | Double click in safety switch | | | | | 880. | |
| DCT | Double click in trigger | | | | | | |
| DCU | Doesn't close-up | | | | | | |
| DE | Doesn't eject | | | 1168 | | | |
| DEL | Doesn't eject live round | | | | | |] |
| DFB | Doesn't feed back | | | | | | |
| DFU | Doesn't feed up | | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | | |
| DLU | Doesn't lock-up | | | | | ż | |
| DS | Dead safe | | | | | | 1** |
| DX | Doesn't extract | | | | | | |
| DXL | Doesn't extract live round | | | | | |] |
| EDS | Extractor drops shell | | | | | | |
| ESB | Ejector sticks back | | | | | | 1 |
| ESCR | Empty shell catches receiver | | | | | | 1 |
| ESS | Extractor sterns shell | | | | | | 1 |




| Subject to Protective Order | |
|-----------------------------|------|
| N. | FA |
| <u>a</u> | FB |
| S S S S | FC |
| | FCB |
| ren | FD |
| nin | FF |
| iams v. Remington | FFP |
| د. | FOS |
| | FPHR |

| FA. | Fires automatically | | | | | | |
|------|-----------------------------------|-----|--------|-----|------|--------------|---------|
| FB | Follower binds | | | | | | |
| FC | Fails to connect | | | | | | |
| FCB | Fore-end cracked or broken | | | | | | |
| FD | Follows-down | | - Arr. | | | | |
| FF | Fails to fire | | | | | | 1 |
| FFP | Flat firing pin | | | | | | |
| FOS | Fires on safe | | | | | | |
| FPHB | Firing pin hits bbl | | | | | | |
| FPHI | Firing pin hits inside rim | | | | | | |
| FPO | Floor plate opens | ~~~ | | | | | |
| FPOH | Floor plate opens hard | | | | | Sec. | |
| FSR | Fires when safe is released | | | | | | |
| FT | Follower tips | | | *** | | | |
| GCSO | Gas cyl shot off | | | | | | |
| HBL | Heavy bolt lift | | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | | |
| HPA | High pressure ammo | | | | | | |
| HUR | Hard under rail | | | | | 200 4 | |
| JCS | Jumps cartridge | | | | | ; | |
| JM | Jumps magazin e | | | | | | 1.3 |
| JO | Jars off | | | | | | |
| LB | Light blow | | | | | | |
| MAH | Magazine assembles hard | | | | | | |
| MCW | Magazine capacity wrong | | | | | | |
| MFA | Misfires (ammo) | | | | | | |
| MFOP | Magazine follower out of position | | | | | | |



| Subject to Protective Order | |
|-----------------------------|------|
| | ML |
| lan . | MILH |
| S No. | MRH |
| .> דו | он |
| len | OR |
| nin | PH |
| ams v. Remingtor | PSI |
| <u>د</u> | PSM |
| | 1 |

| ML | Magazine loose | | | | | |
|------|-------------------------------|--|----|--|---|--|
| MALH | Magazine loads hard | | | | | |
| MRH | Magazine removes hard | | | | | |
| он | Opens hard | | | | | |
| OR | Over-indes | | | | | |
| PH | Pulls hard | | | | | |
| PSI | Proof stamp illegible | | | | | |
| PSM | Proof stamp missing | | | | | |
| RBOC | Rings and bulges on case | | | | | |
| RDW | (Action) release doesn't work | | | | | |
| RIC | Rings in chamber | | | | | |
| RIS | Ring in sholder | | | | | |
| RS | Rim srem | | | | | |
| SBC | Stems bottom chambers | | | | | |
| SBE | Stems bbl extension | | ~~ | | | |
| SCB | Stock cracked or broken | | | | | |
| SCX | Shell catches | | | | | |
| SHI | Short indent | | | | | |
| SI | Stems incline | | | | | |
| SIC | Stems in chamber | | | | á | |
| SL | shaves lead | | | | | |
| SLC | Stems left side of chamber | | | | | |
| SMOC | Stretch marks on case | | | | | |
| SOR | Stem over-ride | | | | | |
| SP | Stems port | | | | | |
| SR | Shoulder rough | | | | | |
| SRC | Stems right side of chamber | | | | | |




MAE00015787


| Protective Order | |
|-------------------|-------|
| | SRIC |
| ā | SSOC |
| ອີ | STC 🔅 |
| T | SWE |
| ٦en | SWH |
| nin | sww |
| iams v. Remington | TD |
| د | τu |
| | 7140 |

Subject to

| SRIC | Specific rings in chamber | | | | | | 1 |
|--------|---------------------------------|-----|------|---|--|------|-------|
| SSOC | Surface scratches on case | | | | | | |
| STC 💮 | Stems top chamber | | | | | | |
| SWE | Satety switch works too easily | | | | | | |
| SWH | Safety switch works too hard | | | | | | |
| sww | Safety ewitxh won't work | | | | | | |
| TD | Tips down | | | | | | |
| TU | Tips up | | | | | | |
| TWP | Trigger won't pull | | | | | | |
| TWR | Trigger won't retract | | | | | | |
| UNCN-T | Uncoded | *** | | | | | |
| хн | Extracts hard | | | | | Sec. | |
| | | | | | | | |
| HI | High | | | | | | |
| LO | Low | | | ~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~ | | | |
| LEFT | Left | | | | | | |
| RIGHT | Right | | | | | | 1 |
| DG | Doesn't Group | | | | | | 4 |
| FSST | Front sight tipped | | | | | | 1 |
| RSTT | Rear sight tipped | | | | | à | 1 |
| RSBR | Rear sight base raised | | | | | | ~ |
| FSTR | Front sight raised | | | | | | |
| FSTL | Front sight loose | | | | | | |
| RSTL | Rear sight loose | | | | | | |
| MGPT-G | Missing parts at target | | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | | |
| | | | **** | | | | |




| AI-P | Assembly incompleye at proof | | | | |
|-------------|---|--|--|-------|--|
| 368 · · · · | Barrel bracket gracked or broken at proof | | | | |
| вс-р | Blows cases at proof | | | | |
| вев-р 👋 | Barrel extension broken at proof | | | | |
| BLP-P | Blanked primer at proof | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | |
| BP-P | Blown primer at proof | | | | |
| BS-P | Barrel split at proof | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | |
| ESB-P | Ejector sticks back at proof | | | | |
| FCB-P | Fore-end cracked at proof | | | | |
| FESO-P | Fore-end shot off at proof | | | 1990. | |
| FF-P | Fails to fire at proof | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | |
| PP-P | Pierced primer at proof | | | | |
| SCB-P | Stock cracked or broken at proof | | | | |
| UNCM-P | Uncoded proof malfunctions | | | | |

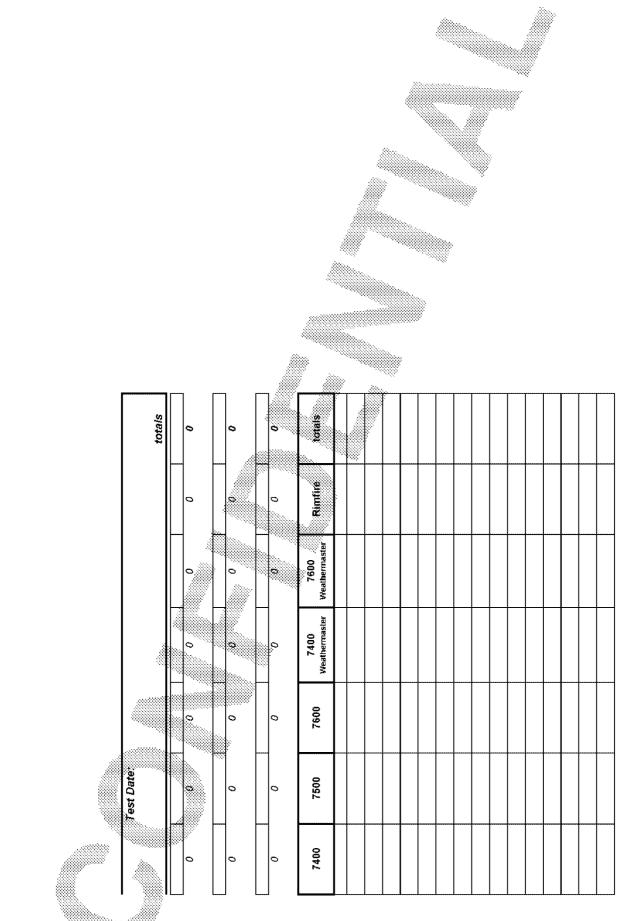


Subject to Protective Order - Williams v. Remington



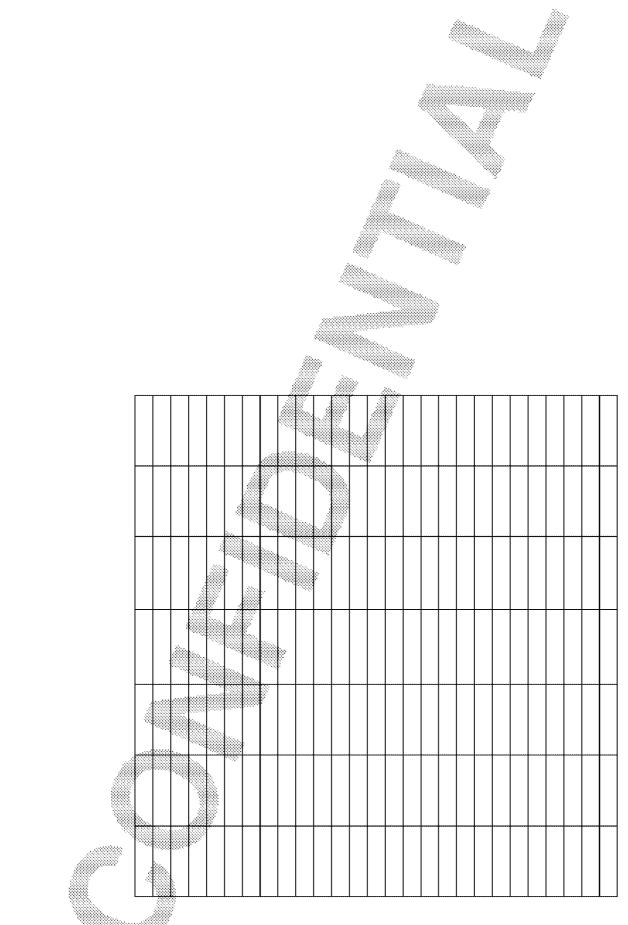





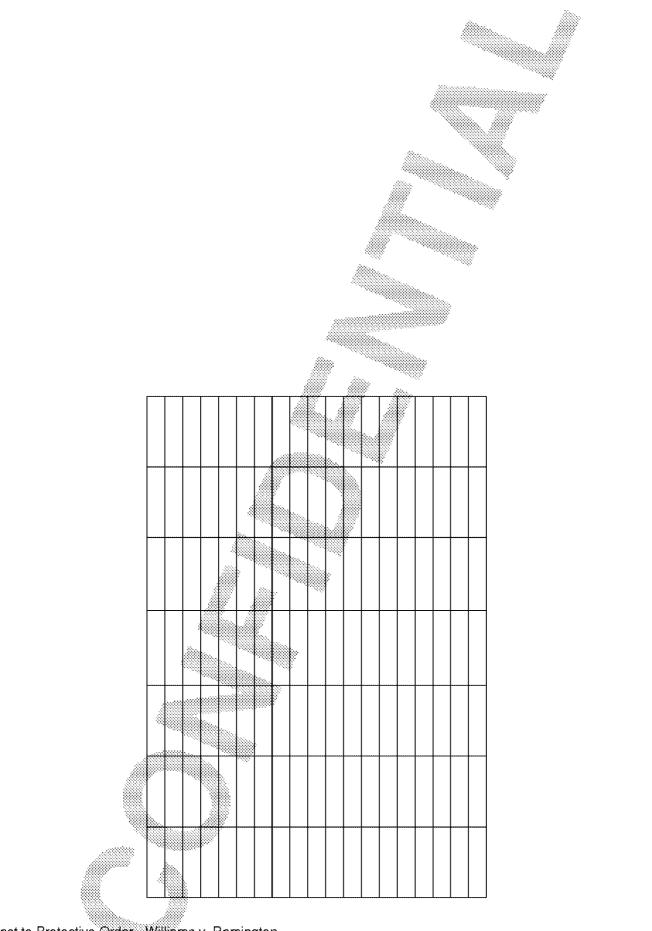

Subject to Protective Order - Williams v. Remington


| | | | | | | | | | _ |
|---------|--|---------|---------|--------|------------|--------|---------|----------------------|-------|
| Summary | Y Total Test + Proof Failure Total Rejected | | | | | | | | |
| | Overall Reject Rate | | | | | | | | |
| | Sho Proof Rejecte Percei | | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Test Rejecte Percer | | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Target Rejecte Percer | d: 0 🎆 | 0 | 0 | 0 | 0 | 0 | 0 |] |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| AB | Action binds | | | | | | | | |
| BABS | Bulge at body shoulder | | | | | | | | |
| BAC | Burr at chamber | | | | | | | | |
| BBMA | BBL-to-bolt misalignment | | | | | | | | 1 🚕 |
| BB | Bolt binds/catches | | | | | | | | 1//// |
| BCOBS | Bolt catches on bolt stop | | | | | | | | |
| BCOF | Bolt catches on follower | | * | | | | | | I. I |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | 1 | 1 🖉 |
| BHS | Bolt plug hits safety switch | | | | | | | | 1 🎕 |
| BLOP | Bar lock or disconnector out of position | | - | | | | | | |
| BLSO | Barrel lug shot off | | | | | | | | |
| BPO | Bolt pulls out | | | | | | | | |
| BSSM | Bolt stems shell in magazine | | | | | | | | |
| BWCD | Bolt won't cam down | | | | | | | | 1 |

| BWCFM | Bolt won't close over full magazine | | | |] |
|-------|--------------------------------------|-------|--|------|----|
| CD | Case dented | | | | 1 |
| СН | Closes hand | | | | |
| CLM | Can't laód magazine | | | | |
| со | Cut-off | itte. | | | |
| CR | Cuts rim | | | | |
| cs | Cases swell | | | | |
| стод | Chamber torn or gouged | | | | |
| CTP | Creepy trigger pull | | | | |
| CWSB | Carns wrong side of action bar | | | | |
| DBB | Doesn't blow back | | | | |
| DCS | Double click in safety switch | | | | |
| DCT | Double click in trigger | | | | |
| DCU | Doesn't close-up | | | | |
| DE | Doesn't eject | | | | |
| DEL | Doesn't eject live round | | | | |
| DFB | Doesn't feed back | | | | ╡. |
| DFU | Doesn't feed up | | | | 4 |
| DLO | Doesn't lock open (after last shell) | | | | 1 |
| DLU | Doesn't lock-up | | | | |
| DS | Dead safe | | | | `` |
| DX | Doesn't extract | | | | |
| DXL | Doesn't extract live round | | | | |
| EDS | Extractor drops shell | | | | |
| ESB | Ejector sticks back | | | | |
| ESCR | Empty shell catches receiver | | | | |
| ESS | Extractor sterns shell | | | | |




| FA FB FC FC FC FD FF FF FF FF FF FF | Subject to Protective Order | |
|--|-----------------------------|----------|
| S FCB | Williams | FA FB |
| | | FCB |
| | ing | FD FF |
| | ytor | FFP |
| ningtor | <u>ب</u> | FOS |
| nington | | EDUD |

| FA. | Fires automatically | | | | 1 |
|------|-----------------------------------|--------|--|-----|---|
| FB | Follower binds | | | | 1 |
| FC 💮 | Fails to connect | | | | 1 |
| FCB | Fore-end cracked or proken | | | | |
| FD | Follows-down | - 242. | | | |
| FF | Fails to fire | | | | |
| FFP | Flat firing pin | | | | |
| FOS | Fires on safe | | | | |
| FPHB | Firing pin hits bbl | | | | |
| FPHI | Firing pin hits inside rim | | | | |
| FPO | Floor plate opens | | | | |
| FPOH | Floor plate opens hard | | | 5a. | |
| FSR | Fires when safe is released | | | | |
| FT | Follower tips | | | | |
| GCSO | Gas cyl shot off | | | | |
| HBL | Heavy bolt lift | | | | |
| HMSC | Heading mismatch-steps on case | | | | |
| HPA | High pressure ammo | | | | |
| HUR | Hard under rail | | | | |
| JCS | Jumps cartridge | | | ; | |
| JM | Jumps magazin e | | | | 1 |
| JO | Jars off | | | | |
| LВ | Light blow | | | | |
| MAH | Magazine assembles hard | | | | |
| MCW | Magazine capacity wrong | | | | |
| MFA | Misfires (ammo) | | | | |
| MFOP | Magazine follower out of position | | | | |



| Subject to Protective Order - V | |
|---------------------------------|------|
| | ML |
| ē | MALH |
| ີ | MRH |
| ams v. Remingt | он |
| ien | OR |
| ning | PH |
| ytor | PSI |
| L | PSM |
| | (|


| | | | | | | | 1 | 1 |
|-----------------------------|---|---|---|--|---|--|---|---|
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | . | | | | | |
| | | | | | | | | - |
| Proof stamp missing | | | | × | | | | |
| | | | | | | | | |
| | | | | | an a | | | |
| | | | | · · · · | | | | |
| | | | | | | | 1 | |
| | | | | | <u> </u> | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | 11111111111 | | | |
| | | | | | | | | |
| Short indent | | | | | | | | |
| Stems incline | | | | | | | | ø |
| Stems in chamber | | | | | | 2 | | |
| shaves lead | | | | | | | | |
| Stems left side of chamber | | | | | | | | |
| Stretch marks on case | | | | | | | | |
| Stem over-ride | | | | | | | | |
| Stems port | | | | | | | | |
| Shoulder rough | | | | | | | | |
| Stems right side of chamber | | | | | | | | |
| | Rings and buiges on case (Action) release doesn't work Rings in chamber Ring in sholder Rim srem Stems bottom chambers Stems bottom chambers Stems bottom chambers Stock cracked or broken Stock cracked or broken Stock cracked or broken Shell catches Short indent Stems incline Stems incline Stems in chamber shaves lead Stems left side of chamber Stretch marks on case Stem over-ride Stems port Stoukder rough | Magazine loads hard Magazine removes hard Opens hard Over-indes Pulls hard Proof stamp illegible Proof stamp missing Rings and bulges on case (Action) release doesn't work Rings in chamber Ring in sholder Rim srem Stems bottom chambers Stems bottom chambers Stems bott or broken Short indent Stems incline Stems left side of chamber Stretch marks on case Stems port Stems port Stems port | Magazine loads hard Imagazine removes hard Over-indes Imagazine removes hard Over-indes Imagazine removes hard Pulls hard Imagazine removes hard Proof stamp illegible Imagazine removes hard Proof stamp illegible Imagazine removes hard Proof stamp illegible Imagazine removes hard Proof stamp missing Imagazine removes hard Rings and bulges on case Imagazine removes hard (Action) release doesn't work Imagazine removes hard Rings in chamber Imagazine removes hard Ring in sholder Imagazine removes hard Rim srem Imagazine removes hard Stems bottom chambers Imagazine removes hard Stems bottom chambers Imagazine removes hard Stems bottom chambers Imagazine removes hard Stems incline Imagazine removes hard Stems in chamber Imagazine removes hard shaves lead Imagazine removes hard Stem over-ride Imagazine removes hard Stems port Imagazine removes hard Stems port Imagazine removes hard | Magazine loads hard Imagazine removes hard Opens hard Imagazine removes hard Over-indes Imagazine removes hard Pulls hard Imagazine removes hard Over-indes Imagazine removes hard Pulls hard Imagazine removes hard Pulls hard Imagazine removes hard Proof stamp illegible Imagazine removes hard Proof stamp missing Imagazine removes hard Rings and bulges on case Imagazine removes hard (Action) release doesn't work Imagazine removes Rings in chamber Imagazine removes Ring in sholder Imagazine removes Rim srem Imagazine removes Stems bottom chambers Imagazine removes Stems bottom chambers Imagazine removes Stems incline Imagazine removes Stems in chamber Imagazine removes shaves lead Imagazine removes Stems left side of chamber Imagazine removes Stems port Imagazine removes Stems port Imagazine removes | Magazine loads hard Imagazine removes hard Magazine removes hard Imagazine removes hard Over-rides Imagazine removes hard Pulls hard Imagazine removes hard Proof stamp illegible Imagazine removes Proof stamp missing Imagazine removes Rings and bulges on case Imagazine removes (Action) release doesn't work Imagazine removes Rings in chamber Imagazine removes Ring in sholder Imagazine removes Rim srem Imagazine removes Stems boltom chambers Imagazine removes Stems boltom chamber Imagazine removes Stems incline Imagazine removes Stems incline Imagazine removes Stems left side of chamber Imagazine removes Stems port Imagazine removes Stems port Imagazine removes Stems port Imagazine removes | Magazine loads/hard Imagazine removes hard Magazine removes hard Imagazine removes hard Opens hard Imagazine removes hard Over-indes Imagazine removes hard Pulls hard Imagazine removes hard Pulls hard Imagazine removes hard Pulls hard Imagazine hard Proof stamp illegible Imagazine hard Proof stamp missing Imagazine hard Rings and bulges on case Imagazine hard (Action) release doesn't work Imagazine hard Ring in sholder Imagazine hard Ring in sholder Imagazine hard Stems bottom chambers Imagazine hard Stems bottom chambers Imagazine hard Stems incline Imagazine hard Sherl catches Imagazine hard Short indent Imagazine hard Stems inchamber Imagazine hard shares left side of chamber Imagazine hard Stems left side of chamber Imagazine hard Stems left side of chamber Imagazine hard Stems port Imagazine hard Stems port Imagazine hard | Magazine loads hard Imagazine removes hard Imagazine removes hard Opena hard Imagazine removes hard Imagazine removes hard Overindes Imagazine removes hard Imagazine removes hard Overindes Imagazine removes hard Imagazine removes hard Overindes Imagazine removes hard Imagazine removes hard Pulls hard Imagazine removes hard Imagazine removes hard Pulls hard Imagazine removes hard Imagazine removes hard Proof stamp missing Imagazine removes hard Imagazine removes hard Proof stamp missing Imagazine removes hard Imagazine removes hard Rings and bulges on case Imagazine removes hard Imagazine removes hard Ring in sholder Imagazine removes hard Imagazine removes hard Ring in sholder Imagazine removes hard Imagazine removes hard Sterms bolt conclusion Imagazine removes hard Imagazine removes hard Sterms bolt conclusion Imagazine removes hard Imagazine removes hard Sterms bolt conclusion Imagazine removes hard Imagazine removes hard Sterms incline Imagazine removes hard Imagazine removes hard | Magazine loads hard Imagezine femoves hard Imagezine femoves hard Magazine femoves hard Imagezine femoves hard Imagezine femoves hard Overafdes Imagezine femoves hard Imagezine femoves hard Pulls hard Imagezine femoves hard Imagezine femoves hard Proof stamp missing Imagezine femoves hard Imagezine femoves hard Proof stamp missing Imagezine femoves hard Imagezine femoves hard Rings and bulges on case Imagezine femoves hard Imagezine femoves hard Rings in chamber Imagezine femoves hard Imagezine femoves hard Ring in sholder Imagezine femoves hard Imagezine femoves hard Ring in sholder Imagezine femoves hard Imagezine femoves hard Ring in sholder Imagezine femoves hard Imagezine femoves hard Stems bolt extension Imagezine femoves hard Imagezine femoves hard < |




| Protective Order | |
|--|------|
| V | SRIC |
| a la | SSOC |
| 0 | STC |
| .< TI | SWE |
| iams v. Remington | SWH |
| ŋiŋ | sww |
| gtor | TD |
| <u>د</u> | ΤU |
| | TIAD |

Subject to

| SRIC | Specific rings in chamber | | | | | 1 |
|--------|---------------------------------|------|-----|--|-----|----------------|
| SSOC | Surface scratches on case | | | | | 1 |
| STC | Stems top chamber | | | | | |
| SWE | Safety switch works too easily | | | | | |
| SWH | Safety switch works too hard | | | | | |
| sww | Safety ewitxh won't work | | | | | |
| TD | Tips down | | | | | |
| TU | Tips up | | | | | |
| TWP | Trigger won't pull | | | | | |
| TWR | Trigger won't retract | | | | | |
| UNCN-T | Uncoded | · ** | | | | |
| хн | Extracts hard | | | | àc. | |
| | | | | | | |
| HI | High | | | | | |
| LO | Low | | 110 | | | |
| LEFT | Left | | | | | |
| RIGHT | Right | | | | | |
| DG | Doesn't Group | | | | | |
| FSST | Front sight tipped | | | | | 17 |
| RSTT | Rear sight tipped | | | | - | |
| RSBR | Rear sight base raised | | | | | 1 % |
| FSTR | Front sight raised | | | | | |
| FSTL | Front sight loose | | | | | |
| RSTL | Rear sight loose | | | | | |
| MGPT-G | Missing parts at target | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | |
| | | | | | | |



| | | | | | | - |
|--------|---|-------------|------|------|------|---|
| AI-P | Assembly incompleye at proof | | | | | |
| 868 | Barrel bracket bracked or broken at proof | | | | | |
| BC-P | Blows cases at proof | | | | | |
| BEB-P | Barrel extension broken at proof | | | | | |
| BLP-P | Blanked primer at proof | | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | | |
| BP-P | Blown primer at proof | | | | | |
| BS-P | Barrel split at proof | | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | | |
| ESB-P | Ejector sticks back at proof | | | | | |
| FCB-P | Fore-end cracked at proof | · · · · · · | | | | |
| FESO-P | Fore-end shot off at proof | | | | See. | |
| FF-P | Fails to fire at proof | | | | | |
| GCSO-P | Gas cylinder shot off at proof | | •••• | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | | |
| PP-P | Pierced primer at proof | | | | | |
| SCB-P | Stock cracked or broken at proof | | | | | |
| | Uncoded proof malfunctions | | | | | |

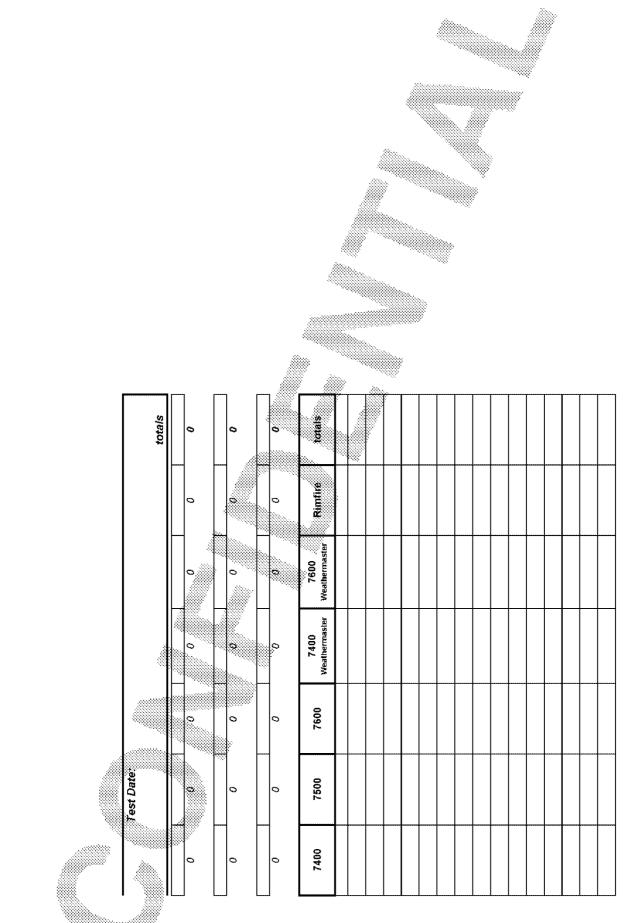


Subject to Protective Order - Williams v. Remington









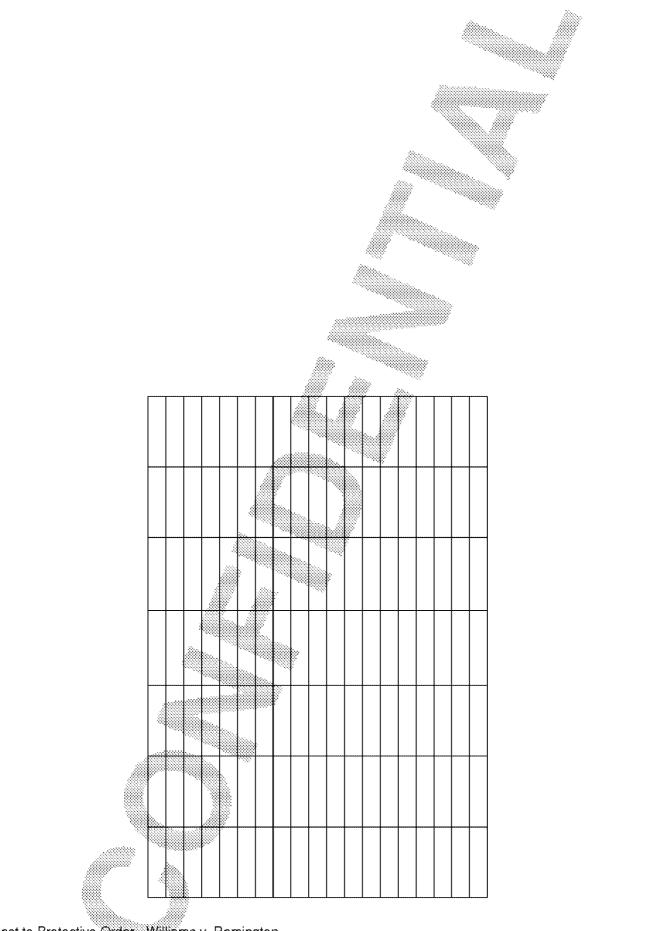

Subject to Protective Order - Williams v. Remington


| | | | | | | | | | _ |
|---------|--|----------|----------|--------|------------|--------|---------|-----------|-----|
| Summary | Total Rejected | d: 0 | | | | | | | |
| | Overall Reject Rate | | | | | | | | = |
| | Sho Proof Rejecte Percei | | 0 | 0 | 0 | 0 | 0 | 0 | |
| | | t [d | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Sho Target Rejecte | t: d: | <u> </u> | 0 | | 0 | 0 | 0 | |
| | Percer | | | L | | allin. | | Model 7 | 1 |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Stainless | |
| | | | | | | | | | 1 |
| AB | Action binds | | | | | | | | - |
| BABS | Bulge at body shoulder | _ | | *** | | | | | - |
| BAC | Burr at chamber | | **** | | | | | | - |
| BBMA | BBL-to-bolt misalignment | | | | | | | | - |
| BB | Bolt binds/catches | | | | | | | | |
| BCOBS | Bolt catches on bolt stop | - | | | | | | | |
| BCOF | Bolt catches on follower | | | | | | | | |
| BC | Blows cases | | | | | | | | ┨▓▓ |
| BHR | Bolt hits receiver | | | | | | | | - |
| BHS | Bolt plug hits safety switch | | | | | | | | - |
| BLOP | Bar lock or disconnector out of position | | | | | | | | - |
| BLSO | Barrel lug shot off | | | | | | | | - |
| BPO | Bolt pulls out | | | | | | | | - |
| BSSM | Bolt stems shell in magazine | | | | | | | | 4 |
| BWCD | Bolt won't cam down | | | | | | | | |

| BWCFM | Bolt won't close over full magazine | | | | | 1 |
|-------|--------------------------------------|------|----------|---------------------------------------|---|-----|
| CD | Case dented | | | | | |
| СН | Closes hand | | | | | |
| CLM | Can't laod magazine | | | | | |
| со | Cut-off | 340. | | | | |
| CR | Cuts rim | | | | | |
| CS | Cases swell | | . | | | |
| CTOG | Chamber tom or gouged | | | | | |
| СТР | Creepy trigger pull | | | | | |
| CWSB | Carns wrong side of action bar | | | | | |
| DBB | Doesn't blow back | | | · · · · · · · · · · · · · · · · · · · | | |
| DCS | Double click in safety switch | | | | | |
| DCT | Double click in trigger | | | | | |
| DCU | Doesn't close-up | | | | | |
| DE | Doesn't eject | | | | | |
| DEL | Doesn't eject live round | | | | | |
| DFB | Doesn't feed back | | | | |] . |
| DFU | Doesn't feed up | | | | | |
| DLO | Doesn't lock open (after last shell) | | | | | P |
| DLU | Doesn't lock-up | | | | á | |
| DS | Dead safe | | | | | |
| DX | Doesn't extract | | | | | |
| DXL | Doesn't extract live round | | | | | |
| EDS | Extractor drops shell | | | | | |
| ESB | Ejector sticks back | | | | | |
| ESCR | Empty shell catches receiver | | | | | |
| ESS | Extractor stems shell | | | | | |




| FA FB FB FC | | Subject to Protective Order | |
|--|-------------------|-----------------------------|----------|
| | S FCB | Williams | FA FB |
| FD FD | | ing | FF |
| fD FD FF | | jtor | FFP |
| FD FF F | ningtor FFP | ت_ | FOS |
| emingtor | nington FF FOS | | EDUD |

| FA. | Fires automatically | | | | |] |
|------|-----------------------------------|-------|------|--|-----|---|
| FB | Follower binds | | | | | |
| FC | Fails to connect | | | | | |
| FCB | Fore-end cracked or broken | | | | | |
| FD | Follows-down | | àre. | | | |
| FF | Fails to fire | | | | | |
| FFP | Flat firing pin | | | | | |
| FOS | Fires on safe | | | | | |
| FPHB | Firing pin hits bbl | | | | | |
| FPHI | Firing pin hits inside rim | | | | | |
| FPO | Floor plate opens | · *** | | | | |
| FPOH | Floor plate opens hard | | | | 5a. | |
| FSR | Fires when safe is released | | | | | |
| FT | Follower tips | | | | | |
| GCSO | Gas cyl shot off | | | | | |
| HBL | Heavy bolt lift | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | |
| HPA | High pressure ammo | | | | | |
| HUR | Hard under rail | | | | | Þ |
| JCS | Jumps cartridge | | | | ; | |
| JM | Jumps magazin e | | | | | |
| JO | Jars off | | | | | |
| LB | Light blow | | | | | |
| MAH | Magazine assembles hard | | | | | |
| MCW | Magazine capacity wrong | | | | | |
| MFA | Misfires (ammo) | | | | | |
| MFOP | Magazine follower out of position | | | | | |



| Subject to Protective Order | |
|-----------------------------|------|
| | ML |
| lan . | MILH |
| S No. | MRH |
| .> דו | он |
| len | OR |
| nin | PH |
| ams v. Remingtor | PSI |
| <u>د</u> | PSM |
| | 1 |


| ML | Magazine loose | | | | |
|------|-------------------------------|--------|---|---|-----|
| MALH | Magazine loads hard | | | | |
| MRH | Magazine removes hard | | | | 1 |
| он | Opens hand | | | | |
| OR | Over-moles | - 200. | | | |
| РН | Pulls hard | | | | |
| PSI | Proof stamp illegible | | | | |
| PSM | Proof stamp missing | | | | |
| RBOC | Rings and bulges on case | | 8 | | |
| RDW | (Action) release doesn't work | | | | |
| RIC | Rings in chamber | | | | |
| RIS | Ring in sholder | | | | |
| RS | Rim srem | | | | |
| SBC | Stems bottom chambers | | | | |
| SBE | Stems bbl extension | | | | |
| SCB | Stock cracked or broken | | | | |
| SCX | Shell catches | | | | |
| SHI | Short indent | | | | |
| SI | Stems incline | | | | ø |
| SIC | Stems in chamber | | | ž | |
| SL | shaves lead | | | | ľ∞; |
| SLC | Stems left side of chamber | | | | |
| SMOC | Stretch marks on case | | | | |
| SOR | Stem over-ride | | | | |
| SP | Stems port | | | | |
| SR | Shoulder rough | | | | |
| SRC | Stems right side of chamber | | | | |




| Protective Order | |
|--|-------|
| | SRIC |
| a la | SSOC |
| iams v. | STC 🛞 |
| <u>ج</u> | SWE |
| len | SWH |
| nin | sww |
| Remington | TD |
| <u>د</u> | ΤU |
| | |


Subject to

| SRIC | Specific rings in chamber | | | | | 1 |
|--------|---------------------------------|------|------|--|------|-------|
| SSOC | Surface scratches on case | | | | | 1 |
| STC | Stems top chamber | | | | | 1 |
| SWE | Safety switch works too easily | | | | | |
| SWH | Safety switch works too hard | àre. | | | | |
| sww | Safety ewitxh won't work | | | | | |
| TD | Tips down | | | | | |
| τυ | Tips up | | | | | |
| TWP | Trigger won't pull | | | | | |
| TWR | Trigger won't retract | | | | | |
| UNCN-T | Uncoded | | | | | |
| хн | Extracts hard | | | | àte. | |
| | | | | | | |
| HI | High | | **** | | | |
| LO | Low | | | | | |
| LEFT | Left | | | | | |
| RIGHT | Right | | | | | |
| DG | Doesn't Group | | | | | |
| FSST | Front sight tipped | | | | | 1 |
| RSTT | Rear sight tipped | | | | 2 | |
| RSBR | Rear sight base raised | | | | | ſ |
| FSTR | Front sight raised | | | | | |
| FSTL | Front sight loose | | | | | |
| RSTL | Rear sight loose | | | | | |
| MGPT-G | Missing parts at target | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | |
| | | **** | | | | |



| AI-P | Assembly incompleye at proof | 1 | | | | | 1 |
|---------|---|---|------|----|---|------|---|
| 368 | Barrel bracket gracked or broken at proof | | | | | | |
| 3C-P | Blows cases at proof | | | | | | |
| зев-р 🚿 | Barrel extension broken at proof | | | | | | |
| BLP-P | Blanked primer at proof | | ása. | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | | | |
| BP-P | Blown primer at proof | | | | | | |
| BS-P | Barrel split at proof | | | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | : | | |
| ESB-P | Ejector sticks back at proof | | | | | | |
| FCB-P | Fore-end cracked at proof | | | | | | |
| ESO-P | Fore-end shot off at proof | | | | | 8eo. | |
| FF-P | Fails to fire at proof | | | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | 10 | | | |
| MSM-P | Magnaflux stamp missing on bbl | | | | | | |
| PP-P | Pierced primer at proof | | | | | | |
| SCB-P | Stock cracked or broken at proof | | | | | | |
| UNCM-P | Uncoded proof malfunctions | | *** | | | | |

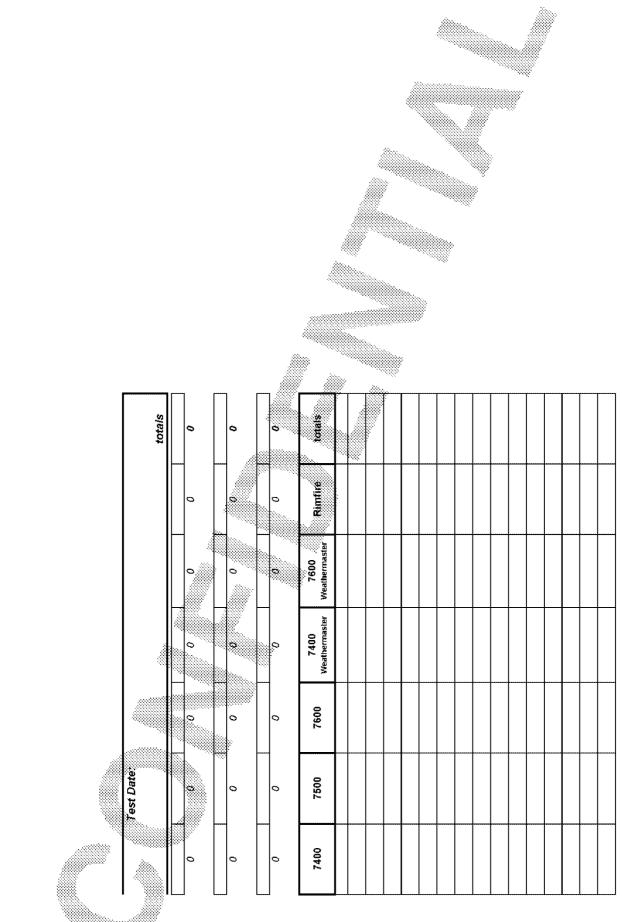


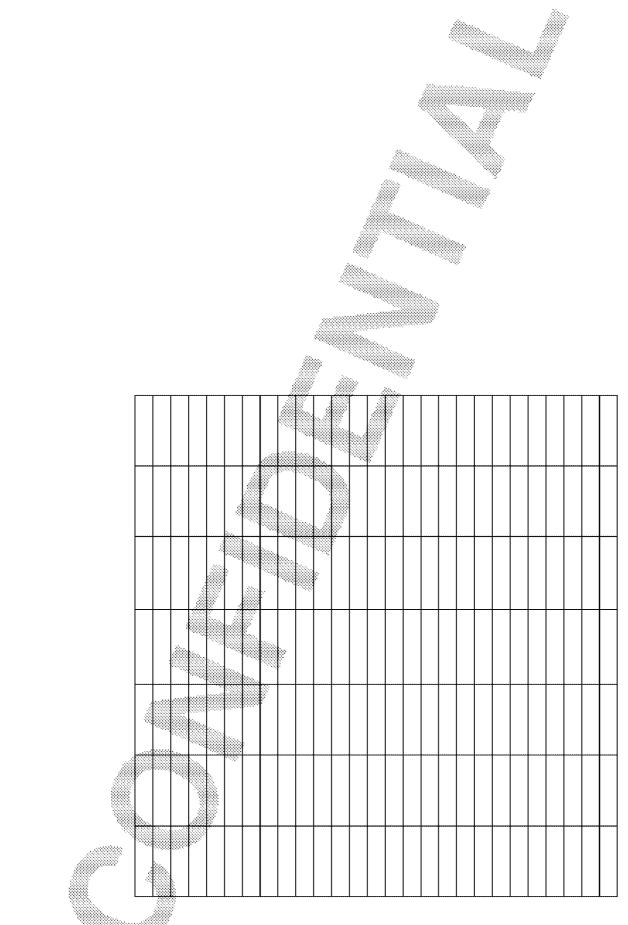







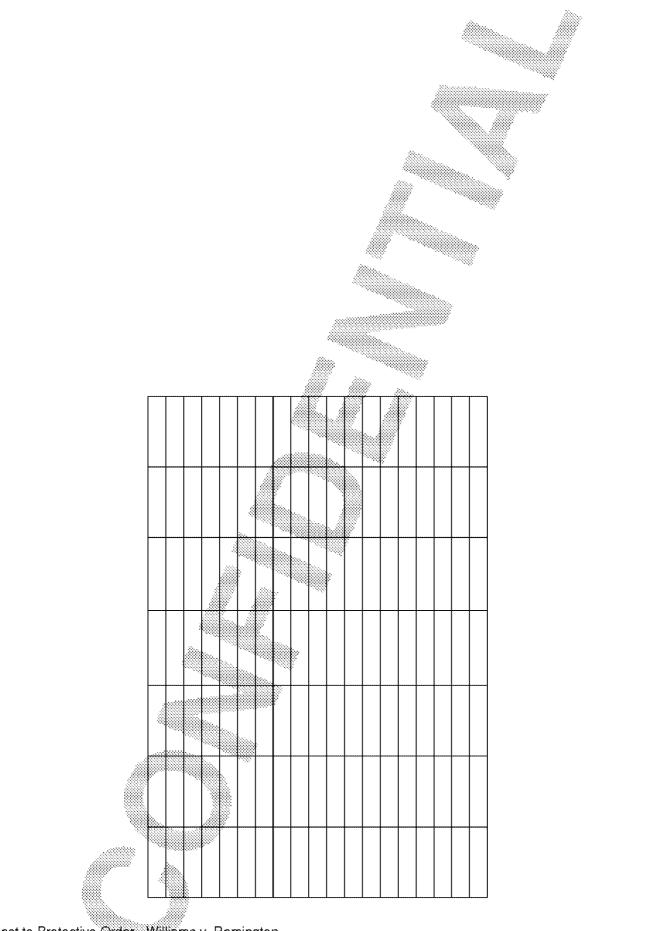

Subject to Protective Order Williams v. Remington

| | | | | | | | | | _ |
|---------|--|---------|---------|--|------------|--------|----------|----------------------|-----|
| Summary | Total Test + Proof Failures Total Rejected: | | | | | | | | |
| | Overall Reject Rate: | | | | | | | | _ |
| | Shot: Proof Rejected: Percent. | 0 | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Shot Test Rejected Percent | Q | 0 | 0 | 0 | 0 | 0 | 0 |] |
| | Shot. Target Rejected. Percent. | · 0 🎆 | 0 | 0 | 0 | 0 | 0 | 0 | |
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 58 | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
| AB | Action binds | | | | | | | | - |
| BABS | Bulge at body shoulder | | 2 | ************************************** | | | | | - |
| BAC | Burr at chamber | | | | | | | | 1 |
| BBMA | BBL-to-bolt misalignment | | | | | | | | 1 |
| BB | Bolt binds/catches | | | | | | | | 1 |
| BCOBS | Bolt catches on bolt stop | | | | | | | | 1 |
| BCOF | Bolt catches on follower | | | | | | 197 1 | | |
| вс | Blows cases | | | | | | | | 1 |
| BHR | Bolt hits receiver | | | | | | | ***** | 1 |
| BHS | Bolt plug hits safety switch | | | | | | | | 1 🕺 |
| BLOP | Bar lock or disconnector out of position | | | | | | | | 1 |
| BLSO | Barrel lug shot off | | | | | | | | 1 |
| BPO | Bolt pulls out | | | | | | | | 1 |
| BSSM | Bolt stems shell in magazine | | | | | | | |] |
| BWCD | Bolt won't cam down | | - | | | | | | 1 |

| 2009 | | | | | | | | |
|-------|--------------------------------------|---------|---------|--------|---------------------------------------|--------|---------|----------------------|
| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 SS | 700 Police | 700 ML | Model 7 | Model 7 Stainless |
| BWCFM | Bolt won't close over full magazine | | | | | | | |
| CD 💥 | Case dented | | | | | | | |
| СН | Closes hard | | 2005 | | | | | |
| CLM | Can't laod magazine | | | | | | | |
| CO | Cut-off | | | | | | | |
| CR | Cuts rim | | | | | | | |
| CS | Cases swell | | | | 8 | | | |
| CTOG | Chamber torn or gouged | | | | | | | |
| CTP | Creepy trigger pull | | | | · · · · · · · · · · · · · · · · · · · | | | |
| CWSB | Carns wrong side of action bar | | | | | | Sec. | |
| DBB | Doesn't blow back | | | | | | | |
| DCS | Double click in safety switch | | | | | | | |
| DCT | Double click in trigger | | | ~~ | | | | |
| DCU | Doesn't close-up | | | | | | | |
| DE | Doesn't eject | | | | | | | |
| DEL | Doesn't eject live round | | | | | | | |
| DFB | Doesn't feed back | | | | | | | |
| DFU | Doesn't feed up | | | | | | ź | |
| DLO | Doesn't lock open (after last shell) | | | | | | | |
| DLU | Doesn't lock-up | | | | | | | |
| DS | Dead safe | | | | | | | |
| DX | Doesn't extract | | | | | | | |
| DXL | Doesn't extract live round | | | | | | | |
| EDS | Extractor drops shell | | | | | | | |
| ESB | Ejector sticks back | | | | | | | |



MAE00015821


| CODE | MALFUNCTION INDEX | 700 ADL | 700 BDL | 700 SS | 700 Police | 700 ML | Model 7 | Model 7 Stainless |
|-------|--------------------------------|---------|---------|--------|---------------------------------------|--------|---------|----------------------|
| ESCR | Empty shell catches receiver | | | | | | | |
| ESS 💥 | Extractor stems shell | | | | | | | |
| FA | Fires automatically | | itter. | | | | | |
| FB | Follower binds | | | | | | | |
| FC | Fails to connect | | | | | | | |
| FCB | Fore-end cracked or broken | | | | | | | |
| FD | Follows-down | | | | | | | |
| FF | Fails to fire | | | | | | | |
| FFP | Flat firing pin | ~~~~ | | | · · · · · · · · · · · · · · · · · · · | | | |
| FOS | Fires on safe | | | | | | | |
| FPHB | Firing pin hits bbl | | | | | | | |
| FPHI | Firing pin hits inside rim | | | | | | | |
| FPO | Floor plate opens | | | ~ | | | | |
| FPOH | Floor plate opens hard | | | | | | | |
| FSR | Fires when safe is released | | **** | | | | | |
| FT | Follower tips | | *** | | | | | |
| GCSO | Gas cyl shot off | | | | | | | |
| HBL | Heavy bolt lift | | | | | | | |
| HMSC | Heading mismatch-steps on case | | | | | | | |
| HPA | High pressure ammo | | | | | | | |
| HUR | Hard under rail | | | | | | | |
| JCS | Jumps cartridge | | | | | | | |
| JM | Jumps magazine | | | | | | | |
| JO | Jars off | | | | | | | |
| LB | Light blow | | | | | | | |



| CODE | | 700 ADL | 700 BDL | 700 SS | 700 Police | 700 ML | Model 7 | Model 7 Stainless | |
|-------|-----------------------------------|---------|---------|--------|---------------------------------------|--------|---------|----------------------|---|
| MAH | Magazine assembles hand | | | | | | | | 1 |
| MCW 👋 | Magazine capacity wrong | | | | | | | | |
| MFA | Misfires (ammo) | | án. | | | | | | |
| MFOP | Magazine follower out of position | | | | | | | | 1 |
| ML | Magazine loose | | | | | | | | 1 |
| MLH | Magazine loads hard | | | | | | | | |
| MRH | Magazine removes hard | | | | | | | | |
| ОН | Opens hard | | | | | | | | |
| OR | Over-rides | 1 | | | · · · · · · · · · · · · · · · · · · · | | | | |
| PH | Pulls hard | | | | | | | | 1 |
| PSI | Proof stamp illegible | | | | | | | | |
| PSM | Proof stamp missing | | | | | | | | |
| RBOC | Rings and bulges on case | | | ~ | | | | | |
| RDW | (Action) release doesn't work | | | | 9.88 | | | | |
| RIC | Rings in chamber | | | | | | | | |
| RIS | Ring in sholder | | | | | | | | |
| RS | Rim srem | | | | | | | | ļ |
| SBC | Stems bottom chambers | | | | | | | | 惨 |
| SBE | Stems bbl extension | | | | | | | | ľ |
| SCB | Stock cracked or broken | | | | | | | | |
| SCX | Shell catches | | | | | | | | |
| SHI | Short indent | | | | | | | | |
| SI | Stems incline | | | | | | | | |
| SIC | Stems in chamber | | | | | | | | 1 |
| SL | shaves lead | | | | | | | | 1 |




| CODE | | 700 ADL | 700 BDL | 700 SS | 700 Police | 700 ML | Model 7 | Model 7 Stainless |
|--------|--------------------------------|---------|---------|--------|------------|--------|---------|----------------------|
| SLC | Stems left side of chamber | | | | | | | |
| SMOC | Stretch marks on case | | | | | | | |
| SOR | Stem over-ride | | - 220. | | | | | |
| SP | Stems port | | | | | | | |
| SR | Shoulder rough | | | | | | | |
| SRC | Stems right side of chamber | | | | | | | |
| SRIC | Specific rings in chamber | | | | | | | |
| SSOC | Surface scratches on case | | | | | | | |
| STC | Stems top chamber | | | | ····. | | | |
| SWE | Safety switch works too easily | | | | | | | |
| SWH | Safety switch works too hard | | | | | | | |
| SWW | Safety ewitxh won't work | | | | | | | |
| TD | Tips down | | | | | | | |
| TU | Tips up | | | | | | | |
| TWP | Trigger won't pull | | **** | | | | | |
| TWR | Trigger won't retract | | **** | | | | | |
| UNCN-T | Uncoded | | | | | | | |
| хн | Extracts hard | | | | | | ; | |
| | | | | | | | | |
| ні | High | | | | | | | |
| LO | Low | | | | | | | |
| LEFT | Left | | | | | | | |
| RIGHT | Right | | | | | | | |
| DG | Doesn't Group | | | | | | | |
| FSST | Front sight tipped | | | | | | | |




| CODE | | 700 ADL | 700 BDL | 700 SS | 700 Police | 700 ML | Model 7 | Model 7 Stainless |
|--------|---|---------|---------|--------|---------------------------------------|--------|---------|----------------------|
| RSTT | Rear sight tipped | | | | | | | |
| RSBR 💥 | Rear sight base raised | | | | | | | |
| FSTR | Front sight raised | | | | | | | |
| FSTL | Front sight loose | | | | | | | |
| RSTL | Rear sight loose | | | | | | | |
| MGPT-G | Missing parts at target | | | | | | | |
| UNCN-G | Uncoded nonconformity at target | | | | | | | |
| | | | | | | | | |
| AI-P | Assembly incompleye at proof | | | | · · · · · · · · · · · · · · · · · · · | | | |
| BBB | Barrel bracket cracked or broken at proof | | | | | | | |
| BC-P | Blows cases at proof | | | | | | | |
| BEB-P | Barrel extension broken at proof | | | | | | | |
| BLP-P | Blanked primer at proof | | | | | | | |
| BLSO-P | Barrel lug shot off at proof | | | | | | | |
| BP-P | Blown primer at proof | | **** | | | | | |
| BS-P | Barrel split at proof | | *** | | | | | |
| DLOS-P | Doesn't lock over shells at proof | | | | | | | |
| ESB-P | Ejector sticks back at proof | | | | | | ; | |
| FCB-P | Fore-end cracked at proof | | | | | | | |
| FESO-P | Fore-end shot off at proof | | | | | | | |
| FF-P | Fails to fire at proof | | | | | | | |
| GCSO-P | Gas cylinder shot off at proof | | | | | | | |
| MSI-P | Magnaflux stamp illegible on bbl | | | | | | | |
| MSM-P | Magnaflux stamp missing on bbl | | - | | | | | |
| PP-P | Pierced primer at proof | | | | | | | |
| | • | | | | | | | |




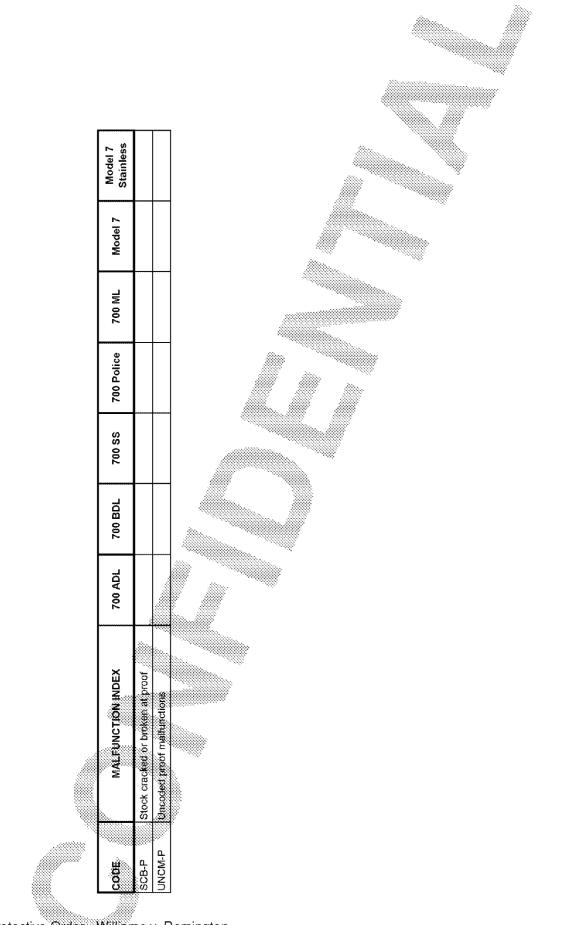



Subject to Protective Order - Williams v. Remington

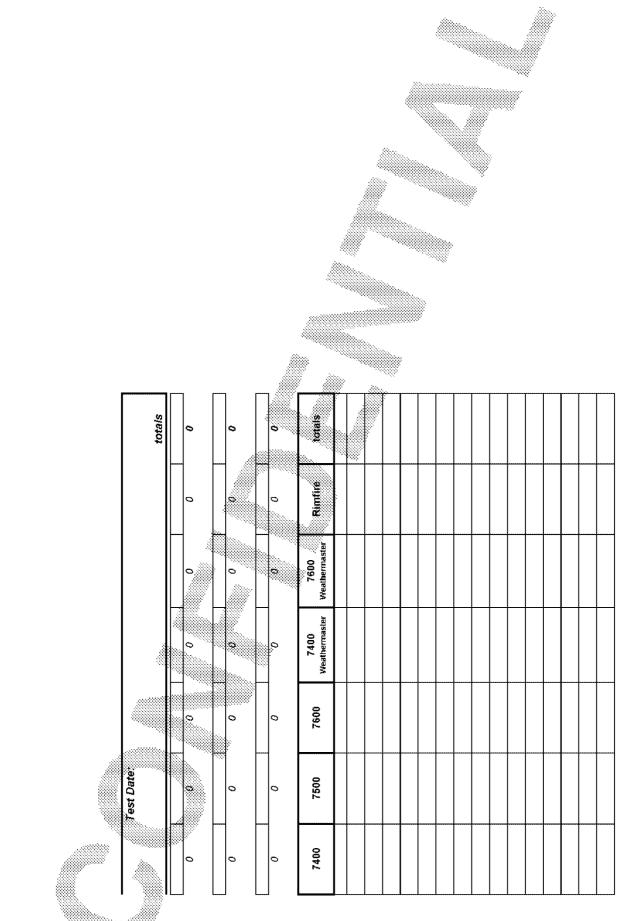



Subject to Protective Order - Williams v. Remington

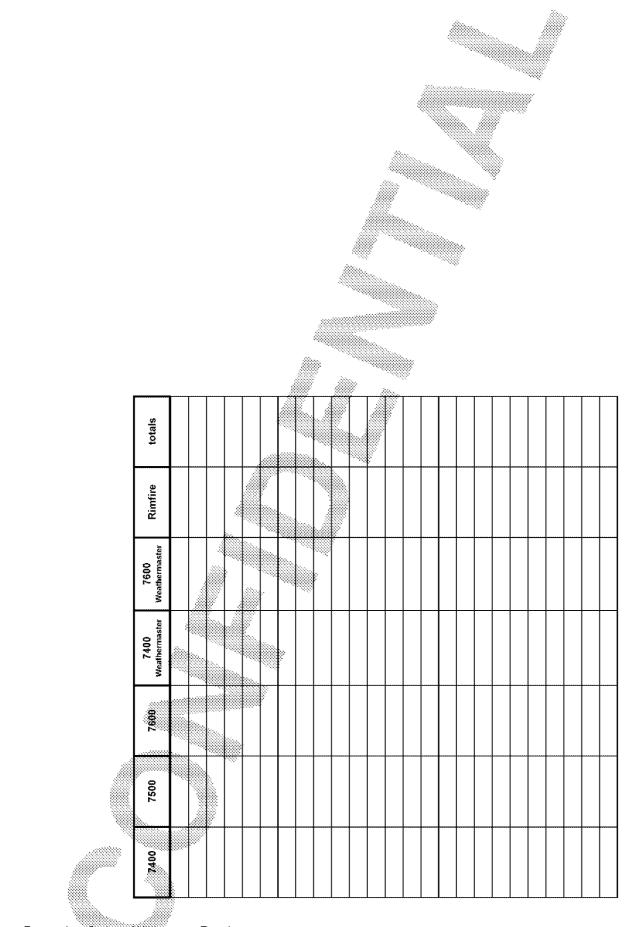


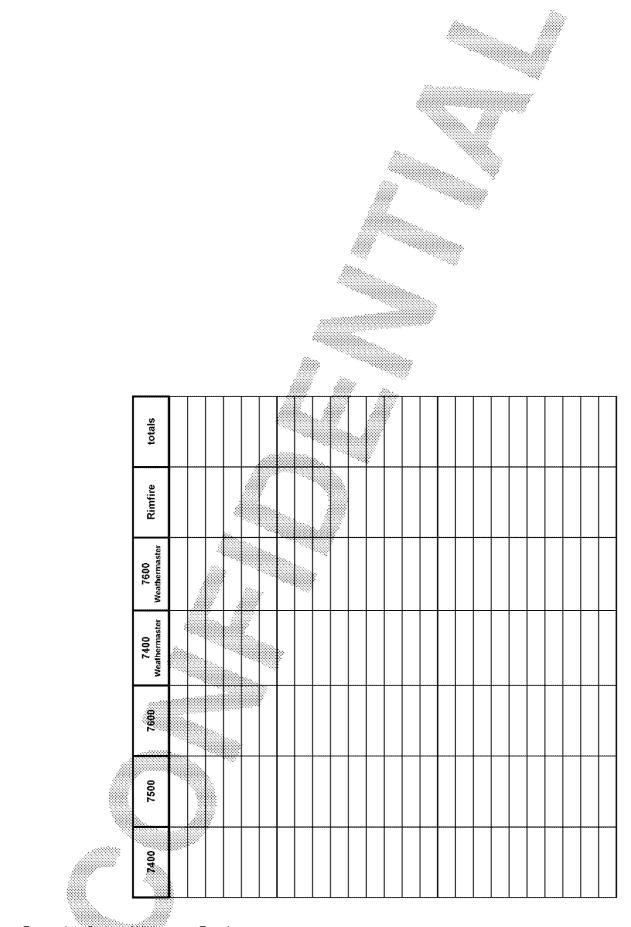

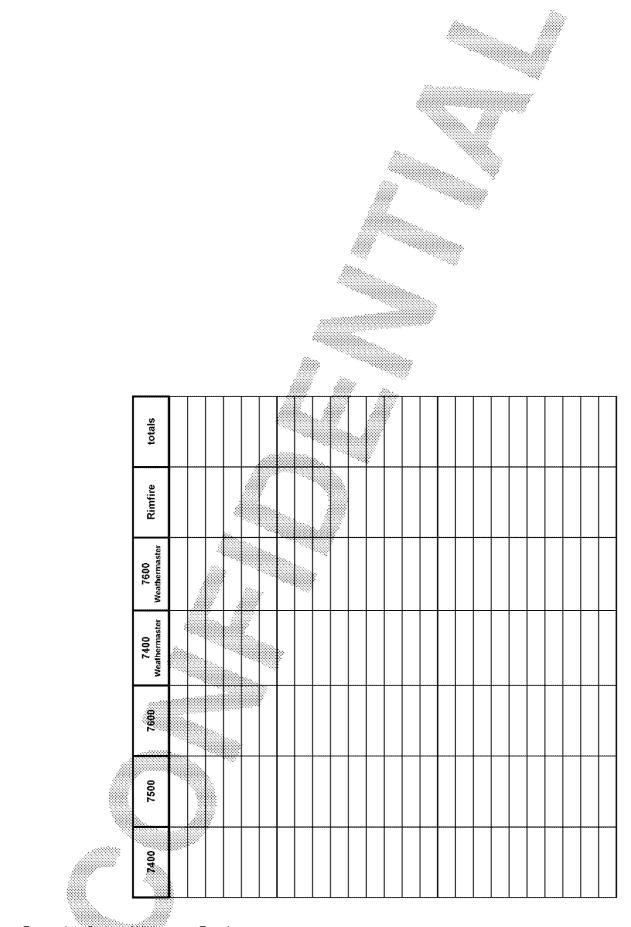

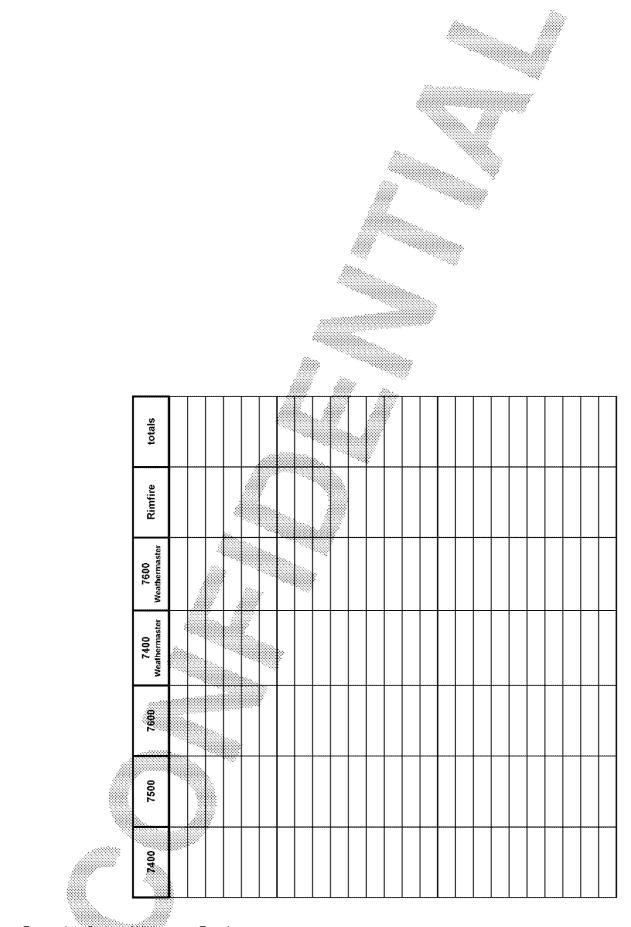

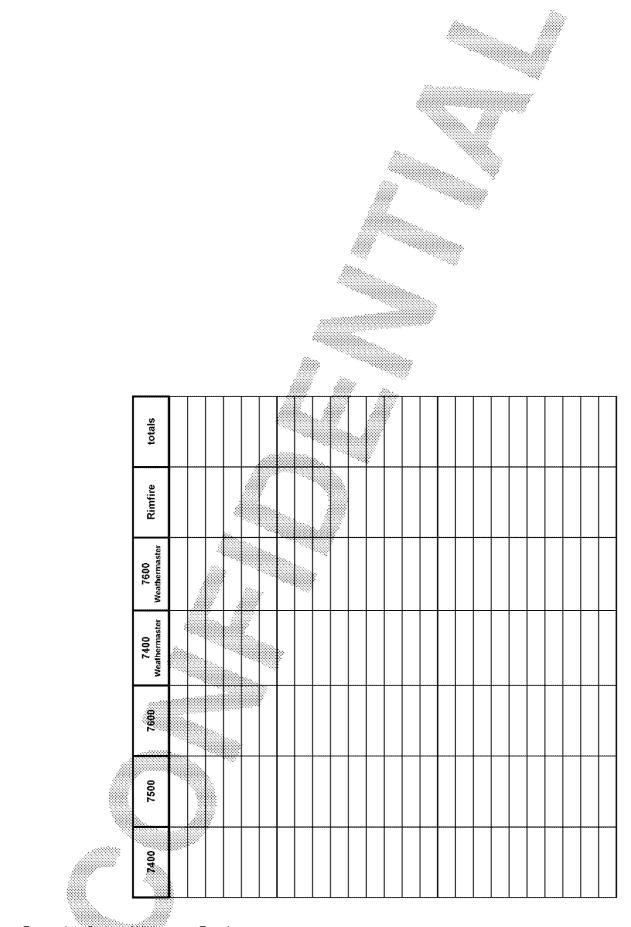

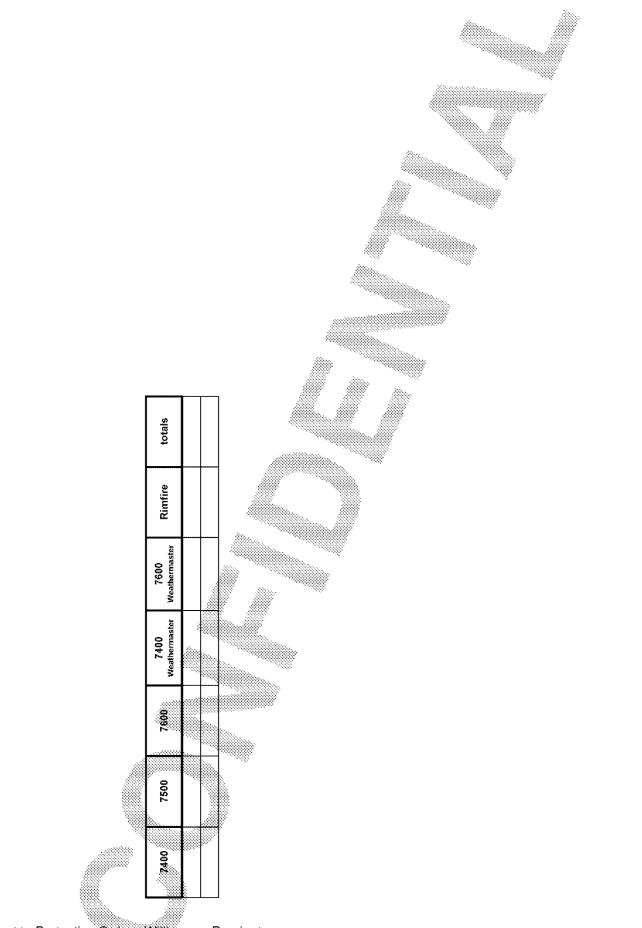

Subject to Protective Order Williams v. Remington