

REMINGTON ARMS COMPANY, INC.  
Bridgeport, Connecticut

May 3, 1979

TO: C.B. WORKMAN ✓ P.S. HEBERT  
D.S. FOOTE N. SKOVAN\*  
R.T. CATLIN

FROM: E.F. BARRETT


SUBJECT: MONTHLY PROGRESS REPORT - MAY 1978

Information for the subject report should be in this office by Friday, May 26, 1978.

5-20-78 Copy of note to:  
J.S. Martin - K.W. Soucy  
J.W. Brooks  
R.L. Sassone (C.W. Stephan)

\*Due June 5 REMINGTON ARMS CO.  
RECEIVED  
MAY 4 1978

ILION RESEARCH DIVISION

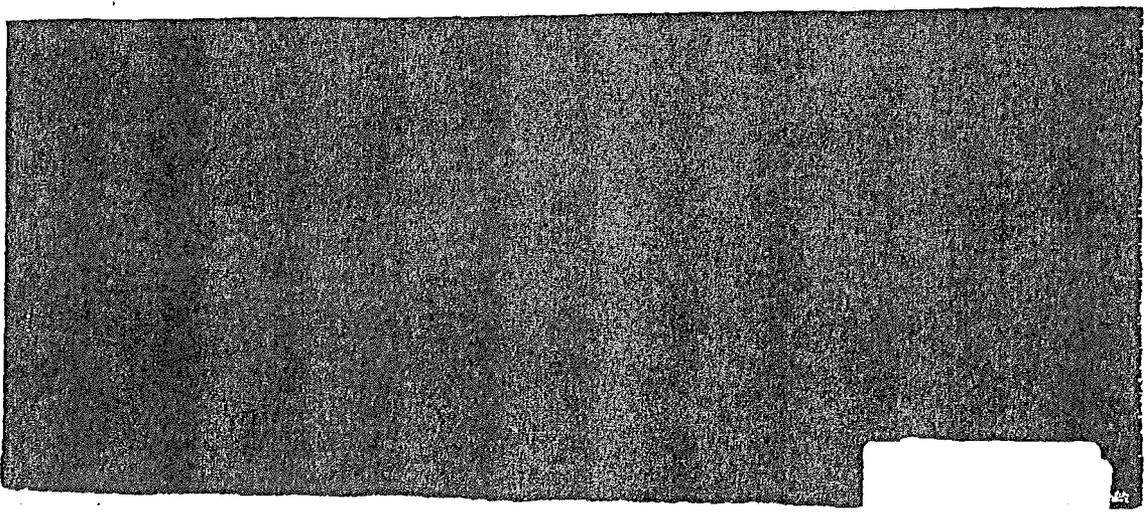

## FIREARMS

### Model 1100 Improvements

Analysis of dry cycle tests on interlocked disconnecter - left connector will be complete the first week in May. Parts for live fire endurance tests are being heat treated. The test is scheduled to begin in mid-May.

Feed latches with the spring loaded retention design have worked well in testing. A method for assembling these latches into the receiver is being devised. A sample run of 300 parts has been started by the vendor.

### Model 1100 Weighted LT-20, 28 & 410

All design, drawing and model making work is complete except for the 410 gauge magazine spring retainer. Live fire testing on one LT-20 and one 28 gauge gun is under way. The LT-20 is at 6,000 rounds and the 28 gauge is at 3,500. Performance has been satisfactory.

### Model 1100 Waterfowl Guns

All drawings for the 12 gauge version of this gun will be transmitted by early May. The 20 gauge design will be complete by mid-May.

### XSG

The first prototype XSG-A3 is nearly complete. Two parts are still in heat treat.

Total gun weight turned out to be 7 lbs. 4.5 oz. for a vent rib 26" field gun and 7 lbs. 0.5 oz. for the plain barrel version.

### Model 870 All Ga. Wood Cosmetics

Six new checkering patterns have been designed and samples have been prepared for a market research study.

Research Department

-2-

April, 1978

Models 7400 - 7600

Research has produced two new firing pin designs. To solve the primer blanking problem, the firing pin tip diameter was reduced to .049" on one design and .055" on the other, the firing pin spring was redesigned to absorb 50% less energy (and thus increase firing pin inertia) and the exit hole in the breech bolt was radiused by a metal removal technique instead of a punch. Tip strength was increased by shortening the tip to approximately half of its former length in order to reduce the cantilever effect.

Testing is now under way on these designs. So far both have sustained 130 proof rounds with no blanking or breakage. The proof ammunition being used is the highest pressure of all lots available (77 C.U.P.). Standard M/742's proofed in the plant gallery with this ammunition show a 5% blanking rate (5 of 100 guns monitored). Endurance testing on two additional guns is also complete. One pin went 4489 rounds and the other 3498 rounds. No tips or bodies were broken. The failure was at the "hat" section at the rear of the pin. This is considered to be a satisfactory failure mode since it does not present a safety problem upon failure. Indent on closing was checked after failure and was 0.0" on both guns. Indent on closing with the pin intact was 0.00" (no discernible mark under 40x magnification) and indent level on firing was increased approximately .004", which now puts us within Remington specs.

After conclusion of endurance testing we will reach a decision as to which tip design to use, .049" or .055". The .055" tip has an advantage in that it should be slightly stronger but the .049" tip gives more leeway for manufacturing tolerances.

Parts for additional testing including firing pins, spring and breech bolts are now being fabricated.

Nylon 66 Improvements

Problems have been experienced by our stamping vendor in forming the receiver cover to accept the new bolt lock device. Alternative methods are being evaluated.

Two new designs for a barrel mounted scope mount have been completed. One is of stamped construction and the other will be either machined or investment cast. Costs are being estimated for both designs.

Research Department

-3-

April, 1978

Model 870 Competition

One gun has had 50,000 rounds of endurance testing with satisfactory results. Four guns have been furnished to Marketing for field testing.

Model 600 Carbine Styling

Nine rifles with various styles and one current M/600 were furnished to Marketing for panel tests.

Model 541 - 22 Hornet

All the parts for a single shot rifle are ready except a bolt head. It requires a milling cut because of a redesign of the ejector. The model should be assembled the first week in May.

Model 700

Three prototype bolt lock systems have been assembled on rifles. They have been delivered to Marketing for comment and for a panel group test.

A new trigger and sear safety cam are being completed in the Model Shop. They will be ready by the end of April.

Bench Rest Bullets

Approximately 52,000, 6mm - 68 gr. bench rest bullets have been shipped to the warehouse.

Research Department

-4-

April, 1978

Model 870 Competition

One gun has had 50,000 rounds of endurance testing with satisfactory results. Four guns have been furnished to Marketing for field testing.

Model 600 Carbine Styling

Nine rifles with various styles and one current M/600 were furnished to Marketing for panel tests.

Model 541 - 22 Hornet

All the parts for a single shot rifle are ready except a bolt head. It requires a milling cut because of a redesign of the ejector. The model should be assembled the first week in May.

Model 700

Three prototype bolt lock systems have been assembled on rifles. They have been delivered to Marketing for comment and for a panel group test.

A new trigger and sear safety cam are being completed in the Model Shop. They will be ready by the end of April.

Bench Rest Bullets

Approximately 52,000, 6mm - 68 gr. bench rest bullets have been shipped to the warehouse.

Research Department

-4-

April, 1978