

593-1-352
Remington.

**QUALITY SERVICE: THE KEY
TO CUSTOMER LOYALTY**

**Remington Arms Company, Inc.
Product Service Division
Ilion, New York - 13357
Fax (315) 895-3237
Tel. (315) 895-3477**

DATE: 2-7-95 TIME: 1 15 pm

TO: ROBERT HASKIN

FROM: KEN GREEN

*file under
"pic control."
owner manual*

315 895-340

TOTAL NUMBER OF PAGES, INCLUDING THIS SHEET

RECEIPT VERIFICATION CALL REQUIRED? (YES/NO)

COMMENTS: PLEASE REVIEW CHANGES TO
M/700 OWNERS MANUAL

The information contained in this FAX is confidential and/or privileged. This Fax is intended to be reviewed initially by only the individual named above. If the reader of this Transmittal Page is not the intended recipient or a representative, you are hereby notified that any review, dissemination or copying of this FAX or the information contained herein is prohibited. If you have received this FAX in error, please immediately notify the sender by telephone and return this FAX to the sender at the above address. Thank you.


CONFIDENTIAL - SUBJECT
TO PROTECTIVE ORDER

WILLIAMS V. REMINGTON

PR 0585

TO CLEAN THE RECEIVER AND TRIGGER ASSEMBLY:

1. Put the safety switch in the 'S' position.
2. Remove the bolt assembly. See instructions on Page 6.
3. Turn the rifle upside down.
4. Remove the screws from the trigger guard. See Picture 10.

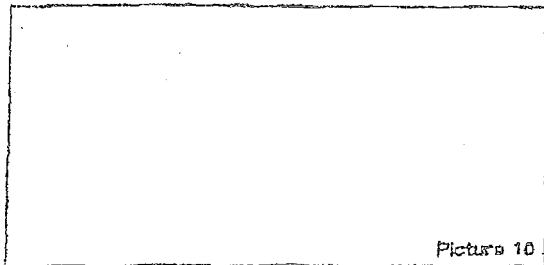

Picture 10

5. Lift the stock away from the receiver and trigger assembly.

MODELS WITHOUT A FLOOR PLATE ONLY:

Remove the magazine spring and follower from the receiver.

NOTE: Clean the receiver and trigger assembly as a unit with Rem™ Oil.

5. Spray the receiver and flush the trigger assembly with Rem™ Oil as shown. See Picture 11. Let stand

for 15 minutes. Spray again to wash off the contaminants. Shake off excess lubricant. Carefully inspect the trigger assembly to insure it is clean and free of sticky lubricant and residue.

FLUSH WITH REM.™ OIL
AS SHOWN

Picture 11

WARNING: Excessive use of a non-recommended lubricant could cause serious function problems possibly leading to accidental firing.

TO ASSEMBLE MODELS WITHOUT A FLOOR PLATE:

1. Put the magazine follower and the spring into the magazine.
2. Put the stock over the receiver and trigger assembly.
3. Replace and tighten the screws on the trigger guard.

WARNING: Before you replace the bolt assembly, make sure the barrel is free of obstructions.

LUBRICATION AND MAINTENANCE

WARNING: Firearms must be regularly cleaned and lubricated at least once a year to keep them in a safe and reliable operating condition. More frequent cleaning is required if the firearm is used under adverse conditions.



LUBRICATION:

Over-lubrication should be avoided at all times. A thin coat of Rem[™] Oil helps to prevent rusting. See Note below.

When the firearm is to be stored, it should be carefully cleaned and thoroughly oiled. Outside surfaces should be wiped with a light coat of Rem[™] Oil occasionally.

When firearm is to be reused, all excess lubrication must be removed. The chamber and bore must be thoroughly wiped dry.

NOTE: Remington Rem[™] Oil is available from your local dealer. If your dealer is out of stock, ask him to order Rem[™] Oil from his Remington distributor.

TO CLEAN THE BARREL:

WARNING: Check the chamber and magazine to make sure there are no cartridges in the firearm.

1. Use the equipment provided in a good cleaning kit. For recommendations, see your Remington Authorized Gunsmith.

2. Remove the bolt assembly. See instructions on Page 5.
3. Select the correct caliber cleaning brush and attach the brush to the cleaning rod.
4. Put the cleaning brush into the gun cleaning solvent.

NOTE: Barrel should lay horizontally with the ejection port facing down during cleaning. Always clean the barrel from the chamber end to the muzzle.

5. Push the cleaning brush through the barrel several times.
6. Remove brush from rod, attach tip with patch, and push through the bore.
7. Repeat several times, using a new cleaning patch each time, until the patch is not dirty.
8. Push a clean patch saturated with Rem[™] Oil through the barrel.
9. Push a clean dry patch through the barrel to remove excess lubricant.
10. Apply a thin coat of Rem[™] Oil to the outside of the barrel with a soft clean cloth.
11. After cleaning the barrel, clean the receiver and the trigger assembly.

WARNING: This firearm should be checked periodically by the Remington Arms Company, Inc. or a REMINGTON RECOMMENDED GUNSMITH. This will ensure proper inspection and any necessary replacement of worn or damaged parts.

CONFIDENTIAL - SUBJECT
TO PROTECTIVE ORDER

WILLIAMS V. REMINGTON