

BARBER - M24 0163370

G6300627
Repka
C-62252444

BARBER M24-0163371

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00082823** Serial: C6225444 Model: M24 SWS Center Fire Caliber: 7.62 NATO Repairman: Status: New 7/14/2004 10:34:57 AM

Address Information

Customer: ☐ Received From: ☒ Return To: ☐ Received From: ☒

Name: **TRANSPORTATION OFFICE** **TRANSPORTATION OFFICE**

Address 1: **BLDG 5210 DOOR 30** **BLDG 5210 DOOR 30**

Address 2: PO Box: PO Box:

City: **FORT CAMPBELL** **FORT CAMPBELL**

State: **KY** Zip Code: **42223** Country: **US** State: **KY** Zip Code: **42223** Country: **US**

FFL ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information

Phone:

Fax:

Email:

Comments:

Received Condition

Good

Condition Notes:

CSR Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A010	Hard Case	1
A017	Scope Base	1
A026	Scope	1
A045	Bi Pod	1
C000	Frt and Rear Sgt Base	1

Repair Search **Refresh** **Close**

naglet 7/14/2004 1:10 PM CAPS NUM INS SCPL

start 3 3 3 3

6300627 (New)

Serial Number: **C6225444**

Model: **M24 SWS**



RE00082823

C6225444(047)

CONTRACT #: DAAE-20-02-D-0127

SERIAL # C6300627 (New) INSPECTED BY: RTL

DATE REC'D: 7-14-04 DATE RET'D: 8-13-04

ITEM

BARREL ASSEMBLY

✓ BARREL
✓ RECEIVER
✓ FRONT SIGHT BASE
✓ REAR SIGHT BASE
✓ SCREWS
✓ FINISH

SCOPE ASSEMBLY

✓ SCOPE
✓ SCOPE RINGS
✓ MOUNTING SCREWS
✓ MOUNTING BASE
✓ SCREWS
✓ FINISH
✓ CLARITY

ITEM

STOCK ASSEMBLY

✓ STOCK
✓ SLING AWIVEL STUDS
✓ ADJUSTABLE
✓ BUTT PLATE
✓ LOCK NUTS
✓ BARREL CLEARANCE
✓ COLOR / FINISH

SYSTEMS CASE

✓ SCOPE CASE
✓ IRON SIGHTS
✓ DEPLOYMENT KIT

TRIGGER ASSEMBLY

✓ SAFETY OPERATION
✓ RE-SET TO FACTORY SPECS

COMMENTS:

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6300627.___0
FILE DATE AND TIME: 08/10/2004 03:52

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.097
The Average Y Centroid of the Five Target Set:	-0.136
The Average Point of Impact of the Five Target Set:	0.167
The Average Mean Radius of the Five Target Set:	0.756
The Distance from POA to Centroid Target #1:	0.092
The Distance from Centroid Target #2 to Centroid Target #1:	0.273
The Distance from Centroid Target #3 to Centroid Target #1:	0.237
The Distance from Centroid Target #4 to Centroid Target #1:	0.299
The Distance from Centroid Target #5 to Centroid Target #1:	0.311

BARBER - M24 0163374

SERIAL NUMBER: G6300627. __0

TARGET NUMBER: 1

FILE DATE: 08/10/2004

FILE TIME: 03:52

X CENTROID: 0.060

Y CENTROID: 0.070

POA TO CENTROID: 0.092

HORZ SPREAD: 1.381

VERT SPREAD: 2.582

GROUP SPREAD: 2.631

MIN RADIUS: 0.227

MAX RADIUS: 1.665


MEAN RADIUS: 0.770

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.456	1.687
2:	0.292	0.922
3:	-0.331	0.429
4:	-0.789	-0.028
5:	-0.357	-0.093
6:	0.201	0.248
7:	0.592	-0.332
8:	0.190	-0.441
9:	0.399	-0.795
10:	-0.051	-0.895

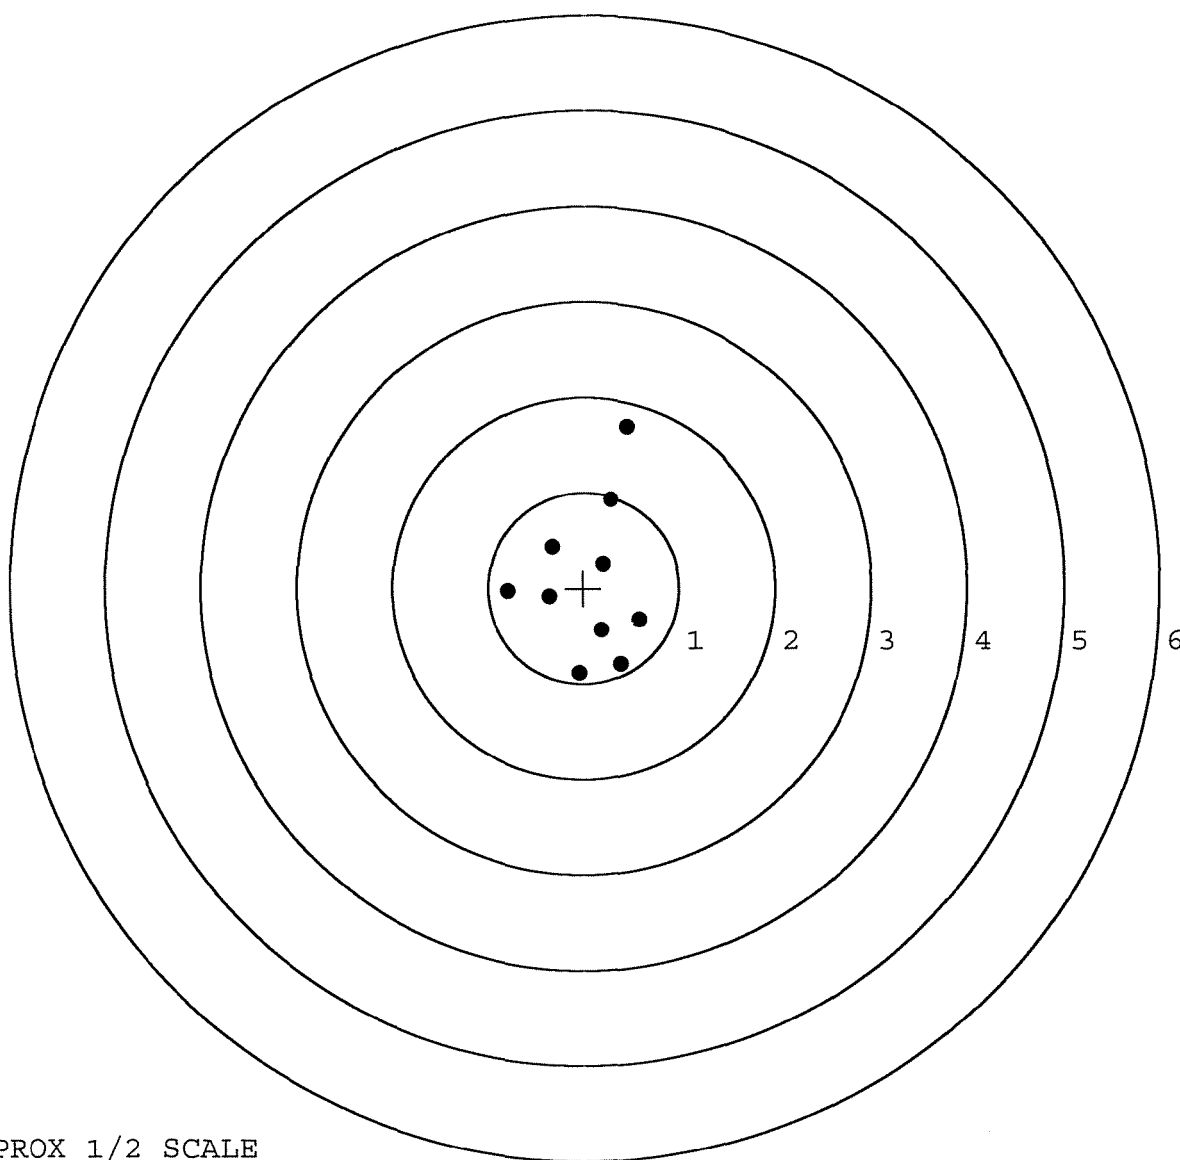

TARGET APPROX 1/2 SCALE

BARBER - M24 0163375

SERIAL NUMBER: G6300627. __0

TARGET NUMBER: 2

FILE DATE: 08/10/2004

FILE TIME: 03:52

X CENTROID: 0.133

Y CENTROID: -0.193

POA TO CENTROID: 0.234

HORZ SPREAD: 1.687

VERT SPREAD: 2.099

GROUP SPREAD: 2.118

MIN RADIUS: 0.317

MAX RADIUS: 1.214


MEAN RADIUS: 0.815

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	1.154	0.231
2:	0.462	0.976
3:	0.030	0.576
4:	-0.533	0.468
5:	-0.037	0.075
6:	-0.256	-0.444
7:	-0.361	-0.976
8:	-0.013	-0.926
9:	0.509	-0.787
10:	0.372	-1.123

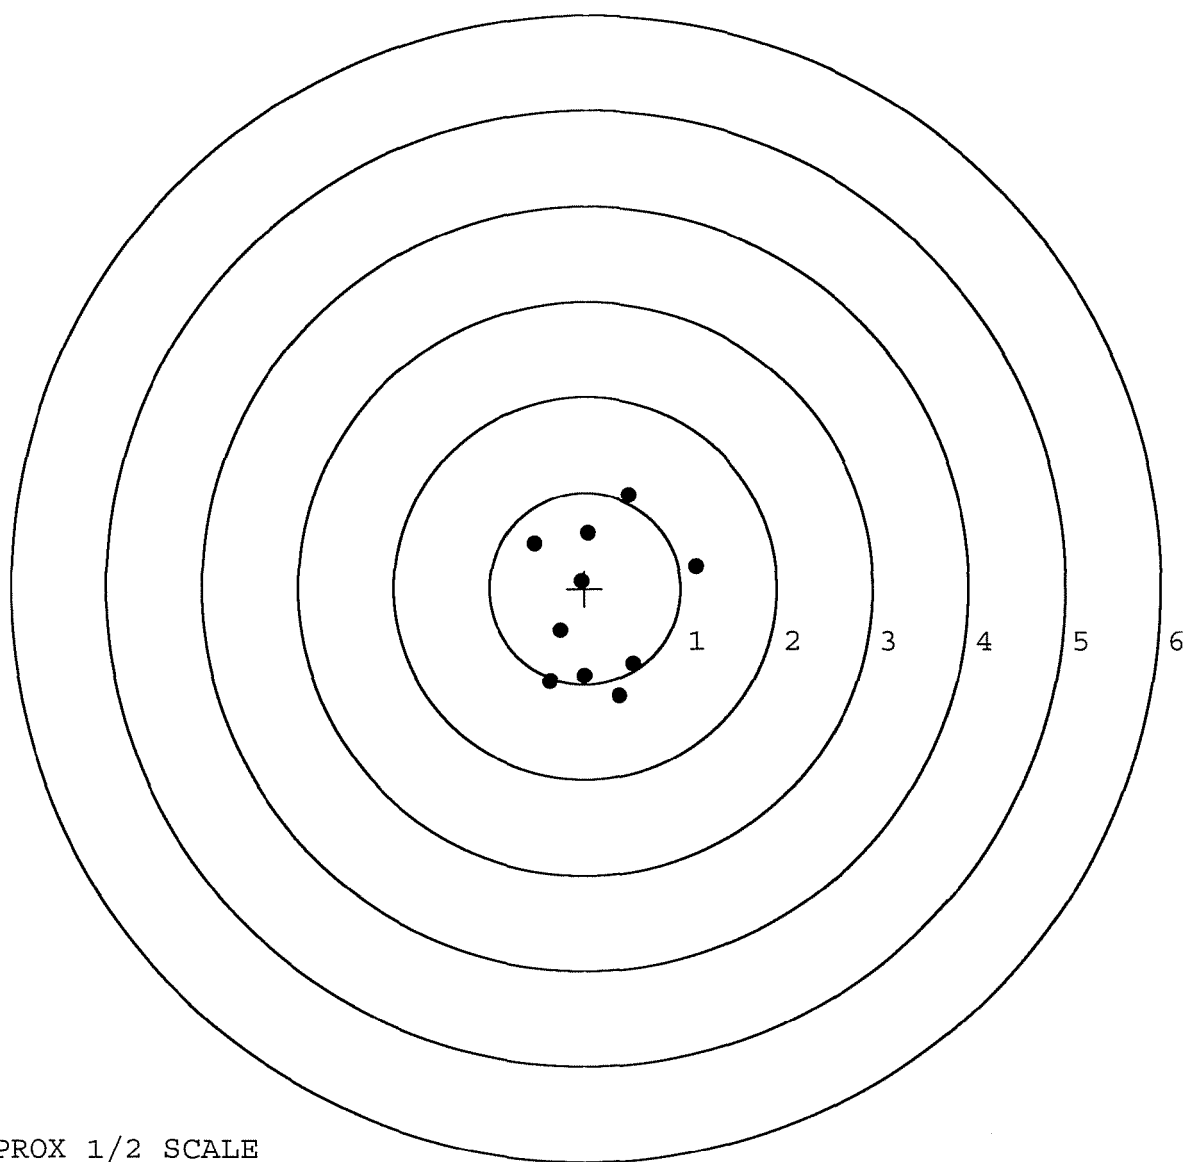

TARGET APPROX 1/2 SCALE

BARBER - M24 0163376

SERIAL NUMBER: G6300627. __0

TARGET NUMBER: 3

FILE DATE: 08/10/2004

FILE TIME: 03:52

X CENTROID: 0.003

Y CENTROID: -0.159

POA TO CENTROID: 0.160

HORZ SPREAD: 1.828

VERT SPREAD: 1.996

GROUP SPREAD: 2.000

MIN RADIUS: 0.341

MAX RADIUS: 1.035


MEAN RADIUS: 0.742

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.220	0.852
2:	0.257	0.466
3:	0.089	0.196
4:	0.852	-0.218
5:	0.541	-0.480
6:	0.253	-0.392
7:	-0.906	0.081
8:	-0.976	-0.360
9:	-0.401	-0.596
10:	0.101	-1.144

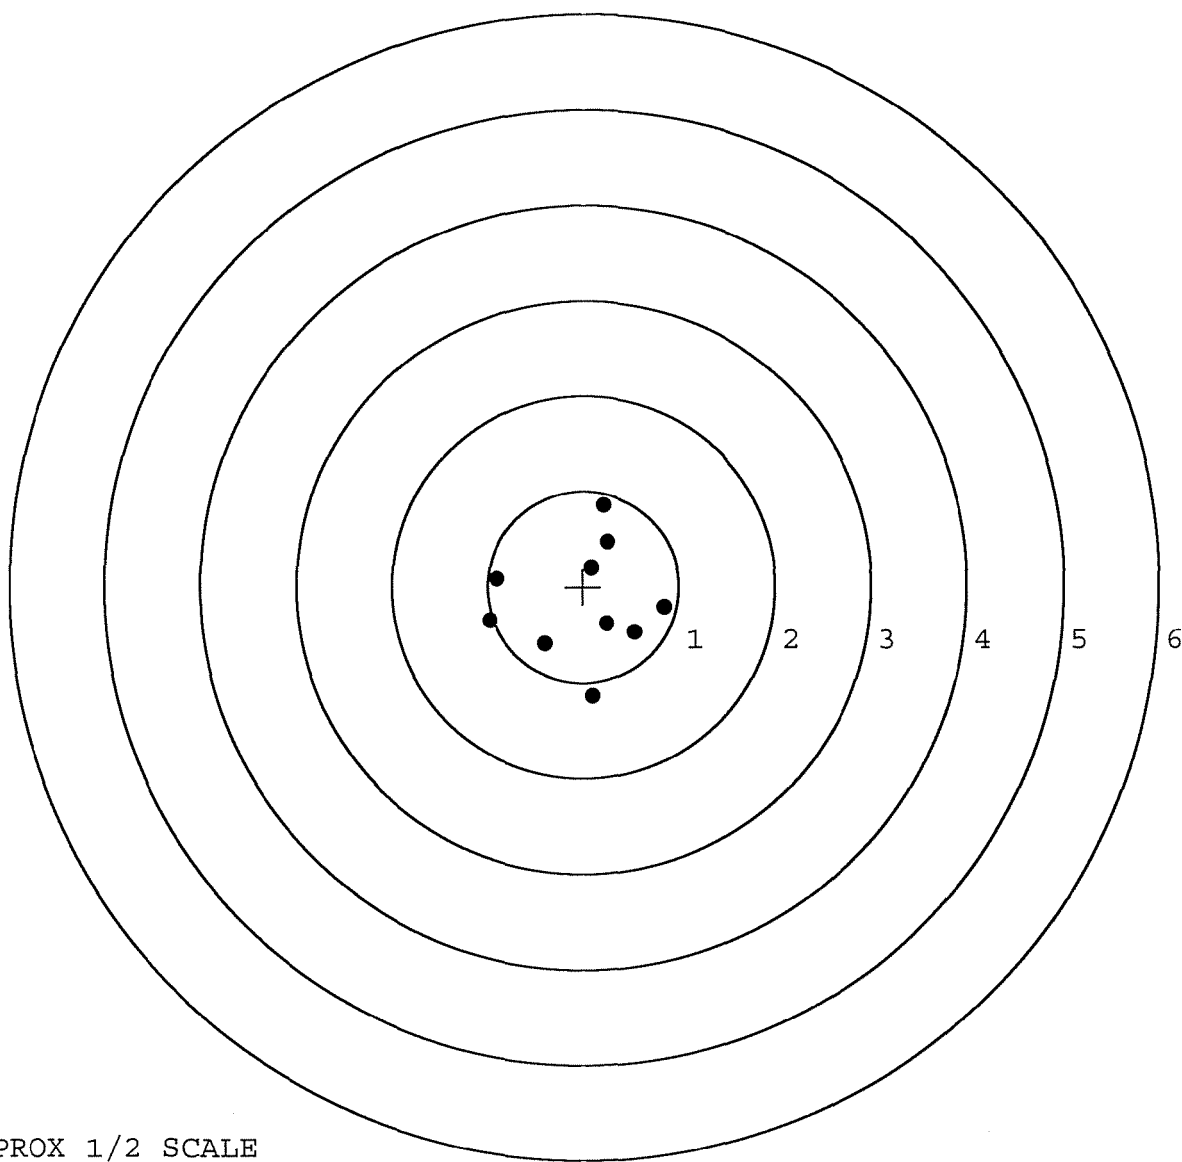


TARGET APPROX 1/2 SCALE

BARBER - M24 0163377

SERIAL NUMBER: G6300627. __0
TARGET NUMBER: 4
FILE DATE: 08/10/2004
FILE TIME: 03:52

	POINT#	X	Y
	1:	0.685	-1.014
	2:	0.785	-0.525
	3:	0.286	-0.621
	4:	-0.186	-0.589
	5:	-0.369	-0.301
	6:	-0.216	0.427
	7:	0.648	0.466
	8:	0.029	0.022
	9:	0.311	0.196
	10:	0.552	0.346
X CENTROID:		0.252	
Y CENTROID:		-0.159	
POA TO CENTROID:		0.299	
HORZ SPREAD:		1.154	
VERT SPREAD:		1.480	
GROUP SPREAD:		1.699	
MIN RADIUS:		0.288	
MAX RADIUS:		0.958	
MEAN RADIUS:		0.604	
# IN 1 IN DIAMETER:		3	
# IN 2 IN DIAMETER:		10	
# in 3 IN DIAMETER:		10	

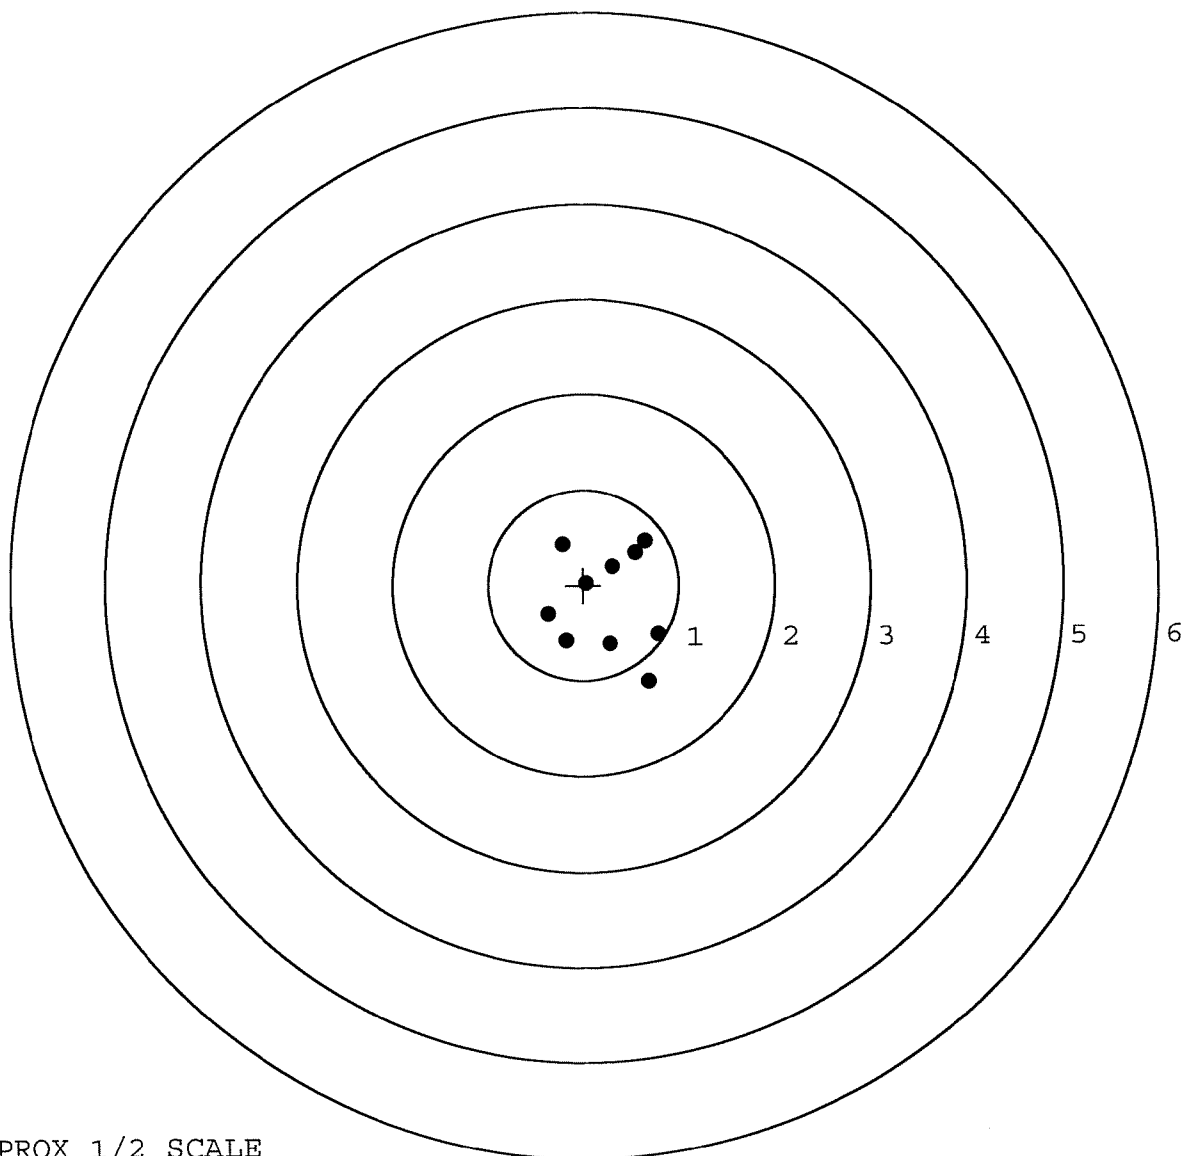

TARGET APPROX 1/2 SCALE

BARBER - M24 0163378

SERIAL NUMBER: G6300627. __0

TARGET NUMBER: 5

FILE DATE: 08/10/2004

FILE TIME: 03:52

X CENTROID: 0.035

Y CENTROID: -0.240

POA TO CENTROID: 0.242

HORZ SPREAD: 1.580

VERT SPREAD: 2.781

GROUP SPREAD: 3.121

MIN RADIUS: 0.206

MAX RADIUS: 1.748


MEAN RADIUS: 0.848

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.984	0.897
2:	-0.596	0.979
3:	-0.149	0.619
4:	0.003	-0.036
5:	0.510	-0.263
6:	0.820	-1.802
7:	-0.566	-1.082
8:	-0.273	-0.818
9:	-0.161	-0.323
10:	-0.225	-0.570

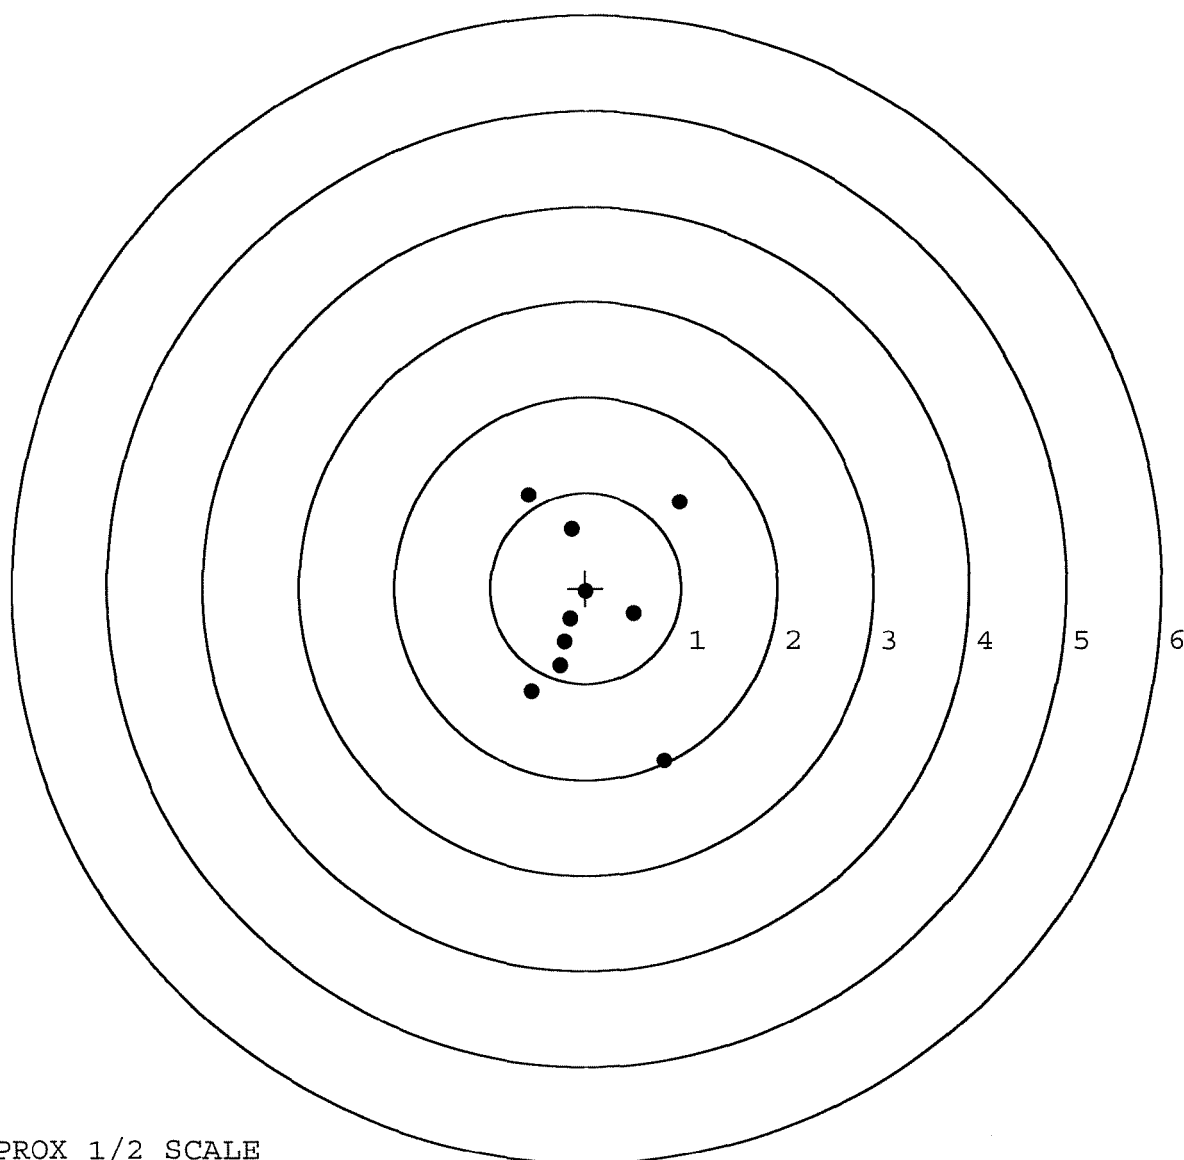

TARGET APPROX 1/2 SCALE

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50 LBS (plus or minus 0.50 LBS)
3.00 LBS (plus or minus 0.75 LBS)
4.00 LBS (plus or minus 1.00 LBS)

SERIAL NO. _____

DATE 7-15-07

TESTER TRW

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.41	2.48		2.65	
PULL #2	2.38	2.28		2.63	
PULL #3	2.47	2.40		2.65	
PULL #4	2.54	2.37		2.67	
PULL #5	2.54	2.89		2.57	
TOTAL	12.34	12.42		13.27	
AVERAGE	2.46	2.48		2.65	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.07	3.13		
PULL #2	3.19	3.29		
PULL #3	3.06	2.97		
PULL #4	3.04	3.13		
PULL #5	2.93	3.07		
TOTAL	15.29	15.59		
AVERAGE	3.05	3.11		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.29	4.40		4.16
PULL #2	4.22	4.26		4.06
PULL #3	4.26	4.40		4.41
PULL #4	4.33	4.30		4.05
PULL #5	4.35	4.30		4.55
TOTAL	21.45	21.66		21.23
AVERAGE	4.29	4.33		4.24

R & E NUMBER	82823		
SERIAL NUMBER	06225444 06300627 (New)		
LOG-IN DATE	7-14-04		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	7-15-04	RTL
560 A	RE-BARREL	7-15-04	RTL
B	DRILL AND TAP	7-19-04	TRL
575	ASSEMBLE	7-19-04	RTL
600	PROOF	7-19-04	RTL
605	CHECK HEADSPACE	7-19-04	RTL
610	DIS-ASSEMBLE GUN	7-19-04	RTL
612	MAGNAFLUX	7-19-04	RTL
615	ROLLMARK CALIBER	7-19-04	RTL
618	ROTO-BLAST	7/20/04	DG
620	APPLY COATINGS	7-21	TA
625 A	FINAL ASSEMBLY	7-22-04	RW
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	8-10-04	AL
655	FINAL INSPECT	8-13-04	RTL
660	PACK	8-13-04	NA
		SHIP DATE	
QAR INSPECTION DATE			

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00040780** Serial: C6225444 Model 700 Center Fire Caliber 7.62 NATO M-24 (SWS) Repairman: Status: Closed 2/2/02 10:36:17 AM

Verify Repair

Address Information

Customer: Received From: Return To: Received From:

Name: TRANS OFFICER CRP TRANS OFFICER CRP

Address 1: BLDG 5207 BLDG 5207

Address 2: PO Box: PO Box:

City: FORT CAMPBELL FORT CAMPBELL

State: KY Zip Code: 42223 Country: US State: KY Zip Code: 42223 Country: US

FFL: [] [] [] [] [] [] [] []

Contact / Condition	Problems	Estimate	History / Status	Shipping / Billing
Date	Code	User ID	Desc1	Current Status
2/2/02 10:34:01	New	fortte	Repair Added	Closed
2/2/02 10:36:17	Closed	fortte	Closed at Expedite	2/2/02 10:36:17 AM
				fortte
				Sniper Systems
				Repair Location
				ILN
				Current Location
				ILN


Shipping Hold ☐ InterFace Hold ☐ Estimate Sent ☐ Parts Received ☐ Passed Inspection ☐ Return As Received ☐ Has been Approved ☐ Internal Repair ☐

Repair Search Refresh Close

Start | Inbox - Microsoft ... | Calendar - Microso... | Microsoft Excel - S... | Arms Services ... | 2:42 PM

Serial Number: **C6225444**

Model: **700**



RE00040780

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6225444.___0
FILE DATE AND TIME: 02/21/2002 02:34

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES


The Average X Centroid of the Five Target Set:	-0.008
The Average Y Centroid of the Five Target Set:	0.069
The Average Point of Impact of the Five Target Set:	0.070
The Average Mean Radius of the Five Target Set:	0.658
The Distance from POA to Centroid Target #1:	0.136
The Distance from Centroid Target #2 to Centroid Target #1:	0.142
The Distance from Centroid Target #3 to Centroid Target #1:	0.418
The Distance from Centroid Target #4 to Centroid Target #1:	0.106
The Distance from Centroid Target #5 to Centroid Target #1:	0.067

BARBER - M24 0163383

SERIAL NUMBER: C6225444. __0
TARGET NUMBER: 1
FILE DATE: 02/21/2002
FILE TIME: 02:34

X CENTROID: 0.109
Y CENTROID: 0.083
POA TO CENTROID: 0.136
HORZ SPREAD: 1.895
VERT SPREAD: 2.146
GROUP SPREAD: 2.577
MIN RADIUS: 0.315
MAX RADIUS: 1.321
MEAN RADIUS: 0.868
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.423	1.270
2:	-0.786	1.054
3:	-0.189	0.515
4:	-0.789	0.043
5:	-0.152	-0.876
6:	0.408	-0.423
7:	0.265	-0.191
8:	0.645	-0.108
9:	1.106	-0.695
10:	1.001	0.237

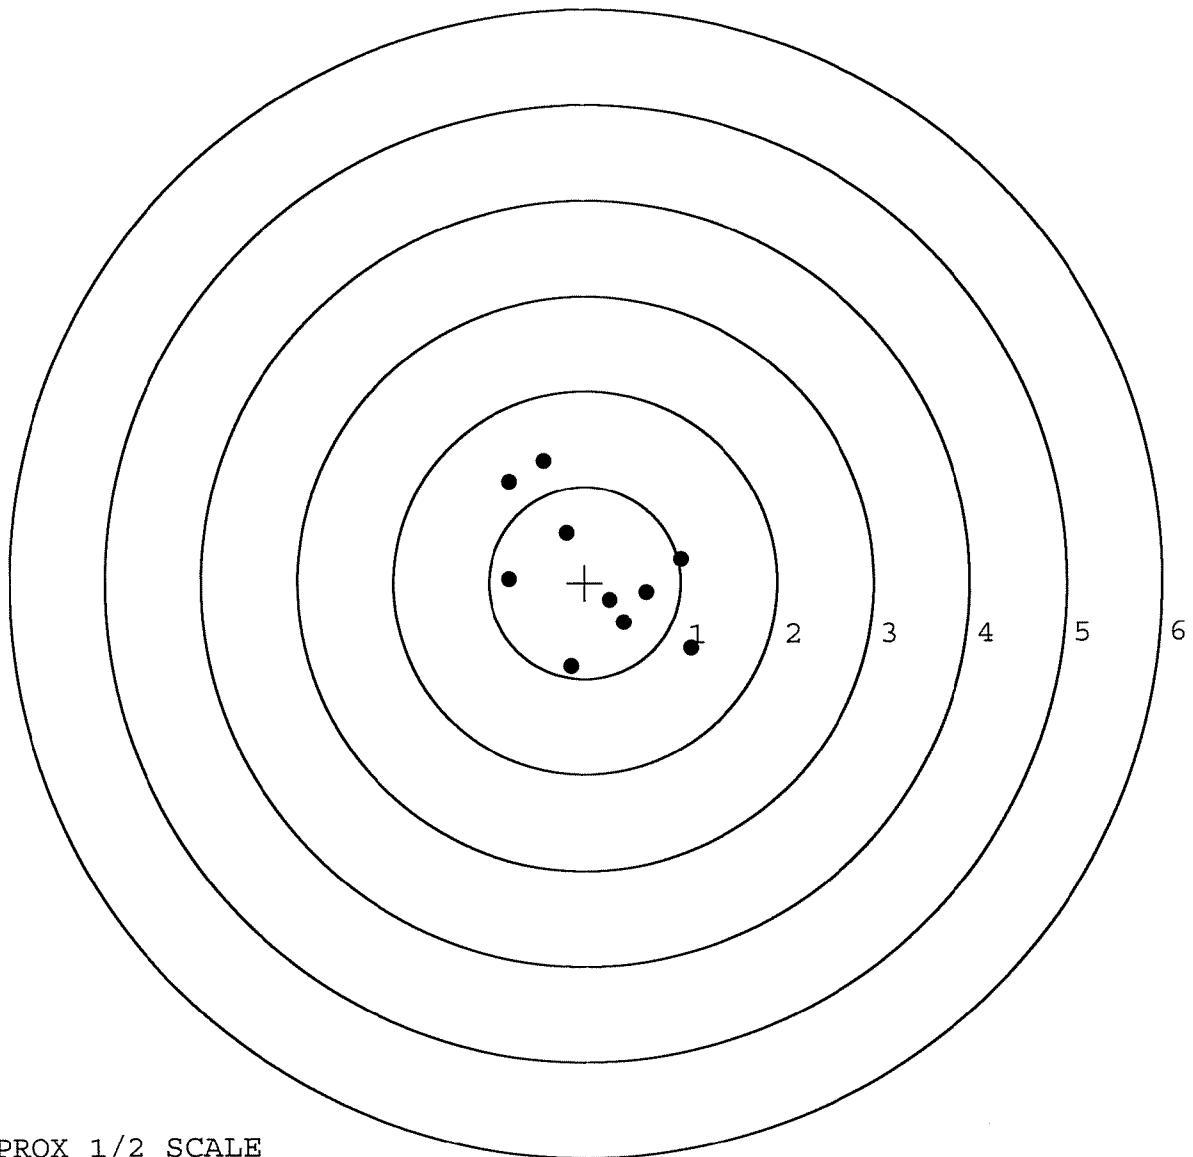


TARGET APPROX 1/2 SCALE

BARBER - M24 0163384

SERIAL NUMBER: C6225444. __0
TARGET NUMBER: 2
FILE DATE: 02/21/2002
FILE TIME: 02:34

X CENTROID: 0.014
Y CENTROID: -0.023
POA TO CENTROID: 0.027
HORZ SPREAD: 1.754
VERT SPREAD: 1.806
GROUP SPREAD: 2.170
MIN RADIUS: 0.354
MAX RADIUS: 1.184
MEAN RADIUS: 0.805
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.065	1.000
2:	-0.894	0.738
3:	-1.001	0.228
4:	-0.662	-0.465
5:	0.144	-0.730
6:	0.348	-0.481
7:	0.631	-0.806
8:	0.753	-0.093
9:	0.349	0.092
10:	0.534	0.289

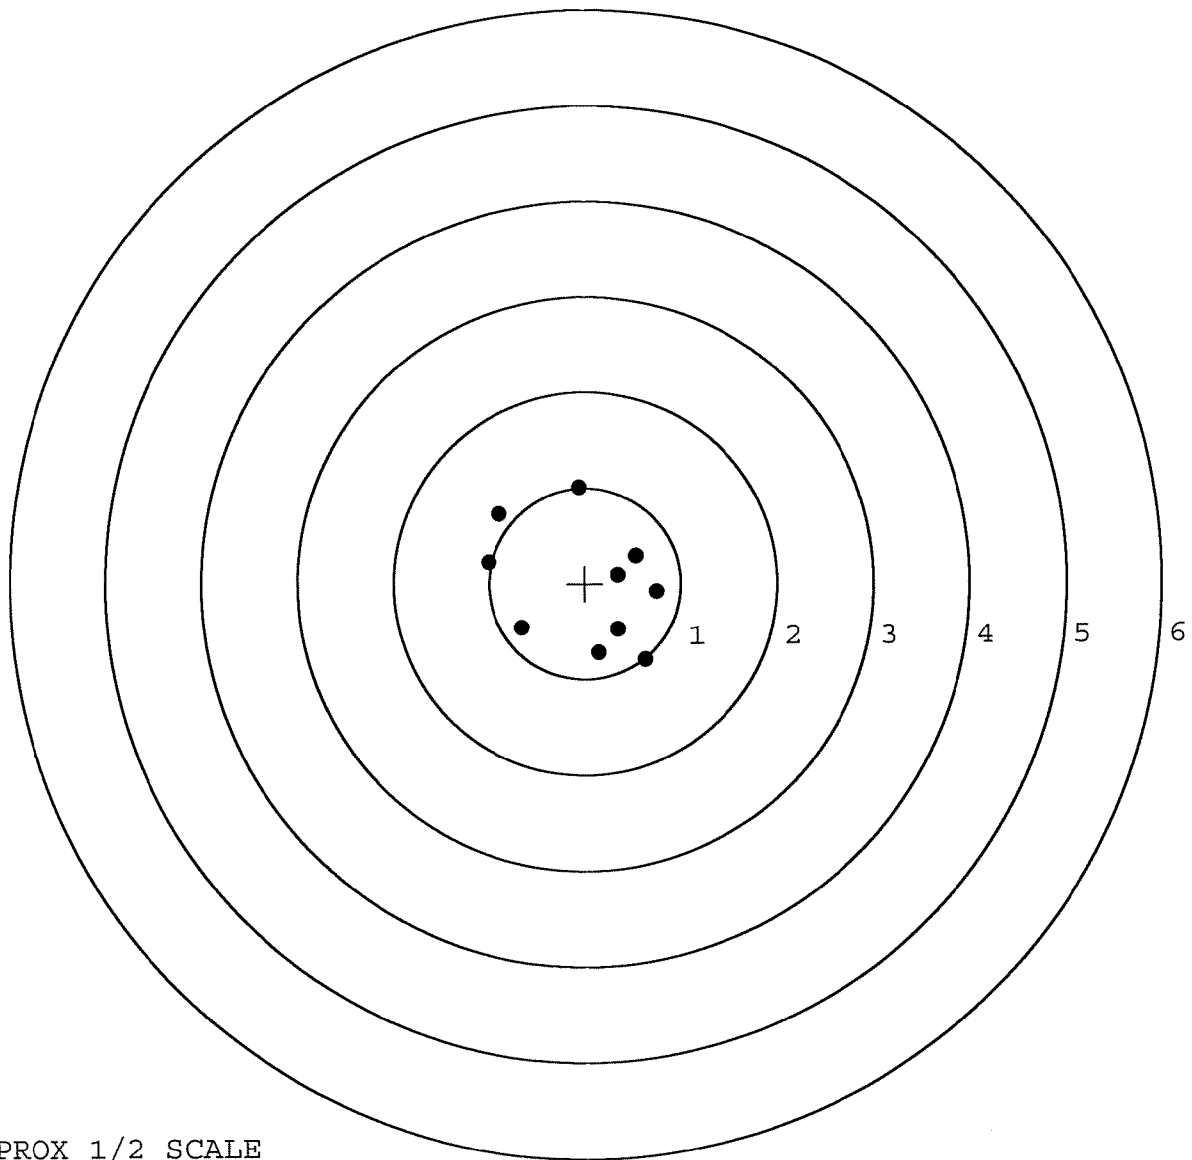


TARGET APPROX 1/2 SCALE

BARBER - M24 0163385

SERIAL NUMBER: C6225444. __0
TARGET NUMBER: 3
FILE DATE: 02/21/2002
FILE TIME: 02:34

X CENTROID: -0.274
Y CENTROID: 0.252
POA TO CENTROID: 0.372
HORZ SPREAD: 2.130
VERT SPREAD: 1.160
GROUP SPREAD: 2.205
MIN RADIUS: 0.110
MAX RADIUS: 1.169
MEAN RADIUS: 0.516
IN 1 IN DIAMETER: 6
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-1.364	0.674
2:	-0.747	0.388
3:	-0.418	-0.166
4:	-0.301	-0.390
5:	-0.330	0.347
6:	-0.098	0.174
7:	0.080	0.306
8:	-0.221	0.770
9:	0.766	0.105
10:	-0.103	0.315

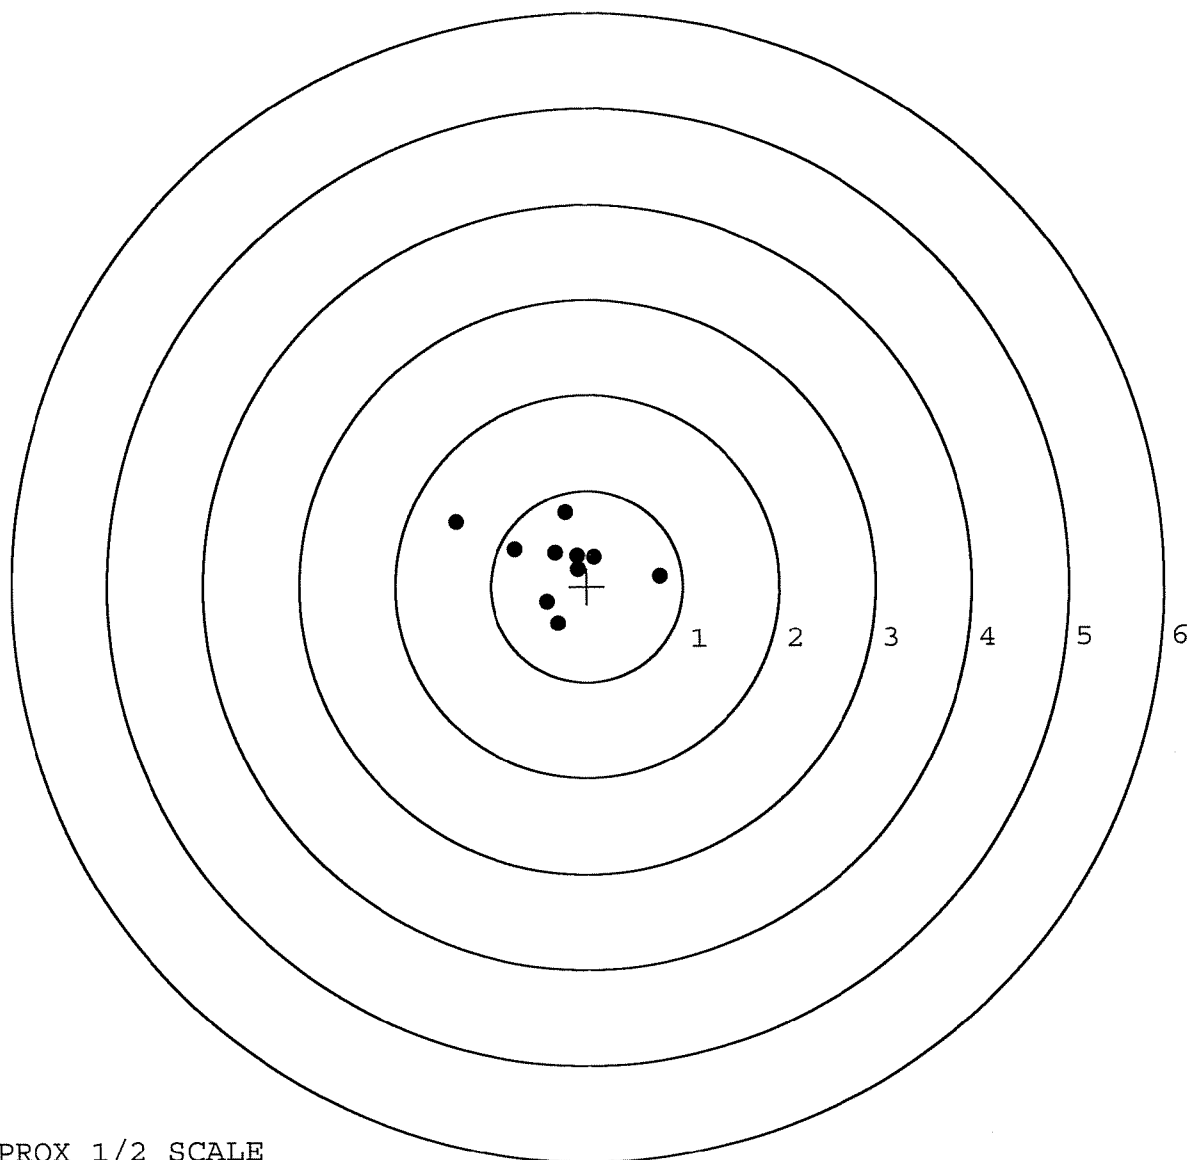


TARGET APPROX 1/2 SCALE

BARBER - M24 0163386

SERIAL NUMBER: C6225444. __0
TARGET NUMBER: 4
FILE DATE: 02/21/2002
FILE TIME: 02:34

X CENTROID: 0.029
Y CENTROID: 0.013
POA TO CENTROID: 0.032
HORZ SPREAD: 0.901
VERT SPREAD: 1.388
GROUP SPREAD: 1.613
MIN RADIUS: 0.119
MAX RADIUS: 1.050
MEAN RADIUS: 0.448
IN 1 IN DIAMETER: 7
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.409	0.242
2:	0.222	0.307
3:	0.207	-0.036
4:	-0.279	0.308
5:	-0.327	0.460
6:	-0.406	0.158
7:	-0.283	0.131
8:	0.104	-0.518
9:	0.495	-0.928
10:	0.147	0.002

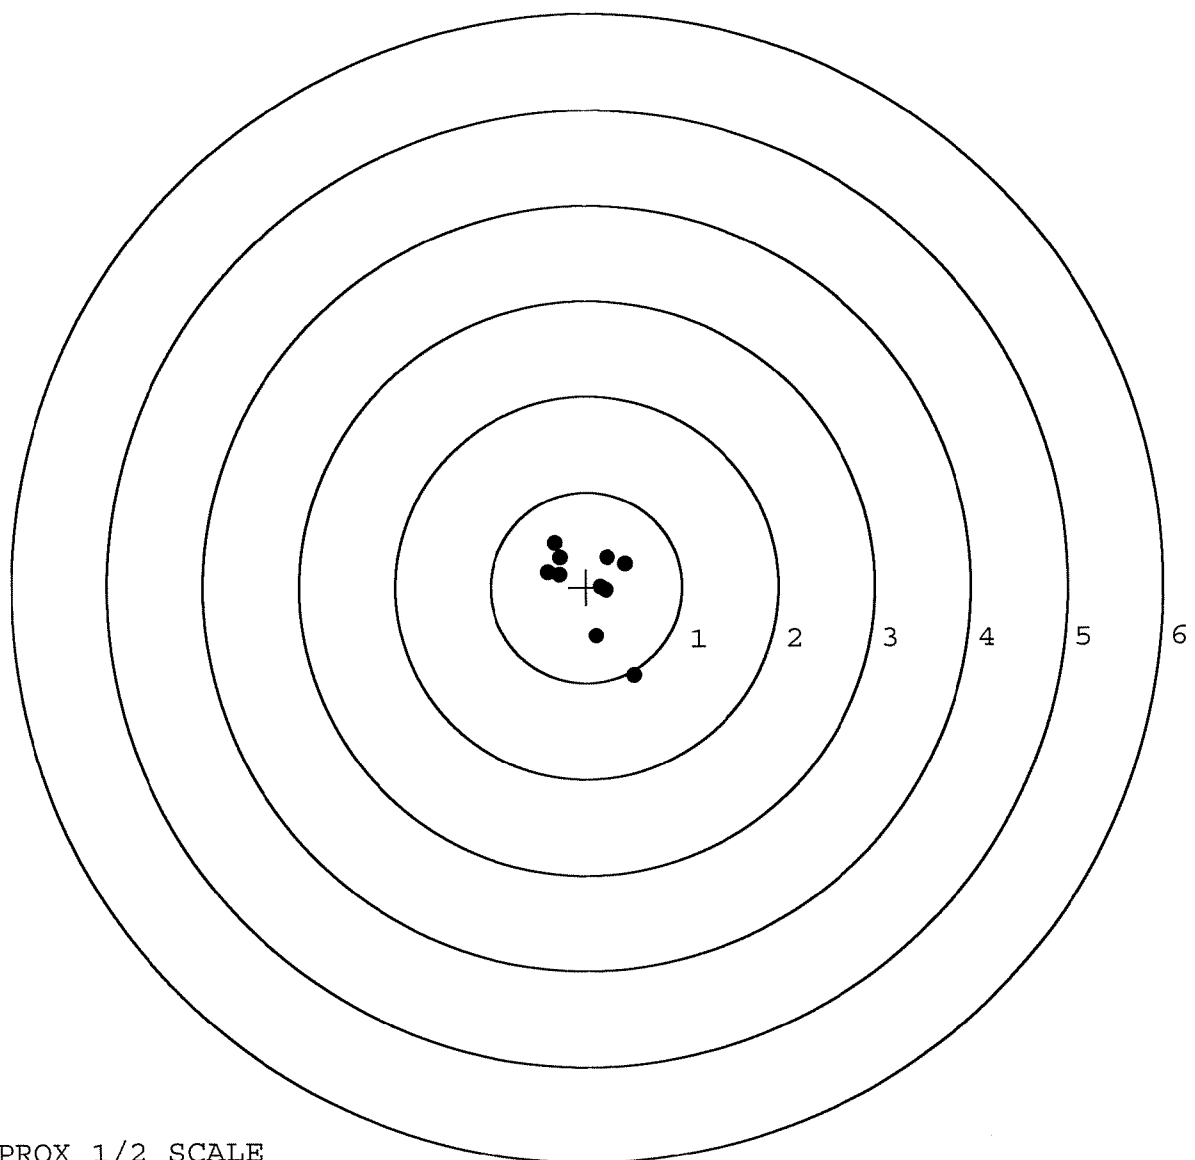


TARGET APPROX 1/2 SCALE

BARBER - M24 0163387

SERIAL NUMBER: C6225444. __0
TARGET NUMBER: 5
FILE DATE: 02/21/2002
FILE TIME: 02:34

X CENTROID: 0.080
Y CENTROID: 0.022
POA TO CENTROID: 0.083
HORZ SPREAD: 1.694
VERT SPREAD: 2.107
GROUP SPREAD: 2.157
MIN RADIUS: 0.249
MAX RADIUS: 1.367
MEAN RADIUS: 0.654
IN 1 IN DIAMETER: 5
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.463	0.653
2:	0.232	0.318
3:	-0.002	0.414
4:	-0.144	0.947
5:	0.279	-0.127
6:	0.342	-0.309
7:	1.045	-0.024
8:	-0.160	-0.163
9:	-0.649	-0.328
10:	-0.607	-1.160

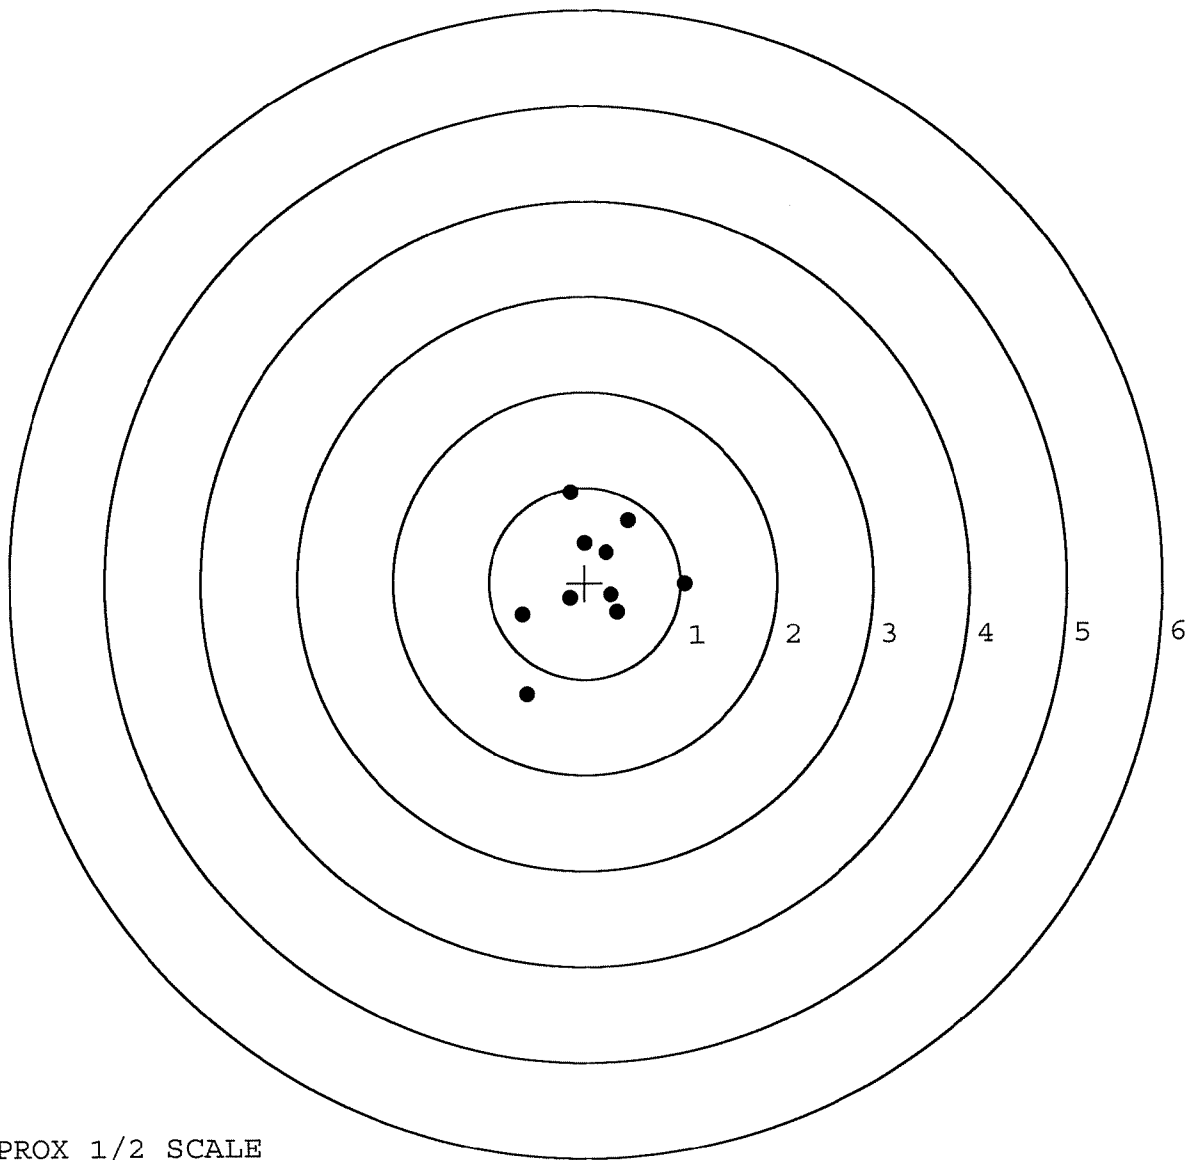

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-97-C-242

R & E NUMBER 40780

SERIAL NUMBER C6225444

LOG-IN DATE 1-4-02

INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	2-6-02	RHK
560 A	RE-BARREL AT CUSTOM SHOP	2/9/02	BWT
B	DRILL AND TAP	2/9/02	BWT
C	POLISH	2-11-02	RHK
575	ASSEMBLE	2-21-02	RHK
600	PROOF	2-11-02	RW
605	CHECK HEADSPACE	2-11-02	RW
610	DIS-ASSEMBLE GUN	2-11-02	RW
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST	2-16-02	S-H
620	APPLY COATINGS	2-20-02	TA
625 A	FINAL ASSEMBLY	2-21-02	RHK
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	2-21-02	AC
655	FINAL INSPECT	2-22-02	RHK
660	PACK	2-22-02	DA
		SHIP DATE	
		QAR INSPECTION DATE	

BARBER - M24 M24090163429

DD Form 1348-1, SEP 87

Jun 86 edition may be used.

FORM APPROVED, OMB NO. 0704-0188

DOD SINGLE LINE ITEM RELEASE/RECEIPT DOCUMENT

DATE: 03-JUN-96

MAINTENANCE REQUEST

DA FORM 5990-E

CUSTOMER DATA

UIC: WACGT0
UTIL CODE: 0

1ST BN 327TH INF

PHONE: (615)798-2807

ACTIVITY DATA

SUP WON: A601447
SUP UIC: WACKB0

A.CO.426 FSB

PHONE: 798-3255
SHOP SEC:

EQUIPMENT DATA

TYPE MNT REQ: 1

ID: A NSN:

MODEL: M24, 7.62MM

NOUN: SNIPER WEAPON SYSTEM SER NUM: C6225444

QTY: 00001

ORG WON: ACGT01606075 PRIORITY: 02

FAILURE DETECTED: 0

MI/KM: -----

HOURS: -----

ROUNDS:

IN WARRANTY:

LEVEL OF WORK: F

ADMIN NUM:

DEFICIENCY: T. I. FOR TURN-IN

PD AUTHENTICATING SIGNATURE:

William A. Buehner

SIGNATURE DATA

SUBMITTED BY: *Kevin Thompson*

ORD DATE:

MIL TIME:

ACCEPTED BY: *Day*

STATUS:

ORD DATE:

MIL TIME:

6/72
6/72

ACTION DATA

WORK STARTED BY:

STATUS:

ORD DATE:

MIL TIME:

INSPECTED BY: *[Signature]*

STATUS:

ORD DATE:

MIL TIME:

6/72
6/72

W55409617381 H242

PICKED UP BY: *[Signature]*

STATUS:

ORD DATE:

MIL TIME:

6/72

Stack

Magazine Spring - 15677

QTY RPR:

QTY CONDEMNED:

NRTS:

EVAC WON: *[Checkmark]*

EVAC UNIT NAME:

RW


8/6/96 8/16/96

KINZER V. REMINGTON

042499263431

DD Form 1348-1, SEP 87 Jun 86 edition may be used. FORM APPROVED. OMB NO. 0704-0188 DOD SINGLE LINE ITEM RELEASE/RECEIPT DOCUMENT

6

MAINTENANCE REQUEST Form, see DA PAM 738-750 and 738-751; Reporting agency is DCSLOG				PAGE NO	NO OF PAGES	REQUIREMENT CONTROL SYMBOL CSGLD-1047(R1)						
SECTION I - CUSTOMER DATA				SECTION II - MAINTENANCE ACTIVITY DATA								
1a. UIC CUSTOMER WACGTO	1b. CUSTOMER UNIT NAME HHC 1125756	1c. PHONE NO 7-621	3a. WORK ORDER NUMBER (WON) WACGTO 1125756 1947		3b. SHOP HHC 1125756	3c. PHONE NO 793 7774						
2a. SAMS-2 UIC/SAMS-I/TDA		2b. UTILIZATION CODE	2c. MCSR	4a. UIC SUPPORT UNIT		4b. SUPPORT UNIT NAME						
SECTION III - EQUIPMENT DATA												
5. TYPE MNT REQ CODE	6. ID	7. NSN 11050113402436		15a. FAILURE DETECTED DURING/WHEN DISCOVERED CODE (Enter code) See DA Pamphlets 738-750 and 738-751								
8. MODEL 2000R 2000R 2000R				15b. FIRST INDICATION OF TROUBLE/HOW RECOGNIZED CODE (Enter Code) See DA Pamphlets 738-750 and 738-751			16. MILES/KILOMETERS/HOURS/ROUNDS M K					
9. NOUN M24							H R					
10a. ORG WON/DOC NO ACGTWILL 6875			10b. EIC									
11. SERIAL NUMBER 66225444		12. QTY 1	13. PD 05	17. PROJECT CODE (if assigned)		18. ACCOUNT PROCESSING CODE		19. IN WARRANTY? (enter Y or N)	20. ADMIN NO			
14. MALFUNCTION DESCRIPTION (for DSU, GSUI/AVIM, DEPOT use) 2000R 2000R 2000R				21. REIMBURSABLE CUSTOMER (if Intransit customer enter Y or N)								
				22. LEVEL OF WORK		23. SIGNATURE [Signature]						
24. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURES IN EQUIPMENT TM (Do not prescribe repairs) [Handwritten text]												
25. REMARKS [Handwritten text]												
26. TECHNICAL REFERENCES												
SECTION IV - TASK REQUIREMENTS DATA												
27a. FILE INPUT ACT CD	27b. TASK NO	27c. ACT CODE	27d. TASK DESCRIPTION		27e. QTY TO BE RPR	27f. WORK CENTER	27g. FAILURE CODE	27h. MH PROJ	27i. MH EXP			
	401	F	M24		10	ARM 7			0.5			
SECTION V - PART REQUIREMENTS												
28a. FILE INPUT ACT CD	28b. TASK NO	28c. ID NO	28d. NSN OR PART NUMBER		28e. SFX CD	28f. QTY RQD	28g. QTY ISSUED	28h. NMCS CD	28i. FAILURE CODE	28j. STORAGE LOCATION	28k. INITIALS	28l. COST \$
					INSPECTED BY: SGT ABSHER DOUGLAS Bco 426 FSB CONDITION CODE: F IAW AR 725-50 & 750-1							
28m. TOTAL MANHOURS			28n. TOTAL MANHOURS COSTS \$			28o. TOTAL PARTS COSTS \$						
SECTION VI - COMPLETION DATA												
29. QTY RPR		30. QTY CONDEMN		31. QTY NRTS	32. EVAC WON			33. EVAC UNIT NAME				
SECTION VII - ACTION SIGNATURES												
34a. SUBMITTED BY		35a. ACCEPTED BY		35c. DATE		36a. WORK STARTED BY		37a. INSPECTED BY		38a. PICKED UP BY		
[Signature]		[Signature]		6/17/77		[Signature]		[Signature] A729		[Signature]		
34b. DATE	35b. STATUS	35d. TIME	36b. STATUS	36c. DATE	36d. TIME	37b. STATUS	37c. DATE	37d. TIME	38b. STATUS	38c. DATE	38d. TIME	
	A		B			B	6/17/77		U	6/17/77		

SHIPPER:	CONSIGNEE: <i>ILION, N.Y.</i>
DESCRIPTION:	GBL NUMBER: <i>G-6578652</i>
ROUTE:	<i>W34XC560930500XXX</i>
<u>NOTICE:</u> HAND TO HAND SIGNATURE SERVICE IS REQUIRED FROM THE TIME THE SHIPMENT LEAVES THE HANDS OF THE CONSIGNOR UNTIL ITS DELIVERY TO THE CONSIGNEE.	
I, the undersigned, have handled (physically or otherwise) the shipment described above:	

BAGGETT TRANSPORTATION COMPANY
BIRMINGHAM, ALA

16. CUSTODY RECORD (Continued)

[illegible]

SIGNATURE AND TALLY RECORD

FORM APPROVED
OMB No. 0702-0027
Expires Oct 31, 1988

DISTRIBUTION INSTRUCTIONS

- * The SHIPPER will prepare copies 1 through 4, retain copy 4 and deliver copies 1 through 3 to the Origin Carrier.
- * The CARRIER will deliver copies 1 through 3 to the Destination Carrier.
- * The DESTINATION CARRIER will attach copy 1 (reflecting all signatures) and Standard Form 1113 (Public Voucher for Transportation Charges) to the original Government Bill of Lading, and forward for payment. Copy 2 will be delivered to the Consignee. Copy 3 will be retained.
- * The CONSIGNEE will ensure Destination Carrier surrenders copy 2.

SECTION A - To be completed by the SHIPPER

1. SHIPPER		2. PROTECTIVE SERVICE REQUESTED	
a. NAME FORT CAMPBELL KY W34GNA		DN DUAL DRIVER PROTECTIVE SERVICE WITH NAC SM DTTTS SATELLITE MOTOR SURVEILLANCE SERVICE	
b. ORIGIN TRANSPORTATION OFFICER FORT CAMPBELL KY ATTN: AFZB-DL-TO, BLDG 873 FORT CAMPBELL, KY 42223-1294		3. GBL OR CBL NUMBER G-6578652	
4. CONSIGNEE		5. PERMIT NUMBER (if any)	
a. NAME REMINGTON ARMS CO CMAH2W			
b. DESTINATION REMINGTON ARMS CO., INC. 14 HOEFLER AVENUE ILION, NY 13357		6. TRANSPORTATION CONTROL NUMBER (FAAT-88-6180007 -01) W34XC560930500XXX	
7. ROUTING BAGGETT TRANSPORTATION CO		8. WEIGHT 140 POUNDS	9. CUBE 14.0
10. SPECIAL INSTRUCTIONS		11. DATE SHIPMENT TENDERED TO CARRIER 96.07.03	12. NAME OF CARRIER BAGT
13. NUMBER OF PIECES 2	14. TYPE OF PACKAGE(S) (For unsealed loads only) OR CONVEYANCE IDENTIFICATION & SEAL NUMBERS (for sealed loads only) BAGT-TRL #2507 X0790372 0789164	15. FREIGHT CLASSIFICATION DESCRIPTION 146230 GUNS, MACHINE, OR PARTS, NOI, FOR USE OF SMALL ARMS AMMUNITITON, IN BOXES	

SECTION B - To be completed by each person accepting custody of classified or protected material requiring the use of transportation protective service during transit.

16. CUSTODY RECORD				
a. PRINT NAME OF PERSON AND COMPANY REPRESENTED	b. STATION INTERCHANGE POINT DESTINATION	c. SIGNATURE OF PERSON ACCEPTING CUSTODY	d. TIME ACCEPTED	e. DATE ACCEPTED
BAGGETT WILLIE H. JONES	FORT CAMPBELL KY	<i>Willie H. Jones</i>	13:00	7-3-96
BAGT MARIE L JONES	FORT CAMPBELL KY	<i>Marie L Jones</i>	13:00	7-3-96
R HALL	Oxford, AL	<i>R Hall</i>	15:30	7/4/96
A Land	Oxford, AL	<i>A Land</i>	2300	7/4/96
T HARRIS	OXFORD AL	<i>T Harris</i>	0700	7-5-96
R Hall	Oxford, AL	<i>R Hall</i>	1525	7/5/96
A Land	Oxford, AL	<i>A Land</i>	2310	7/5/96
L Sizemore	Oxford, AL	<i>L Sizemore</i>	0700	7/6/96
R Hall	Oxford, AL	<i>R Hall</i>	1500	7/6/96
A Land	Oxford, AL	<i>A Land</i>	2305	7/6/96

DD FORM 1907, FEB 86

Previous editions are obsolete

PAGE 1

Consignee - Copy 2

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0163398

U.S. GOVERNMENT FREIGHT WAYBILL										ORIGINAL		B/L NO. G-6578652					
1. TRANSPORTATION ORDER NO. BARBER - M24 0163399				2. SCAC BAGT		3. DATE B/L PREPARED 96.07.03		4. ROUTE ORDER/RELEASE NUMBER 7YBAADRAPA									
5. DESTINATION (Name, address and ZIP code) REMINGTON ARMS CO., INC. 14 HOEFLER AVENUE ILION, NY 13357				6. SPLC (Dest.) 172856000		8. ORIGIN TRANSPORTATION OFFICER FORT CAMPBELL KY ATTN: AFZB-DL-TO, BLDG 873 FORT CAMPBELL, KY 42223-1294		STATE									
9. CONSIGNEE (Name, address and ZIP code of installation) REMINGTON ARMS CO., INC. 14 HOEFLER AVENUE ILION, NY 13357				7. SPLC (Orig.) 297980251		10. GBLOC (Cons.) IOOI CMAH2W		11. SHIPPER (Name, address and ZIP code) TRANSPORTATION OFFICER FORT CAMPBELL KY ATTN: AFZB-DL-TO, BLDG 873 FORT CAMPBELL, KY 42223-1294									
12. APPROPRIATION CHARGEABLE 216202000000762020420000000002217000000GBLG6578652 000FAAD00015056						13. BILL CHARGES TO (Dept./agency, bureau/office mailing address and ZIP code) DEFENSE FINANCE AND ACCOUNTING SVC INDIANAPOLIS CENTER TRANSPORTATION OPS. (DFAS-I-THA) INDIANAPOLIS, IN 46249-0611											
14. VIA (Route shipment when advantageous to the Government)						AGENCY LOC CODE W53QRD											
15. MARKS AND ANNOTATIONS																	
EQUIPMENT 1 DN: DUAL DRIVER PROTECTIVE SERVICE WIT SM: DTTS SATELLITE MOTOR SURVEILLANCE SO: STOP-OFF IN TRANSIT SO: STOP-OFF IN TRANSIT (114) CARRIER TO NOTIFY CONSIGNEE REMINGTON ARMY'S (DUTY PHONE (315)						TP:3 DDD:96.07.07 FAAT-88-6180007-01 894-9661 AV- , NON-DUTY PHONE (205) 235-7501) AND CONSIGNOR TRANSPORTATION OFFICE (DUTY PHONE (502) 798-7154 AV-635-7154, NON-DUTY PHONE (502) 798-9793) IMMEDIATELY IF SHIPMENT IS DELAYED EN ROUTE BECAUSE OF AN SEE DESCRIPTION OF ARTICLES											
16. PACKAGES		17. HM		18. DESCRIPTION OF ARTICLES AND EXCEPTIONS		COMMODITY CODE NO.		19. WEIGHT* (Pounds only)		FOR USE OF BILLING CARRIER ONLY							
NO.	KIND									Services	Rate	Charges					
				CLASSIFICATION ITEM NO. 146230		THIS BL CONSISTS OF 4 PAGES											
				GUNS, MACHINE, OR PARTS, NOI, FOR USE OF SMALL ARMS AMMUNITITON, IN BOXES													
9	MX			TOT QTY:3090 P CU:314.0 SHIP AS-> SEE CONTINUATION SHEET FOR DETAILS				5000	TOTAL CHARGES								
20. TARIFF/SPECIAL RATE AUTHORITY BAGT 546 -00				21. PICKUP SERV. FURNISHED ☐ YES VEHICLE FULLY LOADED ☐ YES				SHIPPER'S INITIALS		22. CARRIER WAY/FREIGHT BILL NO. AND DATE							
23. STOP THIS SHIPMENT AT SEE CONTINUATION SHEET FOR:				24. FURNISH INFORMATION ON CAR/TRUCKLOAD/CONTAINER SHIPMENTS													
				INITIALS & NO.		SEAL NUMBERS		LENGTH/CUBE		MARKED CAPACITY		DATE FURNISHED					
				BAGT:TRL #2507		0790372		ORDERED FURNISHED		ORDERED AV2 FURNISHED AV3		96.07.03					
				APPLIED BY: SH													
25. CARRIER'S PICKUP DATE (Year, month, & day) 96.07.03				26a. SIGNATURE OF AGENT BILL JONES				26b. PER BAGT		B/L NUMBER G-6578652							
27. MODE B		28. ESTIMATE 2183		29. NO. OF CLS/TLS 1		30. TYPE RATE 1		31. PSC DN:SM		32. REASON							
										WEIGHED AT							
										GROSS TARE ALLOWANCE NET							
FOR USE OF ISSUING OFFICE										OUTBOUND JUNCTION AGENT — Show junction stamps in space and order provided. Additional junction stamps and all yard stamps to be placed on back hereof.							
33a. ISSUING OFFICE (Name and complete address) TRANSPORTATION OFFICER FORT CAMPBELL KY ATTN: AFZB-DL-TO, BLDG 873 FORT CAMPBELL, KY 42223-1294										33b. GBLOC FAAT		FIRST JUNCTION		SECOND JUNCTION		THIRD JUNCTION	
33c. ISSUING OFFICER MICHAEL F. BOWERS, CHIEF, ITO																	
33d. CONTRACT/PURCHASE ORDER NO. OR OTHER AUTHORITY										33e. DATED		FOURTH JUNCTION		FIFTH JUNCTION		DESTINATION AGENT (Stamp herein station name and date reported)	
33f. FOB POINT NAMED IN CONTRACT																	

*Show also cubic measurements for shipments via air, truck or water carrier in cases where required.

1105-121-01

WHITE

STANDARD FORM 1105 (REV. 4-85)
PRESCRIBED BY GSA, FPMR(41 CFR) 101-41.3

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0163399 63438

U.S. GOVERNMENT FREIGHT WAYBILL CONTINUATION SHEET

ORIGINAL

B/L NO. **G-65,8652**
SHEET NO. **2 OF 4**

(This form is to be used as a continuation sheet for SF 1105, U.S. Government Freight Waybill-Original, or SF 1205, U.S. Government Freight Waybill- Privately Owned Personal Property-Original.)

ISSUING OFFICE (Name and complete address)

TRANSPORTATION OFFICER
FORT CAMPBELL KY
ATTN: AFZB-DL-TO, BLDG 873
FORT CAMPBELL, KY 42223-1294

TRANSPORTATION COMPANY TENDERED TO

BAGGETT TRANSPORTATION CO

FROM(Shipping Point)

W34GNA
297980251

WAYBILL DATE

WAYBILL NUMBER

PACKAGES		HM	DESCRIPTION OF ARTICLES (Use carrier's classification or tariff description if possible; otherwise use a clear nontechnical description.)	WEIGHT* (Pounds only)	FOR USE OF BILLING CARRIER ONLY		
NO.	KIND				SERVICES	RATE	CHARGES
			STOP-OFF: 01 (UNLOADING)				
			TRANSPORTATION OFFICER LETTERKENNY ARMY DEPOT ATTN: DDLP-TS CHAMBERSBURG, PA 17201-4150 SPLC: 209770250				
1	PT		TCN: W34QVB61500599XXX CU:35.0 FAAD SIGHT, OPTICAL GUIDE NSN: 1440-01-271-7428	400			
1	PT		TCN: W34QS260660521XXX CU:41.0 FAAD SIGHT, OPTICAL, GUIDE NSN: 1440-01-271-7428	250			
2	PT		STOP-OFF 01 TOTALS (UNLOADING)CU:76.0	650			
			RECEIVED BY: _____ DATE.....: _____				

*Show also cubic measurements for shipments via air, truck or water carrier in cases where required.

1111-114

WHITE

STANDARD FORM 1111, (REV. 4-85)
PRESCRIBED BY GSA, FPMR(41 CFR) 101-41.3

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 042400163439

U.S. GOVERNMENT FREIGHT WAYBILL CONTINUATION SHEET

ORIGINAL

B/L NO. **G-6** 52
SHEET NO. **3 OF 4**

(This form is to be used as a continuation sheet for SF 1105, U.S. Government Freight Waybill-Original, or SF 1205, U.S. Government Freight Waybill- Privately Owned Personal Property-Original.)

ISSUING OFFICE (Name and complete address)

TRANSPORTATION OFFICER
FORT CAMPBELL KY
ATTN: AFZB-DL-TO, BLDG 873
FORT CAMPBELL, KY 42223-1294

TRANSPORTATION COMPANY TENDERED TO

BAGGETT TRANSPORTATION CO

FROM(Shipping Point)

W34GNA
297980251

WAYBILL DATE

WAYBILL NUMBER

PACKAGES		HM	DESCRIPTION OF ARTICLES (Use carrier's classification or tariff description if possible; otherwise use a clear nontechnical description.)	WEIGHT* (Pounds only)	FOR USE OF BILLING CARRIER ONLY		
NO.	KIND				SERVICES	RATE	CHARGES
			STOP-OFF: 02 (UNLOADING)				
			TRANSPORTATION OFFICER DEF DISTRIBUTION DEPOT TOBYHANNA 11 MIDWAY ROAD TOBYHANNA, PA 18466-5092 SPLC: 202230250				
1	PT		TCN: W34XC561566785XXX CU:60.0 FAAD IA Z-AHQ/TSC F/KY 58 NSN: 5810-01-026-9624	650			
1	PT		TCN: W34QS160873105XXX CU:35.0 FAAD NIGHT VIS G AN/PVS-5C NSN: 5855-01-228-0936	575			
1	PT		TCN: W81LDF60951108XXX CU:44.0 FAAD TRANSMITTER, COUNTER NSN: 5865-01-323-4999	325			
1	PT		TCN: W36Q2K60860019XXX CU:50.0 FAAD NSN: 5810-01-293-1348	300			
1	PT		TCN: W34QUD61163609XXX CU:35.0 FAAD CRYPTOGRAPHIC SPEECH	450			
5	PT		STOP-OFF 02 TOTALS (UNLOADING)CU:224.0	2300			
			RECEIVED BY: _____ DATE.....: _____				

*Show also cubic measurements for shipments via air, truck or water carrier in cases where required.

1111-114

WHITE

STANDARD FORM 1111, (REV. 4-85)
PRESCRIBED BY GSA, FPMR(41 CFR) 101-41.3

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 042400163440

U.S. GOVERNMENT FREIGHT WAYBILL CONTINUATION SHEET

ORIGINAL

B/L NO. **G-6578652**
SHEET NO. **4 OF 4**

(This form is to be used as a continuation sheet for SF 1105, U.S. Government Freight Waybill-Original, or SF 1205, U.S. Government Freight Waybill- Privately Owned Personal Property-Original.)

ISSUING OFFICE (Name and complete address)

TRANSPORTATION OFFICER
FORT CAMPBELL KY
ATTN: AFZB-DL-TO, BLDG 873
FORT CAMPBELL, KY 42223-1294

TRANSPORTATION COMPANY TENDERED TO

BAGGETT TRANSPORTATION CO

FROM (Shipping Point)

W34GNA
297980251

WAYBILL DATE

WAYBILL NUMBER

PACKAGES		HM	DESCRIPTION OF ARTICLES (Use carrier's classification or tariff description if possible; otherwise use a clear nontechnical description.)	WEIGHT* (Pounds only)	FOR USE OF BILLING CARRIER ONLY		
NO.	KIND				SERVICES	RATE	CHARGES
			FINAL DESTINATION (UNLOADING)				
			REMINGTON ARMS CO., INC. 14 HOEFLER AVENUE ILION, NY 13357 SPLC: 172856000				
1	BX		TCN: W34XC560930500XXX CU:7.0 FAAD RIFLE, M24 SWS, SN: C6225599 NSN: 1005-01-240-2136	70			
1	BX		TCN: W34XC561840500XXX CU:7.0 FAAD RIFLE NSN: 1005-01-240-2136	70			
2	BX		FINAL DEST TOTALS (UNLOADING) CU:14.0	140			
=====							
			MARKS & ANNOTATIONS:				
			ACCIDENT OR INCIDENT. IF NEITHER CAN BE REACHED, CONTACT EASTERN AREA AT HOTLINE (800) 524-0331. USE HOTLINE NUMBER TO OBTAIN SAFE HAVEN OR REFUGE INSTRUCTIONS IN THE EVENT OF A CIVIL DISORDER, NATURAL DISASTER, CARRIER STRIKE OR OTHER EMERGENCY.				
			THIS IS A DTTS SHIPMENT!				
=====							
			BLOCK 24 EQUIPMENT DESCRIPTION CONT.:				
			TRACTOR: 155				

*Show also cubic measurements for shipments via air,
truck or water carrier in cases where required.

1111-114

WHITE

STANDARD FORM 1111, (REV. 4-85)
PRESCRIBED BY GSA, FPMR(41 CFR) 101-41.3

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 042400163441

MILITARY SHIPMENT LABEL		Form Approved. OMB No. 0704-0188	
1. TRANSPORTATION CONTROL NUMBER W34XC5 6093 0500 XXX GBL #G6578652		2. POSTAGE DATA	
3. FROM TRANSPORTATION OFFICE FORT CAMPBELL KY 42223		4. TYPE SERVICE	
5. SHIP TO/POE REMINGTON ARMS CO INC. 14 HOFELER AVE ILION NY 13357		6. TRANS PRIORITY	
7. POD		8. PROJECT	
9. ULTIMATE CONSIGNEE OR MARK FOR	10. WT. (This piece) 70	11. RDD	
	12. CUBE (This Piece)	13. CHARGES	
	14. DATE SHIPPED	15. FMS CASE NUMBER	
	16. PIECE NUMBER 1		
	17. TOTAL PIECES 1		

DD Form 1387, NOV 86

Previous editions are obsolete.

Final Inspection

Sn: C6225444

DATE REC'D: 7/15/96

DATE RET'D:

Auditor: AW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☐ FINISH

Scope Assy.

☐ Scope☐ Scope Rings☐ Mounting Screws☐ Mounting Base☐ Screws☐ Finish☐ Looseness☐ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ Scope Case☐ Iron SIGHTS☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments:

Remington®
REG. U.S. PAT. & TM. OFF.

DUPONT

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700™ M24


SERIAL NO. C6225444

ORDER NO. 5716

MADE IN ILION, N.Y., U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

Ø1

5716 C6225444



CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225444

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	4 21	89	RW
600	Proof	4 21	89	RW
607	Check Headspace	4 21	89	RW
610	Dis-assemble Gun	4 21	89	RW
612	Magnaflux Barrel Action		4/26	KCR
	Magnaflux Bolt		4/27	KCR
615	Rollmark Caliber		4/27	GS
617	Drill and Tap Sight Holes	4 27	89	JB
618	Polish Barrel RB	4 27	89	BT
620	Apply Coatings (Barrel Action)		5-8-89	TA
	Apply Coating (Bolt)		5-8-89	TA
625	Final Assembly A) Clean inside of Bolt Assembly		5/17/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		5/17/89	RW
	C) Inspect Ejector Hole for Chamfer		5/17/89	RW
	D) Oil Firing Pin Ass'y		5/17/89	RW
	E) Adjust Trigger Pull to Min Setting and Stake		5/23/89	GS

op. #	BARBER - M24 0163407	READINGS					DATE	INIT
	OP. NAME							
625 cont.	F) Safety On Force	5	5	4 3/4			5/23/89	WLB
	G) Safety Off Force	3 1/4	3 1/4	3 1/4			5/23/89	WLB
	H) Trigger Pull Test & Retainability						5/23/89	WLB
	I) Firing Pin Indent	.0207	.0207	.0205			5/23/89	WLB
	J) Assemble Stock						5/24/89	RW
	K) Assemble Swivel Studs						5/24/89	JS
	L) Attach Front and Rear Sight Assemblies						5/24/89	RW
	M) Iron Sight Alignment						5/24/89	RW
	N) Detach Front & Rear Sights & place in numbered container						5/24/89	RW
	O) Attach Scope to Rifle						5/24/89	JM
	P) Detach & Attach Scope 20 Times						5/24/89	JM
640	Gallery Target & Test	42R	111L				5-25-89	AC
	A) Time						"	AC
	B) Malfunctions						"	AC
	C) Pierced Primers						"	AC
	D) Optical Clarity of Scope						"	AC
645	Inspect for Live Ammo						5-25-89	AC
655	Final Inspection							
	A) Headspace						30 May 89	JS
	B) Trigger Pull	2.49	2.48	2.43	2.45	2.46	30 May 89	JS
	C) Function						30 May 89	JS
660	Pack						26 June 89	JS

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6225444DATE 4-6-90TESTER DH

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.49	2.40	2.58	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.47	2.50	2.56	
PULL #3	2.49	2.41	2.54	
PULL #4	2.50	2.30	2.46	
PULL #5	2.50	2.50	2.49	
TOTAL	12.45	12.11	12.63	
AVG.	2.49	2.42	2.52	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.28	3.19	
PULL #2	3.23	3.20	
PULL #3	3.30	3.24	
PULL #4	3.24	3.00	
PULL #5	3.35	3.22	
TOTAL	16.40	15.85	
AVG.	3.28	3.17	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.23	4.15		
PULL #2	4.05	4.18		
PULL #3	4.04	4.11		
PULL #4	4.04	4.22		
PULL #5	4.03	4.19		
TOTAL	20.39	20.85		
AVG.	4.07	4.17		

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225444
25 May 1989

CENTROIDAL DISTANCES

Ø TO	1	.200584
1 TO	2	.491424
1 TO	3	.408649
1 TO	4	.336216
1 TO	5	.599921

50
lt <----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.3528
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .2772
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .448673

THE AMR FOR THIS RIFLE IS: .8676

25 May 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6225444

CENTERFIRE PATTERNS # 1

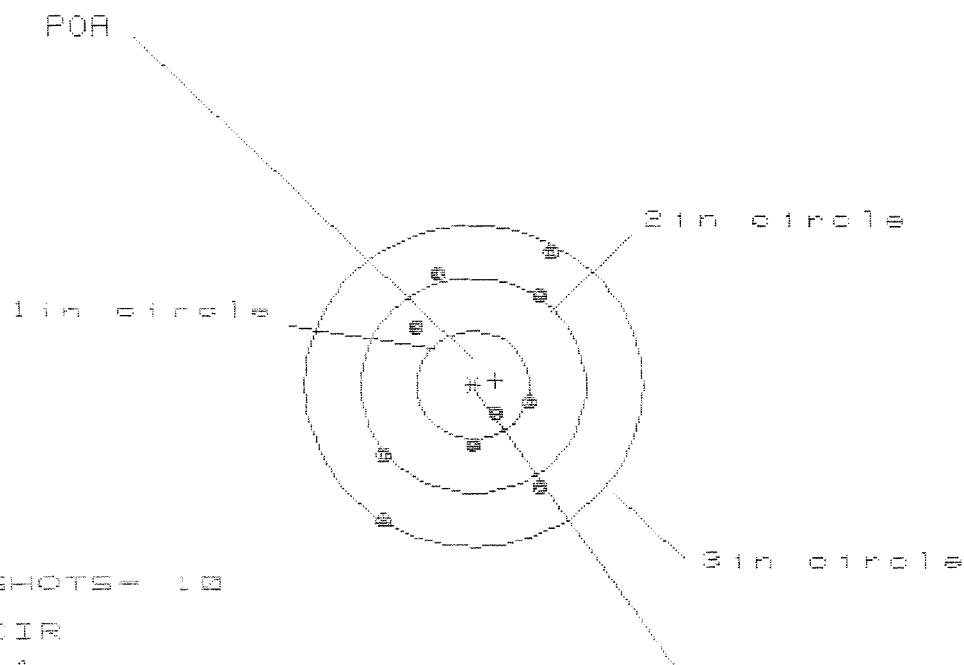

OF SHOTS = 10

IN CIR

1 in = 1

2 in = 4

3 in = 10

HS = 1.504

VS = 2.465

GS = 2.888

CENTROID #

PATTERN #


1

SHOTS (BEST OF)	10	9	8
MAXIMUM X	.665	.572	.575
MINIMUM X	-.839	-.925	-.854
MAXIMUM Y	1.240	1.104	1.083
MINIMUM Y	-1.225	-1.077	-.939
CENTROID X	-.195	-.102	-.173
CENTROID Y	-.047	.089	-.049
POA TO CENTROID in.	.200	.135	.180
MIN RADIUS	.287	.367	.272
MEAN RADIUS	.933	.871	.802
MAX RADIUS	1.485	1.243	1.144
HORIZONTAL SPREAD	1.504	1.497	1.429
VERTICAL SPREAD	2.465	2.181	2.022
EXTREME SPREAD	2.888	2.393	2.212
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	10		

25 May 1989

FILE:/PATTERNING/CENTERFIRE_PATT/06225444

CENTERFIRE PATTERNS # 2

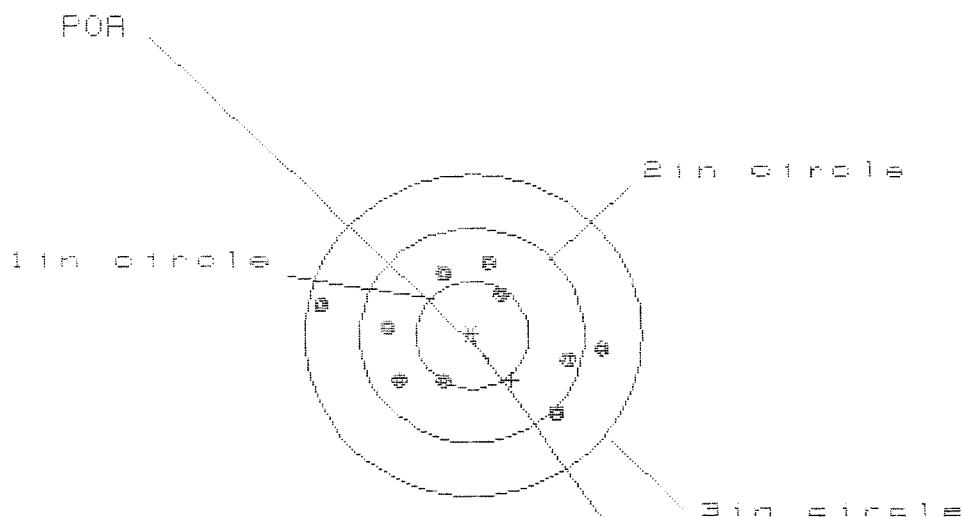

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 7

3 in = 10

HE= 2.461

VS= 1.434

GS= 2.493


CENTROID *

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.156	1.011	.832
MINIMUM X	:	-1.305	-.861	-.735
MAXIMUM Y	:	.710	.736	.719
MINIMUM Y	:	-.725	-.698	-.715
CENTROID X	:	-.348	-.203	-.329
CENTROID Y	:	.420	.393	.410
POA TO CENTROID in.	:	.545	.442	.526
MIN RADIUS	:	.442	.423	.442
MEAN RADIUS	:	.811	.753	.704
MAX RADIUS	:	1.327	1.020	1.018
HORIZONTAL SPREAD	:	2.461	1.872	1.567
VERTICAL SPREAD	:	1.434	1.434	1.434
EXTREME SPREAD	:	2.493	1.882	1.644
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		10	

25 May 1989

FILE:/PATTERNING/CENTERFIRE_PATT/06225444

CENTERFIRE PATTERNS # 3

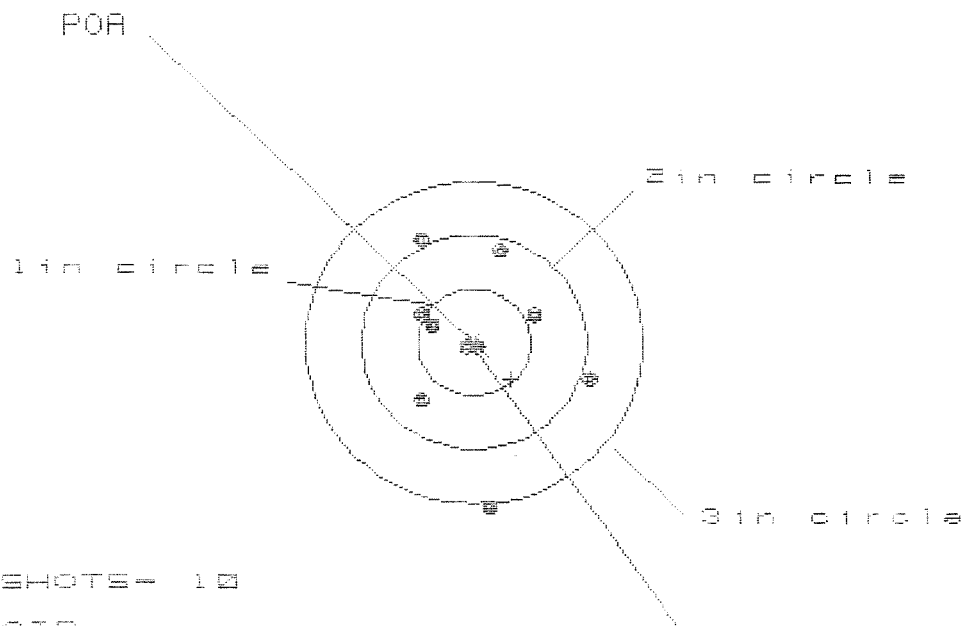

OF SHOTS= 10

IN CIR

1 in = 3

2 in = 7

3 in = 9

HS= 1.542

VS= 2.544

GS= 2.600


CENTROID *

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.027	1.037	.982
MINIMUM X	-.515	-.505	-.560
MAXIMUM Y	.999	.828	.819
MINIMUM Y	-1.545	-.662	-.559
CENTROID X	-.332	-.342	-.287
CENTROID Y	.338	.509	.406
POA TO CENTROID in.	.474	.613	.497
MIN RADIUS	.047	.218	.125
MEAN RADIUS	.701	.613	.560
MAX RADIUS	1.547	1.159	1.066
HORIZONTAL SPREAD	1.542	1.542	1.542
VERTICAL SPREAD	2.544	1.490	1.378
EXTREME SPREAD	2.600	1.997	1.587
NUMBER IN ONE INCH CIRCLE =	3		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	9		

25 May 1989

FILE:/PATTERNING/CENTERFIRE_PATT/06225444

CENTERFIRE PATTERNS # 4

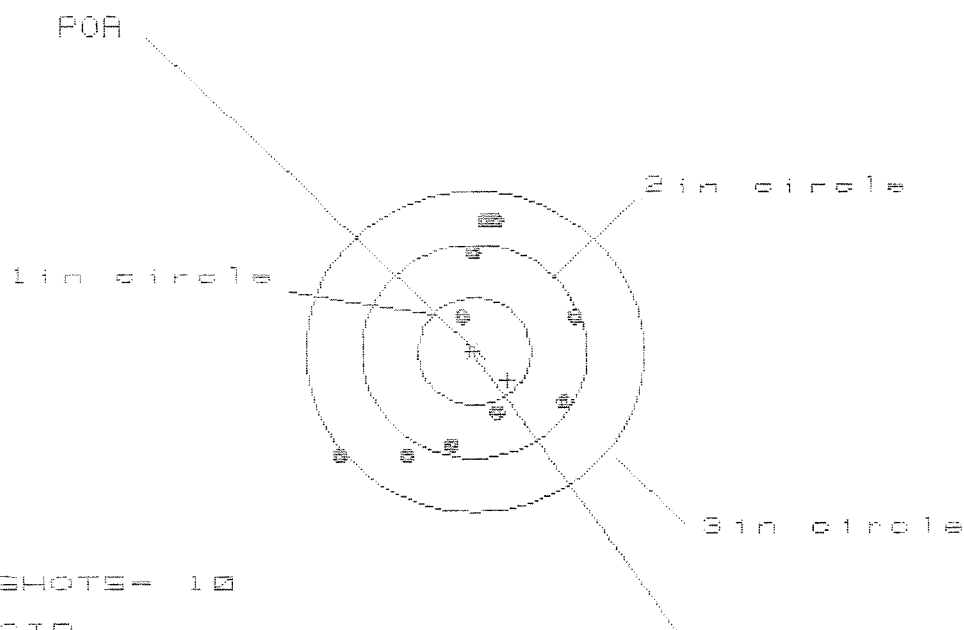

OF SHOTS = 10

IN CIR

1 in = 1

2 in = 6

3 in = 3

HS = 2.032

VS = 2.270

GS = 2.562


CENTROID #

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.856	.726	.719
MINIMUM X	-1.176	-.726	-.733
MAXIMUM Y	1.252	1.143	1.238
MINIMUM Y	-1.018	-1.127	-.984
CENTROID X	-.295	-.165	-.158
CENTROID Y	.274	.383	.240
POA TO CENTROID in.	.403	.417	.287
MIN RADIUS	.325	.309	.419
MEAN RADIUS	.974	.895	.858
MAX RADIUS	1.532	1.340	1.229
HORIZONTAL SPREAD	2.032	1.452	1.452
VERTICAL SPREAD	2.270	2.270	2.212
EXTREME SPREAD	2.562	2.367	2.342
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	9		

25 May 1989

FILE:/PATTERNING/CENTERFIRE_PATT/08225444

CENTERFIRE PATTERNS # 5

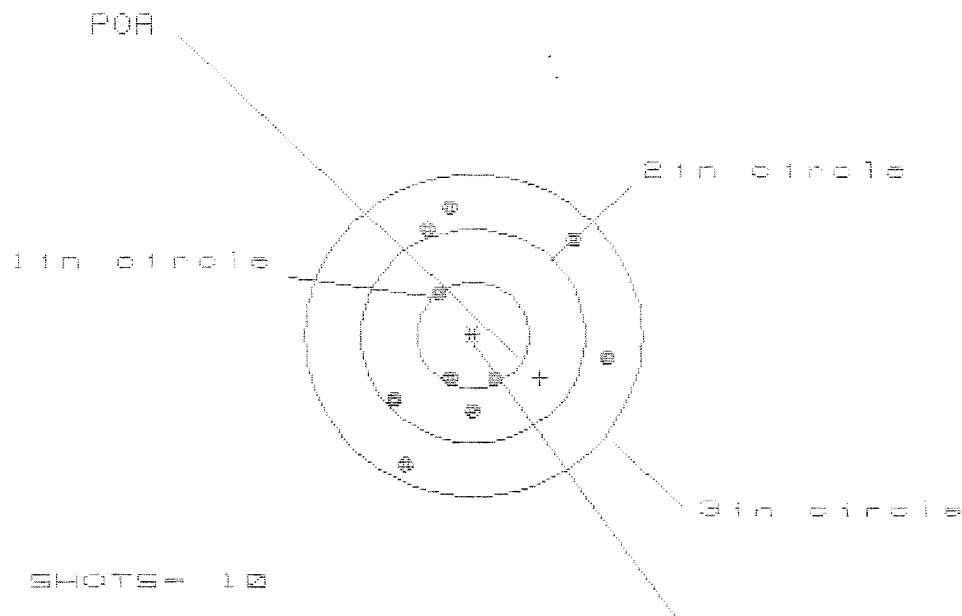

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 5

3 in = 10

HS= 1.853

VS= 2.418

GS= 2.552

CENTROID *

PATTERN #	5	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.180	1.114	1.223
MINIMUM X	-.672	-.739	-.630
MAXIMUM Y	1.236	1.105	1.195
MINIMUM Y	-1.182	-.860	-.770
CENTROID X	-.594	-.527	-.636
CENTROID Y	.401	.532	.442
POA TO CENTROID in.	.716	.749	.775
MIN RADIUS	.442	.481	.465
MEAN RADIUS	.919	.883	.826
MAX RADIUS	1.326	1.174	1.255
HORIZONTAL SPREAD	1.853	1.853	1.853
VERTICAL SPREAD	2.418	1.965	1.965
EXTREME SPREAD	2.552	2.149	2.034
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	10		

RECEIVING AND ESTIMATING REPORT

BARBER M24 0163415

COMMENTS

M-24 SNIPER W/10X-M3A SCOPE

0038

ORDER
R 95-14840

INITIAL
JJM

CUSTOMER ORDER NO.

DATE RECEIVED
05/16/95

DATE OPENED
05/17/95

DATE CODE
CJ 4-89

SERIAL NUMBER
C6225444

NEW SERIAL NUMBER

MODEL AND GRADE
700 7.62

NATO

ACCESSORIES

SCOPE BASE

HARD CASE

W/STUDS

w/i Swivel

FROM:

TRANSPORTATION OFFICE
FT CAMPBELL

KY 42223

SHIP TO:

TRANSPORTATION OFFICE
FT CAMPBELL

KY
42223

CUST NO: 087942 C.O.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
- ☐ LIGHTLY WORN
- ☐ WORN
- ☐ VERY WORN
- ☐ UNREPAIRABLE
- ☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

New

B4

Barrel

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

Barrel Shot out

PARTS

Barrel - 96003

COMMENTS

Repowder Coat - Trigger
Guard Assy - Front & Rear
Sight Base
Re-zinc - Scope Base Rings,
Swivels & Swivel Stud

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0163415 0163454

Final Inspection

Sr: C6225444	DATE REC'D: 5/16/95	DATE RET'D:
--------------	---------------------	-------------

AUDITOR: RW

Item:

BARREL ASSY.

✓ BARREL✓ RECEIVER✓ FRONT SIGHT BLOCK✓ REAR SIGHT BLOCK✓ SCREWS✓ FINISH

SCOPE ASSY.

✓ SCOPE✓ SCOPE RINGS✓ MOUNTING SCREWS✓ MOUNTING BASE✓ SCREWS✓ FINISH✓ LOOSENESS✓ CLARITY

MISC.

 DD-250 BAR CODE PACKAGING

Item:

STOCK ASSY.

✓ STOCK✓ SLING SWIVEL STUDS✓ ADJUSTABLE BUTT PLATE✓ LOCK NUTS✓ BARREL CLEARANCE✓ COLOR/FINISH

SYSTEMS CASE

✓ SCOPE CASE✓ IRON SIGHTS DEPLOYMENT KIT

TRIGGER

✓ SAFETY OPERATION✓ SET

Comments: _____

New Barrel

GUN SERIAL # C6225444

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock		5/30/95	RW
600	Proof		5/30/95	RW
607	Check Headspace		5/30/95	RW
610	Dis-assemble Gun		5/30/95	RW
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		6/16/95	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		6/16/95	RW
	C) Inspect Ejector Hole for Chamfer		6/16/95	RW
	D) Oil Firing Pin Ass'y		6/16/95	RW
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	BARBER - M24 0163418 OP. NAME	READINGS	DATE	INIT
625 cont.	F) Safety On Force			
	G) Safety Off Force			
	H) Trigger Pull Test & Retainability			
	I) Firing Pin Indent			
	J) Assemble Stock			
	K) Assemble Swivel Studs			
	L) Attach Front and Rear Sight Assemblies			
	M) Iron Sight Alignment			
	N) Detach Front & Rear Sights & place in numbered container			
	O) Attach Scope to Rifle			
	P) Detach & Attach Scope 20 Times			
640	Gallery Target & Test		6/19/95	RW
	A) Time			
	B) Malfunctions			
	C) Pierced Primers			
	D) Optical Clarity of Scope			
645	Inspect for Live Ammo		6/19/95	RW
655	Final Inspection			
	A) Headspace		6/20/95	RW
	B) Trigger Pull		6/20/95	RW
	C) Function		6/20/95	RW
660	Pack			

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06225444
11 Jul 1995

CENTROIDAL DISTANCES

0 TO	1	.414237
1 TO	2	.25767
1 TO	3	.474806
1 TO	4	.468796
1 TO	5	.28677


1.48 <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0702
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.2258
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .236461
THE ANR FOR THIS RIFLE IS: .9704

11 JUL 1995

FILE:/PATTERNING/CENTERFIRE_PATT/06225444

CENTERFIRE PATTERNS # 1

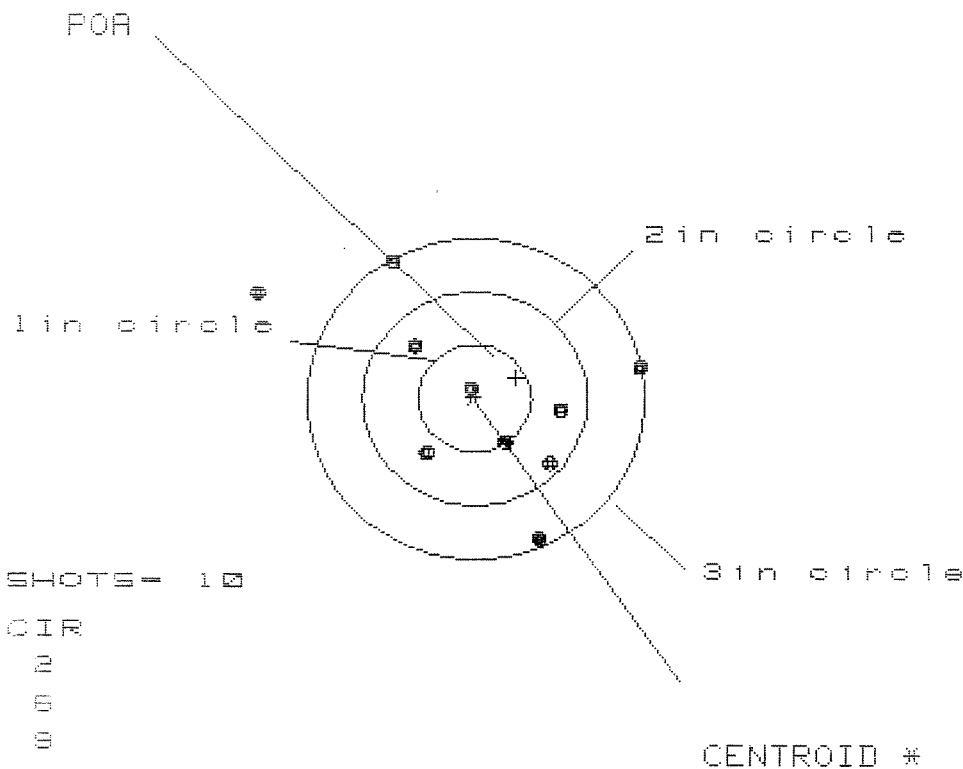

OF SHOTS= 10

IN CIR

1in = 2

2in = 6

3in = 8

HS= 3.392

VS= 2.549


GS= 3.465

PATTERN #	:	1	2	3
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.424	1.205	1.080
MINIMUM X	:	-1.968	-1.001	-.857
MAXIMUM Y	:	1.251	1.358	.738
MINIMUM Y	:	-1.298	-1.191	-1.022
CENTROID X	:	-.366	-.147	-.022
CENTROID Y	:	-.194	-.301	-.470
POA TO CENTROID in.	:	.414	.335	.471
MIN RADIUS	:	.099	.310	.214
MEAN RADIUS	:	1.021	.864	.731
MAX RADIUS	:	2.191	1.687	1.203
HORIZONTAL SPREAD	:	3.392	2.206	1.937
VERTICAL SPREAD	:	2.549	2.549	1.760
EXTREME SPREAD	:	3.465	2.883	2.063
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

11 JUL 1995

FILE:/PATTERNING/CENTERFIRE_PATT/06225444

CENTERFIRE PATTERNS # 2

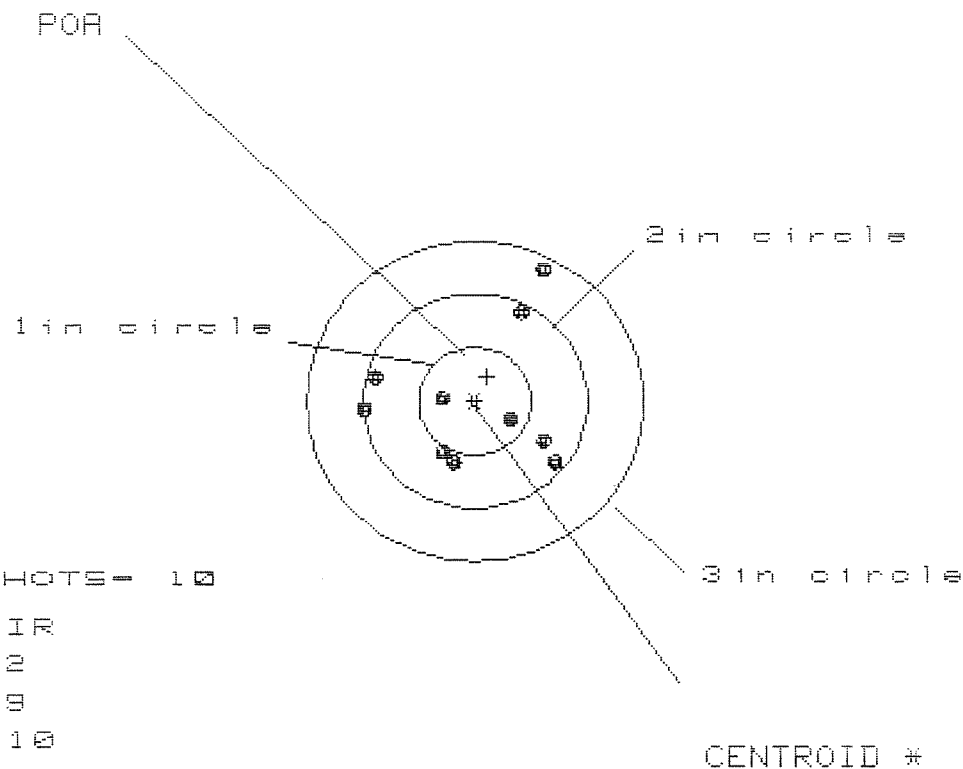


PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.757	.827	.711
MINIMUM X	:	-.999	-.929	-.925
MAXIMUM Y	:	1.183	.969	.980
MINIMUM Y	:	-.601	-.469	-.458
CENTROID X	:	-.111	-.181	-.065
CENTROID Y	:	-.231	-.363	-.374
POA TO CENTROID in.	:	.257	.406	.380
MIN RADIUS	:	.316	.298	.293
MEAN RADIUS	:	.768	.678	.640
MAX RADIUS	:	1.341	1.064	1.032
HORIZONTAL SPREAD	:	1.756	1.756	1.636
VERTICAL SPREAD	:	1.784	1.438	1.438
EXTREME SPREAD	:	2.039	1.833	1.802
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		9	
NUMBER IN THREE INCH CIRCLE	=		10	

11 JUL 1995

FILE:/PATTERNING/CENTERFIRE_PATT/06225444

CENTERFIRE PATTERNS # 3

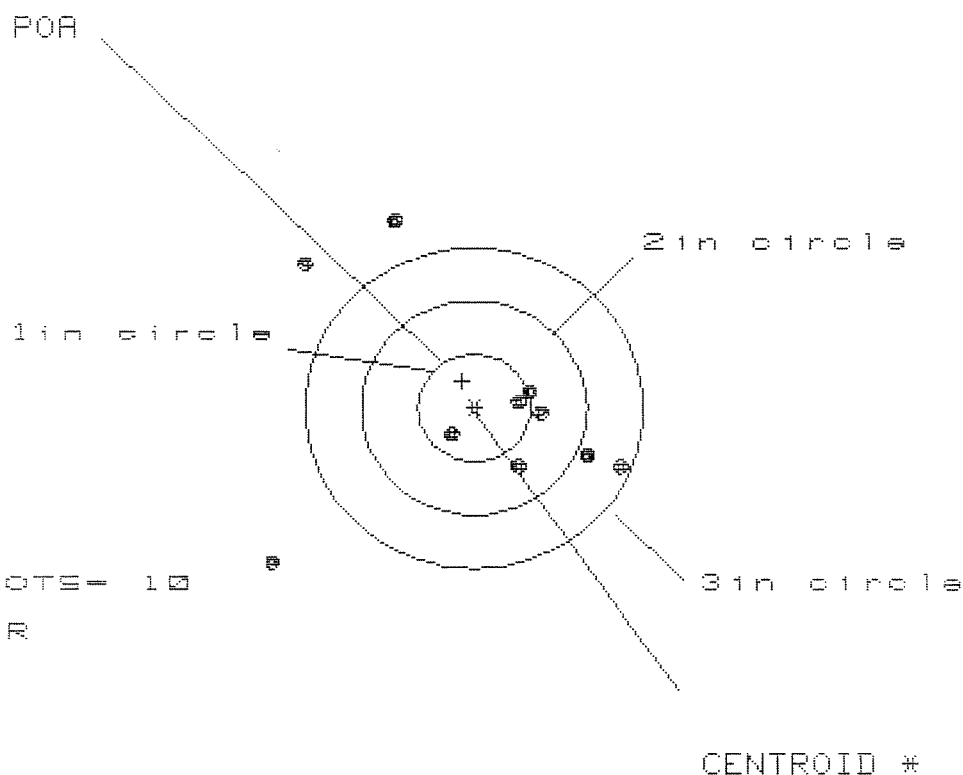

OF SHOTS= 10

IN CIR

1 in = 3

2 in = 5

3 in = 7

HS= 3.081

VS= 3.147

GS= 3.376


PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.292	1.093	.880
MINIMUM X	:	-1.789	-1.706	-1.087
MAXIMUM Y	:	1.704	1.543	1.695
MINIMUM Y	:	-1.443	-1.702	-1.550
CENTROID X	:	.105	.304	.517
CENTROID Y	:	-.254	-.093	-.245
POA TO CENTROID in.	:	.274	.318	.572
MIN RADIUS	:	.314	.182	.080
MEAN RADIUS	:	1.117	.938	.686
MAX RADIUS	:	2.299	2.093	2.013
HORIZONTAL SPREAD	:	3.081	2.799	1.967
VERTICAL SPREAD	:	3.147	2.245	2.245
EXTREME SPREAD	:	3.376	3.376	2.965
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		7	

11 Jul 1995

FILE:/PATTERNING/CENTERFIRE_PATT/08225444

CENTERFIRE PATTERNS

4

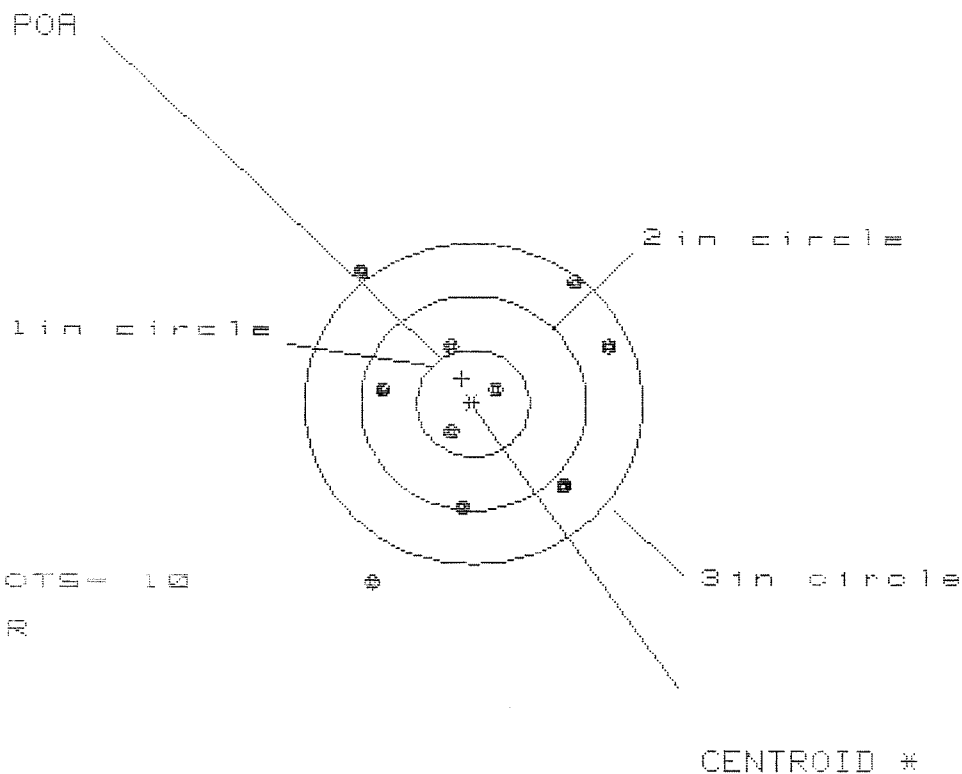

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 4

3 in = 8

HS= 2.144

VS= 2.930


GS= 3.330

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.190	1.093	.962
MINIMUM X	-.955	-1.051	-1.056
MAXIMUM Y	1.239	1.051	1.072
MINIMUM Y	-1.691	-1.197	-1.066
CENTROID X	.101	.197	.328
CENTROID Y	-.235	-.047	-.178
POA TO CENTROID in.	.255	.202	.374
MIN RADIUS	.268	.142	.082
MEAN RADIUS	1.037	.929	.848
MAX RADIUS	1.901	1.486	1.268
HORIZONTAL SPREAD	2.144	2.144	2.018
VERTICAL SPREAD	2.930	2.248	2.138
EXTREME SPREAD	3.330	2.635	2.351
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	8		

11 JUL 1995

FILE:/PATTERNING/CENTERFIRE_PATT/08225444

CENTERFIRE PATTERNS # 5

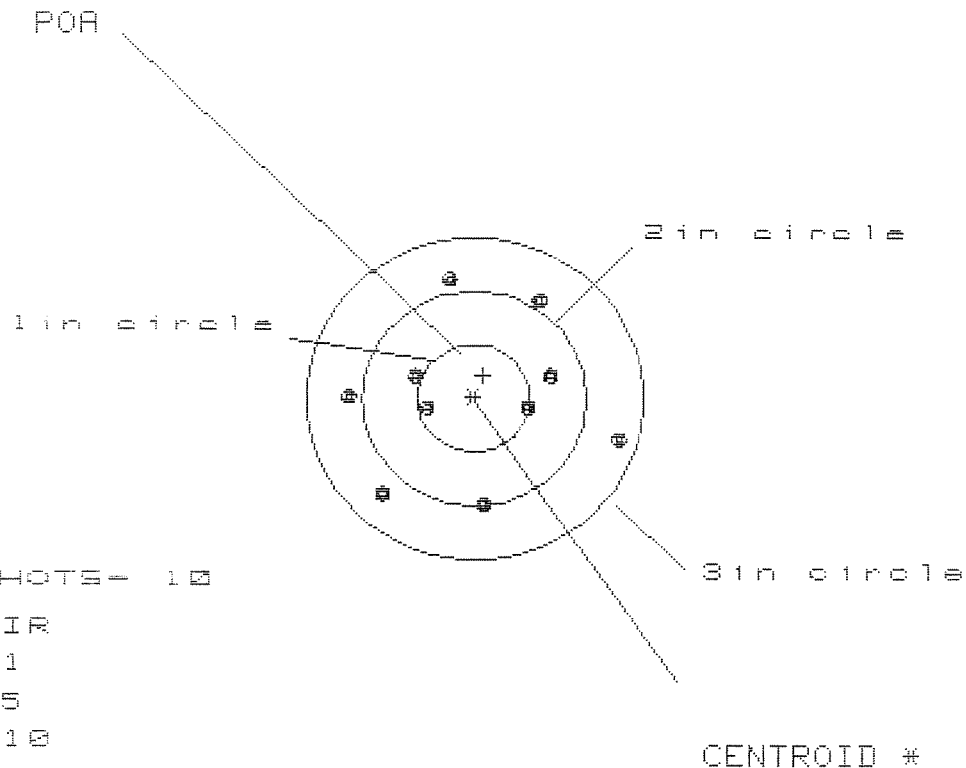

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 5

3 in = 10

HS= 2.459

VS= 2.105

GS= 2.494

PATTERN #	5	5	5
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.301	.806	.727
MINIMUM X	-1.158	-1.013	-1.092
MAXIMUM Y	1.118	1.078	.963
MINIMUM Y	-.987	-1.027	-1.142
CENTROID X	-.080	-.225	-.146
CENTROID Y	-.215	-.175	-.060
POA TO CENTROID in.	.229	.285	.158
MIN RADIUS	.458	.338	.439
MEAN RADIUS	.909	.845	.809
MAX RADIUS	1.349	1.115	1.153
HORIZONTAL SPREAD	2.459	1.819	1.819
VERTICAL SPREAD	2.105	2.105	2.105
EXTREME SPREAD	2.494	2.228	2.136
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	10		