

The Fore-End

The fore-end is used to pull the bolt rearward to open the action.


TO OPEN THE ACTION:

1. Push upward on the action bar lock. See Picture 7.
2. Pull the fore-end rearward to open the action.

WARNING: When the fore-end is forward, the bolt is closed and the firearm can be fired.

TO REMOVE THE MAGAZINE:

1. Point the firearm in a safe direction.
2. Engage the safety mechanism. **RED BAND WILL NOT SHOW.**
3. Open the action.
4. Push the magazine latch forward. See Picture 8. Pull the magazine from the receiver.

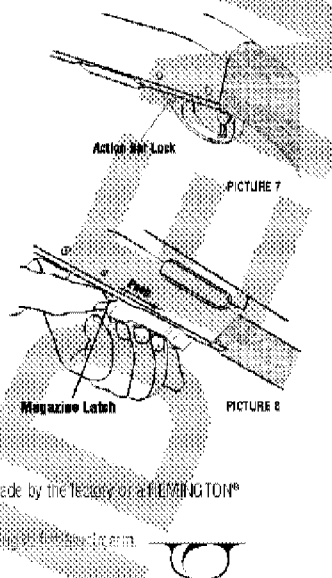

The Trigger Assembly

Pulling the trigger fires the firearm.

The weight of the trigger pull is preset at the factory.

All adjustments to the trigger and trigger plate assembly must be made by the factory or a REMINGTON® RECOMMENDED GUNSMITH.

WARNING: NEVER put your finger on the trigger unless you are going to fire the firearm.

The Barrel

The inside of the barrel must be clean and free of obstructions.

I. TO CHECK THE INSIDE OF THE BARREL:

WARNING: Look into the ejection port. If there are obstructions, they will be in the barrel and may cause injury or the firearm to malfunction.

1. Point the firearm in a safe direction.
2. Engage the safety mechanism. Make sure the **RED BAND IS NOT SHOWING.**
3. Pull the fore-end fully rearward to open the action.
4. Insert a cleaning rod into the muzzle. Push the rod all the way through the barrel until rod can be seen in the ejection port.

II. TO REMOVE OBJECT FROM INSIDE THE BARREL:

WARNING: Never try to remove an object from the barrel with a cleaning rod or any other object. This may cause the barrel to burst or a person serious injury or death.

1. Use the correct size cleaning rod.
2. Insert the cleaning rod into the muzzle and lightly tap rod to free object.
3. Push the cleaning rod all the way through the barrel until the rod can be seen in the ejection port.
4. If an object cannot be easily pushed out of the barrel with a cleaning rod, return the firearm to the factory or a REMINGTON RECOMMENDED GUNSMITH.

III. TO CLEAN THE BARREL, FOLLOW THE INSTRUCTIONS SHOWN ON PAGE 11.

BEFORE LEAVING THE FIREARM: Make sure the inside of the barrel is free of all obstructions.