




NEW SUPERCELL™ RECOIL REDUCTION: SO EFFECTIVE, OUR PUMP GUN BEATS THEIR AUTOS.

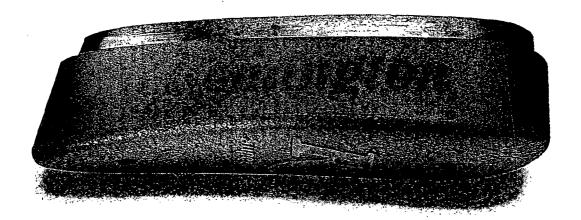


Ten years of rigorous R&D has produced a recoil pad far superior to anything the world has seen before. So effective in fact, our Model 870 pump shotgun now produces 54% less recoil than competing autoloaders with their factory pads. Welcome the most effective recoil pad on the planet, the 21st century's most remarkable development in recoil reduction. SuperCell.

Look for the logo - SuperCell recoil pads are standard equipment on select products for 2008. Also available as an accessory (page 49).



Absorbs force more efficiently than any pad in the world. "Kick" is reduced to a gentle push.

A complex matrix of SuperCells 5 4 1 instantly soak up and redistribute energy over longer time frame.



Our pump gun now kicks less than their auto. SuperCell cuts the recoil and crushes the hype of other systems like no other.

Lightweight

and tough.

surface for

rapid gun

mounting.

THE WORLD'S MOST EFFECTIVE RECOIL

PAD. This year, the new SuperCell¹¹⁴ recoil pad will single-handedly revolutionize the shooting sports. Its development marks the beginning of a new era in which a pump-action Model 870 produces up to 54% less recoil force than competing autoloaders. Where high-velocity magnum rifles become mild, and introducing new shooters to our sport is smoother and less intimidating. A time of better first shots, and faster second and third shots.


RECOIL'S HOLDING CELL. SuperCell technology is the product of 10 years' rigorous R&D by the top recoil-suppression experts in the industry. Using a complex matrix of millions of SuperCells, this advanced polymer construction harnesses and releases energy over a much longer time period. Rearward force of your gun is reduced from a "kick" to a gentle push and muzzle travel is diminished, resulting in the softest shooting experience possible. All from a pad that's extremely lightweight, durable and enhanced with a smooth surface for rapid gun mounting.

MAKING RECOIL-REDUCTION HISTORY.

AGAIN. For more than 200 years, we've pioneered better shooting through improved recoil reduction. Beginning in 1885 with rubber pads, vented pads in 1948. TPE (thermoplastic elastomer) pads in 1987 and now with SuperCell, an entirely new technology that will forever change the way recoil is harnessed. Welcome to the SuperCell era.


MODEL 870" WITH SUPERCELL" VS. MODEL 870 WITH COMPETITORS' PADS.

"Felt recoil" is peak force vs. the amount of time that force is applied to the shoulder. By spreading force over a longer period than any other pad. SuperCell is proven most effective at reducing felt recoil. We fitted the competitors' pads to our Model 870 – SuperCell dominated.

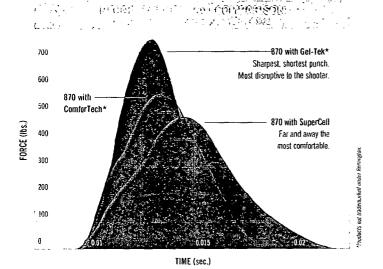

OUR PUMP BEATS THEIR SEMI-AUTOS.

By absorbing force over a longer time period, SuperCell helped our Model 870 produce up to 54% less recoil than a competitor's autoloading shotgun with factory pad. The Model 11-87 with SuperCell^{**} was the softest shooting of all shotguns tested.

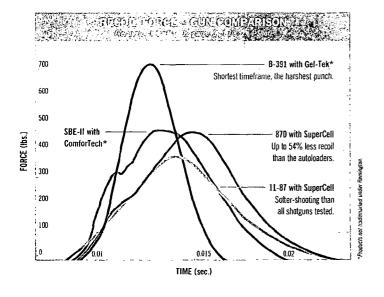

WWW.REMINGTON.COM/SUPERCELL

Log on, watch the video, and see more conclusive proof SuperCell is this century's most remarkable development in recoil reduction.












Highlights of pad comparison.

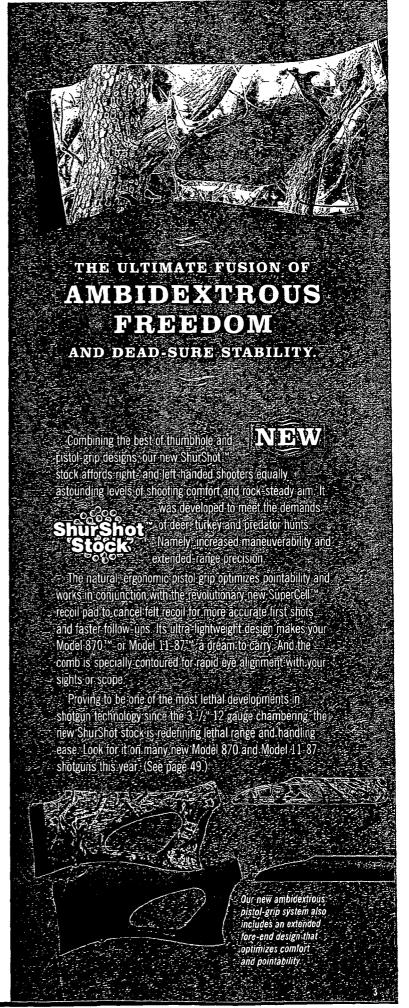

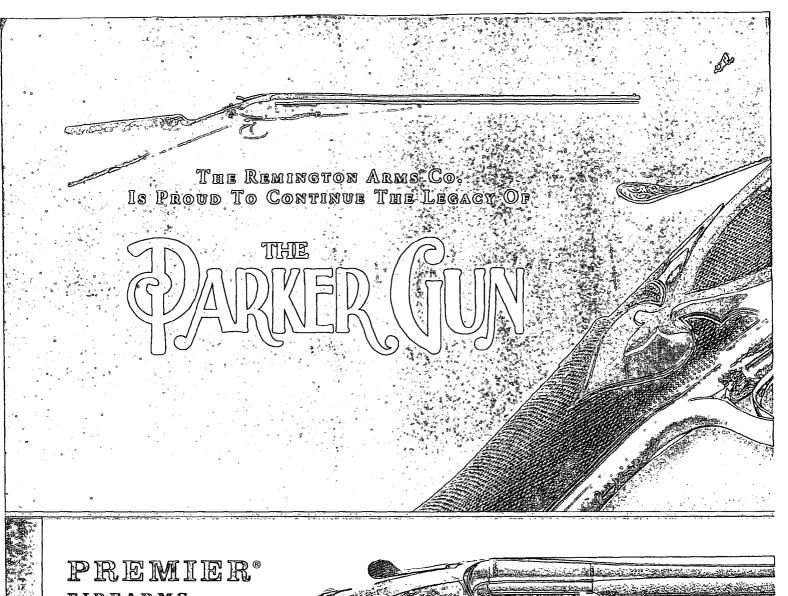

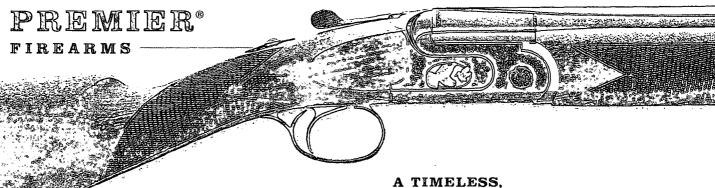


PERFORMANCE-DRIVEN DESIGN FROM AMERICA'S OLDEST GUNMAKER.

Every bit as wicked on the birds as they are beautiful to the eye, our Premier series Over and Unders have taken the hunting community and upland fields by storm. The combination of meticulous craftsmanship, incredible balance, superior pointing characteristics and rock-solid reliability has earned these shotguns high marks with America's most serious shotgunners. Trim, low-profile receivers and an overall sleek form make them a dream to carry and lightning-responsive at the flush.

The prestigious **Premier Over & Under Ruffed Grouse** edition showcases the Ruffed Grouse Society logo in 14k gold on both sides of the black onyx frame. It also features a gold-script Remington insignia "R" on the floorplate, which has become the premier symbol of our status as America's Oldest Gunmaker. This remarkable 20 gauge has 26" barrels and features a straight-grip, English-style stock. The refined appearance of its woodwork is topped off with a satin finish.


Field Grade and Upland Grade Over & Unders are intricately engraved with game scenes and available in 12, 20 and 28 gauge with 26" or 28" barrels. Upland Grade has oil-finished woodwork and a case-colored receiver. The Field Grade is equipped with a nickel receiver and deep satin-finished stock and fore-end. No matter which model from this lineup you choose, it will be a hunting companion to last a lifetime.

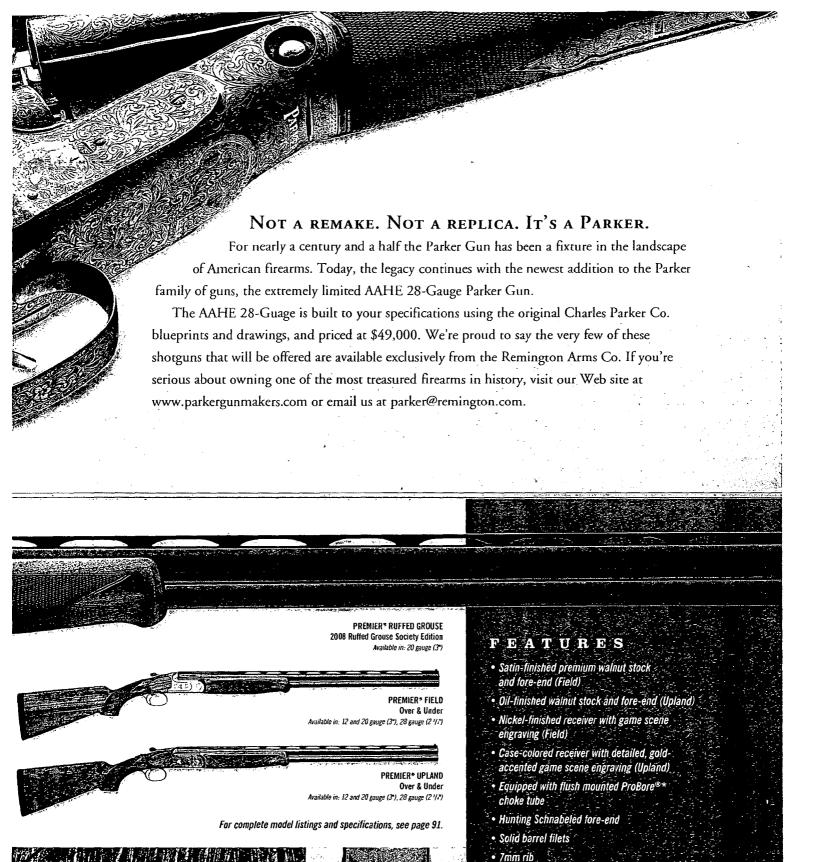

*ProBore Chokes are not interchangeable with Rem ** Chokes.

ALL PREMIER* SERIES SHOTGUNS FEATURE
THE GOLD SCRIPT REMINGTON INSIGNIA "R"

Ivory front bead and steel midpost
FAA-approved lockable hard case

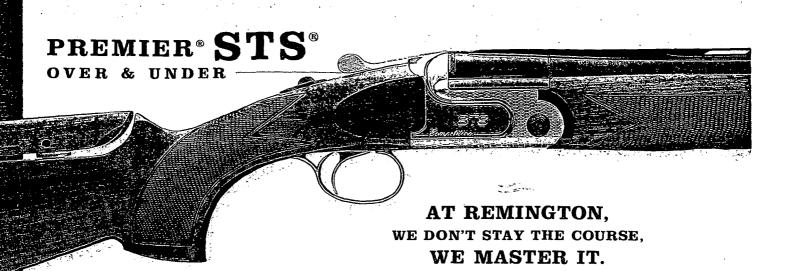

Developed using input from professional shooters worldwide, our 12-gauge Premier® STS® Competition Over and Unders are quickly crushing their way to the top of the competitive scene. Superbly balanced with a sleek, low-profile receiver and built rock-solid, they're a serious competitor's dream.

Every facet is optimized to excel in high-speed, high-volume shooting sports arenas. The barrels are overbored (0.735") with lengthened forcing cones to enhance pattern consistency and lessen felt recoil. For ultra-smooth operation and long-term protection from heat and wear, we added a nickel-plated receiver. A 10mm target-style rib with ivory front bead and steel midpost aid in target acquisition. We even fine-tuned the point of impact using input from professional target shooters. A set of five ProBore® Choke tubes with knurled extensions helps you quickly adapt to changing conditions and courses.

For added comfort, there's a right-hand palm swell, and the lustrous satin wood finish is complemented by a gold trigger and engraved receiver. Other features include a target-Schnabeled fore-end and premium hard case. Barrels are offered in 28", 30" and 32" lengths with standard stock and 30" or 32" with adjustable comb.




CONFIDENCE IS OFFICIALLY TANGIBLE.

No shotguns have won more titles, or are better equipped for the high-volume regimen of today's elite shooters. Prepare to see record scores crushed at a rapid rate by our latest upgrade to the lineup — the new Model 1100™ Premier Sporting series. Featuring nickel receivers with intricate fine-line embellishments and gold accents, they're as aesthetically impressive as they are sweet to point and shoot. Gold triggers and a custom Premier Sporting hard case complete the package. The Premier is offered alongside our original Model 1100 Sporting shotguns. Both the Model 1100 Sporting and Sporting Premier series offer discriminating shooters 12, 20, 28 and 410 options with semi-fancy American walnut stocks and fore-ends, vent-rib Rem¹⁴ Choke barrels and four Briley™ extended chokes as standard equipment.


Our Model 1100 Competition is super-tuned for the competitive scene. By overboring the 30" barrel and lengthening the forcing cones, we improved shot-to-shot pattern consistency and made what was one of the softest-recoiling actions in the world even easier on your shoulder. The receiver and all internal parts feature a nickel-Teflon® finish for the smoothest, most reliable cycling ever. It's optimized for 2 3/4" target loads and light field loads. Its optional adjustable comb can be fine-tuned to your shooting preference, and the barrel has a 10mm target-style rib. All these, plus a host of other upgrades, transform an already legendary design into an unstoppable force at the range.

Generations of die-hard competitors have made our Model 1100 Classic Trap and famous Model 870™ Classic Trap venerable mainstays. From 16s to the very back line, they continue to shoot their way to the top of major events every year.



(Included with each Model 1100 " Premier Sporting)



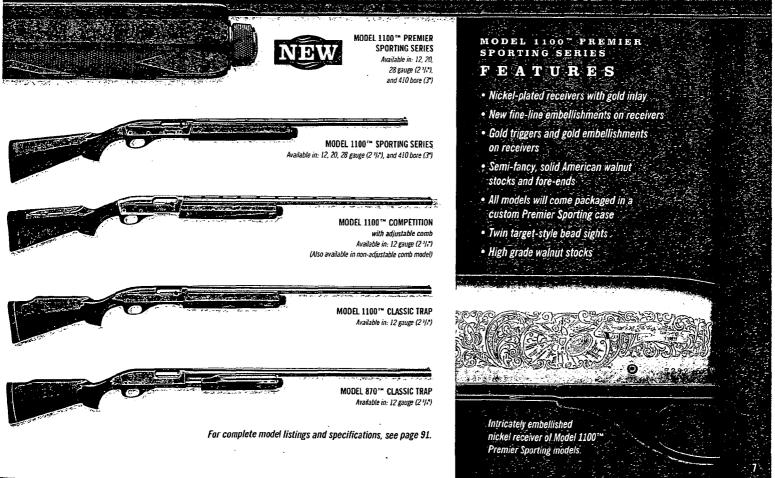



BIRDS SEEM TO FOLD THEMSELVES... WE BUILT IT.

It transforms the shot to a fluid, effortless motion. With 48% less recoil and weighing a mere 7 lbs., the Model 105 CTi™ is the softest-shooting, lightest 12-gauge semi-auto shotgun we've ever built. It's truly the world's most advanced autoloader, inside and out. The first-ever skeletonized titanium shotgun receiver accommodates both 2 3/4" and 3" shells and is wrapped with a stout carbon-fiber covering to create the ultimate fusion of toughness and reduced weight. It's also home to the only bottom feed and eject mechanism on a semi. This "Double-Down" system is truly ambidextrous and produces no peripheral distraction from ejecting shells.

Recoil is reduced to a gentle push by the four-part dampening process, including an optimized gas system, overbored barrel with lengthened forcing cones, in-stock hydraulic recoil suppressor and recoil pad. The simplified gas system has very few moving parts, requires less cleaning and there's virtually nothing to wear out or replace. Along with reducing felt recoil, the overbored barrel enhances pattern consistency.


Available with a 26" or 28" barrel, this revolutionary 12 gauge also features a tournament-grade trigger and our PVD coating that forms a protective outer barrier to corrosion and scratching. Our ProBore® choke tubes are optimized for the overbored barrel and measure 0.735", as opposed to the standard 0.727" found on most 12-gauge bores.

Remington FAA-APPROVED

LOCKABLE HARD CASE

MODEL **1100**[™] G3

AUTOLOADER

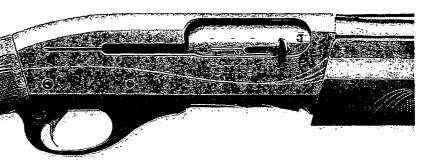


THE MOST TRUSTED IN HISTORY, ENGINEERED FOR THE FUTURE.

Soft recoil, dependability, balanced pointing characteristics — the Model 1100™ G3 is all that made the original Model 1100 America's most trusted semi-auto shotgun, only better.

Available in 12 and 20 gauge, its improved, technologically advanced gas system cycles 2 3/4" and 3" magnum loads with equal efficiency. By coating key internal parts with Teflon, we've created an action that's easier to clean, smoother and more reliable. The plated receiver adds durability and a great new look. Felt recoil is reduced and pattern consistency is improved by the overbored barrel.

Then there's Realwood, our exclusive high-grade walnut construction that meshes genuine American walnut with carbon reinforcements for striking looks that will withstand extreme abuse.

No autoloader has folded more birds or crushed more targets than the venerable Model 1100. We're proud to announce the legacy has advanced - welcome the next generation - the Model 1100 G3.

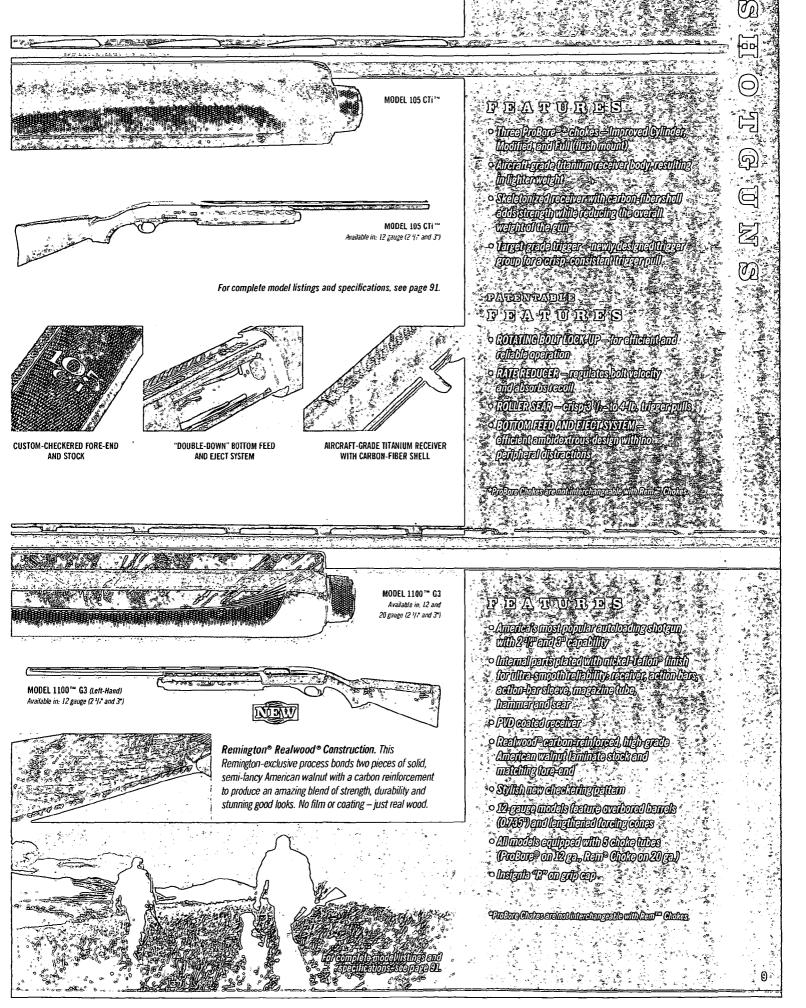



RUT TO STRUT, IN EVERY BLIND AND UPLAND FIELD BETWEEN.


No matter the season, our Sportsman® answers the call with the lethal blend of speed, reliability and smooth operation that has made the Model 11-87 a standard since its introduction. These are workhorse shotguns built to our legendary and uncompromising standards for autoloader performance. This year's expanded lineup includes 12- and 20-gauge field versions, 12- and 20-gauge fully rifled slug guns with cantilever barrels in black and camo, a 20-gauge youth model, as well as specialized options for turkey and waterfowl.

Consider the Model 11-87 Sportsman ShurShotTM Camo Cantilever 2008's deer season MVP. Featuring our new ShurShotTM synthetic pistol-grip stock, it launches 2 ³/₄" or 3" 12-gauge slugs with ambidextrous accuracy. Right- and left-handed shooters alike will marvel at the exceptional comfort, maneuverability and rock-steady hold offered by this new stock design. The new SuperCellTM recoil pad tames hard-hitting slug rounds with unmatched efficiency. Its superior shock absorption, when combined with the soft-shooting Model 11-87 action, facilitates rapid, accurate followup shots and gives you more confidence on your first shot. It's dressed from butt to bore in Realtree Hardwoods[®] HDTM camo and has a 23" barrel that's quick to point. A built-in cantilever mount makes adding optics a cinch. With its unfailing reliability, superior handling characteristics and breadth of line, the Model 11-87 Sportsman is redefining semi-automatic shotgun performance, year after year, buck after bird.

MODEL 11-87[™]

SPORTSMAN® SUPER MAGNUM

SuperCell

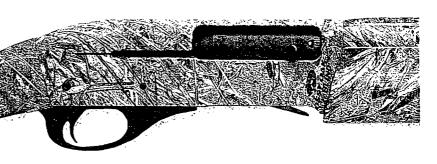


THE QUICKEST & SMOOTHEST IN SUPER MAGNUM STRENGTH.

When it's time to reach out and crush a big bird, reach for the awesome speed, bone-crushing power and swift pointing characteristics of our Model 11-87¹⁶ Super Magnum. Offered in specialized waterfowl and turkey configurations as well as in a standard black synthetic version with a 28" Rem¹⁶ Choke barrel, these shotguns tame the biggest, baddest 3 ½1, 12-gauge rounds with a soft-shooting action and our revolutionary new ultra-shock-dissipating SuperCell¹⁶ recoil pad. Along with world-renowned dependability, these shotguns are equipped with a wealth of specialized features for your game of choice.

Our new Model 11-87 Sportsman Super Magnum Waterfowl definitely looks the part with full Mossy Oak® Duck Blind came coverage. The 28" Rem Choke barrel features a HiViz® interchangeable sight system for rapid sight acquisition in low-light conditions. And the included Wingmaster HD Specialized Waterfowl choke tubes are a lethal ticket when the birds are cupped and committed.

The Model 11-87 Sportsman Super Magnum ShurShot* Turkey is the cutting edge in comfort and precision shot placement. Our new ambidextrous ShurShot synthetic pistol-grip stock provides right- and left-handed shooters alike with a rock-steady hold and awesome maneuverability. Its design also aids in lessening felt recoil. When you combine this attribute with the world-leading recoil-suppressing capability of our new SuperCell recoil pad, you have one soft-shooting machine. The quick-pointing 23" barrel has fully adjustable TruGlo® fiber-optic sights for pinpoint shot placement. We've also included a Wingmaster HD Turkey extended Rem Choke that'll help you flatten gobblers at the farthest reaches of shotgun range.

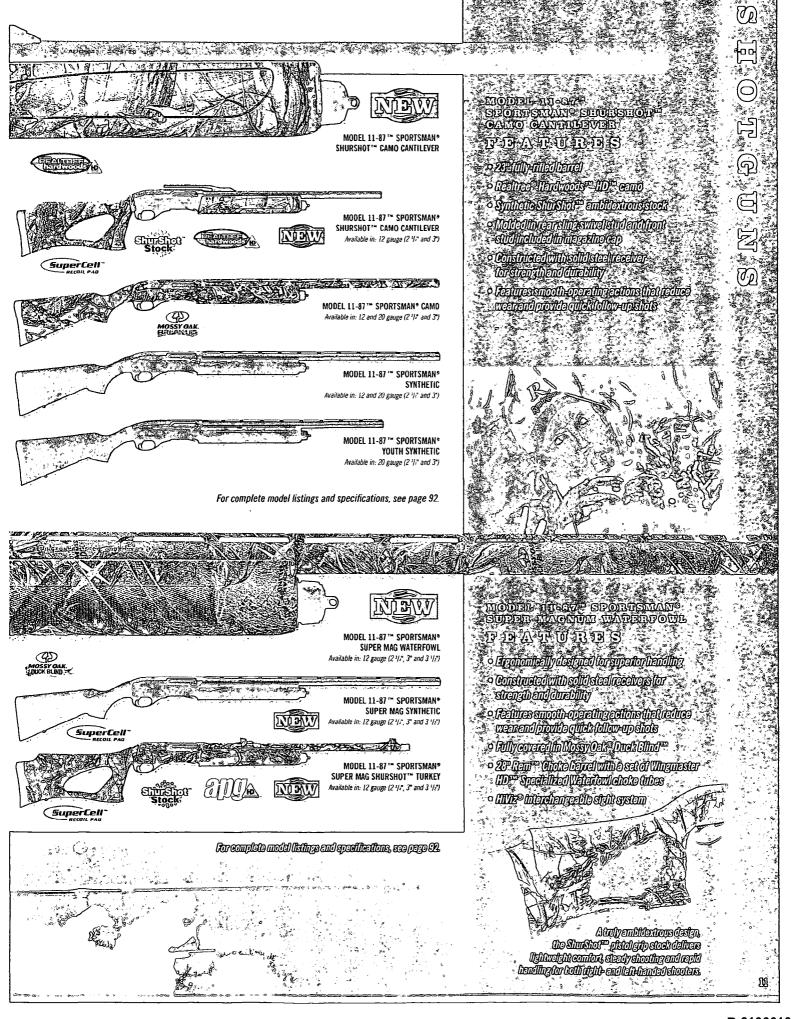



For serious extended-range shotgunners, the Model SP- 10^{1M} is the ultimate in lethality – from duck blinds to the turkey woods and everywhere in between. Its 3 $^{1}/_{2}$ " 10-guage payloads are significantly superior in patterning efficiency to 12-gauge 3 $^{1}/_{2}$ " guns, and even produce less felt recoil. It features a corrosion-resistant gas-operated action in which the cylinder – not the piston – moves, helping dampen rearward force. Ultra-reliable and smooth, it's the only shotgun worthy of the ultimate bird-leveling payload.

Ducks and geese beware: The big gun is now available with the state-of-the-art wetlands concealment — new Mossy Oak® Duck Blind™ camouflage. The **Model SP-10™ Waterfowl** features a 26" Rem™ Choke barrel with a high-visibility fiber-optic sight system, and comes with a full set of three Briley extended specialized waterfowl choke tubes.

Our **Model SP-10 Thumbhole** came will reach out and bust a tom in grand fashion. Its thumbhole stock, adjustable Williams® fiber-optic Fire Sights™ and handy 23" barrel make it the ultimate gobbler stopper. It's also fully dressed in Mossy Oak® Obsession™ came.


The **Model SP-10 Magnum Camo** and **Model SP-10 Magnum Satin** come equipped with 26" or 30" vent-rib Rem™ Choke barrels with twin beads and interchangeable Full and Modified Rem chokes. Choose from a Mossy Oak® Obsession or a traditional wood-stocked Satin finish.



We made it more affordable than ever to own a gas-operated 12 gauge that handles everything from 2 3/2" field loads to 3 ½" magnum rounds. This slick-handling, reliable autoloading shotgun is an incredible value for today's hunter. For a morning's dove shoot with No. 8s, pounding ducks with steel 2s or anchoring a tom with a heavy payload of No. 4's, its manually tunable gas system delivers smooth cycling and softens felt recoil for fast follow-up shots. Dual extractors on the bolt face ensure reliable, ultra-positive ejection.

The vent-rib barrel and receiver have a matte finish for non-glare concealment. Its black synthetic stock is impervious to the elements and stands up to abuse. And it comes from the factory with four choke tubes — improved cylinder, modified, full and super-full — to cover a full season of applications.


We just made your next shotgun purchase an automatic decision - no matter what you're hunting for.

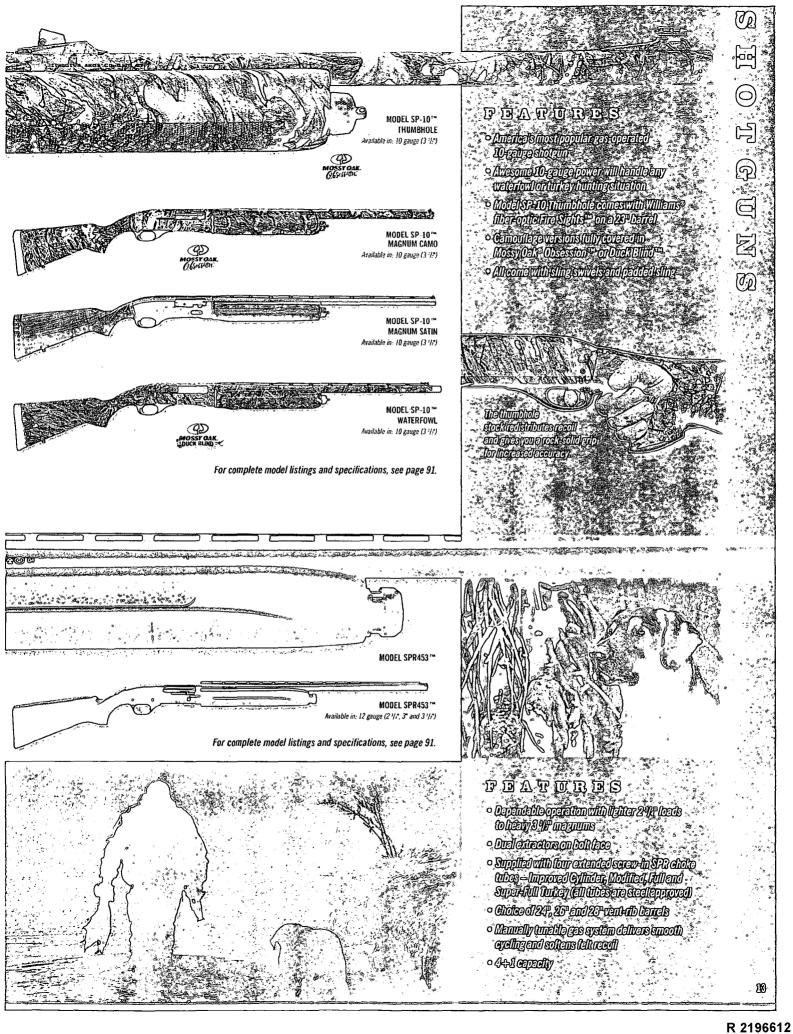



One hundred years as the world's foremost innovator of pump-action shotguns is cause for celebration — and our leader is dressed for the occasion. In the field or in a showcase, the 12-gauge Model 870[™] Wingmaster® "100th Anniversary of Pump Action Shotguns" Commemorative Edition makes a grand entrance with gold inlays and exquisite fine-line accents on the receiver and a striking, high-gloss walnut stock and fore-end featuring our nostalgic fleur-de-lis checkering. For a century, Remington® pump shotguns have reigned supreme over every other. Now owning a piece of the legend is more attractive than ever.

The original **Model 870TM** Wingmaster is so smooth and reliable that today — more than 57 years after its introduction — it's still the standard by which all pump shotguns are judged. Available in 12 gauge 2 ³/₄" and 3", 20 and 28 gauge, and .410 bore, it has the ultra-positive chambering and ejection, flawless balance and natural pointing qualities that have made the Model 870 Wingmaster an American icon. The original Model 870 Wingmaster has a custom-quality finish and handsome American walnut woodwork. Our Premier Dealers can step the aesthetic appeal up a notch with a version featuring a high-gloss claro walnut stock and fore-end, as well as a handsome pheasant and duck scene embellishment engraving on the receiver.

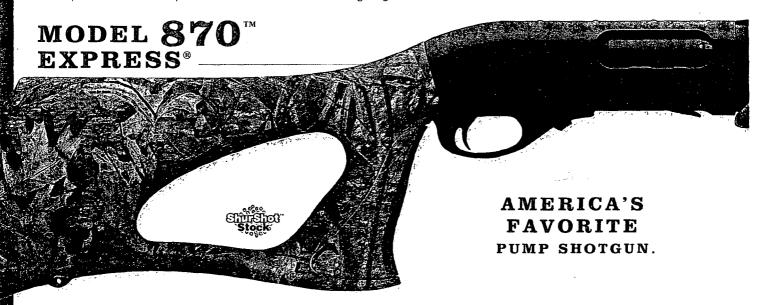

Its solid, dependable action makes it America's favorite, and our continual upgrades make it the most advanced, well-rounded family of pump shotguns around. Along with continually evolving designs, this shotgun's superiority is a matter of rugged dependability, great pointing characteristics and versatility. In fact, the Model 870™ has been the standard for slide-action performance for over 57 years.


Our new Model 870 Express® ShurShot™ Synthetic Turkey is optimized for big birds with the revolutionary ShurShot synthetic pistol-grip stock. It's contoured to accommodate both right- and left-handed shooters, while offering an incredibly steady-aiming platform that handles like lightning and lessens felt recoil. The 21" barrel adds to its superb maneuverability, and the Turkey Extra Full Rem™ Choke channels maximum payload to the sweet spot. Mossy Oak® Obsession™ coverage on the stock and fore-end keeps you concealed.


With our new Model 870 Express ShurShot Synthetic Fully Rifled Cantilever, the buck stops a lot farther out than you ever imagined. It features the incredible stability and comfort of our ambidextrous ShurShot stock and a 23" fully rifled barrel.

The Model 870 Express Turkey Camo and the Model 870 Express Turkey/Deer Combo utilize our synthetic stocks in Mossy Oak Break-Up.[™] Choose the Model 870 Express Super Magnum with a 28" barrel and full Mossy Oak Break-Up coverage.

SuperCell



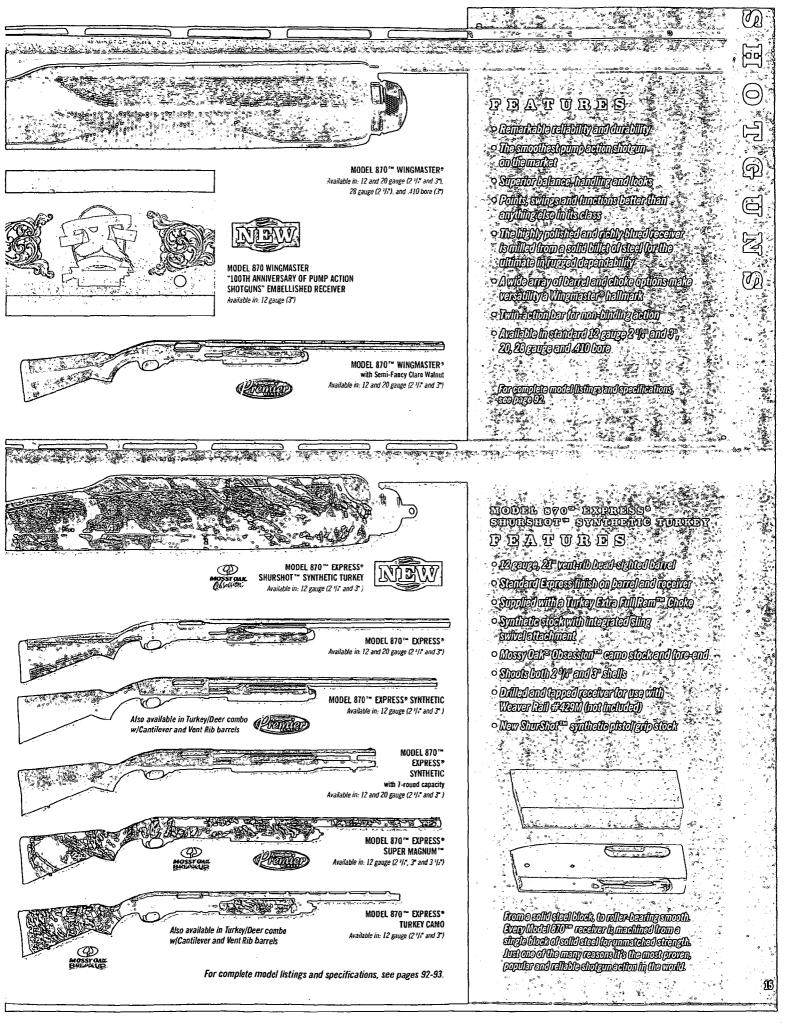


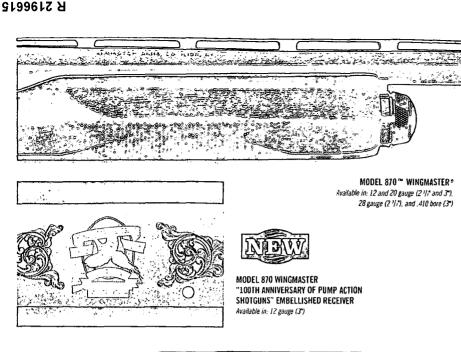

PBATURBS

- Amedablaidleldligendidurabilis
- e The smoothest primper donshold in on (figured) on the figure of the figure of
- ં િર્વાર્ષિક કંપીણ્કાના બેવાની બાંક દેશી સંપીનો ayllingdsellillisdass
- ໄຮບົນໄປເປັນເກືອຮວໄປປາໄປເປັນຮັດຊາໃຕ້ກໍານອ ifffitietelliftrægeddependabilliy Awddeanayolbanalenidabilecopilonsmal
- vaketilliye Viliguesta Phellidatis
- a Telli-Ecolomber (or non-billioting ecolom
- o Arallabballa statista de la Arallabballa statista de la Arallabballa statista de la Arallabballa statista de 20,20*g*agagapal.400bab. 🔭

forcomplete model listings emilispedifications scape 390.






MODEL 870™ EXPRESS® SHURSHOT™ SYNTHETIC TURKEY Available in: 12 gauge (2 1/2 and 3")

For complete model listings and specifications, see pages 92-93.




MODEL 870" WINGMASTER? with Semi-Fancy Claro Walnut Available in: 12 and 20 gauge (2 1/1" and 3")

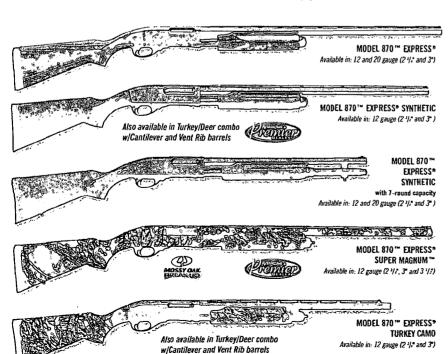

enousnos» errogente Moder erog erregese DATORDS

- Meng Aryan Abbed signed bin
- Standard Eroces Athistocolognet and receive Supplied with a Turkey (2 draif util Rem " (Choke
- Synthetiostockyritibiliterietei/siling sylliellethiment
- · Mossy Qal Obsession camo stock and fore-and
- Shoots both 24 Fand & stiells
- Odiled en illegged (coelved for use with Weever lead & Read (not the lucked)
- o New Shurshoff synthethophstollerip stock




from a solid gleat block to collar bearing smooth. Gray Model 270 ... geedvar is medilmed itomie single block of solld sicel for granet shed strength. includes and reflective strong in section by the most proven, Turk one of the image was the most proven, and the world.



The most dependable slide action of all time in three advanced designs that will go the distance with deadly precision, whether your target is a big red head or the crease behind a buck's shoulder. All feature our new SuperCell™ recoil pad, which dramatically reduces felt recoil through a potent matrix of shock-dissipating cells. The turkey shotguns are fully covered in Realtree® APG™ HD™ camo and deliver 3 ¹/₂" Super Magnum™ payloads with lethal authority at the longest ranges. Now featuring our new ShurShot™ synthetic pistol-grip stock, the updated Model 870™ SPS™ ShurShot Synthetic Turkey offers both right-and left-handed hunters the pinnacle of lightweight shooting comfort and handling ease. With this stock in your grip, repositioning for the shot is quick and efficient, plus the position of your hand naturally diffuses recoil. The 23" barrel offers awesome maneuverability, while the fully adjustable TruGlo® fiberoptic sights and an extended Wingmaster HD™ Turkey Rem™ Choke maximize pattern placement.

Recoil suppression and adaptability are hallmarks of the **Model 870 Super Magnum MAX Gobbler**^{***} thanks to its Knoxx[®] SpecOps^{***} pistol-grip stock. Length of pull is adjustable, so you can customize the fit to your shooting style. This highly advanced stock also incorporates state-of-the-art recoil-dampening technology — with dual shock-absorbing springs — to tame 3 ½" super magnum thunder. Other features include a swift-pointing 23" barrel with bright, fully adjustable Williams[®] fiber-optic Fire Sights^{**} for precision, and an included Turkey Super-Full Rem^{**} Choke.

The Model 870 SPS ShurShot Synthetic Fully Rifled Cantilever shotgun puts exceptional accuracy and swift handling characteristics in the hands of left- and right-handed deer hunters. With its cantilever mount, adding optics couldn't be easier, and its fully rifled 23" barrel maximizes reach with today's high-performance slug loads. The stock and fore-end are dressed in Realtree® Hardwoods HD.[™]
When it's time to add a sling, the swivel studs are built-in for your convenience.





NOW RUSTPROOF & WRAPPED IN ARMOR.

The primary design premise of our Model 870 TM and Model 11-87 TM actions is dependability — add the tremendous corrosion and abrasion resistance of our proprietary TriNyte® Corrosion Control System, and they're virtually invincible. Fact is, these are the most durable, reliable shotguns on land or sea. All have electroless-nickel-coated internals and a plated trigger group for dramatically enhanced resistance to fouling and oxidation. Plus, the same sleek lines and swift pointing characteristics you love about Remington® shotguns.

Built on the most trusted slide action of all time, the **Model 870 XCS Marine Magnum®** is the new standard for all-weather reliability. It has a Black TriNyte coating, a tactical-style SpeedFeed® I stock, 7-round capacity and an 18" cylinder bore. The stock's shell holder keeps up to four extra rounds at your fingertips.

Our Premier Dealers have four Xtreme Conditions Shotguns to choose from. The 12-gauge Model 870 XCS Super Magnum and Model 11-87 XCS Super Magnum with TriNyte PVD coatings, black synthetic SpeedFeed® I shell-holding stocks. The Model 870 XCS Super Magnum Waterfowl and Model 11-87 XCS Super Magnum Waterfowl have all the same great features plus Mossy Oak® Duck Blind To came stocks and fore-ends.

MODEL 870 ™ SPS™ SHURSHOT ™ SYNTHETIC TURKEY Available in: 12 gauge (2 ½, 3° and 3 ½)





MODEL 870™ SPS™ SHURSHOT** SYNTHETIC CANTILEVER Available in: 12 gauge


(2 1/:" and 3")



For complete model listings and specifications, see pages 92-93.

SuperCell

The Knoxx® SpecOps™ stock features a recoil-compensation system that dramatically reduces felt recoil and muzzle jump.




MODEL 870" SPS" SHURSHOT SYNTHETIC TURKEY

RED A 1 USR D S

- 23" rifle=sighted barrel
- TruGlo® fiber optic sights
- Wingmaster HD™ extended Rem" Choke (Turkey)
- Receiver drilled and tapped for scope mounts (Weaver Rail #429M)
- Realtree® APG™ HD™ camo
- Black sling included
- Molded in rear sling swivel stud and front stud included in magazine cap
- Featuring Remington's new SuperCell recoil pad technology

A truly ambidextrous design, the ShurShot "pistol grip stock delivers lightweight comfort, steady shooting and rapid handling for both right, and left-handed shooters.



Available in 12 gauge (2 1/." and 3")



MODEL 870™ XCS SUPER MAGNUM

Available in: 12 gauge (2 1/2, 3* and 3 1/2)



MODEL 11-87™ XCS SUPER MAGNUM WATERFOWL Available in: 12 gauge (2 1/4, 3* and 3 1/2*)

For complete model listings and specifications, see pages 92-93.

TriNyte® Corrosion Control System (Patent pending). Consisting of electroless nickel and proprietary PVD, this armor-tough, multi-layer coating is the world's most effective barrier against rust and abrasion for firearms, yet is only a fraction of a human hair in thickness. The only thing you'll notice is the near invincibility.

MODEL 870 XCS

FEATURES

- TriNyte® Corrosion Control System on barrel and receiver creates an armor-tough barrier against rust and abrasion.
- Its Model 870™ action is the rugged standard for dependability and smooth operation
- 18" cylinder bore, bead-sighted barrel
- 2-shot magazine extension 7-shot capacity
- SpeedFeed® I stock with shell holder keeps 2-4 extra rounds at your fingertips
- Corrosion-resistant trigger group with plated components
- Sling swivel studs




OVER & UNDER

GRACEFUL FORM MEETS RUGGED, RELIABLE FUNCTION.

For good looks and dependability in the field, there's nothing like an over and under. And you won't find a more impressive integration of features and price than our SPR Over and Unders. Similar guns go for twice the price. Each of the three models in this line has a single selective trigger, auto selective ejectors, rich-blued chrome-lined barrels, checkered walnut stock and fore-end, and more.

Put it to your shoulder and feel its superb balance and natural point. Put it to the test and experience its flawless dependability. The Remington® SPR line of over-and-under shotguns. Destined to be a field favorite.

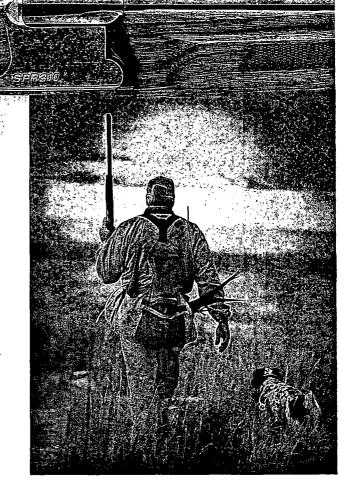

MODEL SPR210™ & SPR220™

SIDE-BY-SIDES




Deeply rooted in the sporting tradition, the side-by-side shotgun is a classic design cherished by collectors and hunters for its graceful lines, reliability and unique handling characteristics. Over the years, we've watched as production costs of the double-gun caused it to become a prize attainable only by the wealthy. Not anymore.


Thanks to the Remington® SPR line, the side-by-side will, once again, become a fixture of America's hunting landscape. Our lineup includes four premium side-by-side shotguns capable of evoking nostalgia at a glance, yet priced to fit into the budget of virtually any hunter. SPR side-by-side shotguns. Start your collection today.





STANDARD SCREW-IN CHOKES



SINGLE SELECTIVE TRIGGER (SPR210 MODELS ONLY)

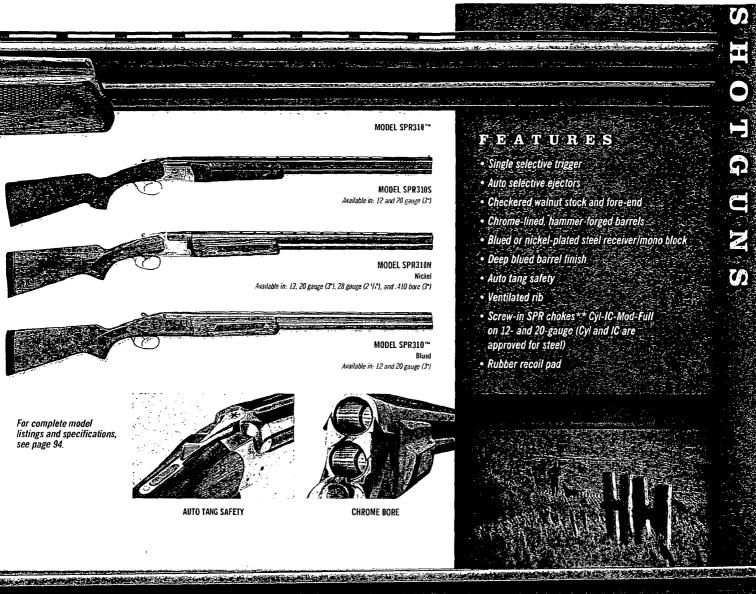

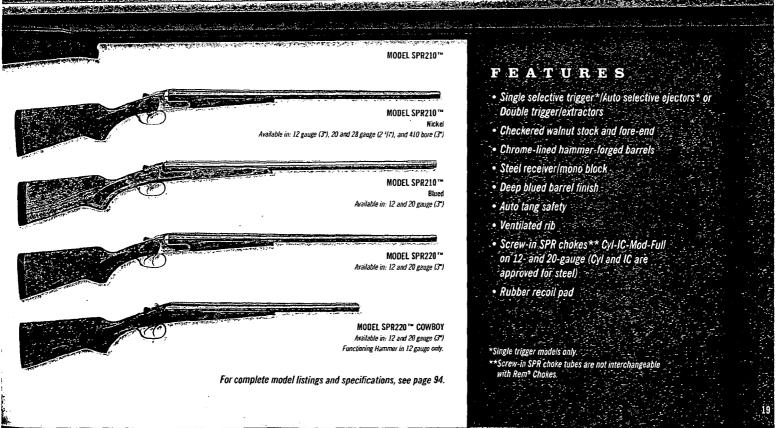

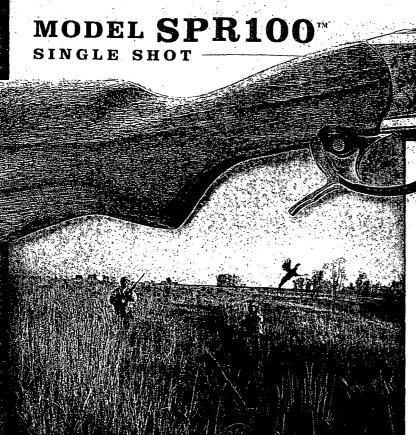

FIRST CLASS IN THE GAME OF FIRST SHOTS.

If you're the type who prefers the simplicity and challenge of hunting with a single shot, you're definitely the kind who will appreciate the balanced feel and natural pointing characteristics of our SPR100™ family. Built by some of the world's best craftsmen, it's a rugged, dependable companion destined to be your perennial favorite for field and range.

This smooth-handling lineup includes something for every hunter — from beginner to seasoned veteran. Choose from Blued Field, Nickel Field, Sporting/Trap and Youth Vent Rib. These single shots are premium shotguns we produce for a modest price without skimping on features. One shot, one choice: Remington® SPR.

SPR SPECIALTY

AN OPEN & SHUT CASE OF QUALITY & VERSATILITY.


This lineup is forged in tradition and old-world craftsmanship, but built to take on the diverse pursuits of today's multifaceted hunter.


First, the head-turning over-and-under shotgun/rifle combination. It's an amazingly versatile combination of short-range knockdown and long-distance precision.

The time-honored single-shot rifle. Its simplicity, sleek lines and superior accuracy make it a favorite of those confident in their ability to make one bullet count.

We're proud to offer a line of firearms anchored deep in our sporting heritage, yet built for modern demands and priced for everyone.



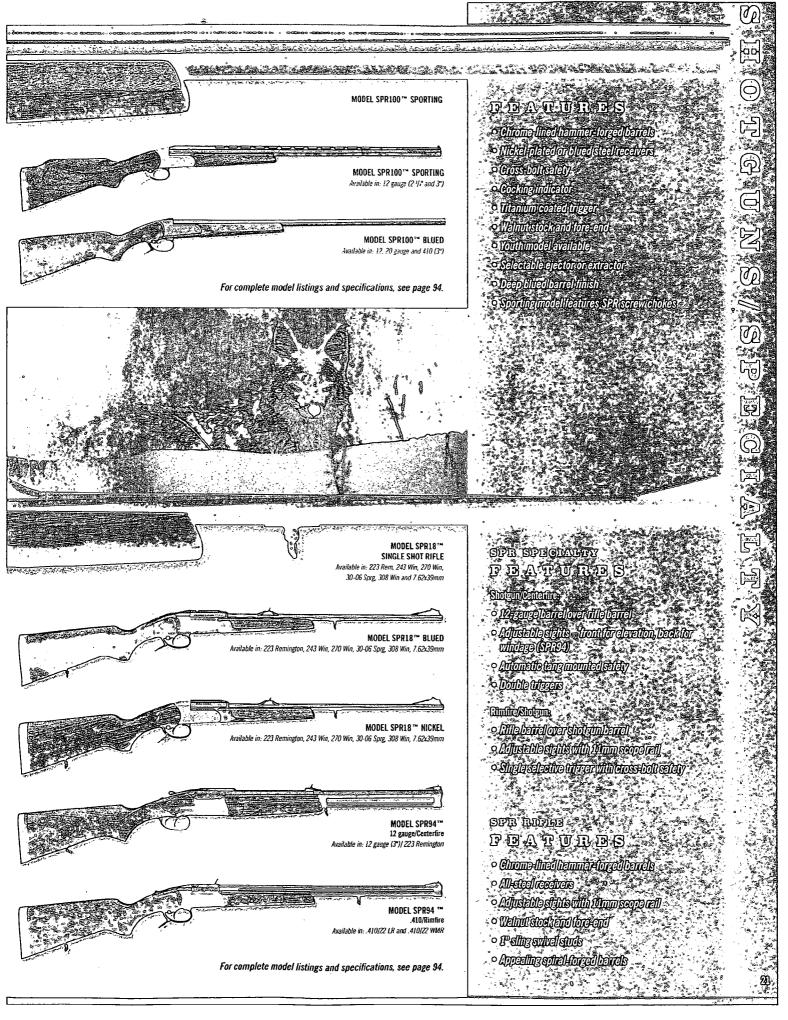

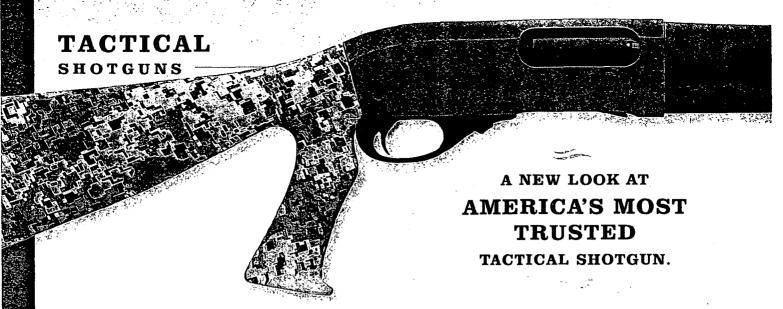

Still the #1 choice of top law enforcement agencies across the country, Remington® tactical shotguns are rugged, ultra-dependable and continually evolve as they're called to serve in new, increasingly demanding environments. The **Model 870[™] Tactical Desert Recon** series shotguns are equipped with Tiger Stripe Products® Digital Tiger Desert camo stocks and fore-ends, and military-style olive drab powder-coated metalwork for looks as distinctive as their performance. These shotguns are available with two different stock designs, 18" or 20" barrels and two- or three-shot magazine-tube extensions. To reduce muzzle jump and recoil, both Desert Recon models come with our special ported Tactical Extended Rem™ Choke tube.

Our all-black **Model 870 Tactical** shotguns are offered with 18" and 20" barrels, three stock options, including a Knoxx® SpecOps[™] folding stock with recoil-reducing springs and two- or three-shot magazine-tube extensions. All 870 tactical shotguns are chambered for 2 ³/₄" and 3" 12-gauge rounds. For Premier Dealers, there's a 20-gauge version with an 18" barrel, 7-shot magazine and Knoxx SpecOps stock.

The famous **Model 1100™ Tactical** shotguns are all-black as well, come with our standard stock or the Knoxx SpecOps SpeedFeed® IV pistol-grip stock and a choice of 18" or 22" barrels. They're chambered for 2 3/4" 12 gauge.



A fusion of our most advanced performance features in target, tactical and varmint rifles, the new Model 700TM Varmint-Target Rifle (VTRTM) is optimized for extended-range precision and mobility. Its patent pending triangular barrel contour is a product of years of rigorous R&D focused on reduced weight, enhanced barrel rigidity and rapid heat dissipation. To decrease recoil and muzzle jump, we machined the 22" barrel with an integral muzzle brake. Our famous Model 700 action gives it the highest degree of out-of-the-box accuracy available today. Plus, its X-Mark ProTM Trigger delivers the ultimate in crispness and shot control. The ergonomic green synthetic stock has a vented beavertail fore-end that promotes rapid cooling, and its black overmold accents provide a firm gripping surface.


In long-range ability and rugged endurance, our **Model 700 XCR Long Range Tactical Rifle** truly stretches the limits. It's Black TriNyte® PVD coating creates a diamond-hard layer of defense against the elements. For tighter groups, the tactical Bell & Carlson stock features a full-length aluminum bedding block. The tactical beaver-tail fore-end and recessed thumb-hook optimize performance off flat surfaces. And barrel cooling is accelerated with wide tactical-style fluting. A compact version of this rifle is available to Premier Dealers.

Our quick-handling, pump-action Model 7615TM Tactical carbine features a Knoxx SpecOpsTM NRSTM (Non Recoil Suppressing) stock with an adjustable length of pull. A durable parkerized finish protects the metalwork, and a 10-round magazine is included. Also available is the Model 700 SPS Tactical. It has a 20" heavy-contour barrel, dual-pillar-point bedding and our X-Mark Pro Trigger.



For complete model listings and specifications, see pages 97-99.

THE LEGENDARY MODEL 70 ADVANCING THE MOST ACCURATE & MOST

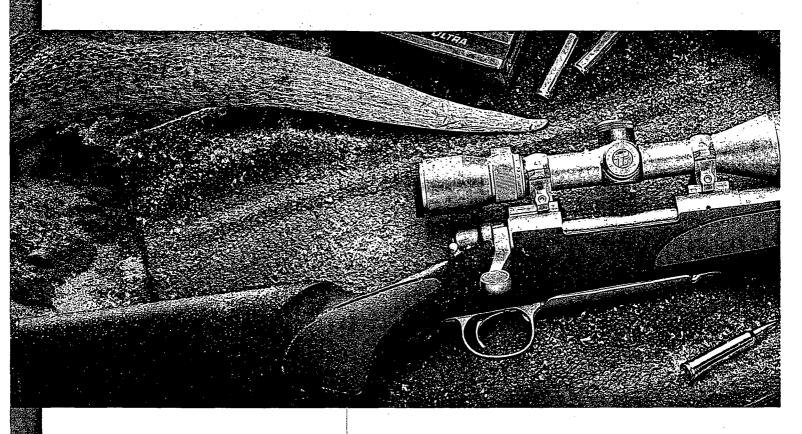

When the Model 700™ was introduced in 1962, it was ahead of its time. And it's even more so over 45 years later. With enhancements such as our new X-Mark Pro™ Trigger, the TriNyte® Corrosion Control System and the continual addition of hot new calibers, barrel contours and stock designs; the strongest and most accurate line of factory-built rifles in the world, is now also the most technologically advanced and versatile. We're proud of the Model 700's heritage — the superior out-of-the-box accuracy, the rock-solid dependability and the generations it's linked. But we're even more excited about where it's headed.

LEADING THE WAY ANYWHERE, ANYTIME.

The Model 700° family has evolved into the most diverse rifle line available to today's hunter and shooter. There are stainless, rich blued and matte finishes to choose from with a variety of stock options, including camo and colored synthetic, American walnut and wood laminate in standard and thumbhole configurations. And the range of calibers available is unrivaled in the industry.

For those who take the hunt to extremes, we offer the world's most advanced protection against corrosion and scratching: Our TriNyte® Corrosion Control System featured on the Model 700 XCR™ (Xtreme Conditions Rifle). This proprietary coating creates a virtually impenetrable barrier from the elements and abuse. New for 2008 is the RMEF Limited Edition XCR™ rifle, chambered in 7mm Remington® Ultra Magnum with a stock camouflaged in new Realtree® AP™ camo. The 25-06 Remington and 7mm-08 Remington have also become standard chamberings in the XCR line (Page 26).

Check out the hot 17 Remington Fireball in the Model 700° SPS° Varmint (*Page 30*), and this year's Model 700 CDL Stainless Fluted Limited Edition rifle (*Page 32*), chambered for the tack-driving 260 Remington. Read on, and you'll find an awesome selection of new chamberings and options in Model 700° rifles, including the addition of the 257 Weatherby Magnum to our Model 700 CDL SF lineup, more left-handed options than we've ever offered before — including the first-ever southpaw youth rifle, the Model 700 SPS Youth. By popular demand, the classic, eye-catching looks of high-polish bluing is now featured on a member of our Model 700 CDL family.

USTED IN HISTORY.



THE BEST KEEP GETTING BETTER. The Model 700[™] is the most accurate production rifle available today. After years of intense R&D, we're taking technology up a notch with our new X-Mark Pro[™] Trigger. It breaks like "glass, has virtually zero creep and offers a level of shot control unmatched by any factory trigger today. While others use gadgets and add-ons to hide inconsistencies, Remington® eliminates them with state-of-the-art manufacturing techniques and the

Remington.
X-MARK

tightest possible production tolerances. A mirror-like finish on its components enhances corrosion resistance and adds to its ultra-crisp feel. The X-Mark Pro™ is standard equipment on select Model 700 and Model Seven rifles, but one shot and you'll know — it's extraordinary by anyone's standards. It's also 100% adjustable for pull weight by a qualified gunsmith. But we seriously doubt you'll need it.

With up to a 40% lower out-of-the-box pull weight, virtually zero creep, one of the most crisp breaks you'll ever feel and 100% adjustability, the new X-Mark Pro is the finest production trigger you'll ever squeeze.

STRENGTH IN NUMBERS. The Model 700 is undoubtedly the strongest action ever conceived. The cylindrical receiver is dramatically more rigid than the traditional flat-bottom types it replaced. Additionally, our famous 3-Rings-of-Steel make it an unshakable vault of strength.

3-RINGS-OF-STEEL

1. Recessed bolt face completely encloses cartridge head for maximum protection against case rupture



2. Barrel surrounds bolt shroud for additional strength

3. Barrel threaded into receiver machined from hardened steel

XCR: THE WORLD'S MOST RESILIENT RIFLE.

Competition (stainless steel)



As proved in a rigorous saltwater test by an independent laboratory, our armor-tough, multi-

layer TriNyte® coating forms a virtually impenetrable barrier to corrosion. It's the most effective on the planet, in fact. (More on page 26)

KING OF THE MOUNTAIN IN 2008



POWER LEVEL AMMUNITION 7mm Remington Ultra Mag ** (Page 65)

Additional firearms chambered for 7mm Remington® Ultra Mag' Model 700 SPS, Model 700 SPS Stainless, Model 700 XCR Camo RMEF and Model 700 XCR.



The Remington Model 700,™ a rifle with no equal, and a superior performer in every way. Its accuracy and dependability have become the standard by which all other centerfire rifles are measured and continually fall short. Still the most accurate out-of-the-box rifle made, the Model 700 brings its famous action and renowned consistency to some new additions to the prestigious family of guns.

With our armor-tough TriNyte® Corrosion Control System, the **Model 700 XCR** is the most durable rifle ever built. And, this year's special Limited Edition Rocky Mountain Elk Foundation Model is dressed in the Realtree® AP¹™ Camo pattern and chambered for 7mm Remington Ultra Magnum — a caliber famous for its ability to make short work of big game at the longest ranges.

Also new this year is the Model 700 CDLTM with a distinctive high-polish blued finish. It's offered in our three best-selling chamberings — the 270 Win, 30-06 Sprg. and 7mm Remington Magnum. Premier Dealers keep demanding the Model 700 CDL Boone and Crockett. Its laminated stock, fluted barrel and medallion insert on the grip cap make it a high-performance rig we're proud to offer again in 2008. Last year, we launched a full line of Model 700 CDL SF rifles with incredible success. We've expanded the family with an additional caliber offering — the flat-shooting, hard-hitting 257 Weatherby Magnum.


The workhorse **Model 700 SPS™** line is as solid and dependable as ever, and we're proud to keep the Buckmasters Edition, including the "Young Bucks" version, filling freezers across America.


TriNyte® Corrosion Control System (Patent pending). Consisting of electroless nickel and proprietary PVD, this armor-tough, multi-layer coating is the world's most effective barrier



against rust and abrasion for firearms, yet is only a fraction of a human hair in thickness. The only thing you'll notice is the near invincibility. Available in a variety of finish colors.




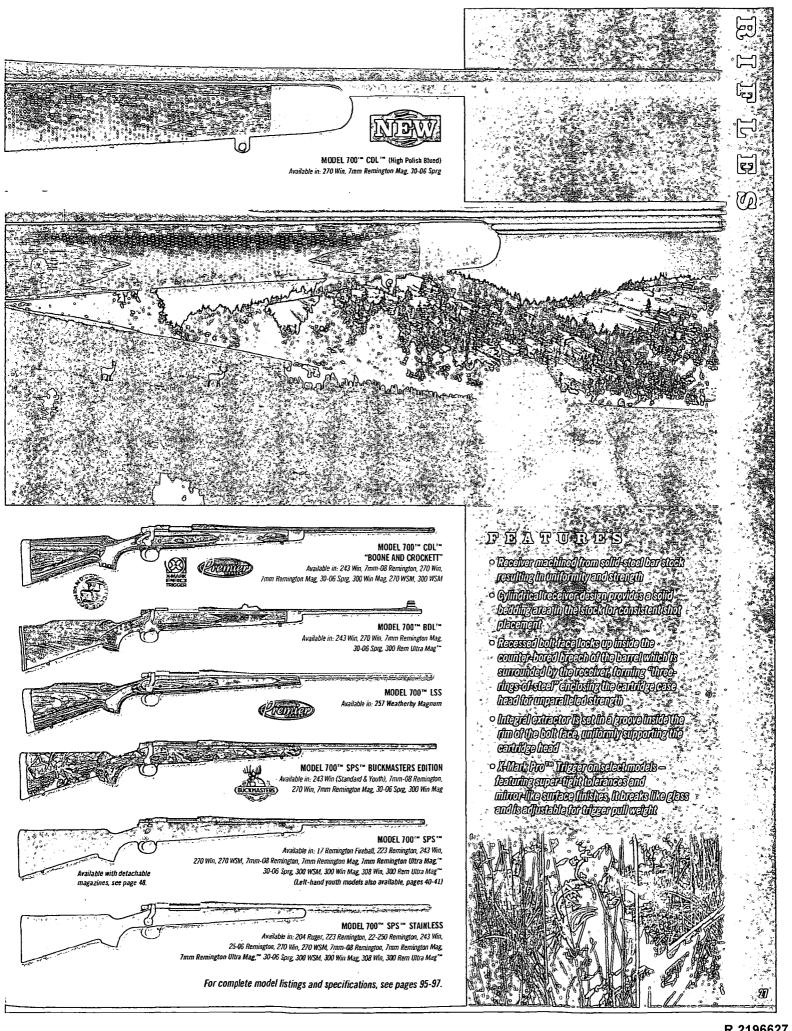

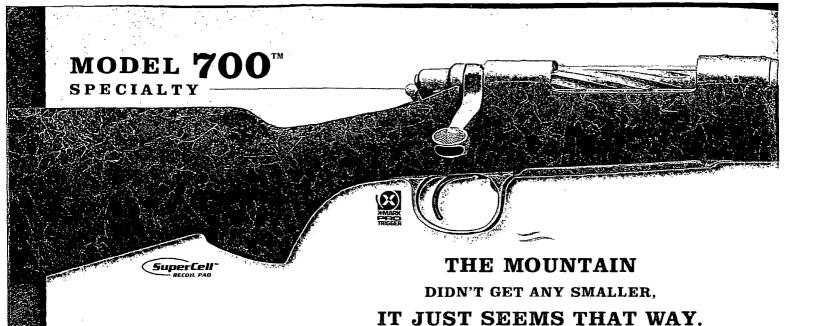

We know the high country demands high standards, that's why we've built the all-new, amazingly light **Model 700™ Alaskan Ti**. Weighing only 6 ¼ pounds long action and 6 pounds short action — it's the ultimate rifle for high-altitude spot-and-stalk hunting. The key to its lightweight feel starts with a titanium receiver that's impervious to weather (drilled and tapped for mounts), incredibly strong and half the weight of steel. Complementing the super-light receiver is a bolt featuring spiral-cut flutes and a 24" magnum contour barrel with light-varmint-style fluting. The action is pillar bedded for outstanding shot-to-shot consistency. Its premium Bell & Carlson stock features their MaxxGuard finish for enhanced durability and SuperCell® recoil pad.


Another favorite for those high-country pack-in hunts is the aptly named **Model 700 Mountain Rifle**. Extremely lightweight, it features a compact stock and tapered barrel to deliver fast, carbine-like handling with full-bore range and accuracy. Its sleek lines, classic shape and superb feel have made it one of our most popular rifles.

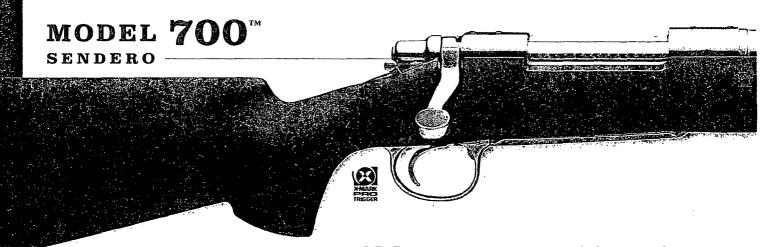

VARMINT-GRADE ACCURACY TO THE NEXT POWER.

Although it has all the great features of a varmint-style gun, the Model 700™ Sendero is designed for something much bigger than a prairie dog. That's because the Sendero is chambered for long-action magnum cartridges for long-range, big-game performance. Hone your skills to match, and you can reach out to the most extreme ranges, thanks to its varmint-influenced target-grade accuracy.

Like our VSSF II, the Sendero is equipped with an H.S. Precision composite stock reinforced with aramid fibers and featuring a contoured beavertail fore-end with ambidextrous finger grooves and palm swell. Full-length aluminum bedding blocks create accuracy-enhancing platforms for its barreled action and its 26" heavy contour barrel features six longitudinal flutes for rapid cooling. Long-range accuracy meets big-game performance in the Remington² Model 700 Sendero.

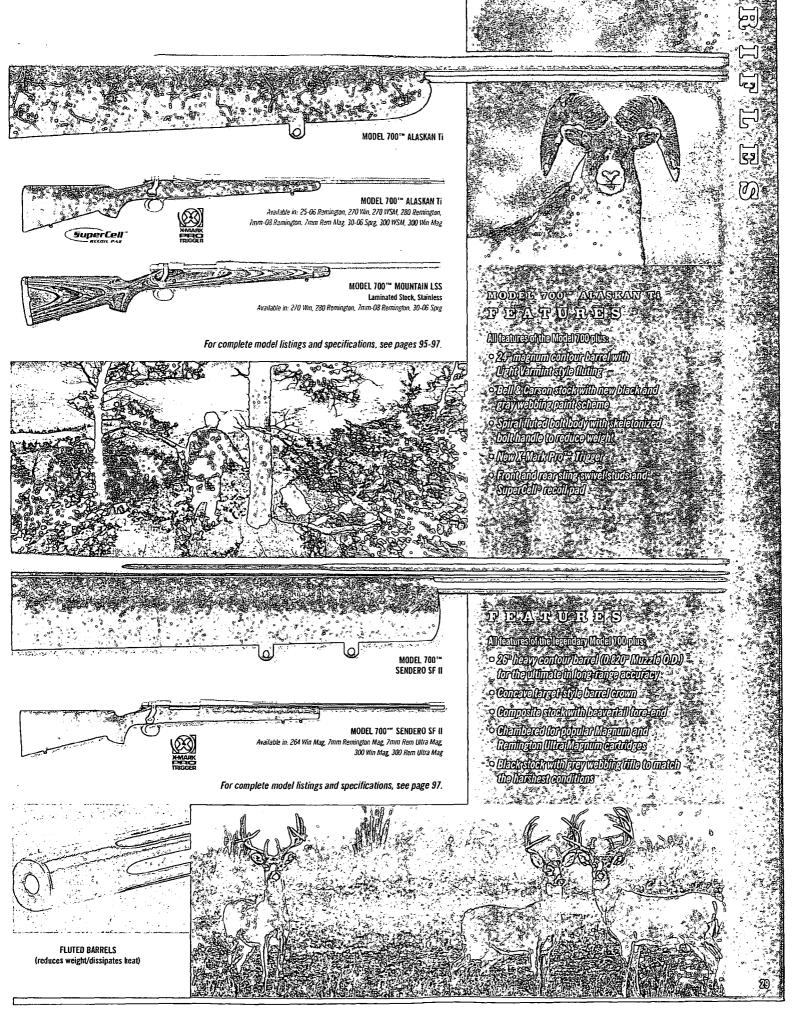




"Why yes, that's really five shots." Tell your friends it's genetics. Fact is, when it comes to precision, there's no finer pedigree in the industry than Remington® varmint rifles. And with the introduction of our new Model 700™ SPS™ Varmint, staking claim to our legendary accuracy is a more attainable feat than ever.

The Model 700 SPS Varmint is capable of punching tiny groups straight out of the box because it's built on the Model 700 action, the most solid, dependable and trusted in existence.

Its 26" heavy contour barrel is perfectly matched to its high-velocity caliber offerings, including the hot new 17 Remington Fireball. Plus, the ergonomically designed black synthetic stock has a vented beavertail fore-end for enhanced grip, reduced weight and better heat dissipation. And sharp predator eyes won't spot the tough, non-reflective matter blued finish on the barrel and receiver. Other standard features include a hinged floorplate magazine, sling swivel studs, and a drilled and tapped receiver. The Model 700 SPS Varmint is destined to leave a lasting impression on any varmint that crosses its line of sight.

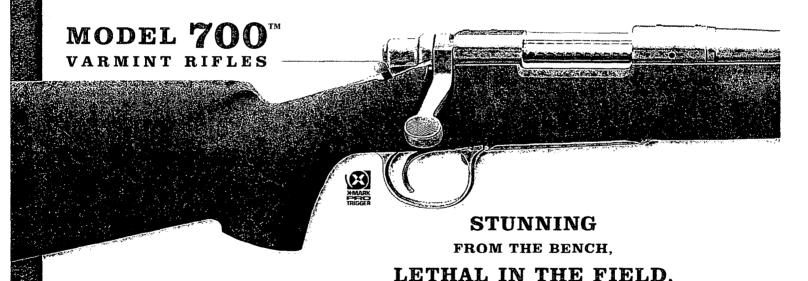



Built on the famous Model 700[™] cylindrical action, Remington[®] Varmint rifles are the most accurate production rifles we produce. You'll be stunned by the degree of precision you get straight out of the box. The varmints won't be so lucky.

The Model 700 VL SSTM TH features a thumbhole stock design for enhanced stability and comfort. Offering great looks and exceptional durability, the stock is crafted of laminated wood. Vents in its widened fore-end facilitate rapid cooling of the heavy-contour stainless barrel, so you can keep driving tacks with any one-of-three hot varmint chamberings.

There's also the Model **700 VS SF** II, a finely tuned machine with full-length aluminum bedding block that creates an ultra-stable, accuracy-enhancing platform. Further improving its shot-to-shot consistency is a 26" heavy contour barrel that's fluted for rapid cooling. Its H.S. Precision composite stock is reinforced with aramid fibers and features a contoured beavertail fore-end, ambidextrous finger grooves and a palm swell. Twin front swivel studs accommodate a sling and a bipod.

For those who prefer the more traditional varmint rifle, there's the time-tested **Model 700 VLS,[™]** with its classic laminated stock and satin-blued barrel. Last but not least is the **Model 700 VSF[™]** with its distinctive desert tan stock with black webbing. All offer the highest level of out-of-the-box accuracy for your small-target pursuits.

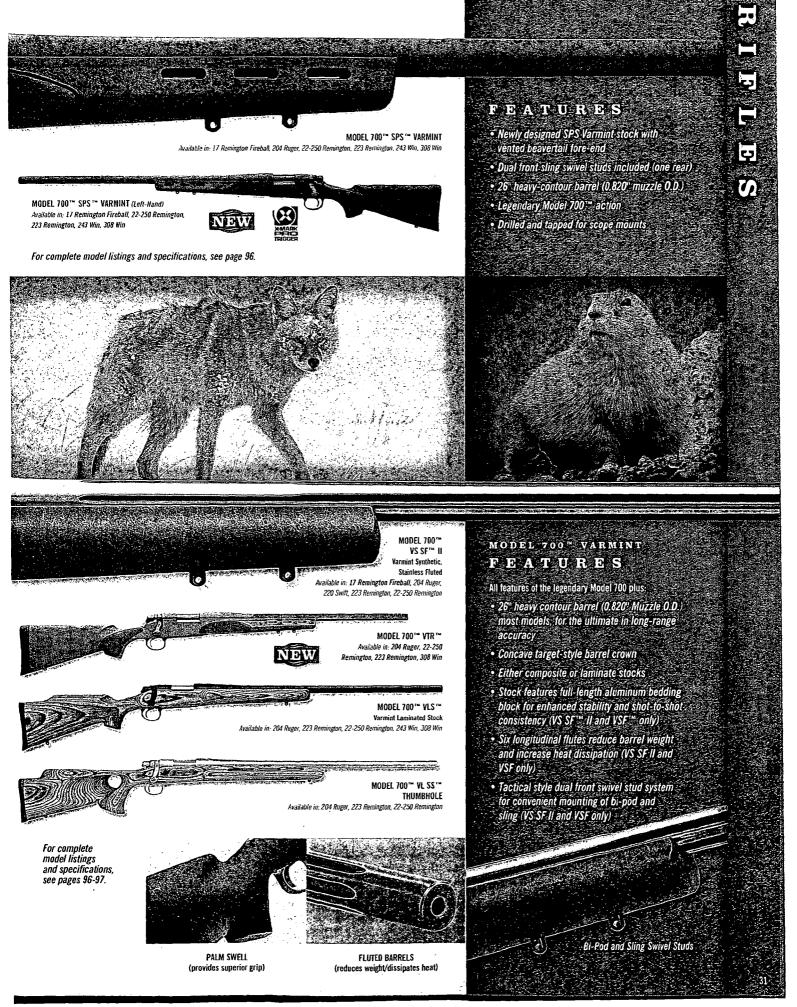

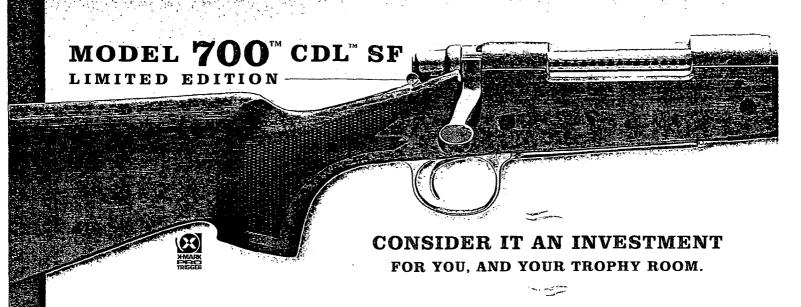

You can try to keep this limited edition rifle in the box, but one shot and it'll be your big-game rifle of choice for life. Chambered for the accurate, flat-shooting 260 Remington,* the Model 700 CDL Stainless Fluted Ltd. is the ultimate embodiment of our world-famous action's sleek lines, good looks and unrivaled out-of-the-box precision.

The 260 Remington is an incredible all-around big-game cartridge. To commemorate its chambering in our newest limited edition rifle, the floorplate is intricately engraved with the cartridge and "260 Remington." The rifle's receiver is heavily roll marked with "Model 700 Limited."

To achieve optimum velocity, the magnum contour barrel is a full 24". It features Light Varmint-style fluting for rapid heat dissipation, and the action and barrel are solidly bedded in our distinctive CDL walnut stock. And prepare to be amazed by the shot control and breaks-like-glass feel of our X-Mark Pro[™] trigger.




HONORING 25 YEARS OF KNOCKDOWN, DRAG-OUT DOMINANCE.



Lightning fast and superbly accurate, the compact, short-action Model Seven has been a leader in the woods since it was introduced in 1983. Join us as we celebrate a quarter century of proven performance with the **Model Seven**TM **25th Anniversary Edition** rifle chambered in 7mm-08 Remington. This rifle is a quintessential Remington classic with some striking commemorative upgrades. Its American walnut Classic Deluxe-style stock is custom laser engraved with "Model Seven 25th Anniversary" and has an intricate 25th anniversary medallion inset at the pistol grip cap area. Adding to its traditional good looks is a high-sheen blued finish on the receiver, bolt and 22" standard-contour barrel. Our ultra-crisp X-Mark Pro Trigger and SuperCell recoil pad are where the good old days stop, and you realize you're experiencing the greatest era in rifle advancement yet.

Our new **Model Seven™ Predator**® is a dream to handle and officially every predator and varmint's worst nightmare. It's decked from butt to bore in Mossy Oak® Brush® camo for concealment, and its fluted, magnum-contour 22" barrel cools quickly when the action heats up. Speaking of hot, the lineup of calibers includes our 17 Remington Fireball. At 4,000 fps, it's sure to light 'em up.

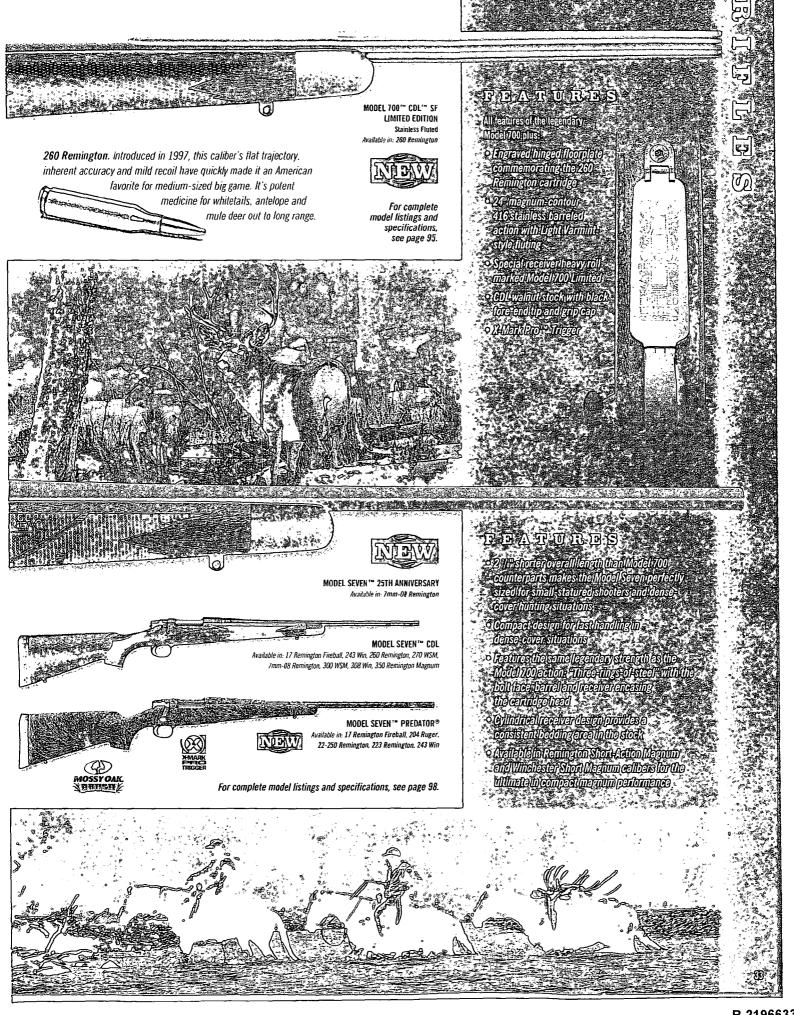




the process of selecting a scope and components. It comes with a pre-mounted and boresighted 3-9x40mm riflescope. But most importantly, it's built to our rigorous standards for accuracy and reliability. Simply choose your ammo and you're ready to shoot.

It features the same great action and barrel as our Model 710 (based on the Model 700™) with super-accurate button rifling, and a more durable magazine latch. Other advancements include a new, ergonomically contoured stock with a raised cheekpiece for rapid scope-to-eye alignment, and grips textured in all the right places for superior shot control.

Available to Premier Dealers, our Model 715™ has many of the same great features as the Model 770, but is equipped with a standard black synthetic stock and doesn't include a scope.

MODEL 798TM/799TM

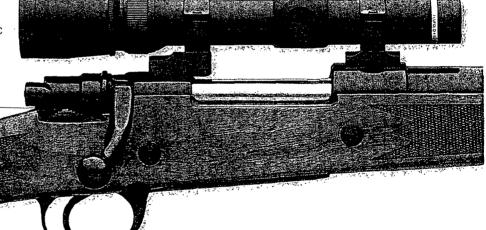


PROVEN ON SAFARI. MADE AFFORDABLE BY REMINGTON.


Welcome custom-shop features in a factory-built rifle. Famous on safari for its amazing strength and reliability, the controlled-round-feed Mauser action is back in mainstream production. That's right, what used to only be available through surplus suppliers and custom shops is now well within reach. We have carefully reworked every aspect of these rifles to meet the tastes and performance demands of today's hunter and shooter. And this year, we're offering the Model 798 chambered in the venerable 375 H&H and 458 Win Mag. Built around a long-action Mauser 98, it's your ticket to dropping the toughest game on earth. Its Realwood™ walnut laminate stock combines the enduring stability and toughness of lamination with the classic good looks of highly figured walnut. This striking woodwork is accented by a richly blued barrel and receiver.

The Model 798 SPS™ is also new to the lineup, featuring a durable black synthetic stock and blued finish. And for 2008, a new walnut stock is offered.

Our quick-handling, compact Model 799 is a scaled-down version of its big brother, the Model 798. It features a miniaturized receiver with the famous Mauser bolt release; a crisp, single-stage trigger; two-position safety; and an all-steel trigger guard and magazine assembly for longevity. It has a rugged, good-looking laminated stock, a deep blued finish and its receiver is drilled and tapped for easy scope mounting. Choose from five popular short-action chamberings.

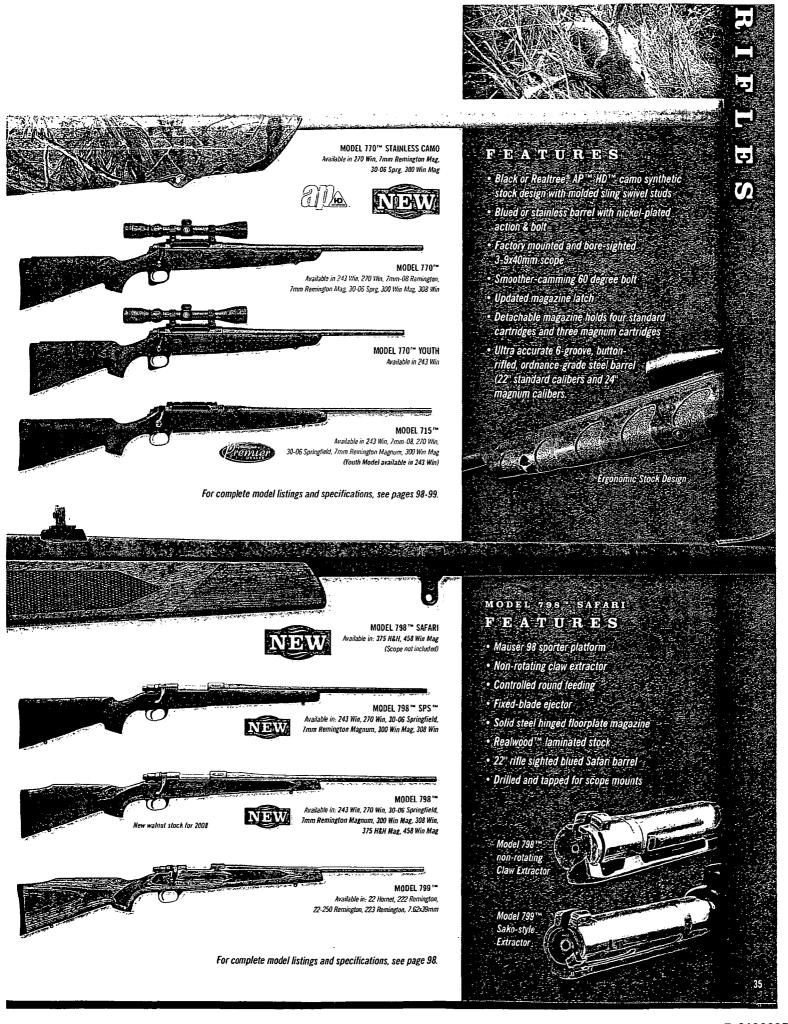



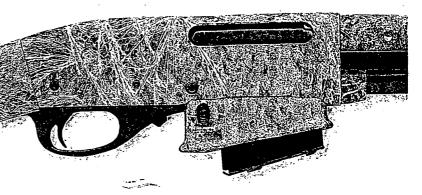

BECAUSE SOMETIMES

YOU NEED A QUICK ONE-TWO

THREE-FOUR-FIVE ...

Maybe you flinched? Or the animal turned at the last split-second? Either way, our Model 7615™ and Model 7600™ centerfire rifles get you back on target — instantly. Because not only are they built to deliver legendary Remington® first-shot accuracy, they're also designed for ultra-fast follow-up shots — without ever having to unshoulder your rifle.

The Model 7615 Ranch Carbine is similar in function to our Model 7615 Tactical, but features a more traditional styling. Its satin-finish American walnut stock houses a 7615 action with a 10-round AR-15 magazine and an 18 1/z" high-polished blue clean barrel. It's drilled and tapped for standard Model 7600 scope mounts. The Model 7615 Camo Hunter is essentially a synthetic version of the Ranch Carbine. Fully covered in Mossy Oak® Brush® Camo, it features a velocity-boosting 22" barrel with rifle sights. It's also drilled and tapped for scope mounts.

Our ever-popular Model 7600 is one of the most proven deerslayers in the woods. It has a 22" barrel, a four-round magazine and is available in wood and durable synthetic models. All of our centerfire pumps feature quick-release magazines and Remington's rotary bolt lock-up design for exceptional strength, safety and reliability.

MODEL 750'


AUTOLOADING RIFLES

PUT FIVE SHOTS THROUGH DEER HUNTING'S NARROW WINDOW.

In the field, patience is a virtue but when it's time to take action, sometimes you need the speed of a Model 750." Its improved gas system provides faster, smoother cycling. And its balanced low-profile design handles like lightning, Rapid follow-ups are its specialty, but famed Remington one-shot accuracy comes standard.

The Model 750™ Woodsmaster™ features a restyled American walnut stock and fore-end with machine-cut checkering. Felt recoil is diminished by its ultra-efficient gas operated action.

For added durability in all conditions, the Model 750 Synthetic features all the Model 750 improvements only with a synthetic stock and fore-end. Go ahead, throw that narrow window wide open with the quickest gun in the woods, the Model 750.

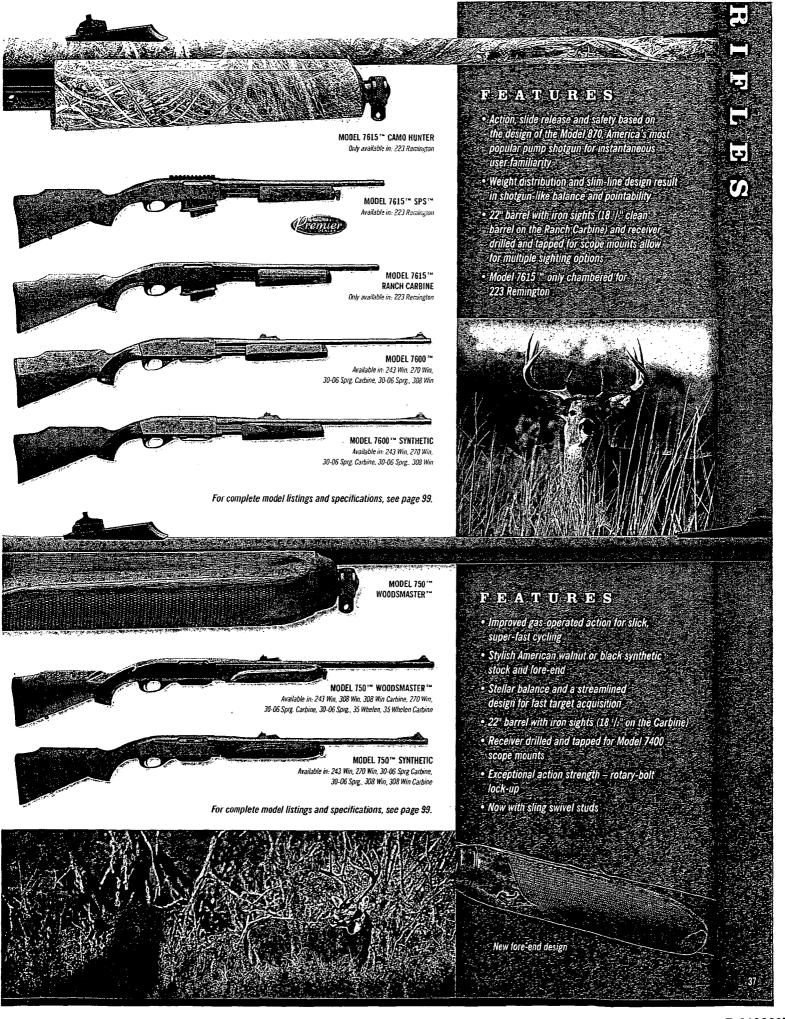

MODEL R-15 VTR™



OPENING UP A NEW ERA,
AND THE SPEED LIMIT,
IN REMINGTON COUNTRY.


We created an unrivaled combination of precision accuracy, blazing-fast follow-ups and hunt-specific features. The new R-15 VTR $^{\text{\tiny IM}}$ modular repeating rifle was born of the most advanced design aspects of AR-15-style rifles available today with a strong emphasis on optimizing form and functionality for the modern predator aficionado. The results are astounding — with very, very fatal implications for every coyote, fox or bobcat that crosses your path.

For peak accuracy, the R-15's 0.680" OD barrel is precision-crafted from ChroMoly steel. It's free-floated within the machined-aluminum fore-end tube and given a recessed hunting crown to ensure gasses escape evenly around the bullet for the ultimate in shot-to-shot consistency. Six longitudinal flutes forward of the gas block promote rapid barrel cooling and increase rigidity while reducing weight, further contributing to this rifle's ability to print tiny clusters at an incredible pace. And our new hunting single-stage trigger design is as clean-breaking as they come. Whether you choose the 223 Remington or 204 Ruger version, the semi-automatic gas action all but eliminates muzzle jump and recoil so your target remains in the crosshairs. And when it's time to add optics, the receiver-length Picatinny rail makes it a rock-solid cinch.

Control comes naturally with the ergonomic pistol grip and lightweight overall design of the R-15. Its uppers and lowers are machined from aluminum forgings for featherweight durability, and the fore-end tube is drilled and tapped for accessory rails.

This new family of firearms consists of three models. Each was designed with input from leading predator authorities and decked in the ultra-effective Advantage[®] MAX-1 HD[™] camouflage to blend with sage, open country and a multitude of hunting terrains. All come with five-round magazines and are compatible with all aftermarket AR-15 magazines and other accessories.

The R-15 VTR Predator Rifle has a 22" barrel with a fixed stock and pistol grip. At 7 ³/₄ lbs, it's extremely stable – the best choice for long shots. Our R-15 VTR Predator Carbine and R-15 Predator Carbine CS* (Collapsible Stock) handle like lightning with their 18" barrels and weigh a mere 6 ³/₄ lbs. – perfect for high-speed hunting scenarios. The Predator Carbine CS features a telescoping stock with a fully adjustable length of pull for a custom fit.

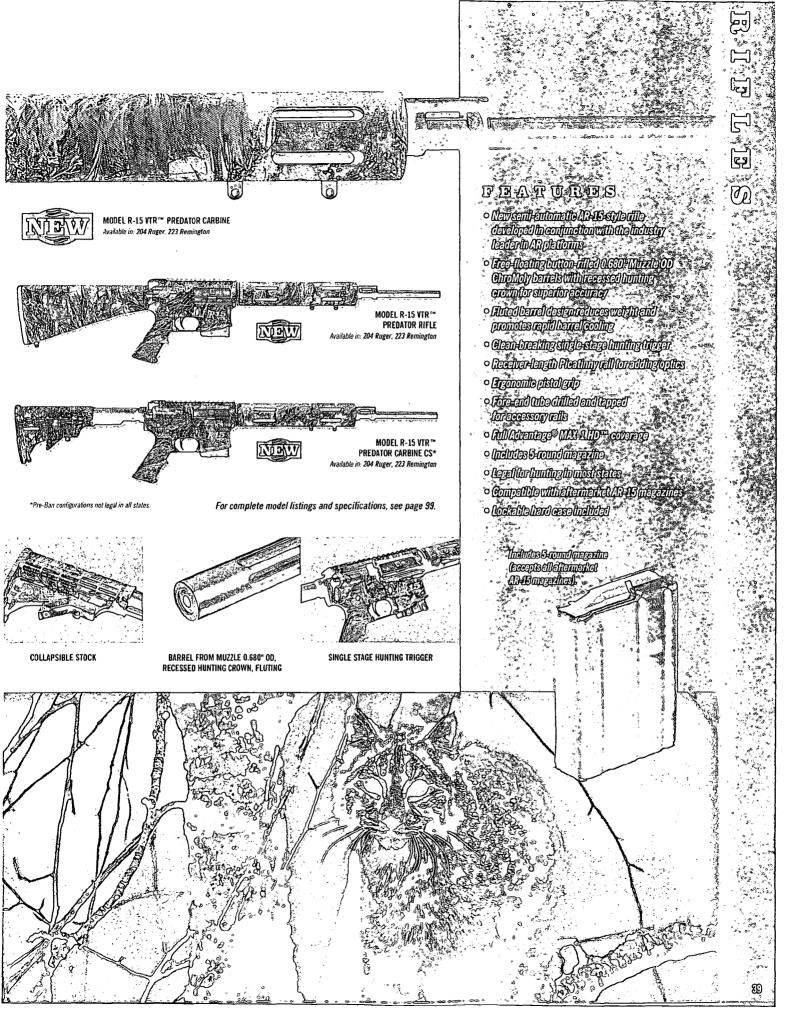

LEFT-HANDED RIFLES


IS MORE THAN JUST RIGHT.

Southpaws are people too, and all people deserve the legendary accuracy and dependability of Remington® Model 700™ rifles. New for 2008, our expanded family of left-handed offerings includes four high-performance additions — the Model 700 SPS™ Varmint, Model 700 XCR, the Model 700 CDL™ and Model 700 SPS Youth Synthetic, the industry's first-ever left-handed youth offering. The Managed Recoil Ammunition line expands to include 7mm-08 Remington, nicely complementing this upgrade to the youth firearms family. Along with our unrivaled standards for out-of-the-box accuracy, all include the new X-Mark Pro™ Trigger system, which offers the highest degree of crispness and shot control you can get from the factory.

The **Model 700 SPS Varmint** sports a 26" heavy-contour barrel complemented by a vented beavertail fore-end for rapid cooling and improved shot-to-shot consistency. It comes in five great short-action calibers including the hot new 4,000-fps 17 Remington Fireball. Other standard features include a non-reflective black matte finish, hinged floorplate magazine, sling swivel studs and a drilled and tapped receiver.

Test your limits with the stainless **Model 700 XCR**. It's the most durable, corrosion-resistant rifle on the planet thanks to exclusive TriNyte® coating. Along with being nearly invincible, it features a sleek black synthetic stock enhanced with gray overmolded rubber grips for superior handling in the most adverse weather conditions.

The **Model 700 CDL** is the quintessential hunting rifle, embodying the best in traditional good looks as well as our leading-edge standards for precision, durability and cartridge chamberings. Only from Remington — our **Model 700 SPS Youth** left-hand has a 1" shorter length of pull, swift-handling 20" barrel and is offered in two venerable big-game calibers: 243 Win and 7mm-08 Remington.

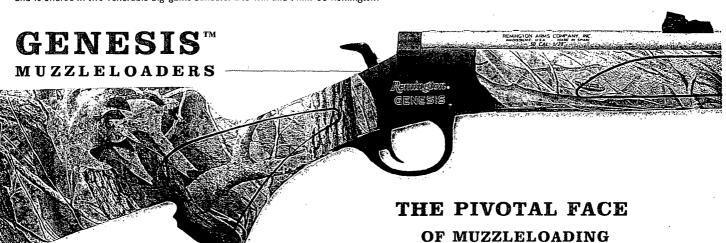


SPEED & EFFICIENCY.

Magnum power, easy cleaning and legendary Remington[®] accuracy in a hot new design that defines reliable. Our innovative TorchCam™ action rotates from the fixed breech for fast priming and locks your 209 primer in a vault of weather resistance. It delivers rapid, super-hot ignition in the most extreme conditions. And to clean, simply unscrew the breech plug, swab the barrel and you're finished.

With a full 28" of powder-burning steel, the Genesis™ generates maximum velocity from magnum 150-grain charges. And you get the swift-handling characteristics of a much shorter gun — the ultra-compact design of the TorchCam action keeps overall length and weight to a minimum.

For safety, the over-travel hammer never comes in contact with the firing pin unless the gun is fully cocked and the trigger is pulled. A crossbolt safety adds extra assurance. Plus, the HammerSpur offers right- and left-handed shooters a rigid grip through cocking and hammer letdown without scope interference.

From the base model equipped with a standard synthetic stock and blued barrel to our super-stable thumbhole models with stainless, fluted barrels, this lineup includes a muzzleloader to suit the preferences and budget of every hunter.

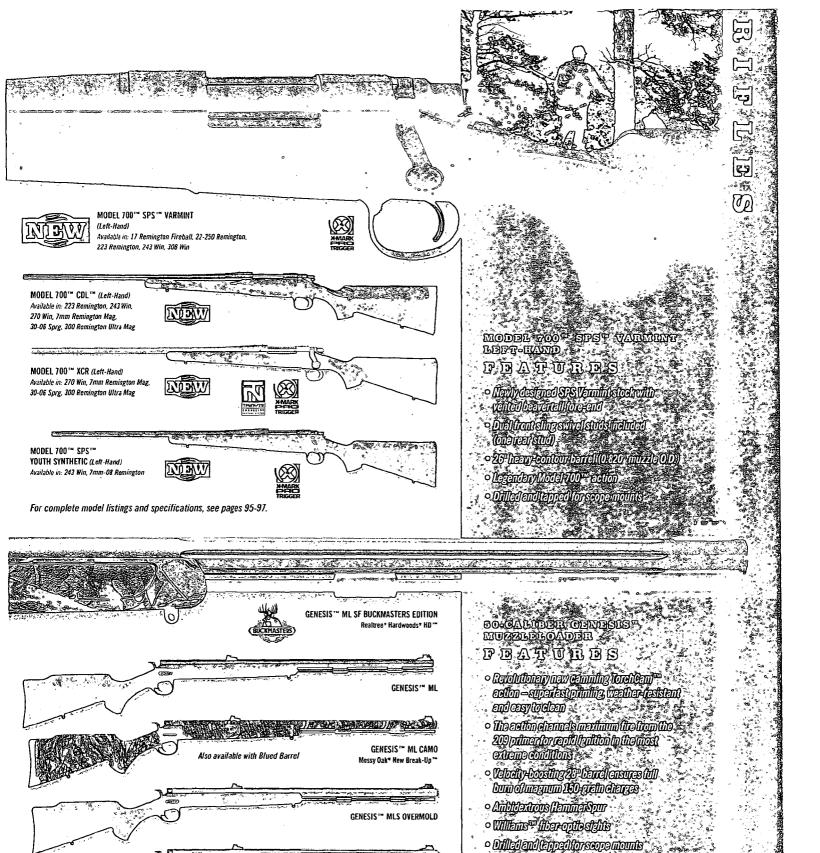

GENESIS™ ML SF

LAMINATE THUMBHOLE

Mossy Oak® New Break-Up™

GENESIS™ ML SF CAMO THUMBHOLE

For complete model listings and specifications, see page 100.

R 2196641

· Alumnum emodlaed remod with feg

o Optimized for use with Remington Kleenbore

ं रिकारिकार्वाद्वायां होता है ।

209 Muzzlebeding Pylineus,

Gossbollsafay
Removable for the complete
Bullsbyddingmuzzle



Our classic Model 552 BDL Speedmaster autoloader and pump-action Model 572 BDL Fieldmaster are two of America's favorites. And they're not only fast, they'll put an entire magazine into the same hole. Both have high-gloss American walnut woodwork with cut checkering, richly blued carbon


steel barrels and fully adjustable iron sights with grooved receivers for easy scope mounting.

R 2196642



YOUTH FIREARMS



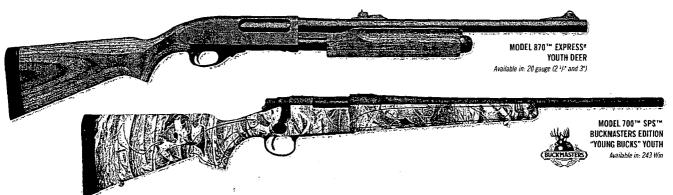

FOR EVERY TRADITION, THERE IS A BEGINNING.

Young shooters are more likely to become stewards of the shooting sports if they start with a gun that fits properly. Exactly why we crafted our standard, premium-grade stocks with a shorter length of pull, then fit them to some of our finest firearms. Adults requiring a shorter length of pull will also benefit from this lineup. Rifles feature 20" barrels and youth shotguns have 21" barrels (20" for deer gun).


The **Model 770™ Youth** is the ultimate first centerfire. The next generation of the hunt-ready Model 710, it's chambered for the mild-recoiling 243 Win. and comes out of the box with a pre-mounted, boresighted 3-9x40mm scope.

Other centerfires include our workhorse, short-action Model 700 SPS™ Youth Synthetic. Now in a left-handed version chambered for 243 Win and 7mm-08 Rem, it's the first-ever southpaw youth rifle offering. Our new Managed Recoil 7mm-08 Rem ammunition is the perfect complement to this addition. Our Model 700 SPS™ Buckmasters "Young Bucks"

model comes in 243 Win., and features a specially engraved floorplate and Realtree® Hardwoods® Grey HD™ stock.

In shotguns, we have the 20-gauge Model 870™ Express® Jr. and Model 870 Express Youth Turkey Gun with Mossy Oak® Break-Up™ stocks and fore-ends. And we still offer the Model 870 Express Youth line, Model 870 Express Jr. and a Model 870 Express Synthetic Youth Combo featuring a 21" vent-rib barrel and a 20" fully rifled barrel. All Jr. offerings have a 1" shorter length of pull than standard Youth models. The gas-operated action of the 20-gauge Model 11-87 Sportsman Youth makes it the ultimate light-recoiling youth shotgun.

Our **Model Five™ Youth** rimfire completes the lineup with superior accuracy and a simple, rugged design that make it a great first rifle. It has a shortened stock and fore-end, a world-class hammer-forged barrel shortened to 16 ½ and fully adjustable rifle sights.

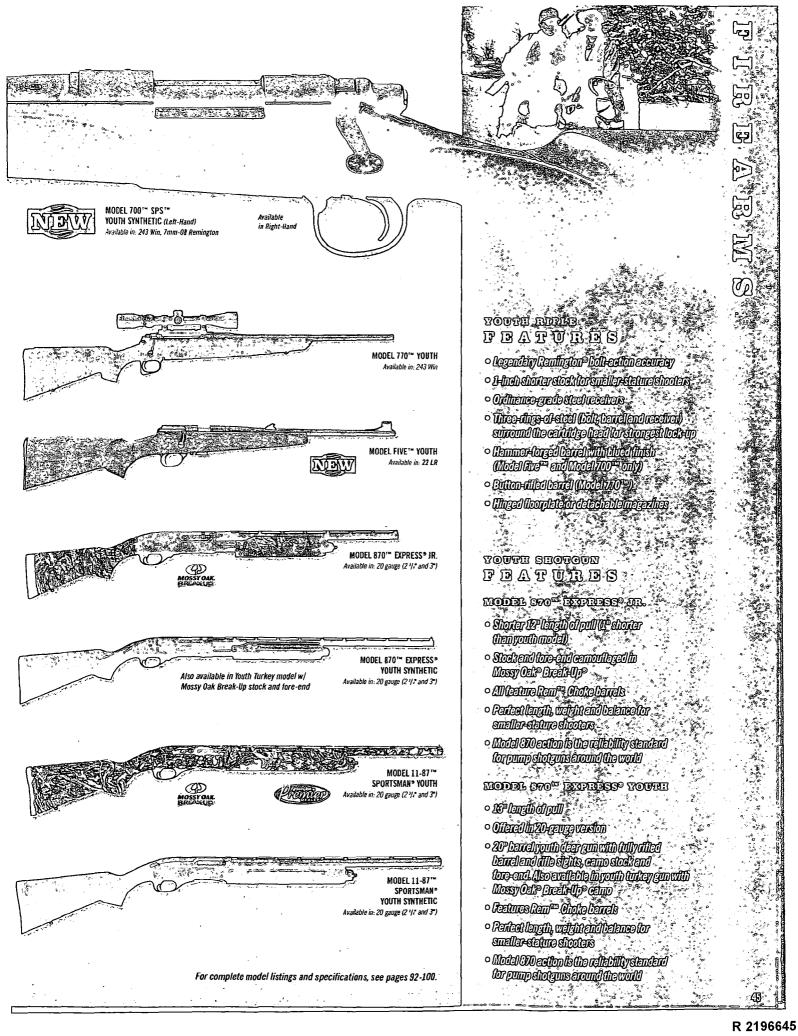

CUSTOM SHOP

When your zeal for fine equipment is surpassed only by your love for the shooting sports, you owe it to yourself to visit the Remington® Custom Shop. The 500-yard rifle, 40 shots in the bull, an ultra-specialized companion for your hunt of a lifetime, stunning aesthetics and one-of-a-kind exclusivity—no matter the aspiration, we singularly craft long arms to meet and exceed the most elevated standards for excellence. Our limited number of craftsman is testament to the rarity of their skill level. They hone components, engrave and accurize to a benchmark best described as perfection. We employ the most advanced gunmaking equipment available today to fulfill a wide range of critical applications, with the unyielding constants being supreme accuracy and robust integrity to last a lifetime and more.

WWW.REMINGTON.COM

You've arrived. Remington Custom Shop is home for those with an undying dedication to excellence. We bring the dream of perfection to fruition. From benchrest aficionados to collectors, passionate hunters to lovers of aesthetic refinement, your rifle is here. Even if you're not currently in the market for a custom firearm, one look and you will be. Stop wishing. Visit us on the Web today.

Remington.

REMINGTON CUSTOM SHOP PERFORMANCE


MODEL 40-XB™ KS

Engineered Accurate. Custom-turned and chambered barrels, trued actions and bolt lugs lapped to ensure full contact and deliver pinpoint accuracy.

Engineered Reliable. The extreme precision with which a Custom Shop rifle is built creates a flawless meshing of components and a piece of machinery that will go the distance. Everlasting? You be the judge.

Engineered to Fit. Your firearm is designed and crafted by serious shooters. From our hands to yours, a Custom Shop rifle is a finely tuned instrument.

Engineered Tough. A Remington Custom rifle is a true shooter's tool, designed and built to weather the harshest conditions.

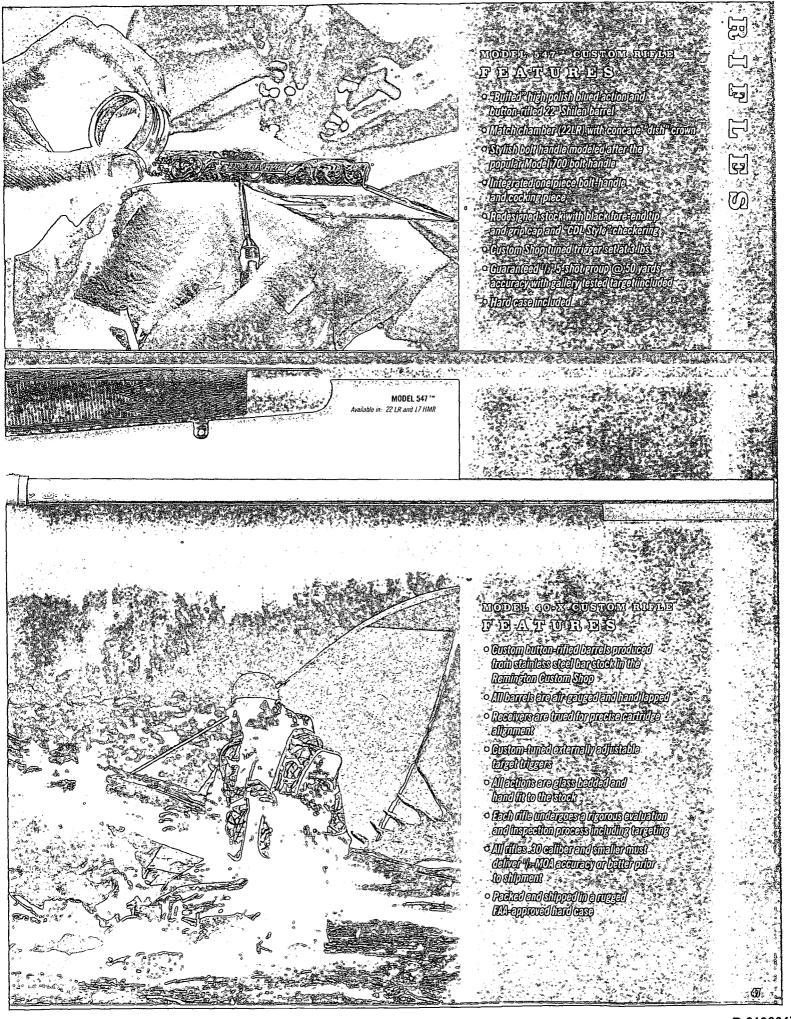


PACKAGED FACTORY PARTS

THE ONLY FITTING CHOICE FOR YOUR REMINGTON

SHOTGUN. If you own a Remington shotgun you know quality and when it comes to replacement parts there's only one brand good enough - Remington. We offer a wide variety of original factory barrels ranging in styles from vent rib, to cantilever to riflesighted, so you never have to compromise the superb craftsmanship and dependability that make Remington ownership a matter of pride. Whether you want your Remington shotgun to perform like two, or you're looking to restore "an old friend," there's no substitute for Remington replacement barrels.

(For complete model listings and specifications, see page 101.)




MODEL 597™ SCOPE RAIL

- · One piece scope mount rail
- · Allows use of Weaver-type rings for full-size 1" scope
- · Lightweight and easy to install
- · Made in the USA


MODEL 1100 TM /11-87 TM GAS SYSTEM KIT

- · Genuine factory replacement parts
- · Nickel-plated piston/piston seal
- Teflon®-coated



SHOTGUN PLUG





- Easy to install and lightweight
- Perfect for adding magnification and the precision of scope sighting

UNIVERSAL MAGAZINE CAP

- Fits all 12, 16 and 20 gauge Model 870's, Model 1100's and Model 11-87's
- to your Remington shotgun



PROBORE® CHOKE TUBES

- 12 gauge extended and flush
- Fits Remington Models 1100™ G3 12 ga., Model 1100™ Competition, Model 105 CTi,™ Premier® Over & Unders 12 gauge that are equipped with interchangeable



REMINGTON* CHOKE TUBES

- · Performance tuned for all Remington shotguns
- · Field and target constrictions for optimal pattern performance
- · Fully rifled tubes for today's high performance sabot slugs
- · Turkey tubes for maximum pattern density



SPR™ CHOKE TUBES

- · Fit Remington® Model SPR™ shotguns with screw-in chokes
- · Compatible with Baikal/EAA products that are equipped with interchangeable chokes in the same gauge
- · All SPR choke tubes approved for lead/

steel shot



MODEL 597" MAGAZINE



- · High quality polymer construction
- · Chrome-silicone spring for max spring life
- · Comes in Black or Clear
- · 30-round capacity for 22 LR
- Made in the USA



METAL MAGAZINES

- · Constructed from a lightweight, magnesium-based alloy
- · Cast as one piece
- Ideal for demanding. high-volume use
- Six-round magazine (Model 504™)
- 8-shot magnum, and 10-shat - long-rifle capability (Model 597™





MODEL 597**


MODEL 504™


MODEL FIVE™ MAGAZINE

- 22 LR or 22 WMR
- 5-round capacity
- · Constructed from stamp steel



CENTERFIRE MAGAZINE BOXES






· Allows you to add a sling



OUR PUMP BEATS THEIR SEMI-AUTOS.

The world's most effective recoil pad. So potent, in fact, it single-handedly helped our Model 870 generate up to 54% less recoil than our leading competitors' autoloading shotguns with factory pads. Its millions of tiny Super Cells absorb and release energy over a longer time period to create a more comfortable shooting experience than was ever before possible with conventional materials.

(For more information, see pages 2-3.)





STOCKS/FORE-ENDS

MODEL 870™ & 11-87™ SHURSHOT™

- · Ambidextrous design for turkey, deer and predator hunters
- · Ergonomic grip for solid shot placement
- · Lightweight synthetic construction
- Available in Black and Mossy Oak®-Obsession™
- Comb designed for perfect eye-alignment with sights and/or scope
- · Molded in sling swivel stud







For more information, see page 3.

MODEL 870.™ 1100™ & 11-87™

- · Available in Black and Mossy Oak® Break-Up®
- 16-ga. and 12-ga. youth and adult











MODEL 11-87 **

MODEL 700™ & MODEL SEVEN™

· Available in Black synthetic



Visit www.remington.com for our complete line of stocks & fore-ends.

DECALS

- · White vinyl die cut decals
- · Waterproof
- · Oil, acid and alkali resistant
- · Usable on smooth and corrugated surfaces
- Heat resistant up to 350 degrees
- Up to 7 years outdoor durability







Ÿ

Ø

Ţ

PREMIER® ACCUTIP BONDED SABOT SLUG

A NEW LEVEL OF PINPOINT PRECISION AND DEER-LEVELING PERFORMANCE.


It doesn't just look intimidating, it's flattening whitetails and competitors in the tipped-slug market with devastating ferocity. Guided by our new Power Port™ Tip, the AccuTip Bonded Sabot Slug delivers a degree of accuracy and terminal performance unmatched by any other we tested. This masterpiece of aero-dynamics consistently prints tiny 100-yard groups and transfers tremendous knockdown force out to the farthest reaches of shotgun range. It's the largest tipped slug you'll find anywhere. In field testing, this huge .58-caliber slug produced gaping wound channels and crumpled every deer it touched with a single shot. From 5 to 200 yards, it yields perfect mushrooms and over 95% weight retention thanks to its spiral nose cuts, bonded construction and high-strength cartridge brass

jacket. With performance as revolutionary as its appearance, this is one tip sure to get stunning results. Available in 2 3/4" or 3" 12-gauge versions for 2008.

 Power Port™ Tip delivers dramatically superior accuracy

FEATURES

- Spiral nose cuts and proprietary bonding technology control expansion at all ranges from 5 to 200 yards
- Huge .58-caliber slug is the largest tipped slug available today
- Over 95% weight retention weighs more after impact than all the others start with!
- Slug jacket made from high-strength cartridge brass
- Designed for use in fully-rifled barrels only



CONTROLLED
EXPANSION — ANOTHER DEADLY MUSHROOM

	ma fina	i. Open		(E1901) (OP)		ne. Di	3) WTD	Chri		o Ode			1971.
				PREM	MER: AC	CUTIP P	OLYMER-	TIPPED S	LUGS			_	
NEW	PRA12	12	23/4	385-gr.	1850	1611	1401	2925	2218	1677	2.7	3.6	0.0
NEW	PRA12M	12	3	385-gr.	1900	1656	1439	3086	2344	1771	2.5	3.4	0.0





The Premier*
AccuTip slug
exhibits impressive
accuracy at all
ranges. (5-shot @
100 yds. with 2.2° groups)

HIGH-PERFORMANCE SLUGS


PREMIER* CORE-LOKT* ULTRA

BONDED[®] SABOT SLUGS. This is one slug that's anything but sluggish when it comes to performance. The Remington[®] Core-Lokt Ultra Bonded[®] is a sleek, ultra-fast, flat-shooting shotgun sabot slug that's virtually in a class of its own. With incredible accuracy, it delivers a 385-grain, .50-caliber, jacketed, bonded bullet that yields near 100% weight retention and expands to 2x in diameter.

Designed for use in fully rifled barrels only, the Core-Lokt³
Ultra Bonded offers a high-tech blend of sabot
power and surgical precision that could


be just what the doctor ordered.



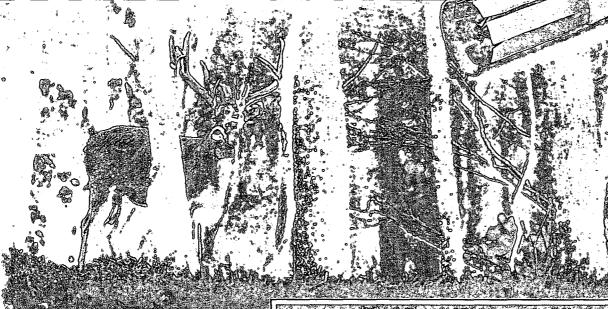

MANAGED-RECOIL* COPPER SOLID* SABOT

SLUGS. The best-selling terminal performance and accuracy of our Copper Solid Slug is now available in a reduced recoil load. With 40% less recoil, they're perfect for anyone who wants outstanding on-game results without the rearward punch. Or, use them to sight-in, then step up to full loads. There's no finer slug load for young or recoil-sensitive hunters.



depth.	Bro.			The state of			The state of	X004	mi.	D	1 10	1 15010
		1	PREMIER!	CORE-L	.OKT° L	ILTRA BONI	DED" SA	BOT SLUG	iS			
PR12CLU.	.: 12	. 27	385-gr.	1900	1770	1648	3086	2682	2325	l i	3 , 24	0.0
PR20CLU	20	2 1/4	260-gr.	1900	1750	1615	2084	1774	1506	2.0	2.7	0.0
			PR	EMIER*	COPPE	R SOLID* S	ABOT SL	UGS				
PR12CS	12	2 1/4	1.1	1450	1320·	1208	2040	1689	1417 -	0.0	1 3.5	
PR12MCS	12	3	1	1550	1408	1283	2331	1923	1597	0.0	t -2.9	
-PR20CS	20	2 1/4	1/4	1500	1360	. 1240	- [444	: 1187	986	0.0	-3.1	
			MANAC	ED REC	OIL™ C	OPPER SOL	ID" SAB	OT SLUG				
RL12CS	12	21/	<u> 1</u>	1200	1113	1046	1400	1204	1063	0.	5.5	i Jaini

t 0.0 indicates yardage at which shotgun was sighted in

PREMIER® COPPER SOLID® SABOT SLUGS. The

unique, all-copper shotgun deer load. Designed specifically for use in fully rifled barrels. Outstanding on-game performance with 2x

caliber expansion and virtually 100% weight retention. Consistently delivers 21/2", 5-shot groups at 100 yards.



HIGH-PERFORMANCE SLUGS

BUCKHAMMER® LEAD SLUGS. When it's time to put the hammer down, this lead slug delivers a devastating one-two punch of precision and explosive power. Specifically designed for rifled barrels and rifled choke tubes, it has an attached stabilizer that optimizes flight to produce 3-inch, 100-yard groups. And weight retention at impact is consistently 100 percent. Choices include 12- and 20-gauge

full-power and Managed-Recoil™ versions. This season, put that big buck down for the count with the hardest-hitting, most accurate lead slug in the woods. BuckHammer.®

THE BUCKHAMMER® LEAD SLUG FEATURES AN IMPRESSIVE
MUSHROOM PROGRESSION. THIS EXPANSION CREATES DEVASTATING ON-GAME PERFORMANCE.

The BuckHammer's lead slug offers near 100% weight retention with full 12-gauge

(.73 cal.) diameter.



25 Yards



50 Yards



75 Yards



100 Yards



SHOTSHELLS


PLASTIC SHOTSHELLS

125 Yards

Index/EDI No.	Gauge	Length (in.)	Slug WL (oz.)	Velo Muz	ally (ft./ 50 yd	ec.) 100 yd.	Er Muz	ergy (ft. 1 50 yd	b I 100 yd.	16 50 v d	jedoty (100 yrl	n) 4150 pd.
l				BUCK	MMAH	er* lead s	LUGS					
SP12LSS :	12	2 1/4	11/4	1550	1320	1145	2935	2177	1600	0.0	-3.6	
SP12MLSS	12	3	1 1/4	1500	1234	1059	3232	2281	1710	0.0	-4.0	
SP20LSS	20	23/4	1	1500	1159	995	2236	1461	1074	0.0	-4.6	
SP20MLSS	20	3	1	1550	1245	1051	2470	1592	1135	0.0	-4.1	
			MANAG	ED-RECO	IL" BU	JCKHAMME	R° LEAD	SLUGS				
RL12LSS	- 12	2 1/4	11/4	1350	1107	972	1991	1340	1032	0.0	-5.5	
RL20LSS	20	2 1/2	³/ _E	1275	1057	938	1379	948	746	0.0	-62	

The unique design of the slug causes it to literally bond with the stabilizer as it travels down the barrel, resulting in unprecedented true flight.






The BuckHammer® Lead Slug exhibits impressive accuracy by putting 100 shots inside an



SLUGGER° & SLUGGER° HV

SLUGGER' HIGH VELOCITY RIFLED SLUGS.

This higher velocity slug exits the barrel at 1,800 fps, 13% faster than standard 1 oz. slugs. The $^{7}/_{3}$ oz. Slugger High Velocity delivers more energy at 50 yards with flatter trajectory on deer than standard 1 oz. slugs. Produced in most popular slug loadings -2 $^{3}/_{3}$ " and 3" 12 gauge and 2 $^{3}/_{3}$ " 20 gauge. Designed for the avid deer hunter using smooth bore guns.



SLUGGER® RIFLED SLUGS.

Remington's most popular, accurate, hard-hitting slug. Slightly oversized for great smoothbore shotgun performance, resulting in better sealing against the barrel wall for greater accuracy.

			SLU	GGER" HIG	GH VELO	ITY RIFLE	D SLUGS				
SPHV12RS	12	21/4	η,	1800	1252	978	2751	1517	813	0.01	-4.1
SPHV12MRS	12	3	74	1875	1302	998	2989	1442	847	₹0.0	-3.7
SPHV20RS	20	2 1/-	1/2	1800	1321	1037	1575	848	523	0.0 t	-3.6
				SLUG	GER* RIF	LED SLUGS	<u> </u>				
SP12RS	12	21/4	i	1560	1175	977	2361	1340	926	0.0	-4.8
S12SRS	12	2 3/4	i	1680	1285	1045	2738	1605	1059	0.0 ^t	-3.8
S12MRS	12	3	1	1760	1345	1075	3005	1753	1121	0.0 [†]	-3.4
SP16RS	16	2 1/1	%	1600	1175	965	1989	1072	724	0.01	-4.8
SP20RS	20	2 1/:	1/3	1580	1240	1034	1513	931	648	0.0	-4.2
SP41RS	.410	2 1/2	⅓.	1830	1335	1040	654	348	211	0.0†	-3.5
SP41RS	.410 1	2 1/2				GGER* RIF			211	0.01	-3.5
RL12RS	12	21/4 **	1	1200	988	873	1397	948	739	0.01	-1.4

BUCKSHOT-



EXPRESS* MAGNUM AND EXPRESS* BUCKSHOT.

One of the great values in shotgun deer loads. A combination of heavy cushioning behind the shot column and a granulated polymer buffering helps maintain pellet roundness for tight, even patterns.

Onder 9		Sign.	Vilceity	<u> विल्डिकी</u> ली	(Alba)
(DC)	Carp	(COOSI)	(M839-833M)	Site	Coun
	EXPRES	S" MAGNUM I	BUCKSHOT LOAD	S – BUFFEREI)
12SB00	12	2 1/2	1290	00	12
12HB000	12	3-	1225	000	10
12HB00	12	3"	1225	00	15
12HB4	12	3"	1225_	4	41
1235B001 :	12	3 1/3"	1125	. 00	18
	- EX	PRESS' BUCK	SHOT LOADS - B	UFFERED	
128000	12	2 1/2	1325	: 000	8
128001	12	2 %-	1325	00	9
1280	12	27/:	1275	. 6	12
1261	12	2 %*	1250	i	16
1284	- 12	2%	1325	4	27
2083	20	23/4	1220	3	20
		MANAGED-	RECOIL™ BUCKS	нот	
RL12BK00	· 12	21/4"	1200	00	8

Utilizes Remington* Power-Piston one-piece was

WINGMASTER HD

DROP-DEAD BETTER.™

The company that redefined lethal shotgun range is proud to unveil the next generation of heavy-density devastation. Wingmaster $HD.^{TM}$

This hard-hitter stretches the kill zone with an ultra-tuned combination of density, shape and energy. At 12.0 grams/cc, it's 10% denser than lead; the scientifically proven optimum density for pellet count and pattern density. Plus, its smooth, round shape delivers awesome aerodynamics and sustained payload energy. It all adds up to the most devastating patterns possible.

Wingmaster HD is nearly as soft as steel shot, which makes it easier on your barrel. And it's more responsive to chokes, allowing you to open up the pattern for close-range hunting or stretch shotgun range to its farthest reaches.

Absolutely no shotshell on the market can touch Wingmaster HD at long range. All of its revolutionary characteristics — optimized density, ultra-round shape and consistent size — come together on game with an unmatched level of deadly force. Patterns with Wingmaster HD will put 60% of the pellets in a 30" circle at 60 yards. Waterfowl, turkey and varmints don't know harm's reach yet. It's Wingmaster HD.



THE ULTIMATE EXTENDED-RANGE PAYLOAD

Wingmaster HD™ Waterfowl and Predator Payloads

FEATURES

- HD = Heavy Density
- 12.0 g/cc density for optimal combination of pellet count and pattern density
- · Proprietary composite of Tungsten-Bronze-Iron
- · Round, consistent pellets:
 - Travel straighter and longer
- Improve long-range lethality
- Tighter patterns
- More even pellet distribution
- · Uniform pellet density
- Softer pellets are easier on your barrel and more responsive to chokes
- Better patterns at long and short ranges more lethal than lead
- Approved for waterfowl hunting by the USF&W and Canada

Non-toxic, 56% denser than steel and 10% denser than lead, it's the most lethal choice whatever you're shotgunning for:

WATERFOWL • TURKEY • PREDATORS

Denser patterns Devastating pellet energy Flies true – near perfect shape

Steel Magnum – 12-ga., 3" – 1 3/8 oz., #3 shot

Remington


WINGMASTER HD™ VS. STEEL MAGNUM Use pellets three sizes smaller with Wingmaster HD and get per-pellet energy equal to steel - with double the pellets on the target.

Remington

Wingmaster HD – 12-ga., $3'' - 1^{3}/8$ oz., #6 shot

12.0 G/CC - BEST PELLET MATERIAL DENSITY


Testing proves Wingmaster HD™ delivers the best combination of pellet energy and pattern density.





MORE UNIFORM WEIGHT

Wingmaster HD's (Heavy Density) smooth, round pellets are extremely aerodynamic. They are uniform in weight and true to listed shot size.

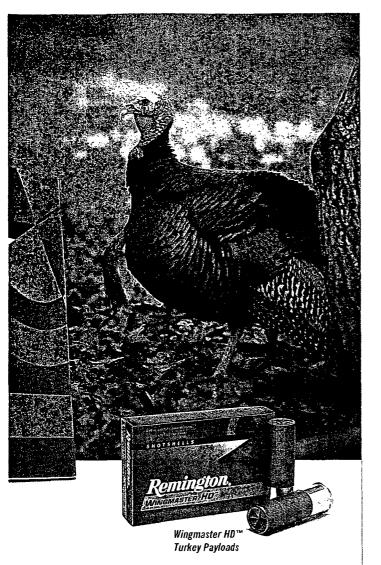

WINGMASTER HD" WATERFOWL PAYLOADS - 10 ROUNDS PER BOX RWIOB 10 1300 RW102 3 1/2 11/2 RW104 RW12S4 12 .21/4 - 1325. 4% RW12S6 RW122 12 1450 RW124 RW126 RW12M2 1450 1 % RW12M4 RW12M6 RW12HMB 11/2 RW12HM2 RW12HM4 RW1235MB RW1235M2 :1300 RW1235M4 RW1235M6 RW20SM4 -- 24: RW20SM6 RW20M4 -- 3 ~1300 --- 11/ RW20M6 WINGMASTER HD MAGNUM TURKEY PAYLOADS 5 ROUNDS PER BOX RW12HMH4 1225 ----i % RW12HMH6 RW1235HM4 1225 11/5--3 1/2 RW1235HM6 RWZ0HM4 1185 1-1/4 RWZ0HM6 WINGMASTER HD" PREDATOR PAYLOADS - 10 ROUNDS PER BOX 12 RW12VT :1300 11/2 RW1235VT 12 3 1/2 1350 1 1/2

EW


EW

NITRO-STEEL

WATERFOWL

THE MIGRATION'S STEEL WALL.

Short or long, Nitro-Steel $^{\rm m}$ stops 'em dead with tight, consistent patterns and premium zinc-plated steel pellets - it's premium performance at a very reasonable price. And we make it in a wide range of loads to suit any hunt - 10 to 20 gauge, maximum payloads and high velocities. Trust your dollar to a legend. Remington. $^{\oplus}$

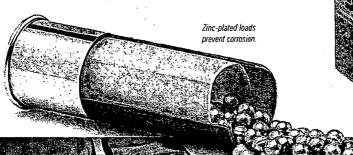



FEATURES

- · Loaded with top-quality, premium steel shot
- · Zinc-plated shot to prevent corrosion
- Wetproof[™] sealed at primer and mouth
- High-velocity and magnum loadings
- · Complete line for all waterfowl hunting situations

56	C.	length In	Velocity (ft./sec. @ 3 ft.)	010000 018001	Shill Sizes
	NITR	O-STEEL" HIG	H VELOCITY MAG	NUM LOADS	
NS10M	10	3 %	1260	1%	T; BBB; BB, 2
NS12HVS	12	2 1/4	1390	1 %	2,4
NS12S	12	2 %	1275	. 1/.	BB, 2, 4
NS12HV	12	3	1550	1 %	BB, 2, 4
NS12M	12	3	1450	1 1/2	T, BBB, BB, 1, 2, 3, 4
NS12HM	12	3	1300	1 1/4	T. BBB, BB, 2, 3, 4
NS1235HV	12	3 //	1550	1 1/2	T, BBB, BB, 2
NS1235	12	3 1/2	1300	J 1/1	T, BBB, BB, 2
NS16HV	16	2 1/2	1300	º/s	2, 4
NS20HVS	20	23/4	1425	3/2	2, 4
NS20M	20	3	1330	1	2, 4

SPORTSMAN" HI-SPEED" STEEL LOADS



HIGH VELOCITY, HIGH VALUE.

- Economical, Hi-Speed™ steel loads
- · Waterfowl loads for every hunting situation
- Upland loads for use in non-toxic zones and for practice shooting
- · Shot size selection to match your game

	SF	ORTSMAN" H	II-SPEED" STEE	L LOADS	
SSTHV10	10	3 ½	1500	12/9	68, 2
SST12	12	2 1/2	1355	1	6.7
SST12S	12	27/4	1375	11/4	2.4
SSTHV12H	12	3	1550	1 1//	6B, 2, 4
SSTHV12HM	12	3	1400	1 1/4	BB, I, 2, 3, 4
SST12HIA	12	3	1300	1%	6B, 2
SSTHV1235	12	31/2	1550	1 1/4	BB, 2
SS129	20	2 1/=	1425	3/4	7

LEAD MAGNUMS

PREMIER® HIGH VELOCITY MAGNUM COPPER-PLATED BUFFERED TURKEY LOADS.

The high-performance lead load for avid turkey hunters. 3" and 3 1/2" 12-gauge payload leaves the muzzle at 1,300 fps. Delivers hard-hitting knockdown power. Loaded with our Power Piston® one-piece wad and

Magnum-grade Copper-Lokt® lead shot for dense patterns and deep penetration.

PREMIER* MAGNUM COPPER-PLATED BUFFERED TURKEY LOADS.

Our original Magnum turkey loads. As fine a lead shotshell as you can carry in the woods. Magnum-grade Copper-Lokt® shot is cushioned with special polymer buffering and further protected by our Power Piston® one-piece wad for dense, even patterns. Delivers superb performance and devastating knockdown power out of tightly constricted turkey chokes.



NITRO MAG* BUFFERED MAGNUMS.

Excellent for turkey or long-range pheasants. Heavy payloads of Magnum-grade shot are packed with polymer buffering and enclosed in our patented Power

12

Piston® one-piece wad to provide dense, even patterns and uniform shot strings.

PREMIER* DUPLEX* MAGNUM COPPER-PLATED BUFFERED LOADS.

A specialized layering of Magnum-grade Copper-Lokt® No. 4 shot over No. 6

shot. Larger pellets deliver excellent retained energy and penetration, while smaller pellets enhance pattern density. Awesome versatility for uncertain shooting distances on

turkeys and late-season pheasants.



Catego	Length (in.)	Velocity (ft./sec @ 3 ft.)	Ounces of Shot	
HIGH VELOCI	TY MAGNUM	COPPER-PLATED TU	RKEY LOADS	- BUFFERED
12	3.	- 1300	1%	4, 5, 6
12	3 1/2	1300	2	4, 5
IIER* MAGNU	M COPPER-PL	ATED LEAD TURKEY	LOADS - BU	FFERED
10	3 1/2	.1210	. 21/.	4
12	2 1/1	1260	11/2	4, 5, 6
12.	3	, 1175	2	4, 5, 6
12	3 1/2	1150	21/	4,6
20	3	1185	1%	6
EMIER' DUPL	EX' MAGNUM	COPPER-PLATED L	OADS - BUFF	ERED
12	21/1	. 1260	1%	4x6
12	3	1210	11/4	4x6
	NITRO MAG	LOADS - BUFFERE	D	
12	21/4	1260	1 %	2, 4, 6
12	3	1280	1%	4,6
12	3	1210	17/	2, 4, 6
20	2 3/1	1175	1 1/4	4,6
3 20	3	1185	19	4.6
NITRO	TURKEY" M	AGNUM LOADS - BU	JFFERED	
12	21/4	1260	1%	4
12	21/2	1260	11/2	5
12	3	1210	1%	4, 5, 6
12	31/2	1300	2	4, 5, 6
20	3	1185	19	13.63
	12 12 10 10 12 12 20 EMIER* DUPL 12 12 12 12 12 12 12 12 12 12 12 10 10 10 11 11 12 12 12 12 12 12 12 12 13 14 15 16 17 18 18 18 18 18 18 18 18 18 18 18 18 18	12 3' 12 3', 12 3', 18ER* MAGNUM COPPER-PL 10 3', 12 3', 12 3', 20 3 EMIER* DUPLEX* MAGNUM 12 2', 12 3 NITRO MAG* 12 2 3, 20 2', 20 3 NITRO TURKEY* M 12 2', 12 3 13 3', 14 3',	HIGH VELOCITY MAGNUM COPPER-PLATED TU 12 3 1300 112 3 1, 1300 112 3 1, 1300 IIER* MAGNUM COPPER-PLATED LEAD TURKEY 10 3 3 1, 1210 12 2 1/4 1260 12 3 1185 EMIER* DUPLEX* MAGNUM COPPER-PLATED L 12 2 1/4 1260 12 3 1210 NITRO MAG* LOADS - BUFFERE 12 2 1/4 1260 12 3 1280 12 3 1280 12 3 1280 12 3 1280 12 3 1280 12 3 1280 12 2 1/4 1175 20 3 1185 NITRO TURKEY** MAGNUM LOADS - BUFFERE 12 2 1/4 1260 12 2 1/4 1260 12 2 1/4 1260 12 3 1280 12 3 1280 12 2 1/4 1260 12 2 1/4 1260 12 2 1/4 1260 12 2 1/4 1260 12 2 1/4 1260 12 2 1/4 1260 12 2 1/4 1260 12 2 1/4 1260 12 3 1210 12 3 1210 13 1300	HIGH VELOCITY MAGNUM COPPER-PLATED TURKEY LOADS 12 3' 1300 1 1/. 12 3 1/. 1300 2 IER* MAGNUM COPPER-PLATED TURKEY LOADS – BU 10 3 1/. 12 2 1/. 12 2 1/. 1150 2 1/. 12 3 1175 2 12 3 1175 2 12 3 1185 1 1/. EMIER* DUPLEX* MAGNUM COPPER-PLATED LOADS – BUFF 12 2 1/. 12 3 1210 1 1/. NITRO MAG* LOADS – BUFFERED 12 2 1/. 12 3 1280 1 1/. 12 3 1280 1 1/. 12 3 1280 1 1/. 12 3 1280 1 1/. 12 3 1280 1 1/. 12 3 1280 1 1/. 12 3 1280 1 1/. 12 3 1280 1 1/. 12 3 1280 1 1/. 12 3 1280 1 1/. 12 2 1/. 12 3 1280 1 1/. 12 2 2 1/. 12 3 1280 1 1/. 12 2 2 1/. 12 3 1280 1 1/. 12 2 2 1/. 12 3 1280 1 1/. 12 2 2 1/. 12 3 1280 1 1/. 12 3 1280 1 1/. 12 3 1280 1 1/. 12 3 1280 1 1/. 12 3 1280 1 1/. 12 3 1280 1 1/. 12 3 1280 1 1/. 12 3 1280 1 1/. 12 3 1280 1 1/. 14 20 2 1/. 16 2 1 1/. 17 2 1 1/. 18 2 1 1/. 19 2 1 1/. 10 1 1/. 11 2 2 1/. 11 2 2 1/. 12 2 1/. 12 2 1/. 12 2 1/. 12 2 1/. 12 2 1/. 12 2 1/. 12 2 1/. 12 2 1/. 12 2 1/. 12 2 1/. 12 2 1/. 12 2 1/. 12 2 1/. 12 2 1/. 12 2 1/. 12 2 1/. 12 2 1/. 12 3 1210 1 1/. 12 2 1/. 12 2 1/. 12 3 1210 1 1/. 12 2 1/. 12 3 1210 1 1/. 12 2 1/. 12 3 1210 1 1/. 12 2 1/. 12 3 1210 1 1/. 12 2 1/. 12 3 1/. 12 2 1/. 12 3 1/. 12 2 1/. 12 3 1/. 12 3 1/. 12 2 1/. 12 3 1/. 12 3 1/. 12 2 1/. 12 3 1



NITRO TURKEY™



NITRO TURKEY™ EXTENDED RANGE BUFFERED MAGNUMS.

- Nitro Mag® extra-hard lead shot
- · Patterns over 80% with Super Full choke
- · Patterns like copper-plated shot
- Value price

UPLAND

NITRO PHEASANT™ LOADS.

For pattern, energy and performance, nobody beats Nitro Pheasant. The best of our Pheasant load offerings, Nitro Pheasant uses Remington's own Copper-Lokt® copper-plated lead shot with high antimony content, the hardest lead we make for hunting. Hard shot stays rounder for truer flight, tighter patterns and greater penetration. So when it comes to bringing down tough birds like pheasant, you need a load that delivers maximum pattern density and lethal energy – you need Nitro Pheasant. Available in both high velocity and magnum loadings in both 12 and 20 gauge.



PHEASANT LOADS.

For the broadest selection in game-specific upland lead shotshells, Remington® Pheasant Loads are the perfect choice. Their high velocity and long-range performance are just right for any pheasant hunting situation. Standard high-base payloads include 12, 16, and 20 gauge.

EXPRESS® EXTRA LONG RANGE LOADS.


Time-proven performance for all upland game. The choice of experienced small game hunters across the country because our Express line offers the best balance of payload and performance. Available in a broad selection of loadings - from 12 gauge to 410 bore - with shot sizes ranging from BB all the way down to 9.





SHURSHOT® HIGH BASE PHEASANT LOADS.

The renowned ShurShot brand is available in a new high-base offering. ShurShot High Base Pheasant offers an ideal balance of velocity and payload to create near-perfect patterns, while its lower recoil helps to minimize fatigue over a long day in the field.




Budget-stretching shotshells for a wide variety of hunting. Available in 410 bore, 20-, 16- and 12-gauge loadings.



SPORT LOADS.

Economical, multi-purpose loads. Built with our premium Power Piston® wad and plastic Unibody hulls. Loaded with No. 8 shot. Ideal for skeet, trap and sporting clays, as well as quail, doves and woodcock.

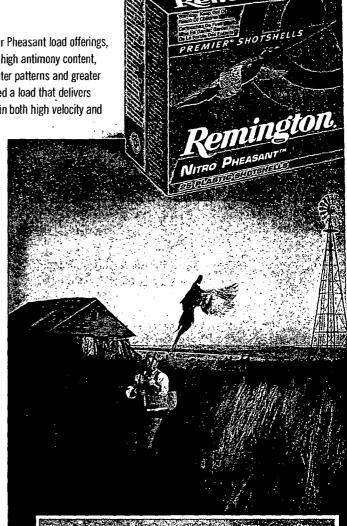

tridex/ ED No Maria	1 (10 (4) (4) (4) (4) (4) (4) (4) (4) (4) (4)			The second second second	Shot Sizes
	NITR		" LOADS - COPP		
NP12	12	23/4	1400	11/4	4, 5, 6
NP12M	12	2 1/4	0001	13/4	4, 5, 6
NP20	20	21/4	1300	1	5, 6
NP20M	20	3	1185	11/4	5,6
		PHE	ASANT LOADS		
PL12	12	2 3/4	1330	11/4	4, 5, 6, 7 1/2
PL16	16	23/4	1295	1 1/1	6
PL20	20	23/4	1220	1	4, 5, 6, 7 1/1
	E	XPRESS' EXT	RA LONG RANGE	LOADS	
SP12	12	2 1/4	1330	1 1/4	BB, 2, 4, 5, 6, 7 1/2, 9
SP16	16	23/4	1295	1 1/4	4, 6, 7 1/2
SP20	20	2 1/4	1220	1	4, 5, 6, 7 1/2, 9
SP28	28	2 1/4	1295	1/4	6, 7 1/2
SP410	.410	2 1/:	1250	1/1	4, 6, 7 1/2
SP413	.410	3	1135	2/2	4.6.71/:
	SH	URSHOT, HIG	H BASE PHEASAI	NT LOADS	
R12P	12	23/2	1220	11/4	4, 5
	SHURSI	HEAVY F	IELD AND HEAV	DOVE LOAD	s
RP12H	12	23/4	1220	11/4	6,71/2,8
RI 2HD	12	21/4	1255	11/4	6,71/.8
R2OHD	20	21/4	1165	1	5, 7 1/2, 8
		PROMOTI	ONAL GAME LOA	DS	
GL12	12	21/4	1290	1	6.7 1/5.8
GL16	16	21/1	1200	1	6, 7 1/2, 8
GL20	20	2 1/4	1225	3/4	6,71/2,8
GL410*	.410	24:	1200	1/2	6
		SF	PORT LOADS		
R12SL	12	2 1/:	1290	1	. 8
R20SL	20	21/1	1200	1/6	8

TARGET LOADS

PREMIER' NITRO 27' HANDICAP TRAP LOADS.

Designed for long-yardage trapshooting and long-range sporting clays, our custom powder blend, Power Piston® wad and Premier® STS® primer mix have improved the Nitro 27's performance, allowing more consistent velocities, 15% better pattern performance and softer

recoil. So if you're looking for tremendous targetbreaking performance choose the improved Nitro 27.



GUN CLUB™ TARGET LOAD LINE.

An excellent choice for economical shooting. These high-quality shells are loaded with the same care as our top-of-the-line STS® loads and feature a Power Piston® wad and the reliable STS® Primer mix. Many shooters are discovering that they can get acceptable reloading life while stretching their shooting dollar.


PREMIER* STS* TARGET.

The standard in target shooting reliability. Absolutely consistent from shot to shot. Bar none, the most reliable, most reloadable shells you can shoot. Available in 12, 20, 28 gauge and 410 bore.





MANAGEDRECOIL ™ STS*
TARGET. Dramatically reduced recoil – 40% less in the 12-ga. load — with target-grinding STS* consistency and pattern density. Ideal for new shooters and recoil-sensitive individuals.

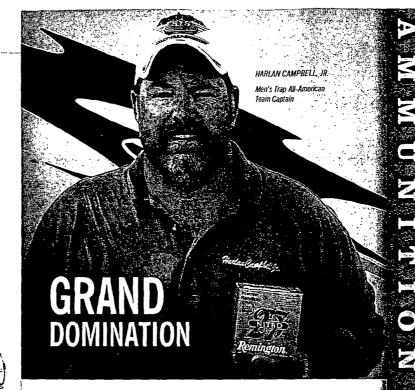


COMPETITORS AT THE GRAND CHOOSE REMINGTON*
AS THEIR WINNING AMMUNITION.

Great champions think alike. For the fifth year in a row, shooters who used Remington shells won more trophies than competitors using other brands at the 2007 ATA Grand American World Trapshooting Championship. And for good reason! Remington STS® and Nitro 27® target loads

provide softer recoil, better pattern performance, and more consistent velocities (not to mention the most reloadable hull on the market). Isn't it time you switch to Remington and step into the winner's circle?

		1 2 1 1 1 1 1 1 1 1 1 1					Shot Sizes
1	Pi	REMIER" STS" TARGET LOA	DS - EX	TRA HARD	STS' TARGET	SHOT	
STS121	12 .	Premier STS Target	2 1/1	- 21/.	1185	1	71/2, 8, 81/2, 9
STS12LR	_12	Premier STS Low Recoil	2 3/1	2://2	1100	11/4	7 1/2, 8, 9
STS12L	12	Premier STS Light Target	21/4	23/.	1145	1%	7.14, 8, 8 14, 9
STS12LH	12	Premier STS Light Handicap	2 1/.	3	1200	11/1	71/4,8
STS12H	12	Premier STS Heavy Target	21/		1200	v.1% ·	9 -
STS12NHE	12	Premier Nitro 27 Handicap	23/4	HNDCP	1290	1	7 ½, 8
STS12NH	12	Premier Nitro 27 Handicap	21/4	HNDCP	1235	1%	7 1/2, 8
STSTENSC	12	Premier STS Nitro Sporting Clays	23/4	Max	1300	1%	7 ½, 8
STS12P	12	Premier STS Pigeon	· 23/4	3 1/1	1235	11/4	71/4.8
STS12IT	12	Premier STS International	21/4	3 1/2	1325	24 gm.	7 1/2, Cu-P,* 8 1/2
STS20LR	20	Premier STS Low Record	21/4	21/2	1135	1/4	9
STS20SC	20	Premier STS Target	23/4	21/2	1200	<i>"</i> h	8
STS20	20	Premier STS Target	21/4	2 1/2	1200	7/4	- 9 ,
STS28SC	28	Premier STS Target	23/4	2	1200	1/4	8
STS28	28	Premier STS Target	21/4	2	1200	- 1/	9
STS410NSC8	.410	Premier STS Target	21/2	Max	1300	1/2	8
STS410SC	410	. Premier STS Target	21/2	Max -	1200	€ 1/t -	81/6
STS410	.410	Premier STS Target	21/2	Max	. 1200	1/2	9
		MANAGED-RECO	OIL" ST	S' TARGET	LOADS		
RLSTS1285	12	Managed Recoil STS Target	- 21/4		1100	1/2	81/1
RLSTS2085	20	Managed-Recoil STS Target	2 1/4	:	1100	1/4	8 1/1
		GUN CLU	B™ TAR	GET LOAD	s		
GC121	12	Gun Club	21/4	2.//	1185	1	71/28
GC12L	12	Gun Club	21/4	21/4	1145	1 1/4	7 1/2, 8, 9
GC12	12	Gun Club	21/4	3	1200	11/4	71/2.8
GC20	20	Gun Club	-23/4	2 1/1	1200	1/4	7 1/2, 8, 9

*Copper-plated shot

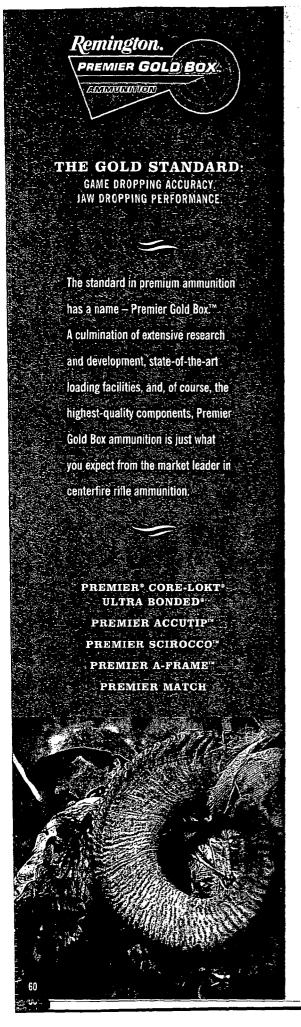

PREMIER CORE-LOKT ULTRA BONDED



THE NEW STANDARD OF ACCURACY IN BONDED HUNTING BULLETS. Premier® Core-Lokt® Ultra Bonded®

is a bullet in a class of its own. It is the first and only bullet to successfully maximize the best features of two great types of hunting bullet construction. It delivers the extreme accuracy and retained energy you would expect from a tipped bullet, in combination with the outstanding penetration and weight retention that only a bonded non-tipped bullet could deliver. This unique design provides the hunter a Premier bullet that yields devastating on-game performance from 50 to 500 yards. Premier Core-Lokt

CORE-LOKT* ULTRA BONDED* EXPANDS RELIABLY AT ALL REASONABLE HUNTING DISTANCES.

Ultra Bonded – the new standard in high-performance hunting bullets.



50 Yards



100 Yards



200 Yards







30-06 SPRG, 150-GR, PREMIER² CORE-LONT² ULTRA BONDED, 5 SHOTS, .6", 100 YDS.

 More accurate. Our unique manufacturing process eliminates jacket stretch for near-perfect wall thickness, which results in better flight stability.

More versatile. A 20% heavier jacket engineered with an innovative wall profile provides better expansion and penetration over a broad range of terminal velocities. **NEW**

More reliable. 50% thicker Core-Lokt section increases mechanical locking of the lear core into the jacket and better controls expansion at higher velocities.


More deadly. Bonded jacket/core design further insures controlled expansion (2x diameter) with up to 95% weight retention for ultimate on-game performance.

The finest big-game bullet in the world is now available to handloaders.

(See page 75 for complete listings.)




(Religing Co.)	art and	Carrier Contraction	i Diliniya
		OKT" ULTRA E	
223 Remington	PRC223R4	62	Core-Lokt* Ultra Bonded
243 Win	PRC243WC	100	Core-Lokt* Ultra Bonded
25-06 Remington	PRC2506RA	115	Core-Lokt* Ultra Bonded
260 Remington	PRC25ORE	140	Core-Lokt* Ultra Bonded
270 Win	PRC270WB	140	Core-Loki* Ultra Bonded
6.8mm Rem SPC	PRC68R4	315	Core-Lok!* Ultra Bonded
7mm Remington Mag	PRC7MMRA	140	Core-Lokt* Ultra Bonded
7mm Remington Mag	PRC7MM.RC	160	Core-Lokt: Ultra Bonded
7mm Rem. SA UM	PR75M1	140	Core-Lokt* Ultra Bonded
7mm Rem. SA UM	PR7SM4	160	Core-Lokt' Ultra Bonded
7mm Rem. Ultra Mag	PR7UM)	140	Core-Lokt* Ultra Bonded
30-06 Springfield	PRC3005A	150	Core-Lokt* Ultra Bonded
30-06 Springfield	PRC3006B	168	Core-Lokt* Ultra Bonded
30-06 Springfield	PRC3006C	180	Core-Lokt* Ultra Bonded
300 Win Mag	PRC300WA	150	Core-Lokt* Ultra Bonded
300 Win Mag	PRC300WC	180	Core-Lokt* Ultra Bonded
308 Win	PRC308WA	150	Core-Lokt: Ultra Bonded
306 Win	PRC30EWC	180	Core-Loki: Ultra Bonded
300 Rem. SA UM	PR300SM1	150	Core-Lokt* Ultra Bonded
300 Rem. SA UM	PR300\$M4	180	Core-Lokt' Ultra Bonded
300 Rem. Ultra Mag	PR300UM4	180	Core-Lokt' Ultra Bonded
338 Win Mag	PRC338WA	225	Core-Lokt' Ultra Bonded

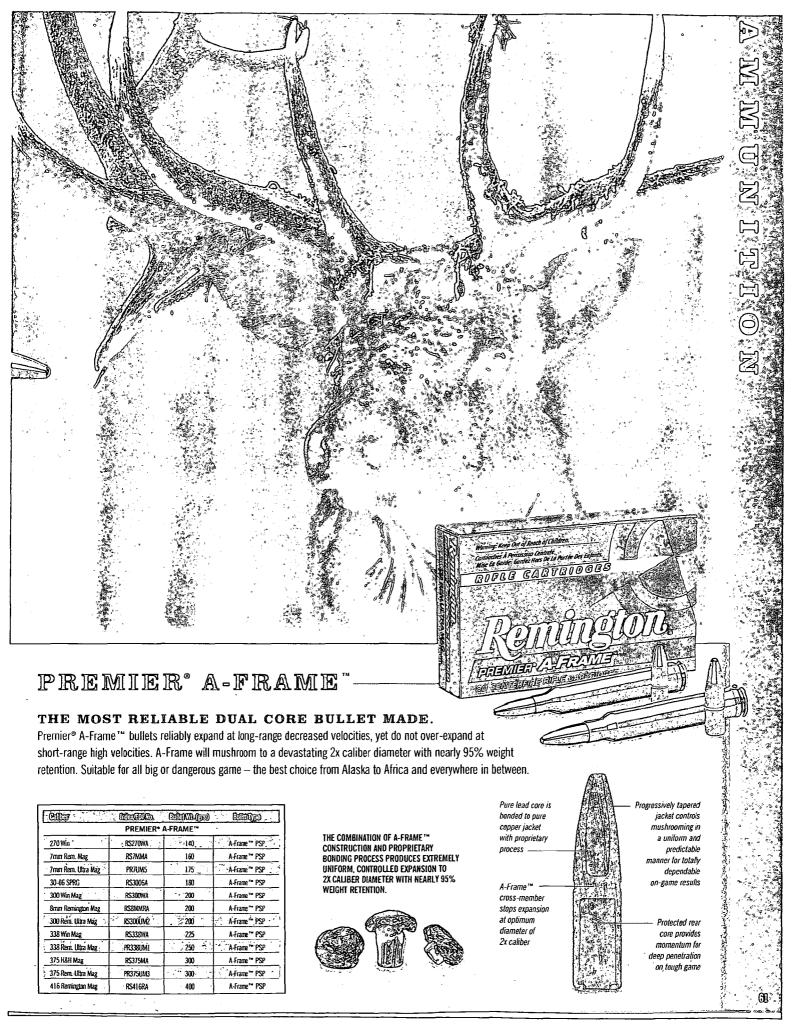

PREMIER® ACCUTIP

PRECISELY THE BIG-GAME BULLET OF YOUR

DREAMS. It's the most accurate, polymer-tipped big-game bullet available today. Along with match-grade precision, it delivers an unprecedented combination of laser-flat trajectory and devastating terminal performance. Accutip bullets expand quickly – producing an awesome level of transferred energy — to dispatch medium and big game with lightning authority. A thicker jacket and harder lead core regulate weight retention and optimize penetration. Make the switch and, trust us, big game won't know what hit 'em.








Sleek secant ogive profile for high ballistic coefficient and reduced

drop and wind drift


Thicker mid-jacket and heavy base for progressive expansion and maximum weight retention

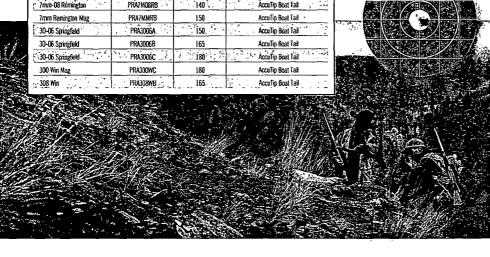

PREMIER SCIROCCO BONDED

THE ORIGINAL BONDED POLYMER-TIPPED

BULLET. Proof that innovation beats imitation every time. The remarkable Swift™ Scirocco™ Bonded bullet maintains its status as the industry leader in bonded tipped bullets by delivering the highest ballistic coefficient of any bullet of its kind for the flattest trajectory and maximum retained energy. Combine that with unsurpassed accuracy and superior weight retention, Premier® Scirocco is unquestionably the most effective bonded, tipped bullet to sit atop a factory load.



reduced air drag



30-06, 180-GR. PREMIER* SWIFT** SCIROCCO BONDED 5 SHOTS. .8". 100 YDS.

SWIFT" SCIROCCO" BONDED BULLETS EXPAND RELIABLY OVER A WIDE RANGE OF TERMINAL VELOCITIES



100 Yaids





300 Yards



	PREMIER' SCIRO	CCO" BONDE	D
243 Win	PRSC243WA	90	Scirocco™ Bonded
270 Win	PRSC270WA	130	Scirocco " Bonded
7mm Remington Mag	PRSC7MMB	150	Scirocco ** Bonded
7mm Rem. Ultra Mag	PRSC7UM1	150	Scirocco " Bonded
30-06 Springfield	PRSC3006C	150	Scirocco™ Bonded
30-06 Springfield	PRSC3006B	180	Scirocco *** Bonded
300 Win Mag	PRSC300WB	180	Scirocco " Bonded
300 WSM	PRSC300WSMB	180	Scirocco™ Bonded
308 Win	PRSC308WA	150	Scirocco " Bonded
308 Win	PRSC308WB	165	Scirocco** Bonded
300 Rem. Ultra Mag	PR300UM5	150	Scirocco*** Bonded
300 Rem. Ultra Mag	PR300UM3	180	Scirocco** Bonded

PREMIER® ACCUTIP-V

PINPOINT DETONATION. Expect dynamite results. In varmint calibers, AccuTip-V combines superb flight characteristics and match-grade accuracy with a design optimized for explosive on-game results. At impact, AccuTip's gold polymer tip is driven rearward causing the thin jacket and soft lead core to fragment violently. First and foremost, though, it gets there precisely shot after shot — it's the most accurate varmint bullet you can shoot.



AccuTip component bullets are now available to handloaders. (See page 75 for complete listings.)

NEW


17 REMINGTON FIREBALL. LIGHTING UP VARMINTS AND THE WORLD OF SMALL-CALIBER PERFORMANCE.


The newest addition to the lineup, our exclusive 17 Remington Fireball breaks the 4,000 fps barner with one of the smallest powder charges ever — this means less fouling and more shots between cleanings. It shoots flatter than a 22-250 Remington 55-grain loading and produces virtually no recoil or muzzle jump, so you never lose sight of your target. Now available with 25-grain JHP bullet. (See page 73.)



Gold polymer tip acts as a wedge, splintering bullet into fragments at impact

> Thin jacket and soft lead core disintegrate and cause massive terminal damage at all ranges



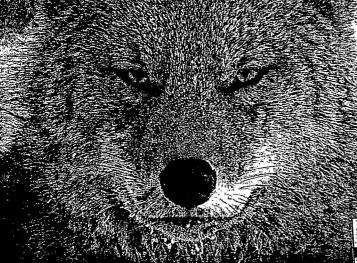

	PREMIE	R* ACCUTIP-V	
17 Remington Fireball	PRAL7F8	20	AccuTip-V
17 Remington	PRA17RA	20	AccuTip-V
204 Ruger	PRA204A	32	AccuTip-V
204 Ruger	PRA204B	40	AccuTip-V Boat Tail
221 Remington Fireball	PRAZŽ1FB	50	AccuTip-V Boat Tail
22 Hornet	Prazzhna	35	AccuTip-V
* 222 Remington	PRA222RB	50 .	Accurrip-V Boat Tail
223 Remington	PRAZZ3RB	50	AccuTip-V Boat Tail
223 Remington	PRA223RC	55	AccuTip-V
22-250 Remington	PRA2250RB	50	AccuTip-V Boat Tail
243 Win	PRA243WB	75	AccuTip-V Boat Tail

Acculip-V: Varmint-Specific Cartridges

PREMIER® MATCH

IF THERE WERE A STRONGER WORD THAN ACCURATE, WE'D USE IT HERE.

Ever hear the phrase, "you could drive tacks with 'em?" Well they're probably talking about Remington® Premier® Match ammunition. Using only match-grade bullets, Premier Match ammunition employs special loading practices to ensure world-class

performance and accuracy with every shot.

Maybe some day there will be a stronger word than accurate to describe Premier Match. Until then we'll continue to prove it on paper.

308 WIN, 168-GR. PREMIER® MATCH 5 SHOTS, .6", 100 YDS.



	Caliber	Index/EDI No.	Bullet Wt. (grs.)	Bullet Type
		PREMIER*		
	223 Remington	R223R6.	62	- Hollow Point Match
	223 Remington	RM223R1	69	MatchKing* BTHP
NEW	223 Remington	RM223R3	ή .	MatchKing® BTHP
	6.8mm Rem. SPC	RM68R1	115	MatchKing® BTHP
	300 Rem. SA UM	RM300SM7	- 190	Matchking® BTHP
	300 Win Mag	RM300W7	190	MatchKing® BTHP
	308 Win	-RM308W7	168	MatchKing® BTHP
NEW	308 Win	RM308W8	175	MatchKing® BTHP


REMINGTON' ULTRA MAG.™

BIG GAME'S HIGHER POWER.

REMINGTON® ULTRA MAG.™

A revolution in high-performance big-game ammunition. In each of its calibers, the Remington Ultra Mag™ cartridges produce the highest velocities, the flattest trajectories and the highest energy levels available to big-game hunters today. This is due to their large case capacities and innovative non-belted magnum case designs. These cases hold dramatically more powder and align with unmatched precision within the bore, making the world's most lethal family of cartridges the most accurate, as well. Available in the most trusted bolt-action rifle of all time — the Model 700™ — the Ultra Mag™ family is a truly superior gun and ammunition system geared for today's most discriminating hunters.

INNOVATIVE CASE DESIGN RESULTS IN A "NON-BELTED MAGNUM" WITH A LARGER CASE DIAMETER WHICH ALLOWS FOR DRAMATICALLY INCREASED POWDER CAPACITY.



Ultra Mag

Win 375 Rem 375 H8.
Ultra Mag

20% MORE



7mm Remington® Ultra Mag.™ With a muzzle velocity over 3,450 fps, it's one of the flattest-shooting big-game rounds on the planet – flatter than 7mm STW, flatter than a 22-250 varmint load. It's the perfect choice for long-range shots on any North American big game.

315 Remington® Ultra Mag.™
The ultimate in stopping power.
With over 5,000 ft-lbs of energy
at the muzzle, it delivers more
energy at 200 yards than 375
H&H at 100 yards — and with
the same flat-shooting trajectory
as a 150-grain 270 Win load.

300 Remington® Ultra Mag.™
The extreme standard for big game. With a 180-grain bullet, it delivers a muzzle velocity of 3,250 fps with 2,160 ft-lbs of retained energy at 500 yards. That's right, a trained marksman could knock an elk off its feet at nearly a quarter of a mile.

338 Remington® Ultra Mag.™
An excellent cartridge for bear,
elk and moose, Loaded with
a 250-grain bullet, it delivers
over 600 ft-lbs greater muzzle
energy than 338 Win Mag and
retains a flatter trajectory all
the way out to 500 yards.



300 Rem. SA UM

SHORT-ACTION ULTRA MAG."

Magnum performance in a lightweight, short-action firearm and ammunition package. Premier[®] Short-Action Ultra Mag™ cartridges offer ballistic performance equivalent to the two most popular belted magnums − 300 Win Mag and 7mm Remington Mag − in a fast handling short-action rifle. They feature a highly efficient case design that duplicates or exceeds belted magnum ballistics with less powder, in turn, generating less felt recoil.

Plus, they're inherently more accurate. The cartridge headspaces off the shoulder of the case, rather than a belt, promoting more precise bore alignment. It's big-time performance in a little package.

7mm Rem. Ultra Mag	PR7UM1	140	Core-Lokt* Ultra Bonded	
7mm Rem. Ultra Mag	PR7UM5	175	A-frame** PSP	
300 Rem. Ultra Mag	PR300UM5	150	Scirocco ** Bonded	
300 Rem. Ultra Mag	PR300UM3	180	Scirocco Bonded	
300 Rem. Ultra Mag	PR300UM4	180	Core-Loid* Ultra Bonded	
300 Rem. Ultra Mag	RS300UM2	200	A-Frame* PSP	
338 Rem. Ultra Mag	PR338UMI	250	A-Frame** PSP	
338 Rem. Ultra Mag	PR338UM2	250	Core-Lokt* PSP	
375 Rem. Ultra Mag	PR375UM2	270	Soft Point Hornady*	
375 Rem. Ultra Mag	PR375UM3	300	A-Frame" PSP	
REM	INGTON' SHOP	T-ACTION ULT	RA MAG'"	
7mm Rem. SA UM	PR7SM1	140	Core-Lokt* Ultra Bonded	
7mm Rem. SA UM	PR7SM2	150	Core-Lokt* PSP	
7mm Rem. SA UM	PR7SM4	160	Core-Lokt* Ultra Bonded	
300 Rem. SA UM	PR30DSM1	150	Core-Lokt! Ultra Bonded	
300 Rem. SA UM	PR300SM2	165	Core-Loki: PSP	

PR300SM4

Core-Lok** Ultra Bonded


POWER LEVEL AMMUNITION.

One gun. One chambering. The ballistic characteristics of three cartridges.

Power Level Ammunition™ allows you to incrementally tailor the performance of your rifle and ammunition to match your intended game species and hunting range, similar to the way shotgunners use 2 3/4", 3" and 3 1/2" loads. The point of impact between Power Level loads stays within 2" out to 200 yards, so you'll have little to no scope adjustment when changing Power Levels. Now when you choose the 7mm or 300 Remington Ultra Mag[™] you're getting three guns in one. Simply put, never before has one cartridge offered this kind of versatility.

POINT OF IMPACT ACROSS ALL POWER LEVELS WITHIN 2", OUT TO 200 YARDS Power Level I

THE CONCEPT - SHOTGUN/SHOTSHELL

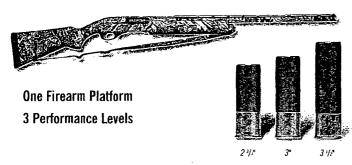





30-06 Springfield Performance Equivalent

		d. To
_	Carried Williams	*
	Ander Power Performance Bullet Sullet Type	

	disdex		Power	Performance		
	EDI Na	Calibar	Level	Equivilent	Wt (gr)	
NEW	PRTUMI	7mm Ultra Mag	181	7mm Ultra Mag	140	Care-Lokt® Ultra Bonded®
NEW	PRSC7UM1	7mm Ultra Mag	III.	7mm Ultra Mag	. 150	Scirocce** Bonded
NEW	PRSC7UM5	7mm Ultra Mag	111	7mm Ultra Mag	175	A-Frame™
	PR300UM5	300 Ultra Mag	Ш.,	- 300 Ultra Mag	150	Scirocco™ Bonded :
	PR300UM3	300 Ultra Mag	18	300 Ultra Mag	180	Scirocco™ Bonded
	PR300UM4	300 Ultra Mag	III .	300 Ultra Mag	180	Core-Lokt* Ultra Bonded*
	RS300UM2	300 Ultra Mag	(1)	300 Ultra Mag	200	A-Frame"
NEW	PR7UM2-P2	7mm Ultra Mag	- (1	7mm Rem Mag	150	Core-Lokt® Ultra Bonded®
	RS300UM2-P2	300 Ultra Mag	- 11	300 Win/300 WSM	180	Core-Lokt® Ultra Bonded®
	RS300UM3-P2	300 Ultra Mag	11	. 300 Win/300 WSM	180	Scirocce" Bonded
NEW	R7UM1-PL	7mm Ultra Mag		270 Win	140	Core-Lokt®
	PRA300UM1-P1	300 Ultra Mag	94 .	30-06 Springfield	.150	AccuTip™
	R300UM1-P1	300 Ultra Mag	T	30-06 Springfield	150	Core-Lokt®

POWER LEVEL III

MAXIMUM ENERGY -EXTREME RANGE

- 300 Remington Ultra Mag™ performance
- · The biggest, toughest game at extreme ranges



Simply the biggest, baddest, flattest-shooting 30 caliber in production today. At 200 yards, it delivers 485 ft.-lbs. more energy than the 300 Wby Mag and 28% more energy than the 300 Win Mag or 300 WSM.

POWER LEVEL II

MAGNUM ENERGY -EXTENDED RANGE

- 300 Win Mag, 300 WSM performance
- · Medium and large big game at extended ranges



With velocity and down range ballistics that mirror the 300 Win Mag and 300 WSM, Level II is ideal for elk, muleys or whitetails at extended range.

POWER LEVEL I

TERMINAL ENERGY LONG RANGE

- 30-06 Springfield performance
- · Whitetail-sized game out to long range

emington, POWER LEVEL ORE-LOKT

> Performs identically to the 30-06, the caliber that's dropped more big game than any other. The optimum deer hunting Power Level - coast to coast.




Remington® Core-Lokt® — a reputation deserved. Hunters with a knack for filling their deer tag tend to have more than success in common. They trust their hunt to Remington® Core-Lokt® For more than six decades, it has remained the leader in centerfire deer ammunition. And deservedly so.


The Core-Lokt bullet design is the original controlled-expansion bullet — and one of the most effective ever developed. Its progressively tapered copper jacket is locked to a solid lead core, promoting perfectly controlled expansion and high weight retention for absolutely dependable on-game results. You'll find its time-proven performance in both soft point and pointed soft point versions — and in a range of bullet weights for virtually every centerfire hunting caliber made.




The Deadliest Mushroom in the Woods™



CORE-LOKT® POINTED SOFT POINT



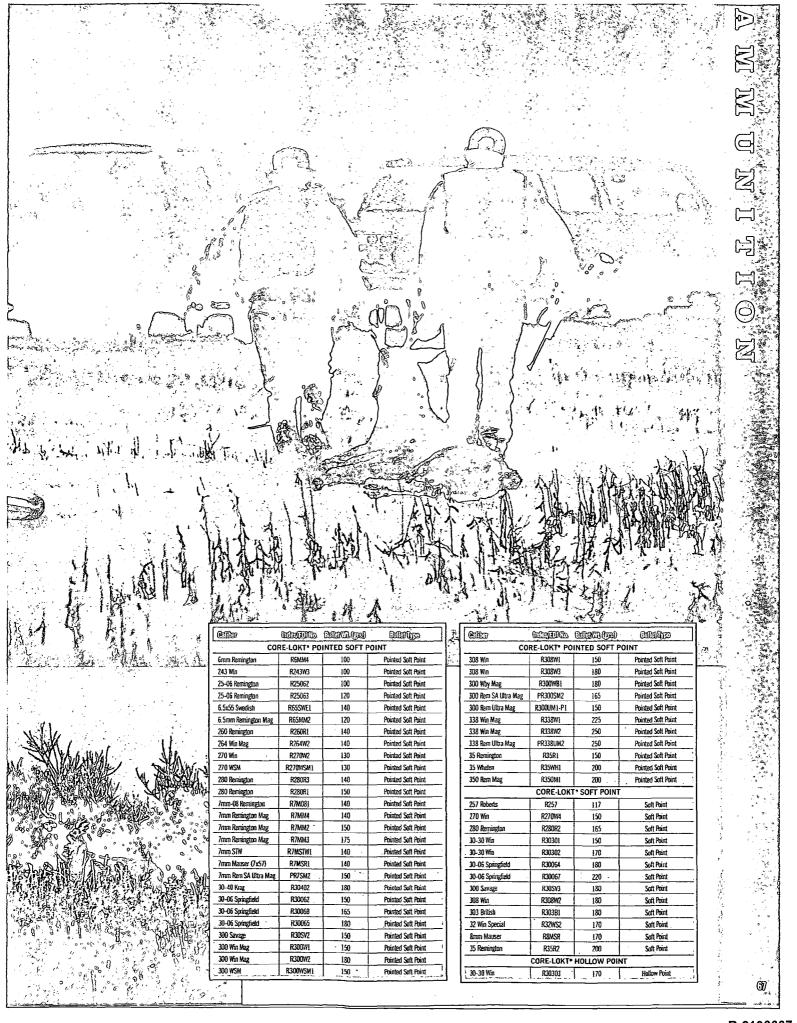

REMINGTON° RIFLE

Proof of our dedication to providing you with the widest selection of centerfire ammunition in the industry, our Rifle series consists of a multitude of calibers and popular bullet styles to match your specialized hunting and shooting pursuits. All assembled with premium components and the ultra-tight tolerances that put more home reloading presses on the back shelf than any other brand. Remington Rifle.



- }	Caliber	Index/EDI No.	Bullet Wt. (grs.)	Bullet Type
- 1		REMING	TON® RIFLE	
- 1	17 Remington	R17R2	25	Hollow Point
ı	22 Hornet	R22HN1	45	Pointed Soft Point
- 1	22 Hornet	R22HN2	: 45	Hollow Point
- 1	220 Swift	R220\$1	50	Pointed Soft Point
-	222 Remington	R222R1	50	Pointed Soft Point
- 1	223 Remington	R223R1	55	Pointed Soft Point
- 1	223 Remington	R223R3	55	Metal Case
ì	22-250 Remington	R22501	55	Pointed Soft Point
-	243 Win .	R243W1	80	Pointed Soft Point
ı	25-20 Win	R25202	86	Soft Point
- {	250 Savage	R250SV	100	Pointed Soft Point
ı	6.8mm Rem SPC	R68R1	115	Open Tip Match (OTM)
- 1	6.8mm Rem SPC	R68R2	115	Metal Case
- 1	270 Win	R270W1	100	Pointed Soft Point
	7mm-08 Remington	R7M082	120	Hollow Point
- 1	30 Carbine	R30CAR	110	Soft Point
ı	30-30 Win Accelerator®	R30069	55	Pointed Soft Point
ı	30-06 Springfield	R30061	125	Pointed Soft Point
ı	7.62x39mm	R762391	125	Pointed Soft Point
Ì	7mm Rem SA Ultra Mag	PR7SM3	160	Pointed Soft Point
Į	32-20 Win	R32201	100	Lead
w	338 Lapua Mag	RM338LMR1	250	Scenar
Į	35 Whelen	R35WH3	250	Pointed Soft Point
- 1	375 H&H Mag	R375MI	270	Soft Point
- 1	375 Rem Ultra Mag	PR375UM2	270	Soft Point
- 1	44-40 Win	R440W	200	Soft Point
- 1	444 Mar	R444M	240	Soft Point
-	45-70 Government	R4570L	300	Semi-Jacketed Hollow Point
	45-70 Government	R4570G	405	Soft Paint

	BRONZE PO	INT TIPPEL)
270 Vลัก	R270W3	130	Bronze Point Tipped
30-06 Springfield	R30063	150	Bronze Point Tipped
30-06 Springfield	R30066	180	Bronze Point Troped


BRONZE POINT TIPPED

Introduced by Remington,[®] these were the first bullets to utilize a tipped design. Exceptional long-range performance on medium-sized game. Sleek profile generates flat trajectory. On impact, the bronze tip is driven backward to create rapid, but controlled expansion.



Aerodynamic tip for superior long-range ballistics and rapid expansion




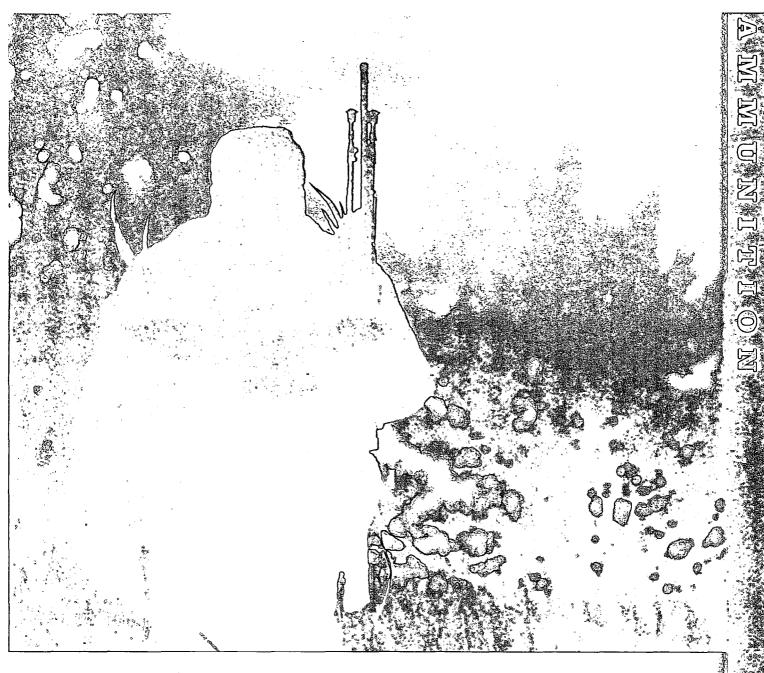

POWER-LOKT° HOLLOW POINT

Another breakthrough from Remington.® Express® Power-Lokt® delivers unmatched performance for small game and varmint hunting. The thin copper jacket is electrolytically plated to the lead core for near-perfect concentricity and gyroscopic balance. The result? Dead-on, benchrest-

type accuracy with instant fragmentation





Plated copper jacket for superior accuracy and instant fragmentation on impact



	POWER-LOKT*	HOLLOW PO	INT
222 Remington	* R222R3	z.:50	Power-Lakt Hollow Point
223 Remington	R223R3	55	Power-Lakt Hollow Point
22-250 Remington	R22502	.55	Power-Lakt Hallow Point
243 Win '	R243W2	. 80	Power-Lakt Hollow Point



MANAGED-RECOIL"

REDUCE RECOIL TO IMPROVE YO

At some point, all shooters feel the negative effects of recoil.

Some hunters experience the frustration of missing a target because of flinching. Others know the aggravation of losing the opportunity for a second shot because of the time it takes for scope recovery. Then there's the shoulder pain after a day of hunting or practicing, which may deter future practice sessions. To fight these effects of recoil, Remington® developed Managed-Recoil ** ammunition.

The Managed-Recoil ammunition succeeds where other recoilcontrol ammunition fails. Past attempts at curbing recoil have focused solely on the amount of gunpowder in the ammunition. Remington's Managed-Recoil focuses on the entire cartridge by incorporating a specially designed bullet built to perform at lower velocities.

FEATURES

- Fully effective hunting performance with less than 50% of the recoil of standard cartridges
- · Less anticipation of recoil
- Increased shooter confidence and improved shot placement
- · Quicker scope recovery for faster second shot placement
- Point of aim is within 2" of a standard cartridge at 100 yards
- · Target practice without the recoil pounding
- Specially designed bullets are optimized to deliver 2x expansion with over 75% weight retention on shots out to 200 yards

FULLY EFFECTIVE ENERGY AND EXPANSION OUT TO 200 YARDS:







100 yards



150 yards



200 yards

MANAGED-RECO




YOUTH AND WOMEN. Managed-Recoil™ allows youth and women to practice and hunt effectively and comfortably with half the recoil. It even lets you use an existing gun without readjusting the scope because "point of aim — point of impact" is nearly identical to standard cartridges at 100 yards.

PRACTICE MAKES PERFECT. For targetshooters and hunters who target shoot to improve their performance, Managed-Recoil cartridges provide more time on the range, without the bruises to prove it. After your practice session, you can switch to full-powe ammunition without scope adjustment.

MANAGED-RECOIL™ COPPER SOLID™ SABOT SLUG.

The best-selling terminal performance and accuracy of our Copper Solid Slugs is now available in Managed-Recoil loads. With 40% less recoil, they're perfect for anyone who wants outstanding on-game results without the rearward punch.



Or, use them to sight-in, then step up to full loads. There's no finer slug load for young or recoil-sensitive hunters.



MANAGED-RECOIL™ SLUGGER® RIFLED SLUG.

Managed-Recoil™ Slugger® Rifled Slugs offer remarkably effective performance with 45% less felt recoil than full velocity Sluggers. With effective energy out to 80 yards, these 1-ounce slugs easily handle the majority

of shotgun deer hunting ranges. Also

check out Managed-Recoil Buckshot; it's an ideal close-range performer.

	7	Č.) · ·				
L			MAN	AGED-RE	COIL" SLUG	ER' RI	FLED S	LUG	-	
RL12RS	T	12	T	21/4	1200	T	1	T =	T	Rifled Stug
				MANA	GED-RECOIL"	BUCKS	HOT			
RL12BK00	Ī	12	_	21/4	1200	_ _		8	Ţ	00 BK

ARKSMANSHIP IN THE FIELD.


No scope readjustment necessary. Remington® Managed-Recoil™ Point of Impact is nearly identical to full velocity loads.

> Point of impact comparison at 100 yards.

- 30-06 Sprg. 125-grain Managed-Recoil
- 30-06 Sprg. 150-grain PSP Core-Lokt

May not operate all recoil or gas-operated firearms

ICATIONS

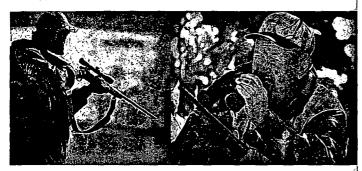

INTING WITH CONFIDENCE. Managedcoil™ Rifle ammunition is designed for y effective hunting performance out to) yards with less than half the recoil of a ndard load. A shooter not anticipating the avy recoil of a full load can better place irst shot on a game animal, and quickly acquire the target for a follow up shot.


RW EW

(EW

RECOIL-SENSITIVE HUNTERS. For shooters that are unable or unwilling to tolerate the recoil of a standard cartridge on the range or on the field, Managed-Recoil™ Cartridges are the perfect solution. Effective performance with half the recoil.


50% LESS RECOIL

Remington² Managed-Recoil * centerfire cartridges deliver 50% less recoil than standard velocity ammunition. Managed-Recoil 270 Win, 308 Win and 30-06 actually deliver less recoil than a standard velocity 243 Win!



LETHAL PUNCH OUT TO 200 YARDS

Managed-Recoil™ rounds pack a lethal punch at the most common deer-hunting ranges. In fact, their energy levels exceed 1,100 ft.-lb. at 200 yards. Managed-Recoil 30-30 delivers 919 ft-lb. at 100 yards and is fully effective on deer sized animals out to 125 yards.



Caliber	Index/ eED) No	Bullet Wt.		***	100	ity (1) (2) (100 yd.)	150 yd: →200 yd.	und c	COMPAN NO. ODA		фή				
				MAI	NAGED-RE	COIL C	ENTERFIRE RIFLE	CARTRIDGE	S						
7 260 Remington	RL2501	140	Care-Lokt* PSP	2300	2206	2115	2024 1935	1644 1	12 1389	1273	1165	0.1	zero	-2.1	-6.3
7 7mm-08 Remington	n RL7M081	140	Core-Lokt* PSP	2300	2195	2095	1995 1895	1644 14	98 1361	1235	1118	0.2	zero	-2.1	-6.5
270 Win.	RL270W2	. 115	Core-Lokt* PSP	2710	2558	2412	2270 2133	1875 10	571 - 1485	1315	1161	0.1	zero	-l.6	-4.B
30-30 Win.	RL30301	125	Care-Lakt* PSP	2175	1993	1820	1658 1508	1313 11	102 919	763	631	0.3	zero	-3.0	-9.1
30-06 Springfield	RL30062	125	Core-Lokt* PSP	2660	2495	2335*	2182 2034	1964 - 1	727 1513	1321	1148	-0.1	zero	-1.5	-4.9
300 Win. Mag.	RL300W1	150	Care-Lokt* PSP	2650	2509	2373	2241 2113	2339 20	97 1875	1672	1486	-0.i	zero	-1.5	-4.7
308 Win.	RL308W1	125	Core-Lakt* PSP	2660	2501	2348	2199 2057	1964 1	736 1529	1342	1174	-0.1	zero"	-1.5	-4.9
7mm Rem, Mag.	RL7MM4	140	Care-Lakt* PSP	2710	2594	2482	2372 2265	2283 20	92 1915	1749	1595	0.0	zero	-1.5	-4.5
300 Rem. Ultra Ma	g RL300UMI	150	Care-Lokt* PSP	2815	2669	2528	2391 2258	2639 2	372 - 2127-	1903	1698	0.3	0.8	zero	23

MANAGED-RECOIL™ BUCKHAMMER® LEAD SLUGS. Managed-Recoil™ Technology has been applied to Remington's most devastating lead slug. We've reduced felt recoil by over 40% to make the BuckHammer® easier on the shooter without sacrificing its on-game performance. The Managed-Recoil BuckHammer 12-gauge slug travels at a fast 1,350 fps at the muzzle and maintains an impressive 1,032 ft-lb. of deer-stopping energy at 100 yards. The 20-gauge, at 1,275 fps., delivers 746 ft.-lb. of energy at 100 yards. Standard

BuckHammer and Managed-Recoil BuckHammer slugs are designed for use with fully-rifled barrels or rifled chake tubes.

Index/ EDI No.	Gauge	Length (in.)	Sing Wt.,	Vel Muz	ocity (ft./sec 50 yd.*) 100 yd.	Muz.	iergy (ft.=1 , 50 yd.5	b.) 100 yd.	Traject 50 yd.	ory (in.) £ 100 yd.
1	. `		MANAG	ED-RECOI	L'" BUCK	HAMME	R* LEAD SLI	UGŚ .			
RL12LSS -	12 ′	~ 21/4 -	1% -	1350	1107	972 .	1991	1340	1032	0.0	-5.5
RL20LSS	20	2 1/4	%	1275	1057	938	1379	948	746	0.0	-6.7

PISTOL & REVOLVER



EVERY APPLICATION, ONE BRAND. Remington®

has been making centerfire handgun ammunition longer than anyone. It should then come as no surprise that we offer the broadest line of pistol and revolver ammunition available. With loadings tailored to virtually every potential shooting application, our line includes vast choices of calibers, bullet weights, bullet styles and combinations of all these. Choose from a complete range of traditional bullet styles, as well as from some of the most sophisticated handgun bullets made. All cartridges are assembled from the highest quality components - with meticulous quality control - to assure reliability in all handgun actions.

GOLDEN SABER™ HPJ



DEAD-SERIOUS BULLET INNOVATION.


A superior bullet for when the stakes are at their highest. Designed for law enforcement and personal defense, the Golden Saber¹⁶⁶ High Performance Jacket successfully combines: match-type accuracy, deep penetration, maximum expansion and near 100% weight retention.

	ladex/	Primer	Wt		Velocity (ft.)	sec)	Fne	rey (ff-lbs.)	Mid-Range Trajecto	ry Barrel
Caliber	EDI No.	A 14	(grs.)	Bullet Style		100 yds:	Muz	50 yds. 100 yds.	50 yds. 100 yds.	Length*
				REMMINGTO	P&R AMMU	NITION				
25 (6.35mm) Auto.	R25AP	11/1	50	Metal Case	760 707	` `659	- 64	56 48	2.01 8.7	2
32 S&W-	R32SW	11/2	88	Lead Round Nose	680 645	610	90	81 73	2.5" 10.5"	3"
32 S&W Long	R32SWL	11%	98	Lead Round Nose	705 670	635	115	98 88	2.3 10.5	4" -
32 (7.65mm) Auto.	R32AP	11/2	71	Metal Case	905 855	810	129	115 97	1.4" 5.8"	4*
357 Mag.**	R357M7	-51/2	110	Semi-lacketed Hollow Point	1295 . 1094	. 975	410	- 292 - 232	-0.8 3.5	4"
	R357M1	5 1/2	125	Semi-Jacketed Hollow Point	1450 1240	1090	583	427 330	0.6" 2.8"	4*
ETELLI	R357M2	51/2	158	Semi-Jacketed Hollow Point	1235 1104	1015	535	428 361	0.8" . 3.5".	4"
	R357M3	51/2	158	Soft Point	1235 1104	1015	535	428 361	0.8" 3.5"	4*
	R357M5	51/2	158.	Semi-Wadcutter	1235 1104	1015	535	428 361	0.8" 3.5"	4
	R357M10	5 14	180	Semi-lacketed Hollow Point	1145 1053	985	524	443 388	0.9" 3.9"	8 1/4"
9mm Luger	R9MM1	1 %	115	Jacketed Hollow Point	1155 1047	971	341	280 241	0.9", 3.9"	4
	R9MM3	1%	115	Metal Case	1135 1041	973	329	277 242	0.9" 4.0"	4"
	R9MM6	1 1/4	115	Jacketed Hollow Point +P‡	1250 1113	1019	399	316 265	0.8 3.5	
	R9MM2	1%	124	Metal Case	1110 1030	971	339	292 259	1.0" 4.1"	4*
	- R9MM8	1%.	147	Jacketed Hollow Point (Subsonic)	990 941	900	320	289 264	1.1" 4.9"	4
380 Auto.	R380A1	11%	88	Jacketed Hollow Point	990 920	868	191	165 146·	1.2 5.1	4*
	R380AP	11/4	95	Metal Case	955 865	785	190	160 130	14- 59	4
38 S&W	R38SW	11/2	146	Lead Round Nose	685 650	620	150	135 125	2.4" 10"	4"
38 Special**	R38S10	11/2	110	Semi-Jacketed Hollow Point +P ‡	995 926	871	242	210 185	1.2 5.1	4"
·	R38S16	1 1/4	110	Semi-Jacketed Hollow Point	950 890	840	220	194 172	1.4" 5.4"	4*
	R38S2	11/2	125	Semi-Jacketed Hollow Point +P ‡	945, 898	858	248	224 204	. 13" 54"	4
	R38S3	1 1/2	148	Targetmaster® Lead WC Match	710 634	566	166	132 105	2.4" 10.8"	4"
	R38S5	11/5	158	Lead Round Nose	755 723	692	200	183 168	20 8.3	4"
	R38\$14	11/4	158	Semi-Wadcutter +P ‡	890 855	823	278	257 238	1.4" 6.0"	4"
	R38S6	11/2	158	Semi-Wadcutter	755 723	692	200	183 168	20 8.3"	4 3
,	R38\$12	11/2	158	Lead Hollow Point +P ‡	890 855	823	278	257 238	1.4" 6.0"	4"
38 Short Cult**	R38SC	11/2	125	Lead Round Nose	730 . 685	645	150	130 115	22" 94"	6
357 Sig.	R357S1	5 1/2	125	Jacketed Hollow Point	1350 1157	1032	506	372 296	07 3.2	4"
40 S&W	R40SW1	5 1/2	155	Jacketed Hollow Point	1205 1095	1017	499	413 356	0.8 3.6	4
·-	R40SW2	5 1/1	180	Jacketed Hollow Point	1015 960	914	412	368 334	1.3" 4.5"	4"
41 Rem. Mag.**	R41MG1	21/2	210	Soft Point	1300 1162	1062	788	630 526	0.7 3.2	4
44 Rem. Mag.**	R44MG2	21/2	240	Soft Point	1180 1081	1010	741	623 543	0.9" 3.7"	4"
	R44MG3	21/3	240	Semi-Jacketed Hollow Point	1180 1081	1010	. 741	623 543	0.9 3.7	4 .
44 S&W Special**	R44SW	2 1/2	246	Lead Round Nose	755 725	695	310	285 265	2.0" 8.3	6"
45 Cott** .	R45C1	2 1/2	225	Semi-Wadcutter	960 890	832	460	395 346	1.3 5.5	5
	R45C	21/:	250	Lead Round Nose	860 820	780	410	375 340	1.6 6.6	5*
: 45 Auto.	R45AP2	21/2	185	Jacketed Hollow Point	1000. 939	889	. 411	362 324	1.1" 4.9"	5*
	R45AP4	21/2	230	Metal Case	835 800	767	356	325 300	1.6 6.8	5"
	R45AP7	21/2	230	Jacketed Hollow Point (Subsonic)	835 800	767	356	326 300	1.6" 6.8"	5
		·			'				•	

			PREMIE	R [®] GOLDE	NSARFE	" HPI/H	IGH PERFO	RMANCE	IACKET)			
357 Magnum*	GS357MA	5 1/2	125	1220	1095	1009	413	333	283	0.8"	3.5*	4.
9mm Luger	GS9MMB	1 1/2	124	1125	1031	963	349	293	255	1.0	4.0	4"
	GS9MMC	11/2	147	990	941	900	320	289	264	1.1"	4.9"	4"
9mm Luger (+ P)	GS9MMD	1 1/2	124	1180	1089	1021	384	327	287	0.8"	3.8"	4"
380 Auto.	GS380B	11/2	102	940	901	866	200	184	170	1.2"	5.1"	41
38 Special (+ P)*	GS38SB	1 1/2	125	975	929	885	264	238	218	1.0~	5.2"	4"
40 S&W	GS40SWA	5 1/2	165	1150	1040	964	485	396	340	1.0"	4.0"	4
	GS40SWB	5 1/2	180	1015	960	914	412	368	334	1.3"	4.5	4"
45 Auto.	G\$45APA	2 1/2	185	1015	951	899	423	372	332	1.1"	4.5"	5*
	GS45APB	212	230	875	833	795	391	355	323	1.5*	6.1"	5"
45 Auto. (+P)	GS45APC	2 1/2	185	1140	1042	971	534	446	388	1.0"	4.0"	5"

‡Ammunition with "+ P" on the case headstamp is loaded to higher pressure. Use only in firearms designated for this carnidge and so recommended by the gun manufacturer.

*Note: These ballistics reflected vented barrel.



Golden Saber **
Driving Band **

Top of rilling band

The bullet diameter directly ahead of the Driving Band's is reduced from groove to bore diameter, so the bullet is precisely aligned before the Driving Band engages the utiling. The result: match-grade accuracy and reduced barrel friction that conserves velocity.

The high-performance jacket expands to a larger diameter than lead core — over 1.6x diameter. Minimal lead deformation retains energy for deeper penetration.



Pistol and Revolver Interchangeability chart is located on page 100.

UMC® AMMUNITION

UMC® HANDGUN CARTRIDGES.

All UMC ammunition is American-made in Lonoke, Arkansas using first-quality factoryfresh brass and clean-shooting Kleanbore® primers to provide the best value for practice, personal defense and hunting



UMC® RIFLE

CARTRIDGES. Made in the

USA, value-priced and ideal for high-volume shooting, our UMC centerfire rifle ammunition is loaded in seven popular calibers including the 30-06 Sprg, 308 Win, 7.62x39mm, 30 Carbine and 303 British. The 45 and 50 grain jacketed hollow point loads in 223 Remington and 22-250 Remington are perfect

> for varmint hunters. Now available in 17 Remington



UMC® LEADLESS™ HANDGUN CARTRIDGES.

A must have for shooters that frequent indoor ranges, economical UMC® LeadLess™ cartridges virtually eliminate lead exposure at the firing line. Specially designed bullet actually prevents the vaporization of lead from the bullet's base upon firing. Standard



bullet weights duplicate the ballistics of conventional loads.

Nose profile designed to function smoothly in all action types

nosc prome u	confince to remember our
Full-length	
copper <	
jacket	
Powder	
blended for	/ 小型 / 20
consistent	
velocity	
	機・多り
High-quality	
reloadable	
brass case	1
	/

Clean-shooting, lead-free priming Solid lead core protected by thick copper jacket



Enclosed base virtually eliminates airbome lead at firing line



				UMC*	HANDGL	JN CART	RIDGES		_			
9mm Ługer	L9MM1	1%	115	ЛНР	1135	1041	973	329	277	242	0.9*	4.0"
	L9MM2	1%	124	MC	1100	1030	971	339	292	259	1.0"	4.1"
	L9MM3	1%	115	MC	1135	1041	973	329	277	242	0.9*	4.0"
	L9MM9	1 %	147	MC	990	941	900	320	289	264	1.1*	4.9*
10mm Auto	L10MM6	21/4	180	MC	1150	1063	998	529	452	398	0.9"	3.7*
25 Auto (6.35mm)	L25AP	11/	50	MC	760	707	659	64	56	48	2.0"	8.7*
32 Auto	L32AP	11/	71	MC	905	855	810	129	115	97	1.4"	5.8°
357 Magnum**	L357M12	5 ⅓	125	JSP	1450	1240	1090	583	427	330	0.6"	2.8"
357 Sig.	L357\$1	51/-	125	MC	1350	1146	1018	506	422	359	0.7"	3.3"
	L357\$2	51/4	125	JHP	1350	1157	1032	506	372	296	0.7"	3.2"
38 Super Auto + P	L38SUP	1%	130	MC	1215	1099	1017	426	348	298	0.8	3.6
38 Special + P**	L38S2	14	125	JHP	945	898	858	248	224	204	1.3"	5.4*
38 Special**	L38S5	1%	158	LRN	755	723	692	200	183	168	2.0"	8.3*
	L38S11	1%	130	MC	790	766	743	173	163	153	1.7*	1.2
380 Auto	L380AP	1%	95	MC	955	865	785	190	160	130	1.4"	5.9* -
40 S & W	L40SW2	5 ⅓	180	JHP	1015	960	914	412	368	334	1.3"	4.5"
	L40SW3	51/	180	MC	985	. 936	893	388	350	319	1.4	- 5.0"
	L40SW4	5%	165	MC	1150	1040	964	485	396	340	1.0"	4.0
44 Rem. Mag**	L44MG7	21/	180	,ISP	1610	1365	1175	1036	745	551	0.5	2.3*
45 Auto	L45AP1	21/:	185	MC	1015	955	907	423	375	338	1.1*	4.8"
	L45AP4	2 1/2	230	MC .	· 835	800	767	356	326	300	1.6	6.8*
	L45AP7	2 ⅓	230	JHP	835	800	767	356	326	300	1.6"	6.8"
45 GAP	L45GAP4	2 %	230	MC	880	841 .	805	395	361	331	1.5"	6.2*

Caliber	Index/ EDI No.	Primer No.	Wit. (grs.)	Builet Style	Velo Muz	city (ft/s 100 yds.	ac.) 200 yds.	Ел Muz	ergy (ft-ll 100 yds.	is.) 200 yds.		hort-rai 100	nge Trajeo 150	tory (in 200	inches) 250	300
					UMC*	CENTE	RFIRE F	RIFLE CA	RTRID	GES						
17 Rem Fireball	L17FBV	7%	25	JHP	3850	3280	2780	823	597	429	0.0	0.9	0.9	zero	-2.0	-5.4
223 Remington	L223R3	14	55	MC	3240	2759	2326	1282	929	660	-0.1	0.6	zero	-1.9	-5.5	-11.0
	L223R7	7 1/2	45	ЯНР	3550	2953	2430	1259	871	590	-0.1	0.4	zero .	-1.7	-4.8	-9.7
	L223R8	7 1/2	50	JHP	3425	2899	2430	1302	933	655	-0.1	0.5	zero	-1.7	-4.9	-9.9
	L223R9 ·	71/2	62	CTFB	3100	2734	2396	1323	[029]	790	0.1 ;	0.6	zero	-1.9	-5.4	-10.6
22-250 Rem	L22503	9 1/2	45	JHP	4000	3340	2770	1598	1114	767	-0.3	0.2	zero	-1.2	-3.5	-7.2
	L22504	9 1/2	50	JHP	3820	3245	2739	1620	1169	833	-0.1	0.8	0.9	zero	2.0	-5.4
7.62x39mm	L762391	7 1/2	123	MC	2365	2060	1780	1527	1159	865	0.1	zero	-2.2	-6.8	-14.1	-24.5
30 Carbine	L30CR1	61/2	110	MC	1990	1567	1236	967	600 .	,373	0.6 -	zero	-4.2	-12.9	-27.2	-48.6
308 Win.	L308W4	9 1/2	150	MC	2820	2533	2263	2648	2137	1705	-0.1	zero	-1.2	-3.9	-8.4	-14.7
30-06 Sprgfld.	130062	9 1/2	150	MC	2910	2617	2342	2820	2281	1827	-0.2	zero	-1.1	-3.6	-7.7	-13.6
303 British	L303B1	9 1/2	174	MC	2475	2209	1960	2366	1885	1484	0.1	zero	-1.9	-5.9	-12.2	-21.4

Caliber	Index/ EDI No.	Primer No.	WL (grs.)	Builet Style	Yeloo Muz.	ity (ft./se 50 yds.	c.) 100 yds.		ergy (ff-lbs. 50 yds.	100 yds.	Mid-rang 50 yds.	ge Trajectory 100 yds.
			UMC	LEADI	ESS" HAI	NDGUN	CARTR	IDGES		_		
9mm Lüger	LL9MM11	11%.	115	FNEB	. 1135	1041	973	329	277	242	0.9	4.0
	LL9MM2	11/1	124	FNEB	1100	1030	971	339	29 2	252	1.0*	4.1°
	IL9MM9	11/2	147	FNEB	990	941	900	320	289	264	. 1.1°	4.9*
357 Magnum**	Ш357М1	51/2	125	FNEB	1450	1240	1090	583	427	330	0.6*	2.8"
38 Special**	1138S17	11/1	125	FNEB	850	822.	796	20i	188	176	1.4*	6.4
38 Special + P**	IL38\$2	11/2	125	FNEB	975	935	899	264	242	224	1.2	4.9"
380 Auto	11380AP2	11/2	95	FNEB	955	865	- 785	- 190	160	130	1.4"	5.9"
40 S & W	LL40SW5	51/2	180	FNEB	985	936	893	388	350	319	1.4*	5.0*
45 Auto	LL45AP8	21/2	230	FNEÉ	835	800	767	356	326	,300	1.6"	6.8

-CIFB = Closed Tip Flat Base | MC = Metal Case | FNEB = Flat Nose Enclosed Base | HP = Jacketed Hollow Point | ISP = Jacketed Soft Point | LRN = Lead Round Nose

RIMFIRE

Match EPS

PREMIER GOLD BOX ** RIMFIRE. Premium rimfire cartridges super-tuned for accuracy and terminal performance. Available in 17 Mach 2, 17 HMR and 22 Win Mag, Premier Gold Box Rimfire Ammunition is loaded with AccuTip-V polymer-tipped bullets for incredible shot-to-shot consistency, flat trajectory and explosive expansion. Upgrading your rimfire rifle or handgun is as easy as shooting the right ammo. Think Premier Gold Box.



Caliber	Index/ EDI No.	Wt. (grs.)	Bullet Style	Ye Huz	locity (ft/sec.) 50.yds	100 yds	Muza	inerpy (ft-lbs.): 50 yds.	100 yds.	50 yds	ajectory (in.) ** 100 yds	150 yds 🚓
Premier* 17 HMR	PR17HM1	17	AccuTrp-V	2550	2212	1901	245	185	136	0.1	0.0	-2.6
Premier® 22 Win Mag	PR22M1	33	AccuTip-V	2000	1730 💝	1495	293	219	164	. 0.6	0.0	4.5, x j
Premier* 17 Mach 2	PR17LR	17	АссиТір-V	2100	. 1801	1532	166	122	88	0.7	0.0	-4.4

COMPETITION/TARGET RIMFIRE. When it comes to competition-grade rimfire ammunition, there's only one name good enough to share the Remington® brand — Eley. A company with a reputation for the world's most accurate and reliable rimfire ammunition, Eley, Ltd. has teamed up with

Remington to offer three grades of their premier 22 long rifle ammunition for the serious target shooter: Target Rifle, Club XTRA and the elite Match EPS. Remington Target ammunition offers the accuracy and economy for Match practice and developmental shooting.

(E) p			Colosive;	, pa		wab.	. Or	EALTS 1	DO.	25 7 43° A	niestory (m.) 50 yds (100 y	
22LR Match EPS	· RE22EPS	40	Lead Flat Nose	1085	1006	941	105	90 🗘	79	0.3	7.1	15.55
ZZLR Club Xtra	RE22CX	40	Lead Round Nose	1085	1006	941	105	90	79	0.3	0.0 -7.1	<u> </u>
22LR Target Rifle	RE22T	40	Lead Round Nose	1085	1006	941	105	90	79	0.3	0.0 7.1	
Remington Target												
22 Long Riffe	6122/6100+	40 -	Round Nose	1150	1048	976	117	98 .	85	. 0.2	0.0 -6.4	





RIMFIRE. Prairie dogs. Tin cans. Or a bulls-eye. No matter what you put in your sights, Remington® offers the perfect 22 rimfire ammunition for any occasion. Remington rimfire ammunition delivers the quality you expect. That's because we put the same level of care into making our rimfire ammunition as we do our centerfire ammunition, so you'll get the maximum performance from every shot.

Magnum												
22 Win Mag	R22M1	40	Jacketed Hollow Point	1910	1610	1350	324	230	162	0.9	- 0.0	-5.7
	R22M2	40	Pointed Soft Point	1910	1600	1340	324	227	159	1.0	0.0	-5.8
				Con C			T CITA		110mls	, and		o Mus
Short												
22 Short	1022	29	Plated Lead Round Nose	1095	982	903	77	62	52	0.3	6.0	-7.4
High Velocity												
22 Long Rifle	1522/1500+	40	Plated Lead Round Nose	1255	1113	1017	140	110	92	0.0	0.0	-5.6
	1622/1600+	36	Plated Hollow Point	1280	1117	1010	131	100	82	0.0	0.0	-5.6
Hyper Velocity												
22 Yellow Jacket' Long Rifle	1722/1700+	33	Truncated Cone Hollow Point	1500	1247	1075	165	114	85	-0.2	0.0	-4.]
22 Viper* Long Rifle	1922/1900+	36	Truncated Cone Solid	1410	1198	1056	159	115	89	-0.1	0.0	-4.7
Subsonic*=												
22 Surbsonic Long Rifle	SUB22HP	38	Hellow Point	1050	965	901	93	79	69	0.3	0.0	-7.7
Low Noise												
CBee Long Rifle	CB-22LI00	33	Holley Point	740	687	638	· 40	35	30	-1.5	0.0	-16.9
Promotional												
22 Thunderboit* Long Rifle	IB ZZA	40	Round Nose	1255	1113	1017	140	110	92	0.0	0.0	-5.6
22 Cyclone* Long Rifle	CY 22HP	36	Hetto:: Point	1280	1117	1010	131	100	82	0.0	0.0	-5.6
22 Long Rifle (High Velocity)	GL 27HP	36	Hollow Point	1280	1117	1010	131	100	82	0.0	0.0	-5.6

**Note: Sight height 1.5' above axis of bore. + These long rifle 22s available in slide-open plastic packs of 100.

NEW

COMPONENTS

REMINGTON® **RELOADING COMPONENTS**. If you reload your own cartridges, then you shouldn't settle for anything but the best reloading components in the business – Remington. We offer industry-leading products that are changing the way sportsmen think about reloading.

More accurate. Our unique manufacturing process eliminates jacket stretch for near-perfect wall thickness, which results in better flight stability.

More versatile. A 20% heavier jacket engineered with an innovative wall profile provides better expansion and penetration over a broad range of terminal velocities.

More reliable. 50% thicker Core-Lokt section increases mechanical locking of the rear core into the jacket and better controls expansion at higher velocities.

More deadly. Bonded jacket/core design further insures controlled expansion (2x diameter) with up to 95% weight retention for ultimate on-game performance.



PREMIER*
CORE-LOKT*
ULTRA BONDED*
BULLETS. World-class
accuracy and unmatched
reliability on-game were just
two of the many reasons
our handloading customers
demanded Core-Lokt Ultra
Bonded bullets.

PREMIER* ACCUTIP BULLETS.

Top off your handloads with the most accurate polymer-tipped big-game bullet available today. Near-perfect concentricity and an overall ballistically superior design make it one of the flattest-shooting bullets

in the world. It also expands quickly to dispatch medium and big game with lightning authority.

CORE-LOKT® BULLETS.

"The Deadliest Mushroom in the Woods," now a handloading component. It's the original controlled-expansion big-game bullet, delivering massive energy transfer as it expands to nearly 2x original diameter. For dead-sure reliability, the progressively thickened jacket is locked to the lead core.



X22600	11	1 1/2 Small Pistol
X22604		2 1/2 Large Pistol
X22626	14.	5 1/2 Small Pistol
X22606		6 1/2 Small Pistol
X22628		7 1/2 Small Rifle BR
X22608		9 1/2 Large Rifle
X22622	1,	9 1/2 M Magnum Rifle

-			Builet Type
: 	MER PACK BAG		
RB2241	224	45	HP ;
RB2242	224	50	PSP
RB224P1	. 224	50	PLHP
RB2244	224	55	MC
. RB2243	. 224	.55.	PSP
RB224P2	224	55	PLHP
RB2247	< 224 · · · ·	62	③HP Match , ↓
RB243P1	243	80	PLHP
RB2432 ****	243	- 80	PSP 1
RB2682	6.8mm	115	MC
, RB3085	308	A 150	MC :
RB303B	310 (303 Brit.)	180	SP Core-Lokt
RB3231	- ≥ 8mm	185	PSP Core-Lokt
RB4571	457	300	SJHP
	IER PACK BAGO		BULLETS
RB9MM3 '-	- 2-39mm 分成	20115 步	MC 1
RB9MM11	9mm	115	FNEB
RB9MM5 💸	9mm 💉	TA115 25	HP,
RB9MM2	9тт	124	MC
RB9MM8	- 9mm	. 147	: USHP 10 4
RB380AP	356 380 Auto	95	MC
. RB38S11 ੴ	356 38 Special	130	で A/MC · 日
RB357M7	357/38	110	SJHP
RB357M1	357/38	125	SJHP,
RB357M2 ·	357/38	158	SJHP
≥ RB40SWI	₽ 40/10mm A	3155	* *** VIHP S***]
R840SW3	40/10mm	- 180	MC
RB40SW5	(₹40/10mm 📦	3 2180	FNEB
RB40SWZ	40/10mm	180	JHP
RB41MG1	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	200	SIHP
RB44MG6	44	210	SJHP
RB44MG3	244 000	240 x	SJHP 34
RB45AP4	45 Automatic	230	MC
RB45AP8	45 Automatic	28230 海线	FMEB 7 3
RB45AP7	45 Automatic	230	JHP

		ISUMER PACK RIFLE BRASS
NEW	RC17FB	- 17 Remington Fireball
	RC17R	17 Remington
	RC204R	204 Ruger
	RC22H	22 Hornet
	RC221FB	221 Remington Fireball
	RC222R	222 Remington
	RC223R	223 Remington
i	RC2250R	22-250 Remington
	RC220S	220 Swift
	RC243W	243 Win
	RC6MMR	6mm Remington
	RC2506R	25-06 Remington
	RC2520W	25-20 Win
	RC257R	257 Roberts
	RC65S	6.5x55 Swedish Mauser
	RC260R	260 Remington
	RC68SPCR	6.8mm Remington SPC
	RC270W	270 Win
	RC270WSM ;	270 WSM
	RC7M08R	7mm-08 Remington
	RC7MMG	7mm Remington Magnum
	RC7MMRS	7mm Remington SA Ultra Magnum
	RC7MMRA	7mm Remington Ultra Magnum
	RC280R	280 Remington
	RC3030W	
	RC300RS	300 Remington SA Ultra Magnum
	RC300RA	300 Remington Ultra Magnum
	RC3006	30-06 SPRG
	RC300WM 1 15	300 Win Mag
	RC300WSM	300 WSM
	RC303B	303 British
	RC308W	308 Win
	RC3220W -	32-20 Win
	RC8MSR	8mm Mauser
	RC8MMG > 1	≱8mm Remington Magaium
	RC338W	338 Win Mag
	RC338RA	#338 Remington Ultra Magnum
	RC350R	350 Remington Magnum
	RC35W	fisa 35 Whelen
ĺ	RC375H	375 H&H Magnum
	RC375RA	375 Remington Ultra Magnum
	RC4440W	44-40 Win -
	RC4570G	45-70 Government
	CON	SUMER PACK PISTOL BRASS
	图 RC357MG 公徽	357 Magnum
	RC357X	357 Maximum
	. ₩ RC9MM	9mm Luger
	RC38AS	38 Super Auto + P
l	RC38SP 4014	38 Special

CONSUM	ER PACK PISTOL BRASS (cont.)
RC40SW	40 S&W
RC41RA	41 Remington Magnum
RC44RA	44 Remington Magnum
RC44SW	44 S&W
RC45C	45 Colt
RC45A	45 Auto
RC454C	454 Casull

	Index/EDI No.	- Caliber	Wit (gr.)	Bullet Type
	PREMIE	R* CORE-LOK	T" ULTRA B	ONDED"
	RBC2433 .	. 243/6mm	100	PSP .
	RBC2571	25	115	PSP
ĺ	RBC2642	26/6.5mm	140	PSP
	RBC2682	27/6.8mm	115	PSP
	RBC2772	-27/6.8mm	40	PSP
	RBC2841	28/7 mm	140	PSP
1	RBC2843	28/7mm .*	160	PSP
- 1	RBC3081	30	150	PSP
	R8C3082 :: 3	30	168	PSP :
1	· RBC3083	30	180	PSP
	F ≥ RBC3381	338	225	PSP
		PREMIER*	ACCUTIP	
NEW	RBA1771 Hel	- no n. 17	≈ 20	AccuTip-V
NEW	RBA2042	20	40	- AccuTip-V
NEW	RBA2241	22-	50	AccuTip-V
NEW	RBA2242	22	55	AccuTip-V
NEW	RBA2431	24/6mm	75 :	- AccuTip-V
NEW	RBA2432	24/6mm	100	AccuTip
NEW	建 RBA2642 表	3 26/6.5mm	140	Accutip
NEW	RBA2771	27	130	AccuTip
NEW	RBA2841	28/7mm 🛴	140	Accutio
NEW	RBA2842	28/7mm	150	AccuTip
NEW	RBA3081	30 🦠 😁	150	Accutio
NEW	RBA3082	30	165	AccuTip
NEW	R8A3083	30	180	Accutip 4
		CORE-L	OKT [®]	
NEW	B2432 溪	-24/6mm	100	PSP
NEW	B2571	25	100	PSP
NEW	* B2462 ***	.~	140	PSP
NEW	B277Z	27	130	PSP
NEW	17872 B2842 3-61	2-228/7mm →	150	PSP ±
NEW	18088	30	150	PSP
NEW	B3083	* 3 0 *	180	PSP
NEW	B30301		150	SP

BR = Bench Rest / FNEB = Flat Nose Euclosed Base HP = Hollow Point / JHP = Jacketed Hollow Point / MC = Metal Case

HP = Hollow Point | JHP = Jacketed Hollow Point | MC = Metal Cas PLHP = Power Lokt Hollow Point | PSP = Pointed Soft Point

PREMIER™ — TACTICAL KNIVES

TANGO®

- Civilian: 440C stainless steel PTFE-Teflon® coated blade with etched Remington® logo
- Law Enforcement: 440C stainless steel Mill Spec: Mil-C 13924 blade with etched Remington® LE logo
- Military: N690 stainless steel DLC coated blade with etched Remington® MPD logo
- G-10 handle
- Series I: Civilian Cordura sheath; LE Molle sheath; Military Molle plus leg extension
- Series I: 5 1/4" Blade, 10 1/2" Overall Length

• Series II: 3 5/8" Blade, 4 3/4" Closed

Made in Italy

TANGO® SERIES I -- FIXED BLADE

CIVILIAN


Clip: 19697 - Boxed Drop: 19698 - Boxed Tanto: 19699 - Boxed


LAW ENFORCEMENT Clip: 19700 - Boxed

Drop: 19701 – Boxed **Tanto**: 19702 – Boxed

MILITARY

Clip: 19703 - Boxed Drop: 19704 - Boxed Tanto: 19705 - Boxed





TANGO® SERIES II -- FOLDER

CIVILIAN


Clip: 19706 - Boxed Drop: 19707 - Boxed Tanto: 19708 - Boxed

LAW ENFORCEMENT Clip: 19709 – Boxed

Drop: 19710 – Boxed Tanto: 19711 – Boxed

MILITARY

Clip: 19712 - Boxed Drop: 19713 - Boxed Tanto: 19714 - Boxed



ECHO™

- Civilian: 440C stainless steel PTFE-Teflon® coated blade with etched Remington® logo
- Law Enforcement: 440C stainless steel Mill Spec:
 Mil-C 13924 blade with etched Remington® LE logo
- Military: N690 stainless steel DLC coated blade with etched Remington® MPD logo
- · Anodized aluminum handle with 3M non-slip inserts
- 4 1/2" Blade, 4 1/2" Closed



MILITARY (Tanto)

ECHO™ SERIES II - FOLDER

CIVILIAN

Clip: 19578 - Boxed Drop: 19579 - Boxed Tanto: 19580 - Boxed

LAW ENFORCEMENT

Clip: 19581 -- Boxed Drop: 19582 -- Boxed Tanto: 19583 -- Boxed

MILITARY

Clip: 19584 - Boxed Drop: 19585 - Boxed Tanto: 19586 - Boxed

ZULU®

- Civilian: 440C stainless steel PTFE-Teflon® coated blade with etched Remington® logo
- Law Enforcement: 440C stainless steel Mill Spec: Mil-C 13924 blade with etched Remington® LE logo
- Military: N690 stainless steel DLC coated blade with etched Remington® MPD logo
- Anodized aluminum handle with 3M non-slip inserts
- Series I: Civilian Cordura sheath; LE Molle sheath; Military Molle plus leg extension (shown above)
- Series I: 4 3/4" Blade, 10 1/2" Overall Length

• Series II: 3 ⁵/ε" Blade, 4 ³/ε" Closed

• Made in Italy

ZULU® Series 1 — Fixed Blade

coursi

CIVILIAN Clip: 19560 – Boxed Drop: 19561 – Boxed

Tanto: 19562 - Boxed

LAW ENFORCEMENT Clip: 19563 - Boxed Drop: 19564 - Boxed

Tanto: 19565 – Boxed

MILITARY Clip: 19566 – Boxed Drop: 19567 – Boxed Tanto: 19568 – Boxed





ZULU® SERIES II – FOLDER

CIVILIAN

Clip: 19569 – Boxed Drop: 19570 – Boxed Tanto: 19571 – Boxed

LAW ENFORCEMENT

Clip: 19572 - Boxed Drop: 19573 - Boxed Tanto: 19574 - Boxed

MILITARY

Clip: 19575 – Boxed Drop: 19576 – Boxed Tanto: 19577 – Boxed

PREMIER"-HUNTING KNIVES

ELITE HUNTER®

- 440C stainless steel blade with satin finish and etched Remington® logo
- 6061 aircraft aluminum handle
- · Genuine leather sheaths
- · Available in 3M non-slip, Olive Wood or Genuine Stag handles
- Series I: 4 1/3" Blade, 9 1/3" Overall Length

Brown Sheath

(BR)

- Clip & Drop: 3 3/3" Blade, 4 1/2" Closed
- -2-Blade: 3 3/3" Drop. 3 1/3" Saw. 4 1/2" Closed
- -3-Blade: 3 3/3" Drop. 3 1/3" Saw. 3 3/3" Gut Hook, 4 1/2" Closed
- Made in Italy

ELITE HUNTER®

SERIES ! -- FIXED BLADE

OLIVE WOOD HANDLE (BR)

GENUINE STAG HANDLE (BR)

NON-SLIP HANDLE (BL)

Clip: 19732 - Boxed

Drap: 19733 - Boxed

Clip: 19735 - Boxed

Drap: 19736 - Boxed

Clin: 19738 - Boxed Drap: 19739 - Boxed





NON-SLIP HANDLE (HBL) Clip: 19741 - Boxed **Drop:** 19742 - Boxed 2-Blade: 19750 - Boxed 3-Blade: 19753 - Boxed

OLIVE WOOD HANDLE (HBR) Clip: 19744 - Boxed Dron: 19745 - Boxed 2-Blade: 19751 - Boxed 3-Blade: 19754 - Boxed

GENUINE STAG HANDLE (HBR) Clip: 19747 - Baxed **Drop:** 19748 - Boxed 2-Blade: 19752 - Boxed 3-Blade: 19755 - Boxed



GENUINE STAG

(2-Blade)






CUSTOM CARRY®

- · 440C stainless steel blade with bead blast finish and etched Remington® logo
- 6061 aircraft aluminum handle
- · Genuine leather sheath (Series I only)
- Available in aluminum or G-10 handles
- Series I: 4³/₈" Blade, 9³/₈" Overall Length
- Series II: 3 1/4" Blade, 4 1/2" Closed

Made in Italy



SERIES II ALUMINUM GRIF

CUSTOM CARRY® SERIES I — FIXED BLADE ALUMINUM HANDLE (BR) Drop: 19724 - Boxed G-10 HANDLE (BL) **Drop:** 19725 - Boxed

CUSTOM CARRY® SERIES II - FOLDER ALLIMINIM HANDLE Drop: 19726 - Boxed G-10 HANDLE Drop: 19727 - Boxed


ELITE SKINNER TH SERIES I (FIXED)

NON-SLIP (3-Blade)

- · 440 stainless steel blade
- · Available in Olive Wood or G-10 handles
- · Genuine handmade leather sheaths
- 3" Blade, 8" Overall Length









ELITE SKINNER'" SERIES I - FIXED BLADE OLIVE WOOD HANDLE (BR) Guthook: 19851 - Roxed Skinner- 19857 - Royed G-10 HANDLE (BL) Guthook: 19855 - Boxed Skinner: 19857 – Boxed



ELITE SKINNER** SERIES II (FOLDER)

- · 440 stainless steel blade
- 6061 aircraft aluminum handle
- Available in Olive Wood inserts or G-10 handles
- · Genuine handmade dual action leather sheaths (allows knife to be carried open or closed)
- · 3" Blade, 4" Closed
- Made in Italy





ELITE SKINNER™ SERIES II - FOLDER OLIVE WOOD INSERTS HANDLE (BR) Guthook: 19852 - Roxed Skinner: 19854 - Royer G-10 HANDLE (BL) Guthook: 19856 - Boxed

Skinner: 19858 - Boxed




PREMIER™ HUNTING KNIVES (cont.)

EXCURSION™

- 420 stainless steel PTFE-Teflon® coated blade and etched Remington® logo
- · Injection molded black rubber handle with 420 SS frame
- · Cordura sheath
- Made in Italy





PREMIER™ RESCUE



• 440C SS 3 1/2" Sheepfoot Combo blade with Remington® etch

• 440C SS 3" push button auto belt/web cutter (double blade only)

· Heavy duty Cordura sheath w/Molle system (double blade only)

· Glass breaker

Made in Italy.





(5 1/2" Closed)

(Sheepfoot & Auto

Belt/Web Cutter)

(5 1/2" Closed) (Sheepfoot)

ESCAPE" SERIES II - FOLDER BLACK HANDLE Sheepfoot: 19847 - Boxed Sheepfoot & Auto Belt/Web Cutter: 19848 - Boxed GREEN HANDLE Sheepfoot: 19849 - Boxed Sheepfoot & Auto Belt/Web Cutter: 19850 - Boxed



TRADITIONAL COLLECTIBLES

"100TH ANNIVERSARY PUMP ACTION SHOTGUN" KNIFE Waterfowl pattern — R-23

 Serrated blade with "100th Anniversary Pump Action Shotgun"

 Clip blade with First in Field logo, Made in the USA tang stamp on front and product code stamp on back

· Choke tube wrench and pin punch


· Certificate of authenticity

· Made in the USA 📰




LOOTH ANNIVERSARY "PUMP ACTION SHOTGUN" KNIFE (41/4" Closed) 18519 - Boxed

2008 "THE VETERAN" BULLET® KNIFE



· Amber jigged bone handle


• 2 1/2" one-armed razor blade with long pull, vintage Remington logo etch, Made in the USA tang stamp on front and product code stamp on back



2008 "THE VETERAN" BULLET KNIFE (3 1/: " Closed) 18993

OUTDOOR EXPLORATION KNIFE SERIES - "WEST"

- Final Limited Edition in a set of four RB-473
- · Genuine jig bone handle
- · 440 stainless steel blades
- 3 1/2" clip blade with compass etch on blade and corresponding direction to West; vintage Remington logo
- 33/s" spey blade with 2008 year tang stamp
- · 4-color display box (stacking)
- Made in the USA ===



OUTDOOR EXPLORATION (WEST) (4 1/: " Closed) 18984 - Boxed

The West. This is the fourth in a series of four knives incorporating the famous Remington Compass onto the handle and blade. The direction of the compass arrow corresponds with the knife's name, thus, on this model, the needle points to "The West." The unique display box is designed to stack in a manner that progressively builds a Remington Country image on two sides.





HERITAGE SERIES KNIVES

- · 440 stainless steel blades and pins
- · Brass liners
- · Available in Green Jigged Bone or Laminated Wood handle
- · Bolster etch "Remington Arms Co." crest dates back from 1888-1914
- · Big Game comes with leather sheath
- Made in the USA









(Drop Point) Laminated Wood R-51: 19835 - Boxed Green Jigged Bone R-53: 19827 - Boxed



Green Jigged Bone R-73: 19829 - Boxed Laminated Wood R-71: 19837 - Boxed



(Clip and Pen) Laminated Wood R-61: 19838 - Boxed Green Jigged Bone R-63: 19830 - Boxed



Green Jigged Bone R-83: 19831 - Boxed Laminated Wood R-81: 19839 - Boxed



lémington.

SPORTSMAN™ SERIES F.A.S.T.® FOLDING KNIVES

- · "Fast Action Soft Touch"
- Rubber coated stainless steel handle w/pocket clip and lanyard hole
- 440 stainless steel blade with etched Sportsman™ Series logo
- Available in matte black, Mossy Oak® Obsession® and Advantage® MAX-4 HD™ camouflage
- · Available in two sizes:

- Large: 3 % Serrated Blade, 5" Closed - Medium: 31/8" Serrated

Blade, 4 1/3" Closed



Large: 18219 - Clampack, 18212 - Boxed Medium: 19072 - Clampack, 19060 - Boxes

STAINLESS STEEL BLADE MATTE BLACK HANDLE

Large: 18220 - Clampack, 18213 - Boxed Medium: 19073 - Clampack, 19061 - Boxed

STAINLESS STEEL BLADE MOSSY OAK* OBSESSION* HANDLE Large: 18216 - Clampack, 18210 - Boxed Medium: 19070 - Clampack, 19058 - Boxed

STAINLESS STEEL BLACK BLADE ADVANTAGE® MAX-4 HD" HANDLE Large: 18215 - Clampack, 18209 - Boxed Medium: 19069 - Clampack, 19057 - Boxed



SPORTSMAN™ SERIES F.A.S.T. FIXED KNIVES

- "Fast Action Soft Touch"
- · Rubber coated stainless steel handle w/lanyard hole
- 440 stainless steel blade with etched Sportsman™ Series logo
- · Available in matte black, Mossy Oak® Obsession® and Advantage® MAX-4 HD™ camouflage
- 53/4" Serrated Blade, 101/2" Overall Length
- · Available with heavy-duty nylon sheath

STAINLESS STEEL BLADE MATTE BLACK HANDLE (Shown) 19785 – Clampack, 19779 – Boxed

STAINLESS STEEL BLACK BLADE MATTE BLACK HANDLE

19784 - Clampack, 19778 - Boxed


STAINLESS STEEL BLADE

MOSSY OAK* OBSESSION* HANDLE 19788 - Clampack, 19782 - Boxed

STAINLESS STEEL BLACK BLADE MOSSY OAK* OBSESSION* HANDLE (Sho 19786 - Clampack, 19780 - Boxed

STAINLESS STEEL BLADE ADVANTAGE® MAX-4 HD™ HANDLE (S 19789 - Clampack, 19783 - Boxed

STAINLESS STEEL BLACK BLADE ADVANTAGE® MAX-4 HD™ HANDLE 19787 - Clampack, 19781 - Boxed



D-SERIES™ KNIVES

- 6061 aircraft aluminum handle
- · Available in black and Mossy Oak® Break-Up® camouflage
- 420 high carbon stainless steel blade
- · Available with leather sheath
- Made in the USA



D-SERIES " CAMO HANDLE Clip (8 1/4" overall): 18328 – Clampack, 19373 – Boxe Drop (8 1/4" overall): 18329 - Clampack, 19374 - Boxed Gut Hook (7 '/- overall): 18327 – Clampack, 19372 – Boxed



D-SERIES™ BLACK HANDLE Clip (8 '/-" overall): 18335 - Clampack, 19376 - Boxed Drop (8 1/4" overall): 18336 - Clampack, 19377 - Boxed

KNIVES

SPORTSMAN™ SERIES INSIGNIA EDITION™


- 440 stainless steel blade
- · Available in black laminated wood or Burl wood handle
- Sportsman ™ Series medallion inlayed in handle
- Fixed: 3 1/2" Blade, 8" Overall Length
- Large Clip Folder: 3" Blade, 4" Closed
- Small Clip Folder: 2 1/2" Blade, 3 1/2" Closed
- · Black leather sheaths











BURL WOOD

BLACK LAMINATE

SPORTSMAN™ SERIES TECTONIC CTi^{1N}

- 420HC stainless steel blades with titanium coating and etched Sportsman™ Series logo
- · Carbon fiber handle
- · Fixed blades come with paddle style ABS plastic sheath
- · Folders have push button closure and pocket clip







FIXED CLIP BLADE (3 1/4" Blade, 7 1/2" Overall) 19277 - Clampack



FIXED CLIP BLADE WITH TRIGGER RING (3 1/2" Blade, 6 1/2" Overall) 19278 — Clampack



QUICK RELEASE FIXED DROP BLADE WITH TRIGGER RING (3 1/2" Blade, 6 1/2" Overall) 19279 - Clampack



· Solid 440 Stainless Steel tip to tip

- Blade lengths: 3" Guthook, 3" Skinner and 27/8" Caping blade
- Overall lengths: 7 1/4" Guthook, 7 3/2" Skinner, 6 1/2" Caper
- · All knives fit in the heavy-duty Cordura sheath
- · Easy access finger hole





DUCK/PHEASANT CLEANING KIT

- 440 Stainless Steel
- Blade lengths: 2" Caping blade
- Overall lengths: 6 3/4" Caper, 7" Guthook, 6" Scissors with bone notch
- · All knives fit in black nylon sheath for easy carry

DOVE/QUAIL CLEANING KIT

- 440 Stainless Steel
- Blade lengths: 1 2/4" Caping blade
- Overall lengths: 5 1/2" Caper, 4 1/4" Guthook, 4 1/2" Scissors
- · All knives fit in black nylon sheath for easy carry





18643 - Clampack

BIRD HUNTER'S TOOL

- · The ultimate upland/waterfowl hunter's multi-tool
- · Includes game shears with wing notch, bird gut hook, 3" clip blade, saw, flathead screwdriver, metric ruler and patented 12- and 20-gauge choke tube wrench
- 100% rust-resistant stainless steel
- · Black nylon sheath included
- 4 1/2" closed

18866 – Clampack



SWIFT-LOKT® 2.0 KNIVES · Aluminum with dark gray anodized finish and tactile rubber inlays with bead blasted stainless steel pocket clip · Cryogenically tempered AUS8 high carbon bead blasted stainless steel blade with thumb stud · Patented assisted opening system using nine long beam springs for superior power and speed Drop · Cold-forged liner lock with enlarged lock surface Reming · Patent pending slide Tanto safety system SWIFT-LOKT® 2.0 M Medium (3" Blade, 3 1/4" Closed) Clip: 19294 - Boxed


SPORTSMAN^{IM} SERIES FIXED KNIVES

· 420HC high carbon stainless steel blade with etched Sportsman™ Series logo

· Black synthetic non-slip handle







(4 '/'" Blade, 9 '/'" Overall Length) 18195 - Clampack, 18179 - Boxed

(4 1/3" Blade, 9 3/4" Overall Length) 18191 - Clampack, 18170 - Boxed

Drop w/Gut Hook

(4 1/3" Blade, 9 1/18" Overall Length) 18193 - Clampack, 18173 - Boxed

(4 3/16" Blade, 9 3/1" Overall Length) 18194 - Clampack, 18176 - Boxed

Skinner Clip

(3 11/16" Blade, 9 3/4" Overall Length) 18192 - Clampack, 18171 - Boxed

SPORTSMAN' SERIES BLACK DELRIN® FOLDERS

- 440 stainless steel blade with etched Sportsman™ Series logo
- · Satin finish stainless steel pins and bolsters
- Black delrin handle
- · Brass liners

SWIFT-LOKT® 2.0 L

Large (3 1/2" Blade, 4 1/2" Closed)





Dran- 19296 - Roxed

Tanto: 19298 - Boxed

PEANUT (2 1/4" Closed) (Clip and Pen) 18033 - Clampack



(3" Closed) (Drop Point) 18037 - Clampack



WHITTLER (3 1/2" Closed) (Clip, Short Clip and Pen) 18034 - Clampack



MINI TRAPPER (3 1/2" Closed) (Clip and Spey) 18040 - Clampack



(3 1/2" Closed) (Clip and Pen) 18042 - Clampack



18036 - Clampack



CAMPER'S KNIFE (3 1/4" Closed) (Spear, Can Opener, Punch Screwdriver and Cap Lifter) 18041 -- Clampack



UPLAND (3 1/1" Closed) (Clip, Choke Tube Wrench) Tool and Bird Hook) 18035 - Clampack



MID-FOLDING HUNTER (4" Closed) (Clip with Thumb Stud) 18039 - Clampack



MEDIUM STOCKMAN (3 5/s" Closed) (Clip. Spey and Sheensfoot) 18032 - Clampack



LARGE STOCKMAN (4 1/4" Closed) (Clip, Spey and Sheepsfoot) 18031 - Clampack

CLEANING KITS

UNIVERSAL ALL-A-ROUND KIT

- Cleans all your shotguns, rifles & pistols (.22 caliber to 12 gauge)
- · Contains an assortment of brushes, 3-piece brass rod, patches, patch puller, & waterproof/stain resistant Rem Pad
- · Portable cleaning station packaged in a polyethylene storage tube that hangs on a peg or sits on a shelf for convenience





TARGETMASTER™ DELUXE KIT

- 52-piece (true count) kit has all you need includes 100 patches
- · Sturdy aluminum case with positive latches
- 3 sets of 3-piece rods: Rimfire rod (.17-.22), Centerfire rod (.22 and up) and Shotgun/muzzleloader rod
- Precision brass patch jags fit .17-.50 calibers
- Adapters allow for cleaning of handguns (.17-.50)
- · Solid assortment of brushes/mops and accessories




- 27-piece (true count) cleaning kit includes 50 patches (.22 caliber to 12-gauge)
- 3-piece brass rod accepts standard #8-32
- · Integral swivel handle
- · An assortment of most popular brushes, mops and patch sizes

· Brass and nylon brushes for cleaning actions, bolts, cylinders and



Order No. 19054



FIELDMASTER® KIT

- · Brass 3-piece rod with swiveling handle
- Rem® Oil (1-oz.) & Brite Bore™ (2-oz.)
- · A wide variety of patches and patch pullers
- · Brass pistol and shotgun adapters
- · An assortment of bronze bore brushes for 22, 270 and 30 calibers as well as 12 and 20 gauges
- Attractive wooden box

Remington cleaning kits readily accept standard #8-32 cleaning brushes, mops, jags and standard shotgun brushes/ mops. (The rimfire rod in the Targetmaster accepts .17 components, and has an adapter for #8-32 accessories.)

GUN STORAGE & CLEANER

BORE LIGHT

- Ideal for inspecting used firearms, cleaning firearms and inspecting bore for obstructions
- · Includes both curved and straight light tubes
- LED light eliminates intense glare
- · Compact size



REM® PAD GUN CLEANING MATS

- · Surface material won't scratch guns or tabletops
- · Absorbent top material traps and holds up to eight times its weight in fluids
- · A non-slip vinyl bottom forms a barrier to prevent spilled fluids from soaking through
- · Fully machine-washable





Order No. 19950 (Clampack)

MODEL 365 MINI **DEHUMIDIFIER**

- Protects 30-60 days before recharging is necessary
- Self-contained unit requires no wiring or extension cords
- · Recharges easily in a few hours
- · 5-year warranty



16" PLUG-IN DEHUMIDIFIER

- · Works by gently warming the air inside your safe which helps in minimizing moisture
- 6' cord comes with easily assembled plug to allow installation using a small hole in back of safe
- Protects even up to 200 cubic feet more than enough for the largest gun safes

TRIGGER BLOCKS



3-Pack --Order No. 19439 Single -Order No. 18491



Order No.

CABLE LOCK

- · Fits most shotguns, rifles & pistols
- California approved

Order No. 18364

REM DRIT 35 DESICCANT

- · Removes moisture to prevent rust corrosion and eliminates odors in
 - gun safes and cabinets
- · No electricity required, easy-to-read indicator
- · Rechargeable for multiple uses, non-toxic
- · Protects up to 35 cu. ft. of enclosed space



Order No. 19952 (Clampack)

Remington's Moistureguard™ VCI/Oil Blend is the most scientifically advanced formula for TECHNOLOGY lubricating and protecting metal surfaces and

NEW

VCI

equipment from rust and corrosion. It's the perfect combination of our premium Rem® Oil rust preventative and new Volatile Corrosion Inhibitor (VCI), providing ultimate protection against the harshest of elements. Designed for long term protection, it should be the last application prior to storing any metal equipment.

MOISTUREGUARD^{IM} REM® OIL

- · Guards your hunting, fishing and marine gear from rust and corrosion
- · Protects all metals from rust and corrosion
- · Displaces moisture
- · Lubricates, cleans and protects
- Built from Rem Oil
- Using Volatile Corrosion Inhibitor Technology
- Comes in: 6 az. spray pump Order No. 18378



Order No.





- · 6cc multi-purpose grease syringe
- Using Volatile Corrosion Inhibitor Technology
- · Safe on all metal surfaces
- Instantly provides superior long lasting lubrication and protection
- · Penetrates into smallest cracks and crevices





MOISTUREGUARD™ REM® CLOTH

- 10" x 10" multipurpose cloth wipe
- Using Volatile Corrosion
- Inhibitor Technology
- Instantly protects all metals from rust and corrosion

MOISTUREGUARD™ GUN PLUGS

Using Volatile Corrosion Inhibitor Technology

VCI

- · Protects all metals from rust and corrosion
- · Place in chamber or mount in gun cabinet/safe to protect gun
- · Leaves no scent residue
- 30 cubic feet of protection
- Use as a snap cap

Order No. 19902

• Comes in: 12 gauge - Order No. 19463 20 gauge - Order No. 19464 Centerfire - Order No. 19465





MOISTUREGUARD™ SUPER SAFE PLUG

- Using Volatile Corrosion Inhibitor Technology
- · Protects all metals from rust and corrosion
- Place or hang in gun cabinet/safe
- · Superior storage protection
- · Leaves no scent residue
- 216 cubic feet of protection for up to one year



CLEANING CHEMICALS

REM: OIL

- · Cleans dirt and grime from exposed metal surfaces while displacing non-visible moisture from metal pores
- · Protects internal and external metal parts from rust and corrosion
- Exclusive Teflon formula provides a thin, long-lasting film that keeps actions working smoothly by reducing metal-to-metal wear
- Cornes in: 10 oz. aerosol can Order No. 24027, 4 oz. aerosol can - Order No. 26610, 2 oz. bottle with child resistant cap in footed clamshell - Order No. 18366, 1 oz. squeeze bottle in footed clamshell - Order No. 26617



U

REM® ACTION CLEANER

- · Easily cleans dirt, powder residue and caked-on lubricants from disassembled actions and fire-control mechanisms
- Dries quickly and leaves no residue
- Comes in: 10.5-oz. can with jet-spray extension tube Order No. 18395

REM® DRILUBE TM

- · Teflon-based lubricant provides a tough, non-congealing film without the residue of dry graphite lubes
- Keeps firearms functioning dependably to -40°F
- Comes in: 4 oz. aerosol can Order No. 18396



REM® OIL WIPES

- . 6" x 8" wipe cloth saturated with Rem Oil
- Comes in: 12 Count Clampack Order No. 18411 and 100 Count Display - Order No. 18473

SHOTGUN CLEANER

- Cleans trigger groups, gas ports, choke tube threading, receivers, chambers, barrels and magazine tubes
- · Dissolves powder residue, fouled lubricants, burnt carbon deposits and gunk
- · Blasts away gummy caked on grime from hard to reach areas such as ejectors, firing pin assemblies, trigger components and bolt recesses
- Contains no CFC's or carcinogens safe for polymers
- Comes in: 18-oz. aerosol can Order No. 18472

40-X™ BORE CLEANER™

- · Formerly Remington Bore Cleaner
- 40-X name ties into the products origins in Precision Benchrest Shooting
- · Uniquely formulated for rifles to improve cleaning, accuracy and performance
- Fast and easy to use no soaking or foul odors
- · Packaged in tri-fold clamshells
- · Comes in: 2 oz. white oval bottle with child resistant cap: Order No. 18359 and 4 oz. squeeze bottle: Order No. 18397




BRITE BORE™ SOLVENT


- · Dissolves carbon and powder fouling, removes copper, lead and plastic deposits
- Handy size for field range use
- Low odor contains no CFC's
- Comes in: 6 oz. can Order No. 18394 4 oz. jar - Order No. 18385 2 oz. bottle - Order No. 18367





REMINGTON° VALUED PARTNERS

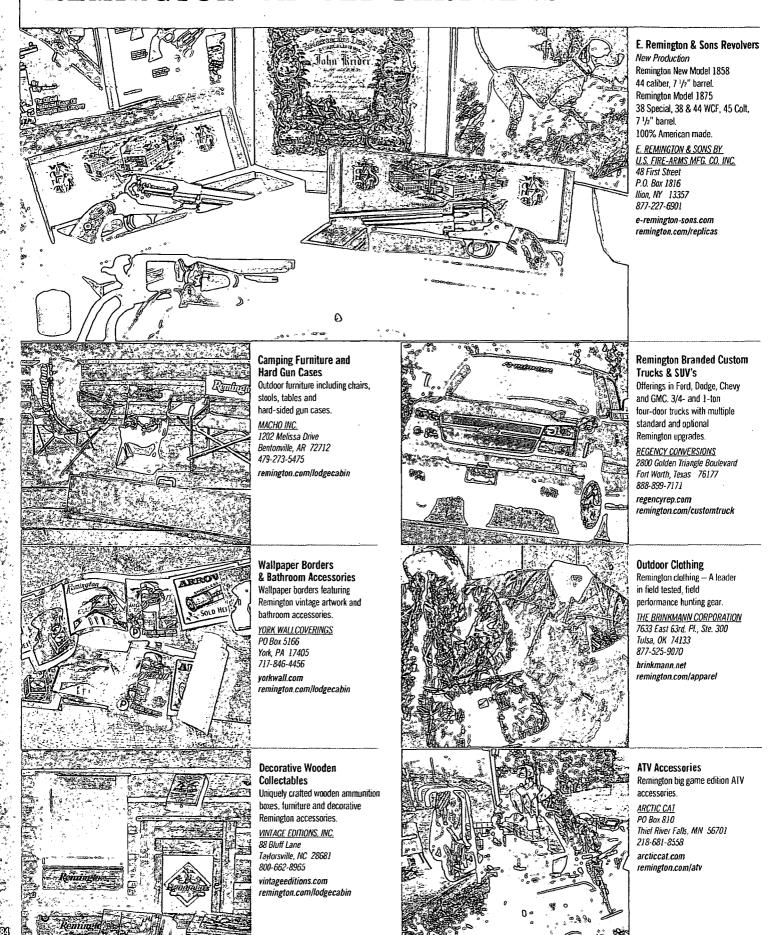

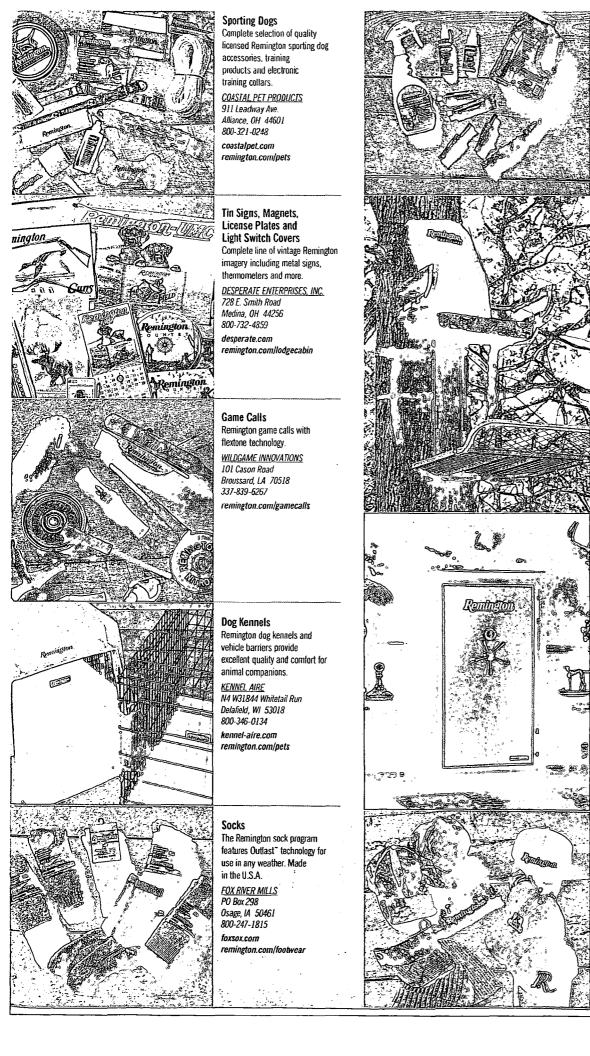

Food Plot Products, Scent

Lures and Game Calls

Products sold exclusively in

Canada and Europe.

262, Principale, C.P. 10 Saint-Benjamin

BUCK EXPERT

Quebec GOM 1NO

418-594-6393

buckexpert.com remington.com/wildlife

Treestands and

Ground Blinds

in the industry.

TREESTANDS

507-831-2540

PO Box 352

W.I.C. - REMINGTON

Windom, MN 56101

remingtontreestand.com remington.com/huntshoot

Gun Safes and Cabinets
Remington gun safes
including gun cabinets.

US MARKETS
LIBERTY SAFE AND
SECURITY, INC.
1199 West Utah Ave.
Payson, UT 84651

800-247-5625

libertysafe.com

AmZiegenberg 3

Headwear

1200 Melissa Lane

800-826-6047

outdoorcap.com

Bentonville, AR 72712

remington.com/apparel

Licensed technical and casual

hunting headwear products.

OUTDOOR CAP COMPANY, INC.

D-33106 Paderborn

Tel: +49 0 5251174444

remington.com/safes

remington.com/safes

EUROPEAN MARKETS

HARTMAN TRESORE AG & CIE

Quality assured treestands

sporting the most exclusive

safety and design standards

Canada

REMINGTON® VALUED PARTNERS



Eye & Hearing Protection, Safety Gloves, Hard Hats and Vests (for both the sporting and industrial markets) Eye and hearing protection and reflective and non-reflective safety gloves, hard hats and vests for both the sporting goods and industrial trades. remington.com/safetygear

Footwear

Hunting boots, PAC boots, hiking boots, rubber knee boots and rugged casual footwear.


remington.com/footwear

RADIANS 2768 Appling Center Cove Memphis, TN 38133 901-388-7776 radiansinc.com



Area Rugs, Mats and Carpet

MILLIKEN & CO. 201 Lukken Industrial Dr. West La Grange, GA 30240 800-342-5539 remington.com/lodgecabin



Wildlife Feeders and **Digital Game Cameras**

Remington wildlife feeders with automatic and self-feeding models, timing units and accessories.

BA PRODUCTS PO Box 291730 Kerrville, TX 78028 800-847-8269

remingtonfeeders.com remington.com/wildlife



Plastic Molded Decoys

Remington decays exceptional detail for realistic look. Duck, goose and related waterfowl products.

CASL INDUSTRIES PO Box 1280 Clayton, CA 94517 925-685-5055 caslindustries.com remington.com/huntshoot




Gun Cases, Paper Targets and Shooting Accessories

The Allen Company manufactures high-quality soft gun cases, targets and other shooting accessories utilizing Remington trademarked logos.

THE ALLEN COMPANY PO Box 445 525 Burbank St. Broomfield, CO 80038 303-469-1857

allencompany.net remington.com/huntshoot



Thermal Underwear T-Shirts and Henleys

Men's screen printed graphic T-shirts depicting Remington themes and thermal underwear for hunters.

WRIGHT'S LLC 208 Walter Blvd. Suite 100 Bentonville, AR 72712 479-271-8488

intradecoapparel.com remington.com/apparel



Action Figures

Outdoor action figures with matching firearms and hunting accessories.

HUNTER DAN PO Box 103 Greencastle, IN 46135 765-655-1400 hunterdan.com remington.com/toys



Cutlery - European Markets

Premier hunting and tactical knives fixed blade and folders.

CONSORZIO CONTELLINAI MANIAGO Via Della Republica, 21 33085 Maiaso (PN) Tel: +39 0 42771185

remington.com/cutlery



Knife Storage Cases, Rolls, Packs and Zipper Pouches Remington knife storage cases,

rolls, packs and zipper pouches. SMOKEY MOUNTAIN

KNIFE WORKS 2320 Winfield Dunn Pkwy Sevierville, TN 37876 865-453-5871 eknifeworks.com

remington.com/cutlery



Calendars

The 2008 Remington calendar program features a collector's poster, calendar and daily olanners

CALENDAR PROMOTIONS / GLOBAL MARKETING 1000 Highway 4 South Sleepy Eye, MN 56085 800-533-0498

countrygallerycalendars.com remington.com/lodgecabin




Wooden Signs, Tins and Magnets

Complete line of vintage Remington, UMC, Peters wooden signs, nostalgic tins and magnets.

AMERICAN SPORTSMAN SIGN CO. 4808 Chilton Court Columbia, MO 65203 573-449-9077

americansportsmansign.com remington.com/lodgecabin



T-Shirts

T-shirts, henleys, turtlenecks, fleece shirts, windbreakers and jackets.

SV3 LICENSING LLC 1057-521 Corporate Center Dr. Suite 160 Fort Mill, SC 29715 803-802-4304 remington.com/apparel




Fine Art Prints

Limited Edition fine art print reproductions of vintage Remington, Peters, UMC firearms and ammo promotional artwork. **WINFIELD GALLERIES**

748 Hanley Industrial Court St. Louis, MO 63144 314-645-7636

remingtonartwork.com remington.com/lodgecabin



Back Packs, Bags and Pouches

Remington camo back packs, bags, pouches and related products.

CERF BROTHERS 4240 Rider Trail North Earth City, MO 63045 800-237-3224

cerfbag.com remington.com/huntshoot

Black Powder Accessories Complete line of Remington black

TRADITIONS BLACK POWDER

powder accessories.


1375 Boston Post Road PO Box 776

Old Saybrook, CT 06475

traditionsfirearms.com

remington.com/huntshoot

860-388-4656



Lighters and Lighter Accessories

The #1 name in American made lighters - now produces a great line of Remington branded products.


ZIPP0 33 Barbour Bradford, PA 16701 814-368-2700 zippo.com

remington.com/personal

Air Rifles & **Soft Air Rifles**

Pneumatic and break barrel air rifles and air gun ammunition. Plus Remington replica soft air rifles.

CROSMAN CORP. Rout 5 & 20 East Bloomfield, NY 14443 585-657-6161 crosman.com remington.com/airguns



Specialty Gifts

Windmills, thermometers, lanterns, wind chimes, ceiling fans, truck hitch covers and benches.

S & D, INC. 203 E. Mill St. Amboy, IN 46911

877-616-7495 harvest-farms.com remington.com/lodgecabin

FOR MORE INFORMATION OR LICENSEE OPPORTUNITIES.

CONTACT US AT 336-548-8535 OR VALUEDPARTNER@REMINGTON.COM

				-1				2 2 0								
CALIBER	URDEN/EDI Russber	(gr).	BULLET STATE	PRIMER HUMBER	MIZZE 100 ZOO	(tps). 300	#00 500	MUZZLE 10	2100 st (ft- 0 200 3	b) 0 490 500	50 100	150 - 200 ' 250 - 300'	100 150	10MG-RAMES TRU 200 250	and the second second age	COEFFICIAL EVENORABION
17 Remington Fireball	PRAI/FII: 3	70	Accord V	11/63	4000 3380 2840		1930 1556	710 50	358 24	7. 165. 107 ;	-03, 02%	008-11, 31, 68.	16 20	¥156 00	water that the same	0.185
	LLITEN	25	CUMC* Jacketed Hollow Point	1/2	3850 3280 2780	2330	1925 1569	823 59	429 30	206 137	0.0 0.9	0.9 zero 2.0 -5.4	1,7 21	1.6 zero	10 - 14.1 - 34.7	0.193
17 Remington	PRALTRAM	202	Accel of Van	£1%	4250 35941, 3028	F. S. 3	A	- E (1) - 1/2		192 - 126	20.000	zenoge 109°, 28 € 59		197	25 11.8 29.2	0.185
	R17R2	25	Hollow Point	1/h	4040 3428 2895		1993 1617	906 652				0.8 zero -1.9 -5.0	1.5 1.9		27 -129 -320	0.187
204 Ruger	PRAZO4A	32	Acculip-V	7.148	4225 3632 3114		time to be	1268 . 93		1 3 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	04 .01%	and the second second second	.06° 01	Same at P. Company	41, -131 289	0.210
	PRA2048	40	Acculin V Boat Tail	£ 7/h	3900 3451 3046			**	8, 824 763	and the same	-03x 02	22,300	2.700	: nero : 1.6 -		
22 Homet	PRAZZHNA P	35*	Accomp V	夏6%	3100] 2271 1591		Charles San Charles	77 40	197 99	4.4	* * * * * * * * * * * * * * * * * * * *	1.63 -55 -13 -25.5		7 N. A. 1921.	238 684 1553	2.54 × 2.43
	R22HN1	45	Pointed Soft Point	61/2	2690 2042 1502		948 840	723 41				-2.1 -7.1 -16.0 -30.0	1.4 zero		5.8 -74.2 -162.0	0.130
000 (). '8	R22HN2	45	Hollow Point	61/2	2690 2042 1502		948 840	723 41			 	-2.1 -7.1 -16.0 -30.0	1.4 zero		5.8 -74.2 -162.0	0.130
220 Swift	R220S1	50	Pointed Soft Point	91/2	3780 3158 2617		1710 1357	1586 110			-	zero -1.4 -4.0 -8.2	0.4 1.0	41.72	62 -201 -461	0.175
221 Rem. Fireball	PRAZZ1FB	-50	According V Boat Tail	7%	2995 2605 2247		1622 1368	996 - 75			<u> </u>	zero 22 61 121	1,8.7.1.7		8.8 27.1 58.8	0.2385
222 Remington	R222R1	50	Pointed Soft Point	71/2	3140 2602 2123		1350 1107	1094 753			+	zero -2.3 -6.5 -13.1	1.9 1.7		9.7 -31.7 -72.8	0.175
	R222R3 PRAZ22RB	50 -50	Power-Lokt® Hollow Point Accurlin-V Boat Tail	. 14 2.74	3140 2635 2182 3140 2744 2380		1432 1172 1740 1471	1094 77			1 1 1 1 1 1 1 1	zero -2.2 -6.2 -12.5 zero - 1.9 -5.410.7	18 16		92 -296 -67.1 78 -2. -239,**-51.7	0.188
223 Remington	L223R3	55	Accellip-V Boat Tail	71h	3240 2759 2326		1587 1301.	4.99	9 (1		the state of		31221	W 4	A 1347 and 483.4	7.7. 327.0
SSS I COLUMBIAN	122387	45	UMC* Jacketed Hollow Point	7 /h.	3550 2953 2430		1559 - 1241	1282 92			-	zerò -1.7 -5.5 -11.0 zerò -1.7 -4.8 -9.7	16-215		81 - 255 - 570. 40 - 193 - 493.	0.202
	£223R8	*		.7 h	3425 2899 2430		1633 1324				 		24 29		4.0 -19.3 -493. 7.3 - 73.4 - 52.7	0.173
	PRA223RB	50.	LIMC* Jacketed Hollow Point Accultio V Boat Tail	7/h	3410 2989 2605		* * *		* * * * * * *				13 13	AT 1 - 1		2 2
	PRA223RC	55 ~	7	71h	3240 2854 2500	خينتب	1928 1635		? +753 : 56 5 : 763 : 57		201	***	2 2 2 2 2			0.242
	RZZ3R1	55	Accuritio-V Point	71h	3240 2747 2304		1554 1270	1282 99 1282 92		A	0.2 0.6 e ⁻⁵	zero -2.0 -5.6 -11.2	1.5 1.4 1.6 1.5		7.17 - 21.71 - 46.3 8.2 - 26.2 - 58.6	0.197
	R223R2	55	Power-Lakt* Hollow Point	71h	3240 2773 2352		1527 1341	1282 93				zero -1.9 -5.4 -10.7	1.5 1.4		7.9 -24.8 -55.1	0.197
	R223R3	55	Metal Case	71/2	3240 2773 2332		1587 1301	1282 92			 	ASTO -1.9 -5.5 -11.0	1.5 1.4		8.1 -25.5 -57.0	0.202
	PRC223R4	62	Corp-Lokt® Ultra Bonded™	71/2	3100 2695 2324		1676 1409	1323 100				zero -2.0 -5.7 -11.0	1.0 1.5		82 -252 -548	0.234
	R223R6	62	Hollow Point Match	11/2	3025 2572 2162		1471 1217	1260 91			 	zero -2.3 -6.5 -12.9	1.9 1.7		9.4 -29.9 -66.4	0.205
	122389	62 -	Closed Tip Flat Base 1.	71/2	3100 2734 2396		1795 *1537	1323 102			A 227472	zero -1.9° 5.4 -10.6°	16,315		7.7 - 23.5 - 50.1 -	0.261
	RM223R1	69	MatchKing BTHP	11/2	3000 2720 2457		1975 1758	1379 113				zero -1.9 -5.3 -10.3	1.6 1.5		7.4 -21.9 -45.4	0.336
	RM223R3	77	MatchKing* BTHP	71/2	2788 2539 2303		1871 1675		2 907 74		-	Zero -2.3 -6.2 -12.0	20 1.7		8.5 -25.1 -51.7	0.362
22-250 Remington	122503	45.4	. UMC® Jacketed Holiow Point	· 91/z :	4000 - 3340 - 2770		1.11111		4 767 51		200	zerō : -12 : -35 · 3-72 :	16- 21		30 E-145 * 36 <i>J-</i>	C0.173 5-4
LL SOO HONE	122504	50 ;	UMC Placketed Hollow Point	91/2	3820 - 3245 2739		1878: 1523:		9 833 58		4 7 7 7 7	0.9 zere 2.1 -5.6	18 - 22		3.157-14.6 36.1	0.192
	PRAZZSORB	50	Accution y Boat Tast	391/2	3800 3339 2925		10.000	-	8 949 72	***	1 2 2 2 2 2	09 00 119 49	16 20		27: 122: 29.1	0.242
	R22501	55	Pointed Soft Point	91/2	3680 3137 2656		1832 1493	1654 120		· · · · · · · · · · · · · · · · · · ·	F #72 1 74	zero -1.4 -4.0 -8.1	1.9 2.4	3	3.3 -15.5 -38.3	0.197
	R22502	55	Power-Lokt® Hollow Point	91/2	3680 3209 2785		2046 1725	1654 125			+	zero -1.3 -3.7 -7.4	1.8 2.2		3.0 -13.7 -32.8	0.230
6mm Remington‡	R6MM4	100	Core-Lokt* Pointed Soft Point	91/2	3100 2829 2573	2332	2104 1889	2133 177	7 1470 120	7 983 792	0.0 0.6	zero -1.8 -4.8 -9.3	1.4 1.3	zero -2.6 -1	6.7 -19.8 -40.8	0.356
243 Win.	PRA243WB	- 75:	Acculin-V Boat Tad	9/2	3375 3065 2775	2504	2248 2008	1897, 156	4, 1282 10	4 842 671	0.0 1 0.4	zero 14 4.0 7.8	- 20 24	218 zero	30 13.3 2 -30.6	0.330 3
	R243W1	80	Pointed Soft Point	91/2	3350 2955 2593	2259	1951 1670	1993 155	1 1194 90	6 676 495	0.0 0.5	zero -1.6 -4.5 -8.8	2.2 2.7	2.0 zero -	3.5 -15.8 -37.3	0.255
	R243W2	80	Power-Lokt* Hollow Point	91/2	3350 2955 2593	2259	1951 1670	1993 155	1 1194 90	676 495	0.0 0.5	zero -1.6 -4.5 -8.8	2.7 2.7	2.0 zero -:	3.5 -15.8 -37.3	0.255
	PRSC243WA	90 :	Swift Sciracco , Bonded	91/2	3120 2871 2635	2411	2199 1997	1946 164	7 1388 110	2 966 797	0.0 0.5	zero -1.7 -4.5 -8.9	1.4 1.3	zero , -2.51	5.4 -18.8 -38.3	0.390
	PRA243WA	957	Acculip	972	3120 2847 2590	2347	2118 1902	- 2053 , 171	0 - 1415 - 110	Ž 946 763 .	. 00 - 05	zero - 1.7 - 4.6 - 9.2 -	1.05 ≱ 1.3	, zeio + -2.7	5.6 -19.5 - 40.2	0.355
	PRC243WC	100	Core-Lokt* Ultra Bonded™	91/2	2960 2709 2471	2246	2033 1832	1945 162	9 1356 117	0 917 745	0.0 0.5	zero -2.0 -5.3 -10.3	1.6 1.5	zero -29 -	7.3 -21.6 -44.3	0.373
	R243W3	100	Core-Lokt* Pointed Soft Point	91/2	2960 2697 2449	2215	1993 1786	1945 161	5 1332 100	9 882 708	0.1 0.7	zero -2.0 -5.4 -10.4	1.6 1.5	zero -2.9 -	7.5 -22.1 -45.4	0.356
25-06 Remington	R25062	100	Core-Lokt* Pointed Soft Point	91/2	3230 2893 2580	2287	2014 1762	2316 185	8 1478 110	901 689	0.0 0.5	zero -1.7 -4.6 -9.1	1.3 1.3	zero -2.6 -1	6.6 -19.8 -41.7	0.292
	PRC2506RA	115	Core-Lokt* Ultra Bonded **	91/2	3000 2751 2516	2293	2081 1881	2298 193	3 1616 134	2 1106 903	0.1 0.6	zero -1.9 -5.1 -9.9	1,6 1.4	zero -2.8 -	7.1 -20.7 -42.5	0.380
	R25063	120	Core-Lokt* Pointed Soft Point	91/2	2990 2730 2484	2252	2032 1825	2382 198	5 1644 13	1 1100 887	0.1 0.6	zero -1.9 -5.2 -10.1	1.6 1.4	zero -2.8 -	7.2 -21.4 -44.1	0.362
25-20 Win.	R25202	86	Soft Point .	61/2	1460 1194 1030	931	B58 797	407 27	203 16	5 141 121	zero -3.5 -	13.2 -30.0 -54.7 -89.1	zero -7.9	-22.9 -45.8 -7	8.5 -173.0 -315.5	0.190
250 Savage	R250SV	100	Pointed Saft Point	91/2	2820 2504 2210	1936	1684 1461	1765 139	2 1084 83	2 630 474	0.0 zero	-13 -4.1 -8.7 -15.3	2.0 1.8	zero -3.6 -!	9.2 -27.7 -58.6	0.285
257 Roberts	R257	117	Core-Lokt* Soft Point	91/2	2650 2291 1961	1663	1404 1199	1824 136	3 999 71	8 512 373	0.0 zero	-1.6 -5.2 -10.5 -19.5	2.6 2.3	zero -4.1 -1	1.7 -36.1 -78.2	0.240
6.5x55 Swedish	R65SWE1	140	Core-Lakt* Pointed Soft Point	91/2	2550 2353 2164	1984	1814 1654	2021 172	0 1456 12	4 1023 850	0.0 zero	-1.5 -4.8 -9.9 -17.0	2.4 2.1	zero -3.9 -!	9.8 -27.0 -57.8	0.435
6.5mm Remington Mag	R65MM2	120	Core-Lakt* Pointed Soft Paint	9½ M	3210 2905 2621	2353	2102 1857		8 1830 14			zero -1.8 -4.9 -9.5	2.7 3.0		3.5 -15.5 -35.3	0.323
260 Remington	PRA260RA	120	Accutio Boat Tail	91/2	2890 2697 2512					0 1340 1146	0.1:- 0.7	zeno. 1.8 -49 -9.5	1.6 1.5	zero -2.8		. 0.480
	R260Ri	140	Core-Lokt® Pointed Soft Point	91/2	2750 2544 2347		1979 1812			8 1217 1021		zero -2.3 -6.1 -11.7	1.9 i.7		3.3 -24.0 -47.2	0.435
	PRC260RB	140	Core-Lokt* Ultra Bonded**	91/2	2750 2554 2365		2013 1849		7 1739 14		 	zem -2.2 -6.0 -11.5	1.9 1.7		3.1 -23.6 -47.6	0.457
	R12601	140	Core-Loke Pointed Soft Point	91/2	2360 - 2171 1991					9 856 710	0.1 zero	-19 - 59 : 120 - 20.6	29: 25	1 1 2	17: 34.0 68.9	- 0.435
264 Win. Mag.	R264W2	140	Core-Lokt* Pointed Soft Point	91/2M	3030 2782 2548					2 1389 1139		zero -1.8 -5.0 -9.6	1.5 1.4		5.9 -20.2 -41.3	0.384
6.8mm Rem. SPC	R68R1	115	Open Tip Match (OTM)	91/2	2625 2373 2135		1702 1513		7 1163 93		ļ	zero -2.7 -7.3 -14.1	2.3 2.0		O.D -29.6 -61.2	0.344
	R68R2	115	Metal Case	91/2	2625 2329 2053		1565 1363		5 1076 82			zera -2.9 -7.8 -15.1	2.5 2.1		0.6 -32.4 -68.3	0.292
	RM68R1	115	MatchKing* BTHP	91/2	2625 2365 2119		1676 1484		8 1147 91		ļ	zere -2.7 -7.4 -14.3	2.4 2.1		0.1 -30.1 -62.5	0.333
	PRC68R4	115	Core-Lota" Ultra Bonded "	91/2	2625 2332 2058		1574 1372		9 1082 83		ļ	zero -2.8 -7.8 -15.0	2.5 2.1		0.7 -32.2 -67.8	0.295
270 Win.	R270WI	100	Pointed Sult Point	91/2	3320 2924 2561		1916 1636	· * * * * * * * * * * * * * * * * * * *	8 1456 109			zero -1.6 -4.6 -9.1	2.3 2.8		3.6 -16.2 -38.5	0.252
	R1270W2	115	Core-Lokt® Pointed Soft Point	91/2	2710 : 2412 : 2133					5 683 519	 	-16 48 100 178			42 - 35.5 - 70.1	0.295,
		130	Acculing Boat Tail	g1/h	3060 2845 2639					1 1467 1243	 	zero1 <i>J</i> , -4.79.0			5.4 -18.6 -37.7	0.447
	PRAZ70NA			91/2	3060 2838 2627		2232 2048	<u> </u>		7 1438 1211		zero -1.7 -4.7 -9.0	1.4 1.3		5.5 -18.8 -38.2	0.433
	PRSC270NYA	130	Swift Scirocco "Bonnled	! 	T			2702 222	5 1818 147	2 1180 936	0.1 0.6	zero -1.8 -5.1 -9.8	1.5 1.4	zero -2.8 -:		0.336
	PRSC270NYA P270N/2	130	Core-Lata: Pointed Soft Point	91/2	3060 2776 2510		2022 1801	!					1		7.0 -20.9 -43.3	
	PRSC270N/A R270V/2 R270W3	130 130	Core-Left* Pointed Soft Point Bronze Point	91/2	3060 2802 2559	2329	2110 1904	2702 226	7 1890 156	5 1285 1046	0.0 0.6	zero -1.8 -4.9 -9.5		zero -2.7 -	6.8 -20.0 -41.1	0.372
	PRSC270N/A R270N/2 R270W3 PRC270WB	130 130 140	Core-Lold* Pointed Soft Point Bronze Point* Core-Lold* Ultra Bonded ***	9½ 9½ 9½	3060 2802 2559 2925 2667 2424	2329 2193	2110 1904 1975 1771	2702 226 265 9 221	7 1890 156 1 1825 149	5 1212 975	0.0 0.6 0.1 0.7	zero -2.0 -5.5 -10.7	1.7 1.5	zero -3.0 -	6.8 -20.0 -41.1 7.6 -22.5 -46.4	0.360
	PRSC270NA R270N2 R270W3 PRC270WB RS270NA	130 130 140 140	Core-Lotat Pointed Soft Point Bronve Point Core-Lotat "Ultra Bonded" Core-Lotat "Ultra Bonded" Sofit A-Frame" PSP	91/2 91/2 91/2 91/2	3060 2802 2559 2925 2667 2424 2925 2652 2394	2329 2193 2152	2110 1904 1975 1771 1923 1711	2702 226 2659 221 2659 218	7 1890 156 1 1825 149 6 1782 143	5 1212 975 9 1150 910	0.0 0.6 0.1 0.7 0.2 0.7	zero -2.0 -5.5 -10.7 zero -2.1 -5.6 -10.9	1,7 15 1,7 15	zero -3.0 zero -3.1	5.8 -20.0 -41.1 7.6 -22.5 -46.4 7.8 -23.2 -48.0	0.360
	PRSCZ70NA R270N2 R270W3 PRCZ70WB RSZ70NA R270N4	130 130 140 140 150	Core-Lota' Pointed Soft Point Bronze Point Core-Lota' Ultra Bonded '* Swift A-Frame" PSP Core-Lota' Soft Point	91/2 91/2 91/2 91/2	3060 2802 2559 2925 2667 2424 2925 2652 2394 2850 2504 2183	2329 2193 2152 1886	2110 1904 1975 1771 1923 1711 1618 1385	2702 226 2659 221 2659 218 2705 208	7 1890 156 1 1825 149 6 1782 143 7 1587 118	5 1212 975 9 1150 910 5 872 639	0.0 0.6 0.1 0.7 0.2 0.7 0.3 0.8	zero -2.0 -5.5 -10.7 zero -2.1 -5.6 -10.9 zero -2.4 -6.7 -13.0	1.7 15 1.7 15 2.0 1£	zero -2.7 -1 zero -3.0 -1 zero -3.6 -1	6.8 -20.0 -41.1 7.6 -22.5 -46.4 7.8 -23.2 -48.0 9.4 -28.6 -61.2	0.360 0.339 0.261
270 WSM	PRSC270N/A R270N/2 R270N/3 PRC270N/B RS270N/A R270N/4 R270N/5M1	130 130 140 140 150 130	Core-Lost* Pointed Seft Point Bronze Point* Core-Lost* Ultra Bonded ** Swift A-Frame* PSP Core-Lost* Seft Point Core-Lost* Seft Point	91/2 91/2 91/2 91/2 91/2	3060 2802 2559 2925 2667 2424 2925 2652 2394 2850 2504 2183 3285 2986 2707	2329 2193 2152 1826 2444	2110 1904 1975 1771 1923 1711 1618 1385 2196 1953	2702 226 2659 221 2659 218 2705 202 3114 257	7 1890 156 1 1825 149 6 1782 143 7 1567 113 3 2114 173	5 1212 975 9 1150 910 5 872 639 4 1392 1112	00 06 01 07 02 07 03 08 -01 04	zero -2.0 -5.5 -10.7 zero -2.1 -5.6 -10.9 zero -2.4 -6.7 -13.0 zero -1.5 -4.2 -8.2	1.7 15 1.7 15 20 18 2.1 25	zero -3.0 zero -3.1 zero -3.6 1.9 zero	6.8 -200 -41.1 7.6 -22.5 -46.4 7.8 -23.2 -48.0 9.4 -28.6 -61.2 5.2 -14.1 -32.2	0.360 0.339 0.261 0.336
	PRSCZ70N/A R270N/2 RZ70W3 PRCZ70WB RSZ70N/A RZ70W4 RZ70W5M1 PRAZ70W5M8	130 130 140 140 150 130	Core-Lust* Pointed Seft Point Bronze Point* Core-Lust* Ultra Bonded ** Swift A-Frame* PSP Core-Lust* Seft Point Core-Lust* Seft Point Acculip Boat Tail	9½ 9½ 9½ 9½ 9½ 9½ 9½M	3060 2802 2559 2925 2667 2424 2925 2652 2394 2850 2504 2183 3265 2966 2707 3160 2972 2792	2329 2193 2152 1826 2444 2618	2110 1904 1975 1771 1923 1711 1618 1385 2196 1963 2452 2291	2702 226 2659 221 2659 218 2705 202 3114 257 3325 294	7 1890 156 1 1825 145 6 1782 143 7 1587 113 3 2114 172 1 2595 22	5 1212 975 9 1150 910 5 872 639 4 1392 1112 3 2002 1748	00 06 01 07 02 07 03 08 -01 04 -01 05	ZEFO -2.0 -5.5 -10.7 ZEFO -2.1 -5.6 -10.9 ZEFO -2.4 -6.7 -13.0 ZEFO -1.5 -4.2 -8.2 ZEFO -1.5 -4.1 -8.0	1.7 15 1.7 15 20 18 21 25 21 25	zero -2.7 -4 zero -3.0 - zero -3.1 - zero -3.6 -4 1.9 zero - 1.8 zero -	58 -200 -41.1 7.6 -22.5 -46.4 7.8 -23.2 -48.0 7.4 -28.6 -61.2 7.5 -14.1 -32.2 7.6 -12.8 -28.5	0.360 0.339 0.261 0.336
270 WSM 280 Remington [‡]	PRSC270N/A R270N/2 R270N/3 PRC270N/B RS270N/A R270N/4 R270N/5M1	130 130 140 140 150 130	Core-Lost* Pointed Seft Point Bronze Point* Core-Lost* Ultra Bonded ** Swift A-Frame* PSP Core-Lost* Seft Point Core-Lost* Seft Point	91/2 91/2 91/2 91/2 91/2	3060 2802 2559 2925 2667 2424 2925 2652 2394 2850 2504 2183 3285 2986 2707	2329 2193 2152 1885 2444 2618 2437	2110 1904 1975 1771 1923 1711 1618 1385 2195 1963 2452 2291 2266 2099	2702 226 2659 218 2659 218 2705 202 3114 257 3325 294 2797 244	7 1890 156 1 1825 145 6 1782 145 7 1567 115 3 2114 177 1 2595 227 4 2129 184	5 1212 975 9 1150 910 5 872 639 4 1392 1112	00 06 01 07 02 07 03 08 -01 04 -01 05	ZEFO -2.0 -5.5 -10.7 ZEFO -2.1 -5.6 -10.9 ZEFO -2.4 -6.7 -13.0 ZEFO -1.5 -4.2 -8.2 ZEFO -1.5 -4.1 -8.0 ZEFO -1.8 -4.8 -9.2	1.7 15 1.7 15 20 18 2.1 25	2210 -2.7 -4 2220 -3.0 -2 2220 -3.1 -1 2220 -3.6 -2 1.9 2220 -2 1.8 2220 -2 2.1 2220 -2	6.8 -200 -41.1 7.6 -22.5 -46.4 7.8 -23.2 -48.0 9.4 -28.6 -61.2 5.2 -14.1 -32.2	0.360 0.339 0.261 0.336

		周	ामहोत्सा <u>त</u>		****	n entre	CD.	and the	in O			
280 Remirgion (cort.)	R23CR1	150	Core-Lukt* Pointed Soft Point	91/2		2624 2373		1912 1705		875 1518 1217 968	0.2 0.7 zaro -2.1 -5.3 -11.2	1.3 1.6 zero -3.1 -8.0 -23.6 48.3 0.345
COO HERITAGUE TORCE	R2SGR2	155	Core-Lutt* Soft Point	91/2						805 1393 1060 801	 	2.0 1.3 220 -3.6 -9.1 -27.4 -57.3 0.290
2 222						2510 2220		1701 1479				
7mm-03 Remiration	R/MG32	120	Hollow Point	91/2		2725 2467		1992 1773		621 1316 1058 842	0.1 0.6 zero -1.9 -5.3 -10.2	1.6 1.4 zero -2.9 -7.3 -21.7 -44.9 0.343
	R7M081	140	Core-Lakt* Pointed Soft Point	91/2		2625 2402		1988 1798	2542 2142 1		0.2 0.7 zero -2.1 -5.7 -11.0	1.8 1.5 zeso -3.1 -7.8 -22.9 -46.8 0.390
	PRA7MOSRB	140	Acculin Boat Fail	91/2	2860	2670 2489	2314	2145 1986	2542 2215 1	925 1664 1432 1225	-02 07 zero -20 -5.4 -10.3	17 15 280 -29 -73 -211 .425 0.486
	RL7M081	140	Core-Lokt* Pointed Soft Point	91/2	2361	2151 1951	. 1764	1590 1433	1732 1437. 1	183 967 786 638	01 zero -20 -60 -124 -213	3.0 25 zen 48 122 356 728 0.390
7mm Rem Magaum	PRC7AIMRA	140	Core-Lokt* Ultra Bonded**	9½M	3175	2934 2707	2490	2283 2086	3133 2676 2	277 1927 1520 1353	0.1 0.5 zero -1.6 -4.3 -8.4	1.3 1.2 zem -2.4 -6.0 -17.J -36.0 0.409
1	R7MM4	140	Core-Lokt* Pointed Soft Point	91/2M	3175	2923 2584	2458	2243 2039	3133 2655 2	240 1878 1564 1292	0.0 0.5 zero -1.6 -4.4 -8.5	2.2 2.6 1.9 zero -32 -14.2 -32.0 0.390
	RL7MM4	140%	Core-Loke Pointed Soft Point	91/2 M	2710	2482 2265	2059	1865 1683	2283 (1915) 1	595 (1318 -1081) 880	01 zero -13 42 -87 -151 *	0.9 zero 24 6.5 125 308 592 0.388
	PRSC7MMB	150	Swift Scirocco Bonded	9½M	3110	2927 2751	2582	2419 2262	3221 2852 2	520 2220 1948 1704	00 0.5 zero -1.6 4.3 -8.2	1.3 1.2 zem -2.3 -5.9 -17.0 -34.0 0.533
	PRAZNAKRA	140	Acculin Boat Tail	91/2M		2971 : 2777		2412 2241	3133 - 2744 . 7	397 2086 1808 : 1560	. 01; 05 zero -15 -42 -80	21 25 18 zero -30 130 -290 0.486
	PRA7MMRB	150	Acculio Boat Tabl	9 1/2 M		2926 2749		2415 2258		516 2215 1943 1697	0.0 0.5 zero -1.6 43 -8.2	13 12 200 23 59 17 341 0530
		150	Core-Lokt Pointed Soft Point	91/2 M		2830 2568		2085 1366			7 33 2 2	7.504
	R7MM2	-										
	PRC7MMRC	i60	Core-Lokt* Ultra Bonded **	91/2M		2724 2510		2109 1924		237 1887 1581 1315	0.1 0.6 zero -1.9 -5.2 -10.0	1.6 1.4 zero -2.8 -7.1 -20.8 -42.4 0.415
	R\$7MMA	160	Swift A-Frame* PSP	91/2 M		2659 2430	2212		2987 2511 2	097 1739 1430 1166	0.2 0.7 zero -2.0 -5.5 -10.7	1.7 1.5 zen -3.0 -7.6 -22.4 -45.8 0.382
	RIMAIS	175	Care-Lokt* Pointed Soft Point	91/2 M	2360	2645 2440	2244	2057 1379	3178 2718 2	313 1956 1644 1372	0.2 0.7 zero -2.1 -5.6 -10.7	1.7 1.5 zem -3.0 -7.6 -22.1 -44.8 0.427
7mm STW	RS7MSTWA	140	Swift A-Frame* PSP	91/2 M	3325	3020 2735	2467	2215 1978	3436 2834 2	324 1897 1525 1215	0.0 0.4 zero 1.5 -4.1 -8.0	2.1 2.5 1.8 zero -3.113.8 -31.5 0.332
	R/MSTW1	140	Core-Lokt* Pointed Soft Point	91/2 M	3325	3064 2818	2585	2364 2153	3436 2918 2	458 2077 1737 1441	0.0 0.4 zero -1.4 -3.9 -7.6	2.0 2.4 1.7 zero -2.9 -12.8 -28.8 0.390
7mm Mauser (7:57)	RIMSRI	140	Core-Lakt* Pointed Soft Point	91/2	2660	2435 2221	2018	1827 1648	2199 1843 I	533 1266 1037 844	0.0 zero -1.4 -4.4 -9.1 -15.8 °	2.2 1.9 zem -3.6 -9.2 -27.4 -55.3 0.390
7mm Remington	PR7SM1	140	Core-Loki* Uitra Bonded™	91/2M	3175	2934 2707	2490	2283 2086	3133 2676 2	277 1927 1620 1353	0.1 0.5 zero -1.6 -4.3 -8.4	1.3 1.2 zem -2.4 -6.0 -17.7 -36.0 0.409
SA Ulira Mag	PR7SM2	150	Core-Lokt* Pointed Soft Point	9 1/2 M		2831 2568		2087 1867	3221 2669 2		0.0 0.6 zero -1.7 -4.8 -9.3	2.5 2.9 2.1 zero -3.6 -15.7 -35.9 0.346
	PR7SM4	160	Core-Lokt* Ultra Bonded**	91/2 M		2733 2518		2117 1931	3112 2654 2		0.1 0.6 zero -1.9 -5.2 -9.9	2.7 3.1 2.2 zero -3.7 -16.2 -36.5 0.414
7mm Ram Ultra Mag*	PR7UM1	140	Core-Lokt* Ultra Bonded™	91/2 M		3170 2929		2485 2278	3646 3123 2			1.8 2.2 1.6 zero -2.7 -11.7 -26.4 0.409
POWER				-		3132 2948				· · · · · · · · · · · · · · · · · · ·		
LEVEL (II)	PRSC7UM1	150	Swift Scirocco "Bonded	91/2 M	-					894 2558 2254 1979		
	PR7UM5	175	Swift A-Frame PSP	. 9 1/2 M		2831 2645		2296 2212		718 2364 2047 1764	0.0 0.6 zero -1.7 -4.7 -9.0	24 28 20 zero -3.4 -14.5 -32.2 0.493
POWER LEVEL II	PR7UM2-P2	160	Core-Lokt* Ultra Bonded **	91/2 M		2724 2508		2108 1922		235 1884 1578 1312	0.1 0.6 zero -1.9 -5.2 -10.0	1.5 1.4 zera -2.8 -7.1 -20.8 -42.4 0.414
POWER LEVEL I	R7UM1-P1	140	Core-Lokt® Pointed Soft Paint	91/2 M	3000	2768 2549	2339	2139 1950	2797 23882 2	019 1700 1422 1181	0.1 0.6 zero -1.8 -5.0 -9.6	2.6 3.0 2.2 zero -3.6 -15.8 -35.6 0.409
30 Cartine	L30CR1	110	UMC* Metal Case	61/2	1990′,	1567 - 1236	1035	923 + 842	ू967 (600 : 3	373 - 262 (208 173	0.6 zen 42 129 272 48.6	28 zero -7.1 -20.4 -403 i 105.6 -2118 0166 .
	R30CAR	110	Soft Point	61/2	1990	1567 1236	1035	923 842	967 600 3	373 262 208 173	0.5 zero -4.2 -12.9 -27.2 -48.5	zero -4.2 -129 -27.2 -48.6 -117.1 -225.5 0.166
30-30 Win. Accelerator ⁵	R3030A	55	Pointed Soft Point	91/2	3400	2693 2085	1570	1187 986	1412 886 5	531 301 172 119	0.0 0.6 zero -2.2 -6.2 -13.2	1.7 1.6 zero -3.5 -9.9 -34.3 -83.3 0.139
30-30 Win.	RL30301	125.1	Core-Loke* Pointed Soft Point	+91/2	21757	1820 1508	1255	1082 4,975 :	1313 - 919	31 437 325 264	- 01)c zeró - 30 - 91 - 191 - 337	.20, (mm \$52 141 278 725 1469) \$0215
	R30301	150	Core-Lokt* Soft Point	91/2	2390	1973 1605	1303	1095 974	1200 1200 1200 1200 1200 1200 1200 1200	858 565 399 316	02 zero -2.4 -7.6 -16.1 -28.8	1.6 zero -4.3 -12.1 -24.0 -64.2 -133.2 0.193
	R30302	170	Core-Lakt* Soft Point	91/2	<u> </u>	1895 1619		1191 1061		989 720 535 425	0.3 zero -2.7 -8.3 -17.1 -29.9	1.8 zero -4.6 -12.6 -24.5 -62.6 -125.3 0.254
	R30303	170	Core-Lokt® Hollow Point	91/2		1895 1619		1191 1061		989 720 535 425	0.3 zero -2.7 -8.3 -17.1 -29.9	1.8 zero -4.6 -12.6 -24.5 -62.6 -125.3 0.254
30-40 Krag	R30402	180	Core-Lokt® Pointed Soft Point	91/2		2213 2007		1632 1468	2360 1957 1		0.1 zero -1.8 -5.6 -11.6 -19.9 -	1.2 zero -3.2 -8.5 -16.2 -39.9 -76.7 0.383
30-06 Sprg. Accelerator *	R30069	55	Pointed Soft Point	91/2		3484 2964		2080 1706				1.4 L8 1.4 zero -2.6 -12.2 -30.0 0.197
												
30-06 Springfield	R30061	125	Pointed Soft Point	91/2	470 10.1	2780 2447		1853 1595	SERVICE OF SERVICE	662 1269 953 706	0.0 0.6 zero -1.9 -5.2 -10.1	1.5 L4 zera -2.8 -7.4 -22.4 -47.6 0.268
	RL30062	125-	Core-Loke Pointed Soft Point	,9 h	20077	A		1509 1300	12000	148 856 637 3469	201 8 mg 3-15 249 7 104 G 183	10 20 223 78 152 389 780 026
	L30062	150	UMC* Metal Case	91/2		2617 2342	•	1843 1622		827 1446 1131 876	. 02 zero 11 -36 -11 -136	1.6 1.6 250 - 32 -82 -244, -509 0.314
	PRSC3006C	150	Swift Scirocco Bonded	91/2	2910	2696 2492	2298	2111 1934	2820 2421 2	069 1758 1485 1246	0.1 0.7 zero -2.0 -5.3 -10.2	1.6 1.5 28m -29 -73 -21.1 -42.3 0.435
	PRA3006A	150	Acculin Boat Tail	9%€	2910	2686 - 2473	2270	2077 1893	2820 2403 2	037 : 1716 - 1436 - 1191	1012-07 View 20 542 5103	175 15 200 29 5 74 215 437 - 0415
	R30062	150	Core-Lokt* Pointed Soft Point	91/2	2910	2617 2342	2083	1843 1622	2820 2281 1	827 1445 1131 876	0.2 0.7 zero -2.2 -5.9 -11.4	1.8 1.6 zero -3.2 -8.2 -24.4 -50.9 0.314
	R30063	150	Bronze Point	91/2	2910	2656 2416	2189	1974 1773	2820 2349 1	944 1596 1298 1047	0.2 0.7 zero -2.0 -5.6 -10.8	1.7 1.5 zero -3.0 -7.J -22.7 -46.6 0.365
	PRC3006A	150	Core-Lokt* Ultra Bonded '*	. 91/2	2910	Z631 Z368	2121	1889 1674	2820 2305 1	868 1498 1188 933	0.2 0.7 zero -2.1 -5.8 -11.2	1.8 1.6 zero -3.1 -8.0 -23.8 -49.3 0.331
	PRA3006B 🛬	165	Accutio Boat Tail	2 2 2 2 2 2 2 2				2039 * 1870	A 117	115 1800 1523 1281	02' 08 zero -21' -59' -11'1	18 16 200 32 79 - 228 462 0447
	R3006B	165	Core-Loke Pointed Soft Point	91/2	466		- 2%	1825 1621	7,30	909 1534 1220 963	0.3 0.8 zero -2.3 -6.3 -12.1	2.0 1.7 zero -3.4 -8.7 -25.9 -53.2 0.339
	PRC3006B	168	Core-Łokt* Ultra Bonded™	91/2				1866 1668		984 1613 1299 1037	0.3 0.8 zero -2.3 -6.2 -11.9	1.9 -1.7 zero -3.3 -8.5 -25.1 -51.7 0.356
	10 10 10 10 10 10 10 10 10 10 10 10 10 1			91/21						226: 1914 1637 :1393		
	PRA3006C (**)	180	Acculin Boat Tail					. 2024 , 1867 ,	7.5.	77. 78.	2 2 2 2 3 2 3 2 3 2 3 2 3 3 3 3 3 3 3 3	The Property of the Control of the C
	RS3006A	180	Swift A-Frame PSP	91/2				1833 1648		010 , 1650 1343 1085	-0.0 zero -13 -42 -89 -154	21 18 2en 3.6 -9.1 26.6 -54.4 0.377
	PRC3006C	180	Core-Lokt* Ultra Bonded "	91/2				1882 1704		2059 1713, 1415 1161	0.0 zero -1.3 -4.2 -8.7 -15.1	2.1 1.8 zero -3.5 -8.9 -25.8 -52.7 0.402
	PRSC30068	180	Swift Scirocco , Bonded	91/2				2028 1878		208 1910 1644 1409	200 zero - 13 -40 -83 -142	2.0 1.7 zero 33 83 23.9 47.9 .0.500
	R30064	130	Core-Lakt* Soft Point	91/2	2700	2348 2023	1727	1466 1251	2913 2203 1	635 1192 859 625	0.0 zero -1.5 -4.9 -10.3 -18.3	24 21 zero -4.3 -11.0 -33.8 -72.8 0.248
	R30065	180	Core-Lokt* Pointed Soft Point	91/2	2700	Z469 2250	2042	1846 1663	2913 2436 2	023 1666 1362 1105	0.0 zero -1.3 -4.2 -8.8 -15.4	2.1 1.8 zero -3.5 -9.0 -26.3 -54.0 0.383
	R30066	180	Branze Point	91/2	2700	2485 2280	2084	1899 1725	2913 2468 2	077 1736 1441 1189	0.0 zero -1.3 -4.2 -8.7 -15.0	2.1 1.8 zero -3.5 -8.8 -25.5 -52.0 0.412
	R30067	220	Core-Lokt* Soft Point	91/2	2410	2130 1870	1632	1422 1246	· 2837 2216 1	708 1301 988 758	0.1 zero -2.0 -6.2 -12.9 -22.4	1.3 zero -3.5 -9.5 -18.4 -46.4 -91.6 0.294
300 Savage	R30SV2	150	Core-Lokt® Pointed Soft Point	91/2		2354 2095		1631 1432		462 1143 886 685	0.0 zero -1.5 -4.8 -10.1 -17.6	2.4 2.1 zero 4.1 -10.4 -30.9 -64.6 0.314
	R305V3	130	Core-Lakt® Soft Point	91/2				1252 1098	2207 1639 1		0.2 zero -2.3 -7.1 -14.7 -25.9	1.5 zero -4.0 -10.9 -21.3 -54.8 -110.3 0.248
300 Win, Mag.	R300W1	150	Core-Lokt* Pointed Soft Point	91/2 M		2950 2634				311 1823 1420 1091	0.0 , 0.5 zero -1.6 -4.4 -8.7	1.3 1.2 zero -2.4 -6.3 -18.9 -39.8 0.294
ON THE INSK	774 745.U	1	1 2 2 7 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	Sec. 2017	1				 			
	RL300W1	1000	Core-Loke Pointed Soft Point	39/1	454			1646 1446	Note In Columbia	486 1164 902 7 696	23 18 18 18 18 18 18 18 18 18 18 18 18 18	And a company of a commercial patrice of the format of the company of the commercial participation of the commercial participa
	PRC300WA	150	Core-Lokt* Ultra Bonded "	9½ M				2120 1873		2366 1893 1496 1168	-0.1 0.5 zero -1.6 -43 -8.5	12 12 zero -24 -6.1 -18.4 -38.5 0.310
	PRSC300WB	180	Swift Scirocco Bonded	9½M				. 2259 2100	******	2692 2348 2039 1762	01 06 zero 18 49 94	15 14 zero -26 -67 -193 -387 0.507
	PRC300WC	180	Core-Loid® Ultra Bonded™	91/2 M	2960	2774 2505	2294	2093 1903	3501 2971 2	2508 2103 1751 1448	0.1 0.6 zem -1.9 -52 -10.0	2.7 3.1 2.2 žero -3.8 -16.4 -37.0 0.402
	PRA300WC	180	, Accultip Boat Tail	91/2M	2960	2764 2577	2397	2224 2058	3501 3053 2	653 7295 , 1976 1893	0.15 0.6 zeri 1.8 49 9.5	15 14 zeo 27 68 196 395 10481
•	R300W2	180	Core-Lakt® Pointed Soft Point	91/2 M	2960	2715 2482	2262	2052 1856	3501 2945 2	2463 2044 1683 1375	0.1 0.6 zero -1.9 -5.3 -10.2	1.7 1.5 zero -2.9 -7.4 -21.3 -43.7 0.383

Note: These ballistics reflected a test barrel length of 24" except those for 30 Carbine and 44 Remirgton Magnum which are 20" barrels. Specifications are nominal Ballistics figures established in test barrels, individual rilles may vary from test barrel results. "Tero" indicates yardage at which rille was sighted in. "Inches above or below fine of sight. Hold lon for positive numbers, high for negative numbers." 1 200 Remirgton and Timm Express, Remirgton are interchangeable.

Managed-Recoil (pages 70-71)

Premier * Core-Lokt * Ultra Bonded (pages 62-63)

Premier AccuTip (pages 64-65)

Premier® Scirocco® Bonded (page 66)

Swift A-Frame PSP (page 67)

UMC® (page 74)

[†] Gram Reministon and 244 Reministon are interchangeable. † Butlet does not rise more than 1° above line of sight from muzzle to sighting-in range. † Butlet does not rise more than 3° above line of sight from muzzle to sighting-in range.

CNIRED	NOTACED	भ	BUILLET STYLE	PRIMER :	1817AF 100	ELOCITY (fp.	S) 400 500	MILET E	. BHERGY (ft-lb)	500	SHORT-RANKE TRANSCTORY* 50 = 100 + 150 200 250 300	100 150 200 259 300 400 500 DEFICIENT
200 US- Mark 13	DMSOOMS	100	MENT AND A SAME A TOTAL		3 12 15 15 15 15 15 15 15 15 15 15 15 15 15	0007 0	000 2220 2000	25.47	3 2758 2420 2115 1	nóan		A SAN COMPANY OF THE OWNER WAS TAKEN THE WAY AND THE OWNER WAY THE OWNER
300 Witt Mag (cont.)	RM300W7	190	MatchKing® BTHP	9½M			395 2239 2089					
	RS300WA	200	Swift A-Frame PSP	91/2 M	2825 - 2595 •	- <u> </u>	169 1971 1786	3544 29	<u> </u>	1416	02 08 zem 22 -5.9 -112	1.8 1.6 zero -3.2 - 8.0 -23.4 - 47.8 0.395 -
300 WSM	R300WSM1	150	Core-Lokt® Pointed Soft Point	91/2 M		de manufact	364 2087 1830	3671 29		1116	-0.1 0.4 zero -1.5 -4.3 -8.5	1.2 1.2 zero -2.4 -6.2 -18.6 -39.0 0.294
•	PRAMOVSER	180	AccilipBox lei	19 /2 ME	3010 2812	2622 2	440 7 2265 2097 1	3621 31	9 2746 2378 2050	1757	_0.15, 0.62, zero	25 29 21 mm 34 148 229 (480)
	PRSC300WSMB	180	Swift Scirocco Bonded	.91/2 M	2980 - 2793	2614 2	442 <i>2276</i> 2116	3549 31	18 - 2730 2382 <u> 2</u> 070 1	1790	.0.1 0.6 zero 1.8 4.8 92	1.5 1.3 zero 26 6.6 19.0 38.1 0.507]
308 Win.	RL306W1	Ľδ	Constant Parish Scribure	9/1	2600 2632	2121221	118 11533 11453	1964 15	6 174) 816 1E9 1	80.5	4 4 4 4 4	10 co 20 40 441 555 536 (1910).
	L308W4	150.	UNIC* Metal Case	9 1/2	2820 2533	2263 - 2	010: 1775, 1561	2648 . 21	37, 1705 : 1345 : 1049	811	-0.1 zem 1.2 39 84 147	20 ± 517 mm 34 88 262 548 031451
	PRSC308WA	150.	Swift Scirocca Bonded	91/2	2820 2611	2410 , 2	2i9 2037 1863′	2648 220	59° 1935° - 1640 - 1381° 1	1156	0.05 zem1.12 -367.6 -13.2	18 16 zero 31 78 227 460 0435
	PRC308WA	150	Core Lokt* Ultra Bonded*	91/2	2820 - 2546	2288 2	046 1819 1611	2648. 21	59 : 1744 - 1394 : 1102 -	864	0.2 zero -1.2 -3.9 -8.2 -14.4,	1.9 1.7 zero -3.4 -8.6 -25.5 -53.1 0.331
	R308W1	150	Core-Lold* Pointed Soft Point	91/2	2820 2533	2263 2	009 1774 1560	2648 21	37 1705 1344 1048	810	0.0 zero -1.2 -3.9 -8.4 -14.7	2.0 1.7 zero -3.4 -8.8 -26.2 -54.8 0.314
·	PRSC308WB	165	Swift Scirocca Bonded	. 91/2	€ 2700 ; 2513 :	2333 - 2	161 - 1996 - 1839 -	2670 23	13 1994 1711 1459 1	1239	0.0 zem 1.37 40 84 14.4	20 ×1.7° zero > 33 - 84 - 24.3 - 489.5 0.475
	PRA308WB	165	Acculin Boat Tail	3942	2700 2501	23112-2	1295, 1956 (1792)	1 2670 ≥ 22	92 1957 1661 1401	1176	0.15 mm 2 13 (414 85 147)	-70 +18 min 34 86 248 501 0447
	RM308W7	168	MatchKing* BTHP	91/2	A SPACE SECTION AND ADDRESS.	2314 2	WALL SEX MINERAL	AL LANGE OF	18 1998 1713 1460 1	700,51,00	0.0 zero -1.3 -4.1 -8.5 -14.7	2.1 1.8 zero -3.4 -8.5 -24.7 -49.9 0.475
	RM308W8	175	MatchKing® BTHP	91/2			102 1946 1798		00 1992 1716 1472 1		0.4 0.9 zero -2.5 -6.7 -12.8	22 1.9 zero -3.6 -9.0 -25.9 -51.9 0.496
	PRC308WC	180		ļ				l				
	79		Core-Lokt* Ultra Bonded**	91/2	77 1, 414		002 1818 1644	2743 23		1080	0.0 zero: -1.4 -4.5 -9.4 -16.3	
	R308W2	180	Core-Lokt* Soft Point	91/2	2620 2274		666 1414 1212	2743 20		587	0.0 zero -1.7 -5.3 -11.2 -19.7	26 23 zero -4.6 -11.8 -36.3 -78.2 0.248
<u>-</u>	R308W3	180	Core-Lokt® Pointed Soft Point	91/2			974 1782 1604	2743 22		1028	0.0 zero -1.5 -4.6 -9.5 -16.5	23 2.0 zero -3.8 -9.7 -28.3 -57.8 0.383
300 Wby. Mag.	R300WB1	180	Core-Lokt* Pointed Soft Point	91/2 M			398 2181 1976	3890 32		1561	0.0 0.5 zero -1,7 -4.6 -9.0	1.4 1.3 zero -2.5 -6.4 -18.9 -38.7 0.383
303 British	(L3038) .5 (174	UMC Metal Case	791/2	2475 S ZZO9 S	1960 1	729 1520 1338	₹ 2366 5 18	85 - 1484 - 1155 - 893 -	692+	0.1° , zero) (-1.9° (-5.9° (-12.2° (-21.4°	28 24 20 47 119 356 -743 0315
	R303B1	180	Core-Lokt® Soft Point	91/2	2460 2124	1817 1	542 1311 1137	2418 18	13 1319 950 687	517	0.1 zero -2.0 -6.3 -13.2 -23.1	1.3 zero -3.6 -9.8 -19.1 -49.4 -99.9 0.247
7.62x39mm	€U62391€	1232	LIMC* Metal Case	7/6	2365 7 2060	1780 1	529. 1315 1150	- 1527 - 11	59 865 638 472 _{= 2}	361	10.11 - zen - 2.21 - 6.81 14.11 24.51	31.5 zeg (3.8 ₹ 10.4 ≥ 20.2 ₹ 51.5 ₹ 103.0 € 0.266 ₹ 3
	R762391	125	Pointed Soft Point	71/1	2365 2062	1783 1	533 1320 1154	1552 11	80 882 652 483	370	0.1 zero -2.2 -6.7 -14.0 -24.5	1.5 zero -3.8 -10.4 -20.1 -51.3 -102.5 0.267
300 Remington	PR300SM1	150	Core-Lokt® Ultra Bonded"	91/2 M	3200 2901	2622 2	359 2112 1880 .	3410 28	13 - 2290 1854 1485 1	1177	0.1 0.5 zero -1.6 -4.6 -8.9	1.3 1.2 zero -2.5 -6.4 -19.1 -39.6 0.330
Short Action Ultra Mag	PR300SM2	165	Core-Lokt* Poined Soft Point	9½ M	3075 2792	2527 2	276 2040 1819	3464 28	56 2339 1898 1525 1	1213	0.1 0.6 zero -1.8 -5.0 -9.7	1.5 1.4 zero -2.7 -7.0 -20.7 -42.1 0.339
·	PR300SM4	180	Core Lokt® Ultra Bonded™	91/2 M	2960 2727	2506 2	295 2094 1904	3501 29	72 2509 2105 1753 1	1449	0.1 0.6 . zero -1.9 '-5.2 -10.0	1.6 1.4 zero -2.8 -7.1 -20.9 -42.6 0.403
	RM300SM7	190	MatchKing* BTHP	91/2 M	2900 2725	2557 2	395 2239 2089	3547 31		1840	0.1 0.6 zero -1.9 -5.1 -9.8	1.6 1.4 zero -2.7 -6.9 -19.9 -39.8 0.533
300 Remington	PR300UM5	150	- Swift Scirocco" Borided 🏅 🗵	91/2 M			762 2556 2358	10.00	27 2956 2541 2175 1		00 : 03 zeo -12 -34 -6.7	-175 21\ 15 \frac{2}{2}\ 26\ -112\ 253 \ 0.435
Ultra Mag	PR300UM3	180	Swift Scirocco Bonded	91/2 M	BALLE COLUMN AND		672 £ 2495 · 2325 ·		14 3260 2853 2487 2		00 04 zero -14 39 -75	20 231 17 200 28 123 273 0.500 4
POWER Level III	PR300UM4	180	Core-Lokt* Ultra Bonded**	91/2 M	3250 2988	20. 20	. 500 - 610 - 6	4221 35	A D. No. SALESCO. W. DO. SPECIFIC	1721	2.1 6 (2.392)	ELECT TRANSPORTED SALATE ASSOCIATE CONTRACTOR
			17	2	20 20 20 20 20	11.00	1 10 17 10 10				~ · · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·
	RS300UM2	200	Swift A Frame PSP	91/2 M	1 1 1 1 5 1 1 m	2562: 2	St. 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	* * * *	59 2916 2442 2030 1	- F. 1	0.1 0.6 zero -1.8 49 -9.5	Actually and the contract of t
POWER Level II	PR300UM2-P2	180	Core Lokt* Ultra Bonded **	91/2 M		2515 2		1-7	04 2528 2114 1755 1		0.1 0.6 zero -1.9 -5.1 -9.9	1.6 1.4 zero -28 -7.1: -20.7: -42.4 0.395
	PR300UM3-P2	180	Swift Scirocco Bonded	91/2 M	2980 2793	To the second	AND COLUMN TO SERVICE OF THE PARTY OF THE PA	Page - Take	18 2730 2382 2070 1	12	01 06 zero 18 48 92	15 13 zero -26 -66 -19.0 38.1 0.507
POWER	PRAGOOUM1 P1	150 2	Acculin Boat Tail	9 1/2 M	AND ASSESSMENT OF THE PARTY OF	2473 •2	The state of the s	the salkates yes	03 2037 1716 1436 1		01 - 07 zero 20 54 103	17 15 200 29 74 715 437 5 0415
LEVELI	R300UM1-P1	150	Core-Lokt* Pointed Soft Point	91/2 M	2910 2617		083 1843 1622	2820 22		876	0.2 0.7 zero -2.2 -5.9 -11.4	1.8 1.6 zero -3.2 -8.2 -24.4 -50.9 0.314
	RL300UM19	150	Core Lokt Pointed Soft Point	942	2815 7528	2258 2	005 1770 1556	2639 21	ZJ, 1698 1339 1043 E	806	035 08 200 -23 -64 -121 c	2.0 18 7em 3.5 88 264 551F 0.314 A
32-20 Win.	R32201	100	Lead	61/2	1210 1021	913 8	334 769 712	325 23	1 185 154 131	113	zero -5.7 -19.7 -43.1 -76.9 -122.2	7ero -11.2 -31.7 -62.7 -105.2 -228.5 -410.8 0.166
32 Win, Special	R32WS2	170	Core-Lokt* Soft Point	91/2	2250 1921	1626 1	372 1175 1044	1911 13	93 998 710 521	411	0.3 zero -2.6 -8.0 -16.7 -29.3	1.7 zero -4.5 -12.4 -24.1 -62.1 -125.3 0.239
8mm Rem. Мадпил	RS8MMRA	200	Swift A-Frame PSP	91/2 M	2900 2623	2361 2	115 1885 1672	3734 ,30	54 2476 1987 1577 1	1241	0.2 0.7 zem -2.1/ -5.8 -11.2	1.8 1.6 zem 3.1 8.0 23.9 49.6 0332,
8mm Mauser	R8MSR	170	Core-Lokt* Soft Point	93/2	2360 1969	1622 1	333 1123 997	2102 14	53 993 671 476	375	0.2 zero -2.4 -7.6 -16.1 -28.6	1.6 zero -4.4 -12.0 -23.7 -62.8 -128.9 0.205
338 Win. Mag.	- RS338WA	225	Swift A Frame "PSP"	91/z M	2785 2517	2266 - 2	029 1808 1605	3871 31	65 2565 2057 1633 1	1286	0.0 - zero -12 -4.0 -8.5 -14.8	2.0 L8 zero 3.5 8.8 26.1 54.1 0.337
	R338W1	225	Core-Lokt" Pointed Soft Point	91/2 M	2780 2572	2374 2	184 2003 1832	3860 33	05 2815 2383 2004 1	1676	0.0 0.8 zero -2.2 -5.9 -11.4	1.9 1.7 zero -3.2 -8.1 -23.4 -47.5 0.435
	PRC338WA	225	Core-Lokt [®] Litra Bonded ***	91/2 M	2780 2582	2392 2	210 2036 1871	3860 33	29 2858 2440 2071 1	1748	0.2 0.8 zero -2.2 -5.9 -11.2	1.9 1.6 zero -3.2 -7.9 -23.0 -46.5 0.456
	R338W2	250	Core-Lokt* Pointed Soft Point	91/2 M	2660 2456	2261 2	075 1898 1731	3927 33	48 2837 2389 1999 I	1663	0.0 zero -1.4 -4.3 -8.9 -15.4	2.1 1.9 zero -3.5 -8.9 -26.0 -52.7 0.431
338 Remington	PR338UM2	250	Core-Lokt ² Pointed Soft Point	91/2 M			249 2064 1887	4540 38		1977	0.2 0.7 zero -2.1 -5.6 -10.6	1.7 1.5 zero -3.0 -7.6 -22.0 -44.7 0.431
Ultra Mag	PR338UM1	250	Swift A-Frame* PSP.	91/2 M			244 - 2057 : 1879 :	 	82 3303 7794 2347 1		0.2 0.7 zem -2.0 -5.6 -10.7	1.7 1.5 zero -3.0 -7.6 -22.1 44.9 0.427
338 Lapua Magnum	RM338LMR1	250	Scenar	91/2M		2683 2			12 3996 3613 3259 2		0.1 0.6 zero -1.7 -4.7 -8.9	1.4 1.3 zero -2.5 -6.3 -17.9 -35.4 0.675
35 Remington	R35R1	150	Core-Lakt* Pointed Soft Point	91/2		1506 1		<u> </u>		291	0.3 zero -2.7 -8.6 -18.2 -32.6	1.8 zero -4.9 -13.7 -27.1 -73.0 -150.8 0.184
00 110111119011	R35R2	200	Core-Lokt* Soft Point	91/2			140 1001 911	1921 12		369	0.5 zero -3.5 -10.7 -22.6 -40.1	2.3 zero -6.1 -16.7 -33.0 -86.6 -174.8 0.192
35 Whelen	R35WH1	200	Care-Lakt* Pointed Saft Point	91/2M			842 1606 1399	 		869		
33 Milata)				⊢ —								
200 0	R35WH3	250	Pointed Soft Point	9½M			823 1652 1496			1242	0.1 zero -1.9 -5.7 -118 -20.4	1.3 zeo -3.2 -8.6 -16.6 -40.0 -76.3 0.409
350 Remington Mag	R350M1	200	Care-Lakt® Pointed Saft Point	91/2 M			921 1678 1461	·		947	-0.1 zero -1.3 -4.2 -9.0 -15.8	2.1 1.8 zero -3.6 -9.4 -28.3 -59.7 0.295
375 H&H Mag.	R375M1	270	Soft Point	91/2 M	<u> </u>		780 1530 1317	 		1039	0.4 1.0 zero -2.8 -7.6 -14.8	2.4 2.1 zero - 4.1 - 10.6 - 32.3 - 69.0 0.267
	RS375MA	300	Swift A-Frame* PSP	91/2 M	2522 2780		836 1637 1458	 	52 2802 2245 1786 1	—- -	0.0 zero -1.7 -5.2 -10.8 -18.7	2.6 22 zero 4.3 -10.9 -32.2 -66.5 0.350
375 Remington Ultra Mag	PR375UM2	270	Saft Point	91/2 M	2900 2558		947 1678 1442			1246	0.0 0.8 zero -2.3 -6.3 -12.3	1.9 1.7 zero -3.5 -8.9 -27.0 -57.6 0.267
	PR375UM3	300	Swift A-Frame ⁻ PSP	9½M	2760 2505		035 1822 1624	5073 41	78 3412 2759 2210 1	1757	0.3 0.8 zero -2.4 -6.4 -12.4	2.0 1.8 zero -3.5 -8.8 -26.1 -53.9 0.350
416 Rem. Magnum	RS416RA	400	Swift A-Frame* PSP	91/2 M	2400 2175	1962 1	763 1579 1414	5115 421	01 3419 2760 2214 1	1775	0.1 zero -1.9 -5.9 -12.1 -20.8	1.3 zero -3.3 -8.9 -17.0 -41.9 -80.8 0.367
44-40 Win.	R4440W	200	Soft Point	21/2	1190 1006	900 8	322 756 699	629 44	9 360 300 254	217	zero -5.9 -20.3 -44.5 -79.3 -125.9	tero -11.5 -32.7 -64.5 -108.2 -235.3 -423.0 0.161
44 Rem. Magnum	R44MG2	240	Soft Point	21/2	1750 1380	1114 9	370 878 806	1650 10	15 661 501 411	346	ze10 -2.1 -8.7 -21.2 -40.5 -68.2	reto -5.6 -17.0 -35.4 -61.9 -143.8 -270.9 0.166
	R44MG3	240	Semi-Jacketed Hollow Point	21/2	1760 1380	1114 9	70 878 806	1650 10	15 661 501 411	345	zero -2.1 -8.7 -21.2 -40.6 -58.2	rero -5.6 -17.0 -35.4 -61.9 -143.8 -270.9 0.166
	RH44MGA	275	Core-Lokt' JHP	21/2	1580 1293	1093 9	976 896 83 2	1524 10	20 730 582 490	422	1.4 zero -6.6 -19.4 -39.6 -67.9	zero -6.6 -19.4 -39.6 -67.9 -152.8 -281.1 0.199
444 Mai.	R444M	240	Soft Point	91/2			027 941 846			381	0.3 zero -29 -93 -20.4 -37.4	1.9 zero -5.4 -15.5 -31.5 -86.8 -181.5 0.146
45-70 Government	R4570L	300	Semi-Jacketed Hollow Point	91/2			073 969 895	2182 14		533	zero -1.7 -7.3 -17.6 -33.5 -56.0	zero -4.7 -14.2 -29.2 -50.9 -117.6 -221.3 0.213
	R4570G	405	Soft Point	91/2	1330 1168		977 918 869	!		679	zero -4.1 -14.6 -32.2 -57.6 -91.4	zero -8.4 -24.0 -47.3 -79.0 -170.4 -303.0 0.221
				 ,.	,			1 12		1	020 01.0 01.7	1 2.7 2.7 2.7 2.7 2.7 300.0 1 0.201

Note: These ballistics reflected a test barrel length of 24" except those for 30 Carbine and 44 Remington Note: These ballistics reflected a test barrel length of 24° except those to 30 Cashine and 44 fleringing Magnum which are 20° barrels. Specifications are nominal. Ballistics figures established in test barrels. Individual filles may vary from test barrel results. "Tero" indicates gradage at which tille was sighted in. Indicates above or below line of sight. Hold low for positive numbers, high for negative numbers. 1 280 Renningion and TIMT Express, Remingion are interchangeable. I Bruffler indicate and 244 Remingion are interchangeable. I Bullet does not rise more than 1° above line of sight from muzzle to sighting-in range. 2 Bullet does not rise more than 3° above line of sight from muzzle to sighting-in range.

	Managed-Recoil (pages 70-71)	Premier* Scirocco Bonded (page 66)
	Premier © Core-Lokt © Ultra Bonded (pages 62-63)	Swift A-Frame" PSP (page 67)
2 1.0° 33 100 miles	Premier © AccuTip (pages 64-65)	UMC* (page 74)

SHOTGUN SPECIFICATIONS

MODEL 105 CTI S	HOTGUN'DIM	IENSIONS,/ AVI	RAGE WEIG	HTS									
140BD	CAUCE	MAG. CAPACITY	ORDER NO.	. BARREL TYPE ²	SIGHTS	RECEIVER FINISH	OVERALL LENGTH	CENGTH OF PULL	DROP (CONS)	OROP (HEEL)	STOCK Material	STOCK FIXESH	AVG. WT. (LBS.)
105 CTi	12	‡	26"/ 29523 28"/ 29521	Vent Rib. ProBore ⁵ Chake ¹	Twin Bead	Black TriNyte*	46 1/2" 48 1/2"	14 W	1 W*	31/2	American Walnut	Satin	6 <i>1</i> /4 7

400EL	GAUGE	MAS. CAPACITY	BBL LENGTH/ Order No.	BARREL TYPE ²	ZICHTS	RECEIVER FINISH	OVERALL LENGTH	LENGTH OF PULL	OROP (COMB)	OROP (HEEL)	STOCK MATERIAL	STOCK FINISH	AVG. WI. (LBS.)
1100 G3	12	4	26"/ 26415 28"/ 26418 28"/ 82901 (L)	Vent Rib, ProBore® Choke®	Twin Bead	Plated	46 '/1' 48 '/1' 48 '/1'	14 1/4"	11/4"	2 ½*	Realwood* Semi-Fancy Carbon Fiber Walnut Laninate	Hi-Gloss	8 1/4 8 1/4 8 1/4
1100 G3	20	4	26°/ 27449 28°/ 2745L	Vent Rib, Rem Choke ¹	Twin Bead	Plated	46 :/** 48 :/*	14 1/4*	11/2"	2 1/2"	Realwood* Semi-Fancy Carbon Fiber Walnut Laminate	Hi-Gloss	7¥4 7 1⁄8

MODEL	GAUGE	BBL LENGTH/ ORDER NO.	BARREL TYPE	ZHSHTS	BARREL FINISH	RECEIVER FINISH	OVERALL Length	LENGTH OF PULL	OROP (COMB)	DROP (HEEL)	STOCK HATERIAL	STOCK Finish	AVG. WT. (LBS.)
Premier Ruffed Grouse	20	26"/ 89715	7mm Vent Rib, ProBore* Choke7	lvory Bead Front, Steel Middle	Polished Blue	Deep Blued	43 1/5"	14 3/4"	11/2"	2 3/3"	Wainut	Oil	6¾
Premier Competition STS	12	28"/ 89591 30"/ 89590 32"/ 89592	10mm Vent Rib PraBore® Choke ⁷	lvory Bead Front, Steel Middle	Polished Blue	Nickel	45¼" 47¼" 49¼*	143/1	1 ½*	2 3/8"	Walnut	Satin	7½ 7¾ 8
Premier Competition STS with Adjustable Comb	12	30"/ 89594 32"/ 89593	10mm Vent Rib, ProBore® Choke ⁷	lvory Bead Front, Steel Middle	Polished Blue	Nickel	47 ¼* 49 ¼*	143/1	11/2"	2 3/3"	Walnut	Satin	73/4
Premier Field Grade	12 12 20 20 28 28	26*/89582 28*/89581 26*/89709 28*/89708 26*/89751 28*/89750	7ann Vent Rib, ProBore® Choke ⁷	Ivory Bead Front, Steel Middle	Polished Blue	Nickel	43 1/s" 45 1/s" 43 1/s" 45 1/s" 43 1/s" 45 1/s"	141/8	11/2*	2 3/5"	Walnut	Satin	7 . 7 ½ 6 ½ 6 ½ 6 ½ 6 ½ 6 ½
remier Upland	12 12 20 20 28	26"/89586 28"/89585 26"/89712 28"/89711 26"/89755 28"/89754	7mm Vent Rib, ProBore® Choke ⁷	lvory Bead Front, Steel Middle	Polished Blue	Case-Colored	43 1/6" 45 1/6" 43 1/6" 45 1/6" 43 1/6"	14 1/4"	11/4"	23%"	Wajnut	Oil	7 7 ½ 6 ½ 6 ½ 6 ½

MODEL	GAUGE/BORE	MAG. CAPACITY	BBL LENGTH/ ORDER NO.	BARREL TYPE ⁵	SIGHTS	RECEIVER FINISH	OVERALL LENGTH	LENGTH OF PULL	(COMB)	DROP (HEEL)	STOCK MATERIAL	STOCK FINISH	AYG, WT. (LBS.)
100° Competition	. 12 ·	4	30"/ 26919	Vent Rib PraBore® Choke	Twin Bead	Nickel	50 W	141/4"	11/2"	21/4"	Semi-Fancy Amer Walnut	Hi-Gloss	81/8
100 [–] Competition w/Adjustable Comb Stock)	123	. 4	30"/26923	Vent Rib PraBore® Choke	Twin Bead	Nickel	50 /4"	141/4"	Adj.	21/4"	- Semi-Fancy Amer, Walnut	Hi-Gloss	:8.14
70" Wingmaster® Classic Trap	12.	4	30"/ 24857	Lt. Contour Vent Rib Rem Choke 1	Twin Bead	High Polish Blued	50 1/2	141/5"	1 1/15"	2"	Semi-Fancy Amer. Walnut	Hi-Gloss	814
100° Classic Trap	ı îž	4	30"/ 25333	Lt. Contour Vent Rib Rem® Choke ¹	Twin Bead	High Polish Blued	50 V2	14 1/2"	1 1/16"	2"	Semi-Fancy Amer. Walnut	Hi-Gloss	8 1/4
100 Tournament Skeet	2 12 20	4	26"/ 25241 26"/ 29595	Lt. Contour Vent Rib Rem Choke ⁴	Twin Bead	High Polish Blued	46 1/4	14"	1 ½t	21/4"	Semi-Fancy Amer. Walnut	Hi-Gloss	8 7
100 * Premier Sporting 12	12	4	28 / 82842	Lt. Contour Vent Rib Rem Choke 2	Twin Bead	High Polish Blued	49	143/16"	11/1	21/4"	Semi-Fancy Amer. Walnut	Hi-Gloss	8
100" Premier Sporting 20	20	4	28"/ 82846	Lt. Contour Vent Rib Rem * Choke 2	Twin Bead	Righ Polish Blued	(1 49° : 1	14"	11/2	21/2"	Semi-Fancy Amer. Walnut	Hi-Gloss	·7
100" Premier Sporting 28	28	4	27,7 82854	Vent Rib Rem Choke 2	win Bead [1]	High Polish Blued	47 1/4	14*	11/2	21/2"	Semi-Fancy Amer. Walnut	Hi-Gloss	* 6 1/2
100" Premier Sporting 410	410 bore	4	27*/ 82858	· Vent Rib Rem Choke 2,6	. Twin Bead	High Polish Blued	47.34	14"	11/7	21/2	Semi-Fancy Amer. Walnut	Hi-Gloss	6 1/2
LOO Sporting 12	12	4	28"/ 25315	Lt. Contour Vent Rib Rem® Choke 2	I win Bead	High Polish Blued	49	14 1/16"	11/7	21/4"	Semi-Fancy Amer. Walnut	Hi-Gloss	
100" Sporting 20 (LT)	20	4	28 / 25399	Lt. Contour Vent Rib Rem Choke 2	s Twin Bead	High Polish Blued	49'	14"	11/2	21/2"	Semi-Fancy Amer. Walnut	Hi-Gloss	
100 Sporting 28	28	4	27"/ 29583	Vent Rib Rem * Choke 2	Twin Bead	High Polish Blued	47 X	14"	11/2"	21/2"	Semi-Fancy Amer. Walnut	Hi-Gloss	.61/2
100" Sporting 410	410 bore	4	- 27"/ 29549	Vent Rib Rem* Choke 2,6	Twin Bead	High Polish Blued	47 34	14"	147	21/2"	Semi-Fancy Amer. Walnut	Hi-Gloss	. ~6 ½

⁴ Supplied with extended Brillay Rem* Choke tubes (Improved Cylinder and Skeet.) 5 Model 1100* shotguns have 3" chambers, unless otherwise nated. 6 Model 1100* Sporting 410 shotguns have 3" chambers and will cycle 2" h, and 3" shotshells.

MODELS	PR453 SHOTO	GUN DIMEN	SIONS / AV	ERAGE WEIGH	TS		1111						
MODEL		CALIGE"	MAG. CAPACITY	BRE LENGTH/ GRIDER NO.	CHOKE	RIB	METAL FIXISH		ENETH DRO F PULL (COM	DROF (HEF1)	STOCK TO	STOCK FINISH	ANS. WI.
SPR 453-	16	12	4	28"/ 89460 26"/ 89462 24"/ 89440	SC-4	VI	Matte Black	49 /4 47 /2 245 /2	41/2" 11/2	2 1/2	Synthetic +	Matte Black	81/4 81/6 8

											•		
MODEL SP-10	MAGNU	M AUTOI	LOADING SHO	OTGUN DIMENSI	IONS / AVER	AGE WEIGHTS							
MODEL	ENICE	MAG. CAPACITY	BST, LENGTR/ CIRDER NO.	RARREL TYPE	SIGNIS	METAL FUGSH	OVERALL ***	LENGTH OF POLL	OROF (COME)	DROP (HEEL)	STOCK MATERIAL	STOCK FIXISH	AVE. WT.
SP-10 ⁻ Magnum ²	10,	2	£ 307/ 24808	Vent Rib Rem - Choke ¹	Twin Bead	Matte Black Non Reflect.	517	14"	1 1/2"	2 1/2*	Satin American Walnut	Satin	上的实
SP-10 ⁻ Thumbhole Camo ²		2	23781000	Rifle Sight Rem Choke 4	FireSights	Mossy Oak® Obsession®	344 A	14 1/2"	1 5/2	1 3/4	Laminate	Mossy Oak® Obsession®	11,
SP-10" Waterfowl Camo ²	10	2	£ 267 81001	Vent Rib Rem - Choke 3	HIViz*	Mossy Oak® Duck Blind ***	147 1/1 3	14"	11/1	21/2	Synthetic	Mossy Oak* Duck Blind **	10%
SP-10" Camo RC/VT2	10.	2	267 24828	Vent Rib Rem * Choke 1	Twin Bead	Mossy Oak® Obsession®	47 Yr 34	14"	11/2"	21/6"	Face Synthetic	Mossy Oak® Obsession®	1034

¹ Model SP-10* shotgams supplied with Full and Med Rem* Choke tubes. 2 IMPORTANT NOTE: Critical components – including the barrel, bolt assembly and trigger plate assembly of the Reministran Model SP-10* and other manufacturers' 10-gauge shotgams
3 MOTE: Supplied with (3) Briley Rem** choke waterlowl tubes – decoying, intermediate and pass shooting (ported) non-tunic approved. 4 NOTE: Supplied with Briley Staright Rifled Turkey Tube.

SHOTGUN SPECIFICATIONS

MODEL	GAUGE	MAG. CAPACITY	ORDER NO. 8	BARREL TYPE 3	SIGHIS S	METAL FINISH	OVERULL)	LEKGIH Of Pull	DROP (COME)	DROP (HEEL)	STOCA VALUE AND MATERIAL	STOCK FIXISH	-1
11-87" Sportsman" Synthetic	12 12 20 20	4	287/29879 267/29881 287/29825 267/29827	Vent Rib Rem Choke Mod ²	Single Bead	Matte Black, Non-Reflective	48° 46° 48° 46°	14"	11/2"	2 1/2"	Synthetic	Matte Black	1000
11-87" Sportsman" Camo	12 s 20	4	28 / 29895 26 / 29917	Vent Rib Rem Choke Mod ²	Single Bead	Mossy Oak* New-Breakup*	46",3	14"	11/2"	1%	= Synthetic	Mossy Oak* New-Breakup*	
11-87" Sportsman" Super Mag	12	4	28*/83604	Rem Chake Mod	Twin Bead	Matte Black, NR	3F 48	14"	11/2"	13/8"	Synthetic ***	Matte Black	
11-87 Sportsman Super Mag Waterfowl	12	4	28"/ 83603	Vent Rib Rem Choke 4	HIVIZ*	Mossy Oak* Ouck Blind* ·-	47 1/2	133%	11/2	11/6"	Synthetic	Mossy Oak* Duck Blind*	
11-87" Sportsman" Super Mag w/ShurShot" Stock (Turkey)	12	4	23 / 83601	Rifle Sights	IruGlo*	Realtree* APG~ HD~	43	13%	11/2"	2*	Synthetic	Realtree* APG" HD"	þ.
11-87" Sportsman" Synthetic w/ShurShot" Stock	12.9	4	23 / 83602	Fully Rifled	Cantilever Scope Mount	Realtree* Hardwoods HD	43	13%	11/2"	2	Synthetic	Realtree* Hardwoods HD	
11-87 Sportsman Synthetic Deer	12 20	4	21°/ 2985813. 21°/ 298771	Fully Rifled	Cantilever Scope Mount	Matte Black, Non-Reflective	41 -	14"	11/2	1 1/2"	Synthetic	Matte Black	
11-B7" Sportsman" Youth Synthetic	20.	4	21 / 29891	Vent Rib Rem Choke Mod ²	Single Bead	Matte Black, Non-Reflective	401/	13*	11/2	2 1/2"	Synthetic:	Matte Black	2.0
11-87" Sportsman" Youth Camo	20	4	- 21 / 29899	Vent Rib Rem Choke Mod 2	Single Bead	Mossy Oak® New Break-Up®	40 1/4	13"	11/2"	2 1/2	⇒ ∵°Synthetic	Mossy Oake New Break-Upe	1.5

1 Model 11-87* Deer barrets are not equipped with a pressure-compensating gas system, and will not function with target or light field bads. 2 NOTE: All Model 11-87* Sportsman* shotguns with a Rem* Choke barret come equipped with Modified Rem* Choke tubes.
3 Model 11-87* Sportsman* shotguns have 3* chambers and will cycle 2*?,* and 3* shotshells. 4 Supplied with Specialized Rem* Choke Waterfowl choke tubes.

	MODEL 11-87 S	PECIAL	PURPO	SE SHOTGUN	DIMENSIONS	/ AVERAGE WE	IGHTS.							
	MODEL.	CAUGE	MAG. CAPACITY	BBL LENGTH/ ORDER MO.	BARREL TYPE	SIGHTS	METAL FINSH	OVERALL. LEMETH	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	STOCK MATERIAL	STOCK FINISH	AVG. WT.
Ð	11-87~ XCS Super Magnum SF 1 Stock	12 (3 ½)	3 (31/2")	28"/ 83680	Rem~ Chake ³	Twin Bead	Grey TriNyte® (PVD)	43"	131/4"	11/2"	21/2*	Synthetic	Matte Black	8
Ð	11-87" XCS Super Magnum Waterfowl SF 1 Stock	12 (3 ½)	3 (31/2")	28 / 83682	Rem ⁻ Chake ³	Twin Bead A	Brown TriNyte® (PVD)	43"	13¾"	11/2"	21/2-	Mossy Oak® Duck Blind®	Mossy Oak* Duck Blind*	8
	3 NOTE: All 11-87 Super Magnum	s have 31/7° c	hambers except L	eer barrel which has 3" cha	amber. Super Magnums can s	shoot 2 1/4", 3" and 3 1/4" shell	s interchangeably.							

MODEL 870 WINGMASTER SHOTGUN DIMENSIONS / AVERAGE WEIGHTS STOCK FINISH CAUGE/BORE² Wingmaster* 100th Anniversary Light Contour Vent Rib Rem- Choke 1 28 / 82087 7.73 ÷ ⊊12-4 Twin Bead 48 1/2 14 1/2" 11/2" 21/2* American Walnut 🐇 Hi-Ghss High Polish Blued 28"/ 82000 26"/ 82001 Light Contour Vent Rib Rem- Choke ¹ 48 1/2" Semi-Fancy Clare Walnut Winemaster 4 Twin Bead 14" 11/2* 2 1/2 High Polish Blued Hi-Gloss Claro Wainut 614 28 / 26927 48 1/2° 46 1/2° 12 12 Light Contour Vent Rib Rem- Choke ¹ 4 Twin Bead 14 1/4" 1 1/2" 2 1/2 American Walnut Hi-Gloss Wingmaster^a High Polish Blued 26"/ 26929 634 28"/ 26947 61/8 61/4 48 1/2" Satin (28") . 20 4 Vent Rib Rem Choke 1 Twin Bead High Polish Blued 14" 11/2" 2 1/2 American Walnut Wingmaster* 26"/ 26949 Hi-Gloss (26°) 28 (2 1/4") 25"/ 24983 Vent Rib Rem Choke 1 Twin Bead High Polish Blued 45 1/2" 14* 11/2" 2 1/2" American Walnut Satin 6 Wingmaster* 410 Bore (3") 25 / 24991 Vent Rib Modified Twin Bead High Polish Blued 1 1/2" American Walnut

1 NOTE: All Model 870' Wingmaster' and Model 870' Wingmaster' Super Magnum' shotguns with a Rem' Chake barrel come equipped with Improved Cylinder, Modified and Full Rem' Choke tubes. 2 Model 870' Wingmaster' shotguns have 3' chambers, unless otherwise noted, and will cycle 2½', and 3' shotshells. 410 bore will cycle both 2½', and 3' shotshells.

MODEL	GAUGE ¹	MAG. CAPACITY	BBL LENGTH/ORDER NO.	BARREL TYPE		SIGHTS	METAL FINISH	OVERALL LENGTH	LENGTH OF PULL	(COMB)	DROP (HEEL)	STOCK MATERIAL	STOCK FINISH	AYG. WT. (LBS.)
170° Express* Turkey-Deer Combo	12 (3")	4 (2¾* & 3*)	21"(Vent Rib)/25663 23"(Fully Rifled Deer)/25663	Vent Rib Rem" Choke (Turkey Extra Full) Fully Rifled Deer	Cant	Twin Bead (Vent Rib) tilever Scope Mount (Deer BBL)	Matte Black Non-Reflect	42 1/2" (Vent Rib) 43 1/4" (Deer BBL)	14"	11/7	2 1/2"	Synthetic	Mossy Oak* Break-Up*	7 1/4 (Vent Rib 8 (Deer BBL)
 870° Express* Combo	12	4	28"(Vent Rib)/23" (Fully Rifled)/81280	Vent Rib Rem* Choke (Mod.) Fully Rifled Deer Cantilever		Single Bead (Vent Rib) Rifle Sights (Deer BBL)	Matte Black Non-Reflect	43 1/4" (Deer BBL)	14"	11/1	2 1/2"	Synthetic	Black	7 1/4 (Deer BBL)
B70° Express* Combo	12	4	26"(Vent Rib)/20" (Fully Rifled Deer)/25578	Vent Rib Rem® Choke (Mod.) I.C. Deer or Fully Rifled Deer		Single Bead (Vent Rib) Rifle Sights (Deer BBL)	Matte Black Non-Reflect	48 1/4" (Vent Rib)	14"	11/7	21/1	Laminate	Satin	7 1/4 (Deer BBL)
870" Express* Combo	20	4	26"(Vent Rib)/20" (Fully Rifled Deer)/25597	Vent Rib Rem* Choke (Mod.) I.C. Deer or Fully Rifled Deer		Single Bead (Vent Riti) Rifle Sights (Deer BBL)	Matte Black Non-Reflect	46 1/2" (Vent Rib)	14"	11/7	2 1/2	Laminate	Satin	6 ½ (Deer BBL)
870" Express* Syn. Youth Combo	. 20	4	21*(Vent Rib)/25659 20*(Fully Rifled)/25659	Vent Rib Rem* Choke (Mod.) Fully Rifled		Single Bead (Vent Rib) Rifle Sights (Deer BBL)	Matte Black Non-Reflect	40 1/2" (Vent Rib) 39 1/2" (Deer BBL)	13"	11/2	21/4"	Synthetic	Matte Black	6 (Vent Rib) 6 (Deer BBL)

MODEL 870 SPEC	IAL PURP	OSE MAI	RINE, MAGNI	ÚM" SHOTGUÍ	I-DIMENSION	S / AVERAGÉ WEIGHT	Ś						
MODEL	GAUGE	MAG. CAPACITY	BBL LENGTH/ ORDER NO.	BARREL TYPE	SIGHTS	METAL FINISH	OVERALL LENGTH	LENGTH OF PULL	DROP (COMB)	OROP (HEEL)	STOCK Material	STOCK FINESH	AYEMT. (LBS.)
870" Marine Magnum ^{e 2}	12 ¹	6	18"/ 25012	Cylinder Choke	Single Bead	Electroless Nickel-Plated	38 1/7"	14"	1 1/2"	21//:	Synthetic	Matte Black	71/2
1 Model 870" Marine Magrium* shote	ms have 3" chambe	ers and will cycle a	? Vi* and 3" shotshells o	nly. 2 Will not accept law	enforcement accessories.								

MODEL 870 XCS	ARINE M	IAGNUM	SHOTGUN	DIMENSIONS	/ AVERAGE W	EIGHTS							
WODET	CAUGE	MAG. CAPACITY	BRL LENGTH/ ORDER NO.	BARREL TYPE	SIGHTS	METAL FINISH	OVERALL LENGTH	LENGTH OF PULL	DROP (COME)	DROP (HEEL)	STOCK MATERIAL	STOCK FINISH	AYGWT. (LBS.)
870" XCS Marine Magnum*	12 ¹	6	18"/ 81308	Cylinder Chake	Single Bead	Black TriNyte	38 1/2*	13¾*	11/2"	21/2	Synthetic	Matte Black	71/2
1 Model 870" XCS Marine Magnum" s.	hotgurs have 3 cha	mbers and will cy	vole 21/1° and 3° shotshe	lls only									

:00EL	EAUXE 1	MAG. Capacity	BEL LENGTH/ ORDER NO.	BARREL TYPE	SIGRTS	METAL FIXISH	OVERALL LENGTH	LENGTH OF PULL	ORCP (COMB)	DROP (HEEL)	STOCK MATERIAL	STOCK FINISH	AVG. WT. (LBS.)
70° Express*	12	4	28*/ 25568 26*/ 25569	Vent Rib Rem * Choke (Alod)	Single Bead	Matte Black Non-Reflect	48 1/2 46 1/2	14*	11//	21/2	Laminate	Satin	1 1/2 1 1/4
70 Express Magnum /ShurShot	12 (3")	4 (2³/1° & 3°)	21781114	Vent Rib Rem * Choke (Turkey Extra Full)	Twin Bead	Mossy Oak* Obsession*	42 1/2"	13 3/44	ιν.	2"	Synthetic	Mossy Oak* Obsession ^s	73/8
O`Express* Magnum ShurShot`	12	4	237 81118	Vent Rib Rem * Choke (Mod)	Single Bead	Matte Black Non-Reflect	44 1/2	133/14	11/1	2"	Synthetic	Matte Black	73/4
70 Express*	20	4	28*/ 25583 26*/ 25582	Vent Rib Rem * Chake (Mod)	Single Bead	Maite Black Non-Reflect	48 1/2 46 1/2	11*	1 <i>Vr</i>	2 V.	Laminate	Satin	6 V2
70" Express * Youth	20	4	217 25561	Vent Rib Rem - Chake (Mod)	Single Bead	Matte Black Non-Reflect	40 1/2	13*	11/2"	21/4"	Laminate	Satin	6 ¥2
70" Express* Synthetic	12	4	28°/ 25587 26°/ 25589	Vent Rib Rem* Chake (Mod)	Single Bead	Matte Black Non-Reflect	48 1/2 46 1/2	14*	11/7	2 ½"	Synthetic	Matte Black	7 V2 7 V4
70° Express* Turkey Camo	12	4	217/25152	Yent Rib Rem ' Choże Turkey (Extra Full)	Twin Bead	Matte Black Non-Reflect	42 1/2	14*	11/1	2 Y z*	Synthetic	Mossy Oak* Break-Up*	7 1/4
70° Express* Jr. Jakes Gun	20	4	18 1/4"/ 26443	Vent Rib Rem * Choke (Full)	Single Bead	Matte Black Non-Reflect	37 1/1"	12"	11/2"	2"	Laminate	Mossy Oak* Break-Up*	6
O' Express * Turkey	12	4	21*/ 25573	Vent Rib Rem ' Choke (Extra Full)	Twin Bead	Matte Black Non-Reflect	42 Vz*	14"	IV.	2 1/2"	Laminate	Satin	7 Y
O Express Turkey Youth	20	4	217/25157	Vant Rib Ram * Choke (Full)	Twin Bead	Matte Black Non-Reflect	40 1/2"	13"	W	2 75	Synthetic	Mossy Oak* Break-Up*	6
O` Express* Synthetic dly Rifled Deer	· 12	4	207/25097	Fully Rifled	Rifle Sights	Matte Black Non-Reflect	40 1/2"	14*	11/2	1 7/3"	Monte Carlo Synthetic	Matte Black	7
70° Express* Deer	12	4	207 25565	Fixed Imp. Cyt. Choke	Rifle Sights	Matte Black Non-Reflect	40 1/2	14"	11/7	1 ⁷ /8"	Monte Carlo Laminate	Satin	7 1/4
70 - Express* Deer Youth	20	. 4	201/ 25555	Fully Rifled	Rifle Sights	Matte Black Non-Reflect	39 1/2"	13"	1 1/2"	2 <i>Vt</i>	Laminate	Satin	6
70" Express* Fully Rifled Beer	12	4	207/ 25575	Fully Rifled	Rifle Sights	Matte Black Non-Reflect	40 1/2	14"	11/2	1 1/8	Monte Carlo Laminate	Satin	7 1/4
70 Express® Synthetic ully Rifled Cantilever	- 12 20	4	23"/ 25090 18 '/"/ 25183	Fully Rifled Heavy Contour Fully Rifled	Cantilever Scope Mount	Matte Black Non-Reflect	43 ¼* 38 ¾*	14"	11/2	1 1/8"	Monte Carlo Synthetic	Matte Black	8 7 1/4
70" Express" Left Hand	12	4	28*/ 25577	Vent Rib Rem Chake (Mod)	Single Bead	Matte Black Non-Reflect	48 1/2"	14"	11/2"	2 1/2"	Laminate .	Satin	7 1/2
70° Express* Synthetic 18*	12	. 4	187/ 25549	Fixed Cylinder Choke	Single Bead	Matte Black Non-Reflect	38 1/2"	14*	1 V:"	2 1/2"	Synthetic	Matte Black	7 1/4
70" Express * 2-Shat Extension istal Grip Stock & Fore-end	12	6	18 / 24823	Fixed Cylinder Choke	Single Bead	Matte Black Non-Reflect	29"	_	_	_	Synthetic	. Matte Black	. 1
70" Express* Folding Stock ith/7-Round Capacity ²	. 12	6	18"/ 81190	Bead Sight Rem Choke ³	Single Bead	Matte Black Non-Reflect	^ Adj.	Adj.	11/2"	2 1/2"	Synthetic	Matte Black	74
70" Express* Synthetic -Shot w/Knoxx SpecOps Stock	20	6	187/81180	Fixed Cylinder Choke	Single Bead	Matte Black Non-Reflect	Adj	Adj.	1 1/2	2 1/2"	Synthetic -	Matte Black	. 7 1/2
70 Express* Synthetic ith 7-Round Capacity ²	12 20	: 6 6	18"/ 25077 18"/ 81100	Fixed Cylinder Choke	Single Bead	Matte Black Non-Reflect	38 1/2	14"	1 1/2"	21/2	Synthetic	Matte Black	7 ½ 6 ³/

MODEL	GIUSE ²	MAG. Capacity	BBL LENGTH/ Order Mil.	BARREL TYPE	SIGHTS	METAL FINISH	OVERULL Length	LENGTH OF PULL	OROP (COMB)	DROP (HEEL)	STOCK Material	STOCK FIXISH	AVG.W7.
870° Express* Super Mag Turkey Camo	12 (3 ½")	3 (3 ½*) 4 (2 ¾* & 3*)	237/25131	Vent Rib Rem * Choke (Turkey Extra Full)	Twin Bead	Mossy Oak* Break-Up*	44 1/2	14"	1 1/2"	2 1/2*	Synthetic	Mossy Oak* Break-Up*	71/4
870" Express" Super Mag Waterfowl Camo ³	12 (3 1/2")	3 (3 ½*) 4 (2 ¾* & 3*)	28"/81111	Vent Rib Rem - Choke ⁴	HiViza	Mossy Oak* Duck Blind	48	14"	1 1/2"	2 1/2 *	Synthetic	Mossy Oak * Duck Blind	7 h
870" Express" Super Mag Camo	12 (3 1/2") .	3 (3 ½") 4 (2 ¾" & 3")	26*/ 25154	Vent Rib Rem - Choke ⁵	HiViz*	Mossy Oak* Break-Up*	46	14*	11/2"	2 1/2*	Synthetic	Mossy Oak* Break-Up*	71/2
870" Express* Super Mag	12 (3 1/2") ;	3 (3 ½") 4 (2 ¾" & 3")	*28"/ 25100	Vent Rib Rem* Choke (Mod)	Single Bead	Matte Black Non-Reflect	. 48"	14"	1 1/2"	2 1/2"	Laminate	Satin	7 1/2
870" Express" Super Mag Synthetic	12 (3 1/2")	3 (3 ½*) 4 (2 ½* & 3*)	26"/ 25102 28"/ 25103	Vent Rib Rem Choke (Mod)	Single Bead	Matte Black Non-Reflect	46" . 48"	14"	1 1/2"	2 1/2"	Synthetic	Matte Black	71/4 71/2
870° Express® Super Mag Combo	12 (3 1/2").	3 (3 ½*) 4 (2 ³/4° & 3°')	26°/ 25114 20°/	Vent Rib Rem Choke (Mod) Fully Rifled (Deer)	Single Bead (Vent Rih)	Matte Black Non-Reflect	46" (VR) 40 1/2" (Deer)	14"	11/1*	2 1/2*	Laminate	Satin	74

MOGEL	GAUGE	MAG. CAPACITY	ORDER NO.	BARREL TYPE	SIGHTS	METAL FINISH	OVERALL .	OF PULL	(COMB)	OROP (KEEL)	STOCK Material	STOCK FINISH	AVG. WT.
870° SP-T° Super Mag Thumbhole ³	12 (3 1/2)	3(31/2"), 4(21/4" & 3")	23"/ 25189	Rifle Sight Rem Choke 2	TruGlo® "	Mossy Oak* Obsession*	.44 1/2	14 1/2	1 5%"	2¾*	Laminate	Mossy Oak* Obsession*	81/4
870" SPS" Super Mag Turkey w/ShurShot" Stock	12 (3 1/2)1	4(2¾ 8 37)	23"/81061	Wingmaster HD Extended Rem Choke	TruGlo®	Realtree* APG~ HD~	44 1/2	13 %"	11/	2*	Synthetic	Realtree* APG* HD*	71/1
870 SPS Cantilever Synthetic w/ShurShot Stock	12 (3) 1	4(2¾*&3*)	23*/82100	Fully Rifled Cantilever	Cantilever Scope Mount	Realtree* Hardwoods HD	441/2	13 1/2	i 1/2*	2*	Synthetic	Realtree* Hardwoods* HD*	134
870 ⁻ SPS Super Mag Camo ³ MAX Gobbler ⁻	12 (3 1/2) 1	3(3 ½), 4(2 ½ & 3")	23"/81060	Rifle Sight Rem Chake 2	Fire Sights	Realtree* APG HD	1-44/4	Adj.	1 1/2	21/2	Synthetic	Realtree*	71/4
870 SPS-1 Super Mag Camo ³	12(3)47)1	3(31/2), 4(21/4 & 3")	23"/ 25007.	Vent Rib Rem Choke 2	Twin Bead	Mossy Oak* Obsession*	244 1/	14"	11/4"	21/2	Synthetic	Mossy Oak* Obsession*	714 **
870 XCS (Xtreme Conditions)	12 (3 1/4)	3(31/2), 4(21/4 & 3")	28"/81309	Vent Rib Rem Choke 4	Twin Bead	Matte Black	48/4	13¾*	11/2*	21/2	Synthetic	Matte Black	7%
870" XCS (Xtreme Conditions) Waterfowl	-12(31/2)	3(31/2), 4(21/4-8.37)	287,81310	Vent Rib Rem Choke 4	Twin Bead TruGlo	Mossy Oak* Duck Blind*	38481/1	13¾*	1 1/2*	21/1	Synthetic	Mossy Oak* Duck Blind*	77%

¹ All 3" and 3 ½" chambers also handle 2 ½", shelts. 2 (Rote: Supplied with Turkey Super Full choke tube. 3 Hote: All Model 870" Super Magnums have 3 ½", chambers except Deer barrel which has 3" chamber. Super Magnums can shoot 2 ½", 3" and 3 ½", shelts interchangeable 4 (Note: Supplied with Modified, Improved Cylinder and Full Rem "Choke Tubes.

SHOTGUN SPECIFICATIONS

MODEL	ORDER NO.	GAUGE	CHAMBER	BBL LENGTH	TRICGER	EXTRACTOR	RECEIVER	RIB	STOCK STOCK	8077	CHOSE	OA LENGTA	LOP	DC	m.	WT (LBS.
	89566	12	3	26"	6、130		Nickel 7		1000		SC-4	43 1/1°	1. 3.6.		1 miles	7 1/2
	89560	12	1	28"			Baue -				SC-4	45 1/2"			148 779 7	7 %
	89576	12		28"	1		Nickel				SC-4	45 1/2"	10.00		1,600,800	7 1/2
SPR310	89700	20	(建 35)	26"	122	ASE	Blue -	VT	Walnut	Pad	SC-4	43 1/2"	14 1/2"	1 1/2	21/3	7 1/2
U1 11010	89716	20 -	3 3	26°			Nickel	••	130		SC-4	43 1/5	1			7 1/2
	89704	20	E 3 3	28°	11 11 11 11 11		Nickel				SC-4	45 1/2"	V. V. V.		1 1 1 1 1 1	7 1/2
	89744	28	2 /	26"	7. 表数		Blue		A STATE OF		IC/MD	43 1/2"			12.347	7 %
	89784	410	3	26*	· } 20 - 42 2 43 4		Blue		The state of the s		IM/FL.	43 1/2"	1 3		1.625	7 1/4
SPR310S	89570	12	2 6	29 1/1° Ported	122	ASE	Nickel	VT	Walnut	Pad	SC-4	47"	14 1/2	11/2	2.6	7:/
31 113103	89702	20	4	28 1/2" Ported	1.383.4	AUL	HILKEI	••	To the state of the	1 40	30-4	46"	1.4	1 //	1.	, ,

SST = Single Selective Trigger VT = Vent Rib SC-4 = Crt., IC, MD, P. (Crt. and IC are approved for steel) IC = Improved Optimizer MD = Modified ID = Improved Modified PL = Full ASE = Automatic Selective Ejector ETI = Edinator 3105 = Source Model with Protect Parrier Birth-Hand Patrix Swell Flavor Four-and Wide Rib

MODEL	ORDER NO.	GAUGE	CHAMBER	BBL LENGTH	TRIGGER	EJECTOR Extractor	RECEIVER	RTB	FORE-END	BUTT	CHOKE	QA LENSTH	LOP -	DC	DH	WT (LBS
INGLE TRIGGER	1. S. S. J.		191-35		16.359.4	-	100		13-13-13-13		H Y		() 3		€ G q¢	
	89524	12	3	26°			Nickel		1.22		SC-4	41 1/4"	100		1	63/4
	89522	12	3.	28"			Nickel				SC-4	43 1/4"				7
	89520	12	3***	28"			Nickel 7		1.55		SC-4	43 1/1"				7
SPR210	89682	20	3"	26"	SST:	ASE	Nickel	SR	Walnut *	Pad	SC-4	413/8	14"	1 1/2"	2 %	63/4
	89680	20	3"	26"	A		Nickel				SC-4	41 3/4"	1			63/4
	89724	28	2 1/1 -	26"			Nickel				JC/MD	41 1/4			F 3. 11 7	63/6
	89774	410	3",1-13	26"			Nickel				IM/FL	41 3/4"	•			6 1/4
UBLE TRIGGER	\$ 10 C 10 S		F. 77 - 74-74		1. 1. 1. 1.		1		The same and		\$100 ATM		E 42 TA		1.7.2. Y.	
	89548	12	2 1/8	20"	DT		Blue		Hardwood	Plate	CYL/CYL	35 1/4"	1.		1.5	6 1/1
	89546	12	2 1/1	20*	DT/TH		Blue		Walnut	Steel	SC-4	35 1/4			The Contract	6 1/:
DD 200	89540	12	3"	28"	DI	O.T.	. Blue	SR	Hardwood	Plate	CYL/CYL	43 1/4"			2.15	7
SPR220	89552	12	2 /	20"	DŤ.	EXT	Nickel-	SR	Walnut	Pad	SC-4	35 2/4"	13 1/2	1 1/2"	2 /2	61/
	89694	20	3"	20-	DT		Nickel		Walnut	Pad	SC-4	35 1/4"				61/-
	89690	20	3"	26"	DT .		Nickel		Walnut	Pad	SC-4	41 3/4"			18	6 1/4

MODEL SE	PR100	SING	LÉ-Š	нот ѕнотс	ŮN DIMI	NSIONS / A	VERAGE	WEIGHTS.			ं						
MODEL	ORDER M		GAUGE	CHAMBER	BBL LENGTH	TRIGGER	EJECTOR EXTRACTOR	RECEIVER	RIB	STOCK/ FORE-END	BUTT	CHBKE	OA LENGTH	LOP	. DE	DH	WT (LBS.)
SPR100	89504 89500 489670		12 12 20	3**	29 '/2" 28" 26"	ST	EJC/EXT	Nickel Blue Blue	VT BS BS	Walnut Hardwood Hardwood	Pad Plate Plate	SC-4 MD MD	44 '/:" 44 '/:" 43 '/:"	14"	r	1-1/4"	6 ½ 6 ½ 6 ½
SPR100 (Youth)	89790 89760		410	3°	26"	SI	EJC/EXT	Blue Blue	BS	- Hardwood - Hardwood	Pad Pad	IM IM	43 1/2"	. 13"	1"	1//	6 1/4
\$1 = Single Trigger	EIC/EXT = Sele	ctive Eje	ctor/Extrac	ctor VT = Vent Rib	BS = Bead Sight	SC-4 == CPL, IC, MD, FL	(CYL and IC are a	pproved for steel) IC =	Improved Cyli	inder MD = Modified IM	= Ітргоче	d Modified PL = Full	* Youth mo	del fitted w/rubbi	er recoil pad.		

MODEL	ORDER NO.	GAUGE / CALIBER	CHAMBER	BBL LENGTH	TRICGER	EJECTOR	RECEIVER	STOCK/ FORE-END	8111	CHOKE	OA LENGTH	LOP	DC	DH	WT (LBS.)
	89392	410 / 22 LR			SST		· ·		1		:		1		71/1
SPR94	89394	410 / 22 WMR	3."	24"	SST	EXT	Blue	Walnut	- Pad	SC-3	40 ¹/i"	14 1/1	11//	2 1/:"	':` 1½
	89330	12 / 223 Remington			DI										. 8 .
	89942	223 Remington													
	89944	243 Win													
SPR18N	89946	270 Win	•	23 1/2"	ST	ĐΧT	Nickel	Wainut	Pad		39 3/4	14"	11//	2'/*	63/4
2LH TOM	89948	30-06 Sprg		23 77	31	EXI	HICKEI	**antipl	rau		33 74	14	172	271	0-72
	89950	308 Win													
	89952	7.62x39mm													
	89930	223 Remington												-	
	89932	243 Win													
SPR18	89918	270 Win	_	23 1/2*	ST	EXT	Nickel	Walnut	Pad		39 *//*	14"	1 1//:	2 1/-	61/4
Blued	89922	30-06 Sprg		23 77	31	CAI	MCKEI	TTANIDE	Fau	_	33 -/-	14	177	2.74	0-74
	89934	308 Win													•
	89928	7.62x39mm													
ST = Single Trigger	SST = Single Seli	ective Trigger III = Double	Trigger EXT = Extra	cta	MD, FL IC = Impre	ued Chader MD = I	Wodfied FL = Full								

MODEL	GAUGE	MAG. CAPACITY	BELLENGTH/ ORDER MO.	BARREL TYPE	SIGHTS	METAL Finish	OVERALL LENGTH	LENGTH OF PULL	DROP (COME)	DROP (HEEL)	STOCK MATERIAL	STOCA FINISH	AVG. WT. (LBS.)
870" Desert RECON Speedfeed® 1*	12	7	187/81420	Rem™ Choke ¹	Single Bead	OD Green Powder Coat	38"	13 %*	1 19	2 14	Synthetic	Desert Digital	71/2
870" Desert RECON Speedleed! IV*	12	8	20"/81421	Rem' Choke1	Single Bead	OD Green Povider Coat	40*	13 34*	1 19	2 !!"	Synthetic .	Desert Digital	7 1/8
870" TAC-2 SpecOps " Stock	12	6	18*/81400	Fixed Cylinder	Single Bead	Blasted Black Oxide	Adj.	Adj.	115	2 1/5	Synthetic	Matte Black	7
870 TAC-3 SFIV Stock	12	7	207/81401	Fixed Cylinder	Single Bead	Blasted Black Oxide	38 1/2	14*	11/2	2 1/2	Synthetic	Matte Black	71/2
870" TAC-2 Folding Stock	12	5	187/81402	Fixed Cylinder	Single Bead	Blasted Black Oxide	Adj.	Adj.			Synthetic	Matte Black	614
870" TAC-3 Fatding Stock	12	7	207/81403	Fixed Cylinder	Single Bead	Blasted Black Oxide	Adj.	Adj.			Synthetic	Matte Black	7
1100° TAC-2 SFIV Stock	12	6	18"/82800	Fixed Imp. Cylinder	Single Bead	Blasted Black Oxide	38 1/7	14'	1 1/2*	2 45	Synthetic	Matte Black	71/2
1100° TAC-4	12	8	22*/82801	Rem' Choket	Single Bead	Blasted Black Oxide	42 V7	14"	147	2 1/2	Synthetic	Matte Black	7¾

MODE	- 700 BDL '												
ORDER NO.	CALIBER	MAG. Capacity	BARREL Length	TWIST — R-H 1 Turb in	OVERALL LENGTH	LENGTH OF PULL	DROP (COMB)	DROP (HEFL)	BARREL Material	BARREL FLNISH	STOCK MATERIAL	EINIZH ZIOCK	NYG. WT. (LBS.)
25787	243 Win	#	22"	9 1/1	41 5%	13 14	i.	1.594	Carbon Steel	Polished Blue	American Walnut	Gloss	7 14
25791	270 Win	4	22.	10"	42 1/2"	13 33*	1.	I 33.	Carbon Steet	Polished Blue	American Walnut	Gloss	71/3
25803	7mm Remington Mag	3	24*	9 Vi*	44 1/2"	13 ½°	1.	l W	Carbon Steel	Polished Blue	American Walnut	Gloss	7 Vz
25793	30-06 Springfield	4	22	10'	42 V:*	13 1/3*	l.	1 34.	Carbon Steel	Polished Blue	American Walnut	Gloss	71/8
26410	300 Remington Ultra Mag	3	26*	10'	46 1/2"	13 14	i*	1 1/3"	Carbon Steel	Palished Blue	American Walnut	Gloss	71/1

MODEL	.700 CDL				71 C							ر الإعلام والأعلام الإعلام والأعلام	
ORDER NO.	CALIFIER	MAG. Capacity	BARREL LENGTH	TAIST — R-H 1 Turn un	OVERALA LENSTH	LENGTH OF PULL	DROP (COM8)	OROP (KEEL)	BARREL Material	BARREL Finesh	STOCK MATERIAL	STOCK FINISH	ANG. WI. (LBS.)
27101 (L)	223 Remington	5	24"	12*	43 ¥4°	13 ½*	I 1/4*	1 1/4"	Carbon Steel	Satin Blue	American Walnut	Satin	7 ½ 1
27007	243 Win	4	24"	9 1/3"	43 1/4"	13 1/2*	1 1/3*	1 1/3*	Carbon Steel	Satin Blue	American Walnut	Satin	71/4
27103 (L)	243 Win	4	24"	9 1/1	43 1/3"	13 1/2"	1 1/3*	1 1/3"	Carbon Steel	Satin Blue	American Walnut	Satin	71/1
27009	25-06 Remington	4	24*	10*	44 1/2"	13 1/2"	1 1/3"	1 341	Carbon Steel .	Satin Blue	American Walnut	Satin	71/1
84080	270 Win	4	24"	10-	44 1/2"	13 1/2"	11/3	1 1/4"	Carbon Steel	Polished Blue	American Walnut	Satin	7 Vz
27011	270 Win	4	24*	10"	44 1/2"	13 1/2*	1 1/3"	1 1/3"	Carbon Steel	Satin Blue	American Walnut	Satin	7 <i>1</i> ⁄t
27105 (L)	270 Win	4	24*	10*	44 1/2"	13 1/2"	1 1/3"	1 1/3"	Carbon Steel	Satin Blue	American Walnut	Satin	71/1
27015	7mm-08 Remington	4	24*	9 1/4*	43 1/8"	13 1/2"	l 1/3°	1 3/3"	Carbon Steel	Satin Blue	American Walnut	Satin	71/4
84082	7mm Remington Mag	3	26*	9 1/1"	46 1/2"	13 1/2"	1 1/4*	1 1/3"	Carbon Steel	Polished Blue	American Walnut	Satin	7 1/8
27047	7mm Remington Mag	3	26*	9 1/4"	46 1/2"	13 1/2"	1 1/5"	1 3/8"	Carbon Steel	Satin Blue	American Walnut	Satin	71/1
27109 (L)	7mm Remington Mag	3	Z6*	9 1/1"	46 V?*	13 %	1 1/3"	1 1/3"	Carbon Steel	Satin Blue	American Walnut	Satin	7 %
27051	7mm Remington Ultra Mag	3	26"	9 1/2"	46 1/2"	13 1/2"	1 1/3"	1 3/3"	Carbon Steel	Satin Blue	American Walnut	Satin	7 54
27017	30-06 Springfield	4	24*	10*	44 1/2"	13 1/2"	1 1/4"	1 1/3°	Carbon Steel	Satin Blue	American Walnut	Satin	71/2
84081	30-06 Springfield	4	24"	10*	44 1/2"	13 1/2"	11/8	1 1/5"	Carbon Steel	Palished Blue	American Walnut	Satin	7 1/2
27107 (L)	30-06 Springfield	4	24*	10"	44 1/2"	13 1/2"	1 1/3"	1 3/8"	Carbon Steel	Satin Blue	American Walnut	Satin	7 1/2
27049	300 Win Mag	· 3	26*	10"	46 1/2"	13 1/2"	11/4"	1 1/1"	Carbon Steel	Satin Blue	American Walnut	Satin	7 5/8
27053	300 Remington Ultra Mag**	3	26"	10"	46 1/2"	13 1/2"	1 1/8*	1 1/8"	Carbon Steel	Satin Blue	American Walnut	Satin	7 1/8
27111 (L)	300 Remington Ultra Mag**	3	26*	10"	46 1/2"	13 1/2"	1 1/8"	1 1/3"	Carbon Steel	Satin Blue	American Walnut	Satin	75%
(L) Left-hand m	odel.												

ORDER NO.	CALIBER	. MAG.	BARREL LENGTH	TWIST — R-H 1 TURN IN	OVERALL LENGTH	LENGTH OF PULL	OROP (COMB)	OROP (HEEL)		BARREL MATERIAL	BARREL Finish		STOCK MATERIAL	STOCK FINISH	AVG. WT. (LBS.)
84019	257 Weatherby Mag	4	26"	10"	46 1/2"	13 1/2"	11/1	114	٠	416 Stainless	Satin Stainless	7 %	American Walnut	Satin	71/1
84018*	260 Remington	4	24"	10"	45 1/2" 1	13 V:	1 1/8"	1 3/3"	•	416 Stainless	Satin Stainless	7.1	American Walnut	Satin	71/2
84014	270 Win	: 4	· 24"	10"	45 1/2	13 1/2"	1 1/4"	1 3/5"		416 Stainless	Satin Stainless		American Walnut	Satin	71/2
84013	270 WSM	; 3	24"	10"	43 1/4"	13 1/2	11/4"	1 1/1		416 Stainless	Satin Stainless	•.	American Walnut	Satin	73/8
84012	7mm-08 Remington	: 4	24*	9 1/1*	43 5%	13 1/2*	11/1	1 1/5"	77.	416 Stainless	Satin Stainless		- American Walnut	Satin	73/8
84016	7mm Remington Mag	3	26*	9 1/4"	46 1/7	13 1/2"	1 1/8"	1 1/s"		416 Stainless	Satin Staintess	-	American Walnut	Satin	7%
84015	30-06 Springfield	, 4	24"	10"	44 1/2"	13 1/2	1 1/8"	l 3/8"		416 Stainless	Satin Stainless		American Walnut	Satin	71/2
84017	300 WSM	3	24"	10"	43 1/8	13 1/2"	1 1/4"	134	1-	416 Stainless	Satin Stainless	1 11	American Walnut	Satin	.73%

* Model 700 CDL SF Limited Edition

MODE	L 700" LSS					17.							
ORDER NO.	CALISER	MAG. CAPACITY	BARREL LENGTH	TWIST R-H I TURN IN	OTERALL LEXETH	LENGTH OF PULL	DROP (COMB)	OROP (HEEL)	BARREL Material	BARREL Funish	* STOCK MATERIAL	STOCK FINISH	AVG. WT. (LBS.)
84099	257 Weatherty Mag	5	26*	10"	46 1/2	13 1/2*	1 1/4"	2 1/4"	416 Stainless	Satin Stainless	Black Laminate	Semi-Gloss	7 1/8

MODE	L 700 ALASKAN TI (T	itaniun	u Keceiv	erj	<u> </u>			15, 5	2.		全位等 经基本 经		
ORDER NO.	CALIBER	MAG. CAPACITY	BARREI. Length	TWIST — R-H 1 TURN IN	LENGTH	OF PULL	(COMB)	OROP (HEEL)	BARREL	BARREL FINISH	STOCK MATERIAL	STOCK FIXISH	AVG. WT. (LBS.)
84261	25-06 Remington	4	24*	10"	44 1/2	13 1/2"	1 1/8"	1 1/1°	_ 416 Stainless	Satin Stainless	Aramid Fiber Synthetic	Matte	614
84262	: 270 Win	4	24"	10"	44 1/7	13 3/8"	1 1/6"	1 1/1"	416 Stainless	Satin Stainless	Aramid Fiber Synthetic	Matte	6 1/4
84267	270 WSM	3	24"	10-	43 56	13 34"	1 1/1	1 3/4	416 Stainless	Satin Stainless	Aramid Fiber Synthetic	Matte	. 6
84263	280 Remington	4	24"	10*	44 W	13 3/8"	1 1/1	1 1/4"	7416 Stainless 1	Satin Stainless	Aramid Fiber Synthetic	Matte	614
84260	7mm-08 Remington	4	24"	9 1/1"	43 14	13 3/4"	11/6*	1 3/4"	416 Stainless	Satin Stainless	Aramid Fiber Synthetic	Matte	} 6
84265	7mm Remington Mag	3	24*	9 1/4"	44 17	13 3/8"	1 1/1"	1 1/8"	416 Stainless	Satin Stainless	Aramid Fiber Synthetic	Matte	6 14
84264	30-06 Springfield	4	24"	10	44 17	13 3/4"	1 1/1"	1 1/6"	416 Stainless	Satin Stainless	Aramid Fiber Synthetic	Matte	6 1/4
84266	300 Win Mag	3	24"	10*	3 44 W	13 1/4"	1 1/4*	1 1/6"	416 Stainless	Satin Stainless	Aramid Fiber Synthetic	Matte	6 1/4
84268	300 WSM	3	24"	10°	43 16	13 1/1"	11/6"	1 34"	416 Stainless	Satin Stainless	Aramid Fiber Synthetic	Matte	16

MODEL	700 SPS BUCK	MASTERS	e EDIT!	ÓN		·		g.		7.			
ORDER NO.	CALIBER	MAG. CAPACITY	BARREL LENGTH	TWIST — R-H 1 TORN SI	OVERALL OF	LENGTH OF PULL	DROP (COMS)	DROP (HEEL)	MATERIA DE M	BARREL FINISH	ASTOCK MATERIAL	STOCK FIXESH	AVG. WT.
84170	243 Win	4	24"	91/8*	43 %	13 3/6"	1 1/4"	1 1/4"	Carbon Stee	Matte Blue	Synthetic	Realtree* Hardwoods* HD**	1 -> 114
84176 Youth	243 Win	:-] 4	20"	9 1/8"	.∉.39 ₩	12 3/8"	1 1/4"	1 1%*	Carbon Steel	Matte Blue	Synthetic	Realtree* Hardwoods* HD**	1 7
84172	270 Win	₹ 4	24*	10"	44 W	13 1/1"	1 1/2"	1 1 %"	Carbon Steel	Matte Blue	Synthetic S	Realtree® Hardwoods® HD™	3.171%
8417[7mm-08 Remington	4	24"	9 1/4"	43 **	13 34"	116	1 1/4"	Carbon Steel	Matte Blue	Synthetic 💉	Realtree® Hardwoods® HD™	X 471/2
84174	7mm Remington Mag	4	26*	91/4*	46 Vr.	13 1/4"	1 1/8"	1 14"	Carbon Steel	Matte Blue	Synthetic	Realtree® Hardwoods® HD™	7%
84173	30-06 Springfield		24"	10"	× 144 W	13 1/4"	1 1/4"	1 1/4"	Carbon Steel	Matte Blue	Synthetic Source	Realtree® Hardwoods® HD™	美加州
84175	300 Win Mag	3	26"	10"	46 %	13 3/8"	1 1/4"	1 1/4"	Carbon Steel	Matte Blue	Synthetic Synthetic	Realtree® Hardwoods® HD™	TY IN YES

Premier Dealer offerings

	MODEL	700 SPS												
	ORDER MO.	CUITE	MAS. CAPACITY	BARREL LENGTH	TWIST — R-H 1 Turn in	OVERALL LENGTS	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARRE BARRE	BARREL FINISH	STOCK MATERIAL	STOCK FINISH	ANE, WITH
	84200	17 Remington Fireball	5	24"	9*	4387	13 3/8"	1 1/1"	1 34"	Carbon Steel	Matte Blue	Black Synthetic	Matte	Se 1988
	27351	223 Remington	5	20"	9 1/4"	39 %	12 3/8"	1 1/5"	1 3/1"	Carbon Steel	Matte Blue	Black Synthetic (*)	Matte	10年10年
	27475 (Y)	243 Win 24	4	20"	9 W.	239 Ye	1234"	1 1/8"	1 1/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	W 750
NEW	84150 (Y) (L)	243 Winny	4	20°	9 1/6"	39.6	12 1 %"	1 1/1"	1 1/1°	Carbon Steel	Matte Blue	Black Synthetic (*)	Matte	100
	27355	243 Win	4	24"	9 1/6"	#43 Yr	13 3/8"	1 1/2"	1 3/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	507以
	27361	270 Win 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	4	24"	10"	44/7		1 1/6"	1 1/1"	Carbon Steel 5	Matte Blue	Black Synthetic	Matte	776
	27331	270 WSNV	3	24"	10"	43 97		1 1/4"	1 3/4.	Carbon Sheel	Matte Blue	Black Synthetic	Matte	等,7 90元
ĺ	27391 (Y)	7mm-08 Remington	4	20°	9 1/4*	39 7	1234	1 1/8"	1 3/6"	Carbon Steel	Matte Blue	Black Synthetic	Matte	四位为其
NEW	84151 (Y) (L)	A 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	4	20*	9 1/4*	39 % 3	12 3/8"	1 1/8"	1 3/8"	Carbon Steel	Matte Blue	Black Synthetic	Matte	14.11.42
	27357	7mm-08 Remington	4	24"	9 W.	43 9		1 1/4"	1 3/1"	Carbon Steel	Matte Blue	Black Synthetics	Matte	1827W 25
	27385	7mm Remington Mag	3	26*	9 1/4"	46 14		1 1/8"	1 3/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	5 7.90 5
NEW	84152	7mm Remington Ultra Mag	3	26*	9 1/4"	46 1/1		1 1/8"	1 3/8"	⊭ Carbon Steel	Matte Blue	Black Synthetic 3	Matte	79.
	27363	30-06 Springfield	4	24'	10"	44 14	13 3/8"	114"	1 3/8"	Carbon Steel	Matte Blue	Black Synthetic	Matte	77%
	27333	300 WSM	3	24"	10	43 1/4	13 ¾°	1 1/6"	1 1/6"	Carbon Steel	Matte Blue	Black Synthetic	Matte	23.7M
	27387	300 Win Mag	3	26*	10"	46 1/2		1 1/6"	1%"	Carbon Steel	Matte Blue	Black Synthetic	Matte	7%
	27359	308 Win	4	24*	10*	43 98	13 3/5"	1 1/1°	136"	Carbon Steel	Matte Blue	Black Synthetic	Matte	7,42
	27389	300 Remington Ultra Mag	3	26*	10"	46 1/2	13 3/8"	1 1/1"	I 3/8"	Carbon Steel	Matte Blue	Black Synthetic	Matte	75%
	(1) Youth. (L	Left-hand model.										***************************************		
,														

MODE	E 700 SPS STAINLE	SS											
ORDER NO.	CALIBER	MAG. CAPACITY	BARREL LENGTH	TWIST — R-H 1 TURN IN	OVERALL /	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL	BARREL Finish	STOCK MATERIAL	STOCK FINISH	AVG. WT.
27131	204 Ruger	5	24"	12"	43 1/2	13 3/8"	1 1/6"	1 3/8"	416 Stainless	Matte Stainless	Black Synthetic	Matte	710
27133	223 Remington	5	24"	12*	43 1/8	13 3%*	1 1/4"	1 3/2"	416 Stainless	Matte Stainless	Black Synthetic	Matte	714
27135	22-250 Remington	4	24"	14-	43 1/8	13 3/8"	1 1/1"	1 ¾t"	416 Stainless	Matte Stainless	Black Synthetic	Matte	71/
27263	243 Win	4	24"	9 1/2"	. 43 W	13 3/8"	1 1/8"	1 3/8"	416 Stainless	Matte Stainless	Black Synthetic	Matte	7% · :
27251	25-06 Remington	4	24"	10"	44 1/2	13 3/8*	1 1/8"	1 3/8"	416 Stainless	Matte Stainless	Black Synthetic	Matte	7.3%
27267	270 Win	4	24"	10"	44 1/2	13 3/8*	1 1/8"	1 3/8"	416 Stainless	Matte Stainless	Black Synthetic	Matte	7.3%
27253	270 WSM	3	24"	10"	44 1/1	13 3/8"	1 1/4"	1 3/2"	416 Stainless	Matte Stainless	Black Synthetic	Matte	738
27265	7mm-08 Remington	4	24"	9 1/4"	43 %	13 3/8"	1 1/6"	1 1/8"	416 Stainless	Matte Stainless	→ Black Synthetic	Malte	* JW.
27271	/mm Remington Mag	3	26*	9 1/4"	46 /2	13 1/8"	1 1/8"	1 ¾"	416 Stäinless	Matte Stainless	Black Synthetic	Matte	7.5%
84300	7mm Remington Ultra Mag	3	26*	9 1/4*	46 1/2	13 3/2"	1 1/8"	1 3/8"	416 Stainless	Matte Stainless	Black Synthetic .	Matte	7 1/8 ~- "
27269	30-06 Springfield	4	24"	10"	44 1/7	13 3/8"	1 1⁄€"	1 1/2*	416 Stainless	Matte Stainless	Black Synthetic	Matte	7 1/8
27255	300 WSM	3	24*	10°	44 1/2	13 3/8"	1 1/6*	1 1/t"	416 Stainless	Matte Stainless	Black Synthetic	Matte	7.1/8
27273	300 Win Mag	3	26"	10*	46 1/2	13 3/8"	1 1/8"	1 1/8	416 Stainless	Matte Stainless	Black Synthetic	Matte	7 %
27136	308 Win	4	24"	10°	43 1/8	13 3/8"	1 1/8"	1 3/8"	416 Stainless	Matte Stainless	Black Synthetic	Matte	174
27140	300 Remington Ultra Mag	3	26*	10"	46 V2	13 1/2"	1 1/8"	1 1/2"	416 Stainless	Matte Stainless	Black Synthetic	Matte	7%

ORDER NO.	CALIBER	MAG. Capacity	BARREL LENGTH	TWIST — R-H 1 Turn in	OVERALL LENGTH	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL Material	•	BARREL FINISH	STOCK MATERIAL	STOCK FINISH	AYG. WT. (LBS.)
27338	243 Win	4	24"	9 1/8*	43 1/8"	13 3/8"	1 1/5*	1 3/5"	Carbon Steel	N	latte Blue	Black Synthetic :	Matte	71/4
27335	270 Win	4	24"	10*	44 1/2"	13 3/8"	1 1/8"	1 1/2"	Carbon Steel	M	latte Blue	Black Synthetic	Matte	. 73%
27341	7mm-08 Remington	4	24*	9 1/4"	43 1/6"	13 3/8"	1 1/8"	1 3/2*	Carbon Steel	-: N	fatte Blue	Black Synthetic	Matte	71/4
27343	· 7mm Remington Mag	3	26"	9 1/4"	46 1/2"	13 1/2"	1 1/6"	1 3/8"	, Carbon Steel	ŀ	latte Blue	Black Synthetic	Matte	7 %
27337	30-06 Springfield	4	24"	10"	44 1/2	13 3/8"	1 1/1	1 3/8"	Carbon Steel	·	latte Blue	Black Synthetic	Matte	73%
27339	300 Win Mag	3	26"	10*	46 1/2"	13 3/6"	11/4"	1 3/8"	Carbon Steel	- · k	latte Blue	Black Synthetic	Matte	71/1

	MODEL	700 SPST VAR	MINT												
	ORDER NO.	CALIBER	. (MAG. CAPACITY	BARREL LENGTH	TWIST — R-H 1 TURN DI	OVERALL Length	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL Material	BARREL Finish	STOCK MATERIAL	STOCK FINISH	AVE. WT. (LRS.)
	84213	-17 Remington Fireball		5	26"	9*	46 ½"	13 1/4"	1 1/2"	1 1/4"	Carbon Steel	Matte Elue	Black Synthetic	Katte	81/2
NEW	84225 (L)	17 Remington Fireball		5	26"	9*	46 1/2"	13 1/4"	1 1/2"	1 3/2"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
	84214	204 Ruger	٠.	5	26*	12*	46 V2"	13 1/4"	1 1/4"	1 1/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
	84216	22-250 Remington		4	26*	[4*	46 1/2"	13 1⁄4"	1 1/1"	1 1/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
NEW	84226 (L)	22-250 Remington		4	26*	14"	46 1/2"	131/1	1 1/8"	11/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
	84215	223 Remington		5	26*	12"	46 1/2"	13 1/1"	11/4*	1 ½°	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
NEW	84227 (L)	223 Remington		5	26	12"	46 V2"	13 %*	I 1/4*	1 ¥ŧ*	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
	84217	243 Win		4	26*	9 1/8"	46 1/2	13 1/4"	1 1/1	1 1/2"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
NEW	84228 (L)	243 Win		4	26*	9 1/4"	46 1/2	13 3/2"	1 14"	1 1/4"	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
	84218	308 Win		4	26'	12*	46 1/2	13 14"	1 1/1	1 /t *	Carbon Steel	Matte Blue	Black Synthetic	Matte	81/2
NEW	84229 (L)	308 Win		4	26"	12"	46 1/2"	13 %**	1 1/2"	1 11"	Carbon Steel	Matte Blue	Black Synthetic	Matte	8½
	(L) Leit-hand m	odel.													

MODEL	700 VESS THUI	MBHOLE											
ORDER NO.	CALIBER	MAG. Capacity	BARREL LENGTH	TWIST — R-H I TURN IN	OVERALL LENGTH	LENGTH OF PULL	OROP (COMB)	DROP (HEEL)	BARREL MATERIAL	BARREL FUNISH	STOCK MATERIAL	STOCK FIXISH	AYE, WT. (LBS.)
27443	204 Ruger	5	26*	12*	45 3/4*	13 1/5"	1 1/4*	2 1/4"	416 Stainless	Polished Stainless	Brown Laminated	Satin	91/2
27447	22-250 Remington	4	26"	14"	45 3/4"	13 1/4"	1 1/4"	2 ₩	416 Stainless	Polished Stainless	. Brown Laminated	Satin	91/2
27445	223 Remington	5	26*	12*	45 ¾*	13 14*	1 1/4"	2 ₹€*	416 Stainless	Folished Stainless	Brown Laminated	Satin	91/2

ODEF	. 700 MOUNTAIN R	IFLE LS	S [*]										
NO	CALIBER	MAG. CAPACITY	BARREL LENGTH	TWIST - R-H 1 TERN IN	OVERALL LEXGIH	LENGTH OF POLL	OROP (COMB)	DROP (HEEL)	BARREL BATERAL	BARREL FINISH	STOCK MATERIAL	STOCK FINISH	AVG. W
	270 Win	4	22,	10*	42 ½*	13 1/5"	1 1/3"	1 1/3"	416 Stainless	Satin Stainless	Brown Laminated	Satin	694
)	280 Remington	4	22.	10-	42 Yt*	13 35	1 1/3"	l Vi*	416 Stainless	Satin Stainless	Brown Laminated	Satio	614
<u> </u>	7mm-08 Remington	4	22*	9 W*	41 97	13 %	11/4	l vir	416 Stainless	Satin Stainless	Brown Laminated	Sation	61/2
]	30-06 Springfield	4	22.	10,	42 <i>V</i> r	13 1/5"	1 1/3"	l Vi*	416 Stainless	Satin Stainless	Brown Laminated	Satin	64
DEL	700 VLS (LAMINA	TED ST											
XÜ.	CALISER	MAG. CAPACITY	BARREL LENGTH	TWIST — R-H I TURN IN	CVERALL LENGTH	OF PULL	(COME)	(HEEL)	BARREL Material	BARREL FIXISH	STOCK MATERIAL	STOCK FINISH	AVG. W
7	204 Ruger	5	26*	12*	45 3/4*	13 V?	1.	1 1/3"	Carbon Steel	Satin Blue	Brown Laminated	Satin	9 1/3
1	223 Remington	5	26*	12*	45 3/1	13 1/2"	<u>''</u>	1 1/3*	Carbon Sizel	Satin Blue	Brown Laminated	Satin	9 1/3
9	22-250 Remington	4	26*	14"	45 ¾**	13 1/2"	<u>l.</u>	1 35"	Carbon Steel	Satin Blue	Brown Laminated	Satin	9 1/8
15	243 Win 308 Win	4	26°	9 14*	45 ¥1*	13 1/2"	1.	1 1/5"	Carbon Steel Carbon Steel	Satin Blue Satin Blue	Brown Laminated Brown Laminated	Satin Satin	9 %
Sper	700- VE EE II	F. 76 47.	5-30 of .			Agrical Con	4 (- 2)						
• •	_700 VS SF II	MAG.	BARREL	1A121 — 15-H	OMERIT	LENGTH	DROP	DROP	BARREL	BAUREL.		210CK	AYG. W
KO.	CALIBER	CAPACITY	LENGTH	1 furs as	LEIGTH AS 3/41	OF PULL	(COMB)	(HEEL)	MATERIAL 81C Chainles	FINISH	STOCK MATERIAL	FINISH	(LBS.)
3	17 Remington Fireball 204 Ruger	<u>5</u>	26*	12*	45 ¾* 45 ¾*	13 1/2*	1 1/4"	1 1/2"	416 Stainless 416 Stainless	Polished Stainless Polished Stainless	H.S. Precision Black Amarid Fiber Reinf. H.S. Precision Black Amarid Fiber Reinf.	Matte Matte	81/2
9	220 Swift		26"	144	45 1/4*	13 1/2*	1 1/4*	I N;	416 Stainless	Polished Stainless	H.S. Precision Black Amarid Fiber Reinf.	Matte	81/2
7	223 Remington	5	26*	12*	45 34*	13 1/2°	1 1/4"	l 1/2"	416 Stainless	Polished Stainless	H.S. Precision Black Amarid Fiber Reinf.	Matte	8 1/2
5	22-250 Remington	4	26"	14*	45 ¥4*	13 1/2"	1 1/1	1 W.	416 Stainless	Polished Stainless	H.S. Precision Black Amarid Fiber Reinf.	Matte	81/2
	700 SENDERO SF												
DEL	You STUDEKO'SL	MAG.	BARREL	TWIST — R-H	OVERALL	LENGTH	DROP	BROP	BARREL	BARREL	Control of Birth	STOCK	BVC #
NO.	CALIBER	CAPACITY	LENGTH	1 TURN IN	LENGTH	OF PULL	(COMB)	(HEEL)	MATERIAL	FINISH	STOCK MATERIAL	FIXUSH	AVG. W
	264 Win Mag.	3	26"	9*	45 1/4*	13 14"	1 1/4"	1 1/2"	416 Stainless	Polished Stainless	H.S. Precision Black Amerid Fiber Reinf.	Matte	81/
1 5	7mm Remington Mag 7mm Rem Ultra Mag**	3 3	26"	9 1/2"	45 ¾*	13 39"	1 1/4"	1 1/2"	416 Stainless 416 Stainless	Polished Stainless Polished Stainless	H.S. Precision Black Amerid Fiber Reinf. H.S. Precision Black Amerid Fiber Reinf.	Matte Matte	814
3	300 Win Mag	3	26*	10*	45 3/4"	13 3/5"	1 1/4"	11/2"	416 Stainless	Polished Stainless	H.S. Precision Black Amarid Fiber Reinf.	Matte	814
8	300 Rem Ultra Mag "	3	26"	10"	45 1/4"	13 1/4"	1 1/4"	1 1/2"	416 Stainless	Polished Stainless	H.S. Precision Black Amand Fiber Reinf.	Matte	81/8
DÈL	700 XCR	2 . 5.2.4			\$ (\$ \$ \$ 4);	79.6						\$ 10.	
4. ***	144 Y 1 1 28 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	MAG.	BARREL	TWIST — R-H	ONTERALL	LEKGTH	DROP	DROP	BARREL.	BARREL		STOCK	AVG. W
NO	CALIBER 25. GC Paggington	CAPACITY 4	LENGTH 24"	1 TURN IN 10"	LDIGTH .	0F PULL	(coms)	(HEEL)	Stainless w/Tellhotes	FINISH Lighter Setio	STOCK MATERIAL	FINISH	(LBS.
10 15	25-06 Remington 270 Win	4	24*	10"	44 1/2"	13 3/4"	1 1/4"	1 1/3"	Stainless w/TriNyte* Stainless w/TriNyte*	TriNyte® Satin TriNyte® Satin	Black Synthetic w/Overmold Black Synthetic w/Overmold	Matte Matte	7 1/1
12 (L)	.270 Win.	4	24"	10*	44 1/2"	13 3/8"	1 1/8"	1 3/4"	Stainless w/TriNyte*	TriNyte* Satin	Black Synthetic w/Overmold	Matte	7 1/8
3	270 WSM	3	24"	10"	44 1/2	13 34"	1 1/1	1 3/2"	Stainless w/TriNyte* .:	TriNyte* Satin	Black Synthetic w/Overmold	Matte	. 734
11	7mm-08 Remington	4	24"	9 Vi*	43 56 ,	13 1/8"	1 1/6"	1 1/4"	Stainless w/TriNyte*	TriNyte* Satin	Black Synthetic w/Overmold	Matte	7 1/
9	7mm Remington Mag		26*	9 1/1*	46 1/2"	13 1/1"	1 1/1	1 1/8"	Stainless w/TriNytes	TriNyte* Satin	Black Synthetic w/Overmold	Matte	.756
4 (L)	7mm Remington Mag	3	26*	9 1/4"	46 1/2	13 1/8"	11/6"	1 1/4"	Stainless w/Trivyte*	TriNyte* Satin	Black Synthetic w/Overmold	Matte	7%
19 18 (C)	7mm Remington Ultra Mag ~~ 7mm Remington Ultra Mag ™	3	26"	9 1/2"	46 1/2"	13 1/8"	1 1/8"	1 1/5"	Stainless w/TriNyte*	TriNyte® Satin TriNyte® Satin	Black Synthetic w/Overmold Camo Synthetic w/Overmold Real	Matte tree* AP'* HD '*	7.5%
57	30-06 Springfield	4	24"	10	44 1/2"	13 1/3"	1 1/3"	1 3/1*	Stainless w/TriNyte ^s	TriNyte* Satin	Black Synthetic w/Overmold	Matte	7 3/3
3 (L)	- 30-06 Springfield	4	24"	10"	44 V2"	13 3/3"	1 1/3"	1 1/4"	Stainless w/TriNyte*	TriNyte* Satin	Black Synthetic w/Overmoid	Matte	714
5	300 WSM	3	24"	10"	44 V:	13 1/5"	1 1/8"	1 1/3"	Stainless w/TriNyte*	TriNyte* Satin	Black Synthetic w/Overmold	Matte	734
1	300 Win Mag	3	26*	10"	46 V2"	13 1/1	1 1/1"	1 3/1"	Stainless w/TriNyte*	TriNyte* Satin	Black Synthetic w/Overmold	Matte	. 754
1 (1)	300 Remington Ultra Mag™	3	26"	10"	46 1/2"	13 1/1	11/4"	1 34*	Stainless w/TriMyte*	TriNyte® Satin	Black Synthetic w/Overmold	Matte	7%
9 (L) 3	300 Remington Ultra Mag** 338 Remington Ultra Mag**	3	26"	10"	46 ½" 46 ½"	13 1/1	11/4"	1 1/4"	Stainless w/TriNyte*	TriNyte* Satin	Black Synthetic w/Overmold	Matte Matte	756
7	338 Win Mag	3	26*	10"	46 1/2	13 1/4"	11/4"	1 1/3"	Stainless w/TriNyte*	TriNyte* Satin TriNyte* Satin	Black Synthetic w/Overmold	Matte	759
1 †	375 H&H	3	24"	12"	46 1/2	13 1/5	11/1	1 1/8"	Stainless w/TriNyte*	TriNyte* Satin	Black Synthetic w/Overmold	Matte	754
3 †	375 Remington Ultra Mag™	3	24°	12*	46 1/2"	13 1/8"	1 1/8"	1 1/4"	Stainless w/TriNyte* ,	TriNyte® Satin	Black Synthetic w/Overmold	Matte	754
ipped wi	th Iron Sights. (C) Came – RMEF Rock	y Mountain Elk i	Foundation (L) Left-hand model									
DEL	700 VTR (VARMIN	IT TARG	ET RIF	E)									
¥0.	CALIBER:	MAG. CAPACITY	BARREL LENGTH	TWIST — R-H 1 Turn in	OVERALL LENGTH	LENGTH OF PULL	OKOP (COMB)	DROP (HEEL)	BARREL	BARREL FINISH	STOCK MATERIAL	STOCK FURISH	AVG. V
9	204 Ruger	5	22"	12"	41 %*	13 1/2	1 1/4"	1 1/1°	Carbon Steel	Matte Blue	OD Green Synthetic W/Overmold	Matte	1. 71/
0	223 Remington	5	22"	9'	41 %"	13 1/4"	1 1/8"	1 1/4"	Carbon Steel	Matte Blue	OD Green Synthetic w/Overmold	Matte	71/
3	22-250 Remington	4	22*	14"	41 %*	13 1/6	1 1/1"	1 1/1"	Carbon Steel	Matte Blue	OD Green Synthetic w/Overmold	Matte	74
i	308 Win	4	22"	12"	41 54	13 1/2"	1 1/8°	1 1/4"	Carbon Stee	Matte Blue	* > COD Green Synthetic w/Overmold	Matte	: 79
ĎΕΙ	700 CDL "BOONE	AND C	OCKET	T" SERIE	s ·	7.	1						
		MAG. CAPACITY	BARREL LENGTH	TWIST — R-H 1 Turn (n	OVERALL THE	LENGTH	DROP	DROP (HEEL)	BARREL	BARREL	The second second second	STOCK	LING T
MO	CALIBER 242 Min				LENGTH	OF PULL	(COME)		4.9 - 8.9 Francis acid	FINISH	STOCK MATERIAL	FORTSR	- 12
<u>. </u>	243 Win 7mm-08 Remington	4	24"	3 N.	14 W	13 1/2	1 1/6"	1 3/2	Carbon Steel	Blued	Brown Laminate	Satin Satin	73
	270 Win	4	24*	10"	44 14	13 1/2"	1 1/8"	1 1/6"	Carbon Steel	Blued	Brown Laminate	Satin	74
3	30-06 Springfield	4	24*	10"	44 1/7	13 1/2"	1 1/8"	1 1/1	Carbon Steel	Blued	Brown Laminate	Satin	77
4	7mm Remington Mag	4	26"	9 1/4*	≠ 46 ¼* ÷	13 1/2"	1 1/4"	11/	Carbon Steel	Blued	Brown Laminate	Satin	75
5	- 300 Win Mag	4	26*	10*	46 14 74	13 1/2"	1 1/8"	1 1/2	Carbon Steel	Blued	Brown Laminate	Satin	754
6	270 WSM	4	24*	10"	44 V/ state	13 1/2"	1 1/2	134	Carbon Steel	Blued	Brown Laminate	Satin	74
7	300 WSM	4	24*	10"	44	13 1/2"	1 1/4"	1 34"	Carbon Steel	Blued	Brown Laminate	Satin	79

	MODEL	700" XCR" COMP	ACT TACT	TICAL R	IFLE									
	ORDER NO.	CARROLL STATE	HAG. CAPACITY	MARREL Length	TWIST — R-# I Turn in	DALLETT AND THE	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	MIERUL MESSE	BARREL Finish	SIDCA MATERIAL AND	STOCK FORSH	IN WE
NEW		223 Remington		20"	9"	39 V	13 3/8*	1 W	1 ¼°	Stainless w/InNyte	Black TriNyte®	Amand Fiber Reint	OD Green	以及
NEW	84467	308 Win 36	4	20*	12"	39 V	13 ¾°	1 1/4"	1 1/7	Stainless w/TriNyte	Black TriNyte*	Amand Fiber Reint	OD Green	7/1/

MODE	L 700" XCR	TACTICA	L LONG	RANGE	RIFLE									
ORDER MO.	CAUBER	1	MAG. Capacity	BARRET. LENGTH	TWIST — R -II 1 Turn in	LENGTH	CF PULL	DROP (COMB)	DROP (HEBL)	MARREL MATERIAL SALES	BARREL Finish	STOCK MATERIAL	SH STOCK FURSIN	AVE. WIT
84460	223 Remington	ंद्राद्वीर	5	26*	9"	。45 VC 改	13 1/1	1 1/4*	1 1/2"	Stainless w/InNyte: 2	Black TriNyte®	Amand Fiber Reint	OD Green	814.
84461	308 Win 💸	11.73	4	26	12*	45 W	13 1/2	1 1/4"	1 1/2	Stainless w/TriMyte	Black TriNyte*	Amarid Fiber Reint	OD Green	81/2
84462	300 Win Mag	(SEE 13)	3	26"	10"	45 W 💜	13 ¾°	1 1/4"	1 W	Stainless w/TriNyte	Black TriNyte®	Amand Fiber Reint	OD Green	814

	L-715 SPORTSMAN	MAG.	BARREL	TWIST — R-H	OVERALL	LENGTH	DROP.	DROP	BARREL ST.	BARREL		STOCK AVE.
OFFDER NO.	CAUSTR*	CAPACITY	LENGTH	1 TURN IN	LENGTH	OF PULL	(COME)	(HEET)		FINISH	STOCK MATERIAL	FORISH (LB
85800	243 Win	4	22°	9 1/1"	42 /25	13 1/7	1 1/4"	1 38	Cartion Steel	Matte	Black Synthetic	Matte 7.
85801	7mm-08 Remington	4	22*	9 1/4"	42 1/2	13 1/2"	11/4"	1 1/4	Carbon Steel	Matte	Black Synthetic	Matte 7
85802	270 Win	4	22"	10"	42 1/2	13 1/2"	1 1/4"	1 3/2"	Carbon Steel	Matte	- Black Synthetic	Matte : 7
85803	30-06 Springfield	4	22"	10"	42 1/2	13 1/2"	1 1/4°	1 3/1"	Carbon Steel	Matte	Black Synthetic	Matte 7
B5805	7mm Remington Mag	4	24"	9 W*	44 1/2	13 1/2*	1 1/4"	1 1/2"	Carbon Steel	Matte	Black Synthetic	Matte 7
35806	300 Win Mag	4	24"	10"	44 1/2	13 1/2"	1 1/4"	1 3/8"	Carbon Steel	Matte	Black Synthetic	Matte 7
35807*	243 Win Youth	4	22*	9 W*	~ 41 1/2° ~-	12 1/8"	1 1/8*	1 34*	Carbon Steel	Matte	Black Synthetic	Matte : 7

MODEL 798-779	99" BOLT ACT	ION RIFLE														1
MODEL	ORDER NO.	CALIBER		MAG. CAPACITY	BARREL LENGTH	,	OVERALL LENGTH	LENGTH OF PULL	DROP (COME)	DROP (HEEL)	1.	BARHEL Material	BARREL FINISH	STOCK MATERIAL	STOCK FINISH	AVG. WT. (LBS.)
w 798° Safari	89846	375 H&H Mag	1.	3	22°	1-	42 ¼°	13 ¾	I 1/1°	1 1/1	:	Carbon Steel	Blued	Realwood ** Laminate	Satin	814
w 798⁻ Safari	\$ 89848	458 Win Mag	į -	3	22"	ï	· 42 1/4"	13 1/8"	1 1/8"	1 1⁄2*	i	Carbon Steel	Blued	Realwood™ Laminate	Satin	- 814
V 798" SPS"	89804 -	243 Win		4 -	22*	1	42 V/	13 1/1"	1 1/2"	13%	1-3	Carbon Steel	Blued	Synthetic	Matte	7 74
798" SPS"	89805	270 Win	1	4 ;	22*	1	. 42 1/1	13 3/6°	1 1/8"	1 1/2"		Carbon Steel	Blued	Synthetic	Matte	714
798" SPS	89807	30-06 Springfield	r.	4	22*	17.	42 1/4"	13 3/8"	1 1/8"	1 3/2"		Carbon Steel	Blued	Synthetic -	Matte	7.34
798" SPS"	89808	7mm Remington Mag		3	24"		44"	13 3/8"	1 1/8"	1 1/8"		Carbon Steel	Blued	Synthetic .	Matte	, 7.34
798" SPS"	89809	300 Win Mag	:	3	24"	ļ.	44"	13 1/8"	1 1/6"	1 1/4"		Carbon Steel	Blued	Synthetic	Matte	7 74.
798" SPS"	89806	308 Win	ļ	4 -	22"	71	42 1/4"	13 %"	1 1/8"	1 3/2"	,	Carbon Steel	Blued	Synthetic	Matte	7 3/4
v 798" Walnut	89838	243 Win		4	22*	:	42 1/4"	13 1/4"	1 ½"	1 1/1"		Carbon Steel	Blued	Walnut .	Satin	7 3/4
798" Walnut	89839	270 Win		4	22"	-	42 1/4"	13 1/2"	1 1/2"	1 3/2"	•	Carbon Steel	Blued	Walnut	Satin	7.34
798" Walnut	89842	30-06 Springfield	•	4 .	22*	· ·	42 V4*	13 1/8"	1 1/8"	1 1/1*		Carbon Steel	Blued	Walnut	Satin	7 ¾
798 Walnut	89843	308 Win		4	22"	_ 1.	42 1/4"	13 %"	11/4"	1 3/8"	-	Carbon Steel	Blued	Walnut	Satin	7 1/4
798" Walnut	89844	7mm Remington Mag		3 -	22"	7	. 42 1/4"	13 3/6"	1 ½*	1 3/8"	Τ.	Carbon Steel	Blued	Walnut	Satin	7 3/4
798" Walnut	89845	300 Win Mag		3	22"		42 1/4"	13 3/8"	1 1/4"	1 3/4"		Carbon Steel	Blued	Walnut	Satin	714
798" Walnut	89847	375 H&H Mag		3	26	;	46 1/4"	13 1/2"	1 1/5"	1 1/2"		Carbon Steel	Blued	Walnut	Satin	81/2
798" Walnut	89849	458 Win Mag	i	3	26"	; ;	46 1/4"	13 1/2"	1 1/2"	1 1/1"	7	Carbon Steel	Blued	Walnut	Satin	8 1/2
799" Short Action	89852	22 Hornet		5	20*	:	39 1/2*	13 1/2"	1 1/18*	134		Carbon Steel	Blued	Brown Larninate	Satin	61/2
799" Short Action	89851	222 Remington		5	20*		39 1/2"	13 ¾"	1 1/6"	1 3/4"		Carbon Steel	Blued	Brown Laminate	Satin	6 1/2
799" Short Action	89854	22-250 Remington		4	20°		39 1/2"	131/8	11/2"	11/2		Carbon Steel	Blued	Brown Laminate	Satin	5 1/2
799" Short Action	89850	223 Remington		5	20	•	39 1/2"	13 3/2"	1 1/4"	13/1"		Carbon Steel	Blued	Brown Larninate	Satin	6 1/2
799" Short Action	89853	7.62x39mm		- 4	20"	:	39 1/2*	13 1/2"	1 1/2*	1 1/2"		Carbon Steel	Blued	Brown Laminate	Satin	61/2

NODE	L SEVEN CDE					<u> </u>	4.5						,
ORDER NO.	CALIBER	MAG. CAPACITY	BARREL Length	TWIST - R-H 1 Turn (n	OVERALL LENGTH	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL MATERIAL	BARREL Finish	STOCK MATERIAL	STOCK FINISH	AVG. WT.
85900	17 Remington Fireball	5	20*	9*	39 1/4"	13 ∜€*	1 1/4"	1 1/2"	Carbon Steel	Satin	Walnut	Satin	61/2
26417	243 Win	4	20	9 1/2"	39 1/4"	13 ¾*	1 1/4"	1 1/2"	Carbon Steel	Satin	Walnut	Satin	61/2
26419	260 Remington	4	20°	9*	39 1/4"	13 ¾*	1 1/2"	1 ½*	Carbon Steel	Satin	Walnut	Satin	6 1/2
26361	270 WSM	3	22°	10"	39 V	13 1/1*	1 1/4*	1 1/2*	Carbon Steel	Satio	Walnut	Satin	6 1/2
85901*	7mm-08 Remington	4	22*	9 1/4"	39 W*	13 ∛i*	1 1/4*	1 1/2"	Carbon Steel	Blued	Walnut	Semi-Gloss	6 ½
26421	7mm-08 Remington	4	20"	9 1/4*	39 1/4"	13 1/2"	11/4"	1 1/2	Carbon Steel	Satin	Walnut	Satin	61/2
26367	300 WSM	3	22*	10"	39 1/4"	13 1/4"	1 5/4"	1 1/2"	Carbon Steel	Satin	Walnut	Satin	61/2
26423	308 Win	4	20"	10"	39 W*	13 3/1"	1 1/4*	1 1/2"	Carbon Steel	Satin	Walnut	Satin	61/2
26369	350 Remington Magnum [†]	4	20*	16*	41 1/4"	13 1/2	1 1/4*	1 1/4*	Carbon Steel	Satin	Walnut	Satin	73%

	MÕDEL	SEVEN PREDATOR			1.53.				1 %					
	ORDER NO.	CALIBER	MAG. CAPAÇITY	BARREL LENGTH	TWIST - R-H 1 TORN B	OVERALL Length	LENGTH OF PURLL	OROP (COMB)	DROP (HEEL)	BARREL Material	BARREL Finish	STOCK MATERIAL	STOCK FINESH	AYG. WT. (LES.)
NEW	85950	17 Remington Fireball	5	20°	91/2"	39"	13 ¾*	1 1/4"	1 1/2"	Carbon Steel	Mossy Oak* Brush*	Synthetic	Mossy Oak* Brush*	7 .
NEW	85951	204 Ruger	5	20"	91/2*	39"	13 14"	11/6	1 1/4*	Carbon Steel	Mossy Oak* Brush*	Synthetic	Mossy Oak* Brush	7 .
NEW	85952	223 Remington	5	20°	9 1/2"	39*	13 %*	1 10	11/	Carbon Steel	Mossy Oak* Brush*	Synthetic	Mossy Oak* Brush*	7
NEW	85953	22-250 Remington	4	20"	9 1/2"	39*	13 54"	1 19	1 1/2	Carbon Steel	Mossy Oak* Brush*	Synthetic	Mossy Oak' Brush'	7
NEW	85954	243 Win	4	20*	91/2"	39*	13 %*	1 %*	11/1	Carbon Steel	Mossy Oak.' Brush'	Synthetic	Mossy Oak* Brush*	7

MODÉI	700" SPS" TAC	TICAL											
ORDER NO.	CALIBER	MAG. Capacity	BARREL LENGTH	TWIST — R-H E TURN IN	OVERALL Length	LENGTH OF PULL	OROP (CGMB)	OROP (HEEL)	BARREL Material	BARREL Finish	STOCK MATERIAL	STOCK Flach	AVG. WT. (LBS.)
84206	223 Remington	5	20*	9"	39 1/2"	13 1/3"	137	1 1/2"	Carbon Steel	Matte Blue	Black Overmold	Matte Black	7 1/2
84207	308 Win	4	20-	12"	39 74.	13 1 3"	1 1/1	1 1/2"	Carbon Steel	Matta Blue	Black Overmold	Matte Black	71/2

MODEL 750" AUTO	LOADING	CENTERFIRE	RIFLE			\$		al.		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	14 A A A A A A A A A A A A A A A A A A A		
MODEL	ORDER NO.	CALISER	TWIST — R-H 1 TURN ON	BARREL LENGTH	OVERALL LENGTH	LENGTE OF PULL	DRGP (COME)	DROP (HEEL)	BARREL MATERIAL	BARREL FINISH	STOCK MATERIAL	STOCK FINISH	AYG. WT. (LBS.)
750 Woodsmaster	27055	243 Win	9 1/3"	22"	42 ¥5°	13 1/2"	1 1/3"	2 1/2*	Carbon Steel	Polished Blue	Walnut	Satin	11/2
750 Woodsmaster	27059	270 Win	9 1/3"	22*	42 1/8"	13 12	1 53*	2 ½°	Carbon Steel	Polished Blue	Walnut	Satin	71/2
750° Woodsmaster	27061	30-06 Springfield	9 1/4*	22*	42 1/1	13 1/2"	114	2 1/2"	Carbon Steel	Palished Blue	Walnut	Satin	7 Vz
750 Woodsmaster	27057	308 Win	10"	22*	42 ¾°	13 1/2*	1 1/3"	2 1/2"	Carbon Steet	Polished Blue	Walnut	Satin	7 1/2
750 Woodsmaster	27063	35 Whelen	16*	22*	42 ¾*	13 ∀:*	1 1/2"	2 ½°	Carbon Steel	Polished Blue	Walnut	Satin	7 1/2
750 Woodsmaster Cartine	27077	30-06 Springfield	10*	181/5"	39 1/8°	13 V2	l iii	2 1/2*	Carbon Steel	Polished Blue	Walnut	Satin	7 1/4
750 Woodsmaster Cartine	27075	308 Win	10*	181/:"	39 1/3"	13 1/2	1 1/3"	2 1/2"	Carbon Steel	Polished Blue	Walnut	Satin	7 <i>Y</i> :
750° Woodsmaster Carbine	27079	35 Whelen	16"	181/2	39 1/8*	13 1/2"	1 1/3"	2 1/2"	Carbon Steel	Polished Blue	Walnut	Satin	7 1/2
750" Synthetic	85682	243 Win	91/8"	22*	42 56*	13 Vz	1 1/3	2 1/2	Carbon Steel	Matte Blue	Synthetic	Matte Black	71/2
750° Synthetic	85685	270 Win	9 1/4"	22"	42 1/8"	13 15	1 1/1"	2 1/2	Carbon Steel	Matte Blue	Synthetic	Matte Black	11/2
750" Synthetic	85686	30-06 Springfield	9 1/4"	22"	42 1/8"	13 1/2*	1 55*	2 1/2"	Carbon Steel	Matte Blue	Synthetic	Matte Black	7 1/2
750" Synthetic Carbine	85687	30-06 Springfield	10"	18 1/2"	39 W	13 V/r*	1 1/4"	2 <i>Yt</i> *	Carbon Steel	Matte Blue	Synthetic	Matte Black	71/4
750" Synthetic	85683	308 Win	10"	22*	42 1/3°	13 1/2"	1 1/1"	2 1/7"	Carbon Steel	Matte Blue	Synthetic	Matte Black	7 ½
750" Synthetic Carbine	85684	308 Win	10	18 1/2"	39 1/8"	13 1/2"	1 1/8"	2 1/2"	Carbon Steel	Matte Blue	Synthetic	Matte Black	7 1/4

MODEL R-15 VI	R MODULAI	REPEATING	RIFLE								19. S. S. B.		
MODEL	ORDER NO.	CALIBER	MAG. CAPACITY	BARREL LENGTH	OVERALL LENGTH	LENGTH OF PULL	OROP (COMB)	DROP (HEEL)	BARREL . Material	EARREL FINISH	STOCK MATERIAL	STOCK FINISH	AYG. WT. (LBS.)
Predator Rifle	60000	204 Ruger	5,	22"	40 V4"	13 1/3"	1 1/8"	1 1/1°	Carbon Steel	Matte	Synthetic	Advantage* MAX-1 HD™	7.1/4
Predator Rifle	60001	223 Remington	5	22*	40 1/4"	13 1/5"	1 1/4"	1 1/1"	Carbon Steel	Matte	Synthetic	Advantage MAX-1 HD~	7 ¾
Predator Carbine	60002	204 Ruger	5	18"	36 14*	13 3/3"	1 1/2*	1 1/4"	Carbon Steel	• Matte	Synthetic	Advantage® MAX-1 HD™	6 ⅓
Predator Carbine	60003	223 Remington	5	18"	36 V	13 1/3"	1 1/8"	1 1/2"	Carbon Steel	Matte	Synthetic	Advantage® MAX-1 HD™	6 3/4
Predator Carbine - CS	60004	204 Ruger	5	18*	33 14" - 36 14"	11 1/4" - 14 3/4"	1 1/8"	1 1/8*	Carbon Steel	. Matte	Synthetic	Advantage® MAX-1 HD™	6 3/4
Predator Carbine - CS	60005	223 Remington	5	18"	33 W - 36 W	11 1/8" - 14 3/8"	1 1/9"	1 1/4	Carbon Steel	Matte	Synthetic	Advantage® MAX-1 HD™	. 6 1/4

MODE	L 770 STAINLESS BOL		ION RI	FLE .		रस्ट । दिक्					1				
DROER NO.	CALIBER	MAG. CAPACITY	BARREL LENGTH	TWIST — R-H 1 TURN IN	OVERALL LENGTH		LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL MATERIAL	:	BARREL FINISH	STOCK MATERIAL	STOCK Finish	AVG. WT. (LBS.) †
85655	270 Win	4	22°	10"	42 1/2	ė	13 1/3	11/1	1 3/8*	416 Stainless Steel	-}	Matte	- Synthetic !	Realtree® AP™ HD™	81/2
85657	7mm Remington Mag	3	24"	9 Vr	44 1/2	7	13 1/3"	11/3"	1 1/3"	416 Stainless Steet		Matte	Synthetic	Realtree® AP™ HD™	· 8½
85656	30-06 Springfield	4	22*	10"	- 42 V2	;	13 1/3"	1 1/4"	1 3/8"	416 Stainless Steel	:	Matte	Synthetic	Realtree® AP " HD"	81/1
85658	300 Win Mag	3	24"	10*	. 44 1/2		13 1/3"	1 1/8"	1 1/8"	416 Stainless Steel	4	Matte	Synthetic	Realtree® AP™ HD™	81/1
† Average we	ight includes scape.														

MODEL	770 BOLT ACTIO	N	RIFLE	74.	1	u"		- 4.		72 T									
GROER NO.	CALIBER	:	MAS. CAPACITY	BARREL LENGTH	TWIST - R-H 1 TURN IN		OVERALL LENGTH		LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARREL Material		BARREL FINISH		STOCK MATERIAL		STOCK FIXISH	AVG. WT. (LBS.) †
85630	243 Win		4	22*	9 1/3"		42 1/2"	- :	13 1/3*	1 1/4"	1 1/4"	Carbon St	el .	Matte		Black Synthetic	- 1	Matte	81/1
85637 Youth	-243 Win		4	20"	9 1/3"	•	39 1/2"	- :	12 3/3"	11/4*	1 3/8"	Carbon St	iel :	Matte	• 1	Black Synthetic	-	Matte	814
85632	270 Win	,	4	22*	10°		42 1/2"		13 1/4	1 1/8*	ì ½ *	Carbon St	æl .	Matte		Black Synthetic		Matte	814
85631	7mm-08 Remington		4	22"	9 1/1"		42 ½*		13 1/8"	1 1/8"	1 1/5"	Carbon St	el .	Matte		Black Synthetic		Matte	81/2
85635	7mm Remington Mag	, ;	3	24"	9 1/7		44 1/2"	- ;	13 1/6	1 1/8"	1 3/5"	Carbon St	eel j	Matte	1.	Black Synthetic	9 J. N	Matte	89
85633	30-06 Springlield	, 1	4	22*	10*	1	42 Vz	4	13 1/4	1 1/8"	1 3/6"	Carbon St	el ,	Matte		Black Synthetic		Matte	81/2
85636	300 Win Mag	,.'	3	24*	10"	•	44 1/2" .		13 1/8"	1 1/8"	1 34*	Carbon St	el	Matte		Black Synthetic	1	Matte	81/4
85634	, 308 Win	:	4	22*	10*		42 1/2"	*	13 1/2"	1 1/8"	1 3/3"	Carbon St	el - i	Matte		Black Synthetic		Matte	81/2
† Average weigh	nt includes scope.																		

MODEL 7615 /	7600 PUN		RIFLE							
MODEL	ORDER NO.	CALIBER		ST — R-H OVERALL Turn by Length	LENGTH DROP DROP BF PULL (COMB) (HEEL)	BARREL Material	BARREL FDRISH	STOCK MATERIAL	STOCK FINISH	AVG. WT.
7615 Tactical	86400	223 Remington	.10 161/7	9 36 1/2	131/2 11/6 21/2	Carbon Steel	Parkerized	Black Synthetic	Matte /	61/4
7615 Ranch Carbine	86401	223 Remington	10 18 1/7	9 38 1/2	1 13 1/2 1 1/16 2 1/4	Carbon Steel	Parkerized	American Walnut	-Satin	7
7615 Camo Hunter†	86402	223 Remington	10 22	9 , 42	131/2 11/6 21/4	Carbon Steel	Mossy Oak* Brush Camo	Synthetic	Mossy Oak® Brush Camo	7 1/8
7615 - SPS -	86410	223 Remington	10 16 1/7	9 36 1/1	13 1/2" 1 1/15" 2 1/4"	Carbon Steel	Parkerized	Black Synthetic	, Matte ;	7 1/8
7600	24653	243 Win	4 22	9 1/8" 42 5/8"	13 1/2" 1 1/15" 2 1/1	Carbon Steel	Polished Blue	American Walnut	Satin .	71/2
7600-	24655	270 Win	4 22	10" 42 1/1"	13 12 1 196 2 19	Carbon Steel	Polished Blue	American Walnut	Satin	71/2
7600	24667	270 Win	4 22	10 42 1/8	13 1/2 1 1/6 2 1/4	Carbon Steel	Polished Blue	American Walnut	High Gloss	71/2
7600" Carbine	24661	30-06 Springfield	4 181/	10" 39 1/4"	13 1/2" 1 1/16" 2 1/4"	Carbon Steel	Polished Blue	American Walnut	Satin	71/4
7600°	24657	30-06 Springfield	4 22	10" 42 14"	13 1/2 1 3/16 2 1/2	Carbon Steel	Polished Blue	American Walnut	Satin	71/2
7600-	24671	30-06 Springfield	4 22	10" 42 1/8"	13 1/2 1 1/15 21/2-	Carbon Steel	Polished Blue	American Walnut	High Gloss	71/2
7600-	24659	308 Win	4. 22	10" 42 5%"	13 1/2 1 1/16 2 1/4	Carbon Steel	Polished Blue	American Walnut	Satin	71/2
7600 Synthetic	25143	243 Win	4 22	9 1/8" 42 1/4"	13 1/2 1 1/16 2 1/2	Carbon Steel	Matte Blue	Black Synthetic	Matte	7 ½
7600" Synthetic	25145	270 Win	4	10" 42 1/8"	13 W 1 1 Nr 2 Vr	Carbon Steel	Matte Blue	Black Synthetic	Matte -	71/2
7600" Synthetic	25149	30-06 Springfield	4 22	10 42 5%	13 W 1 1 W 2 W	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/2
7600" Synthetic	25151	308 Win	1.54 3 4, 22 m 3	10" 42 54"	-13 W 13/6 21/	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/2
7600 Synthetic Carbine	≫25153 · *	30-06 Springfield	L 44 77 1814 54	10 39 16	13 14 2 1 1/16 21/6 .	Carbon Steel	Matte Blue	Black Synthetic	Matte	71/4
Equipped with iron sights.							<u> </u>		•	,

Premier Dealer offerings

	MODEL 597													
	MODEL	ORDER NO.	ACTION TYPE (CALIBER)	CAPACITY	BARREL LENGTH	DVIRULE A	LENGTH OF POLL	EROP (COME)	DECOP (HEEL)	BUREL	BARREL FINISH	F.S. STOCK MATERIAL CONTROL	STOCK FIXISH	AVE WIT
NEW	597 "Yellow Jacket"	80850	Auto (22 LR)	10	20"	40.3	14*	11%	2 14"	Stainless Steel	Matte	Yellow/Gray, Laminate	Satin	- 50/2
	597" TVP	80852	Auto (22 LR)	£10	20°	40,4	14"	1 1/2"	2 1/4"	Stainless Steel	Matte	Shady Camo Lammate	Satin	573
NEW	597 Blaze Came	80853	Auto (22 LR)	~ ** 10 **	20°	40***	14"	11/2"	2 1/4"	Carbon Steel	Matte	Mossy Oak Blaze Came	Matte	510
NEW	597 Pink Camo	80854	Auto (22 LR)	10	20"	40°	14*	1 ½°	2 1/4"	Carbon Steel	Matte	Mossy Oak Pink Carno	Matte	551/2
	597-	1 26550 🗶	Auto (22 LR)	10	20°	40,	14"	1 1/2"	2 1/4"	Carbon Steel	Matte	Cray Synthetic	Matte	5 Vi
	597 Scope Combo	26513	Auto (22 LR)	10	20	40"	14*	1 1/2"	2 1/4"	Carbon Steel	Matte	Gray Synthetic	Matte	34E5W
NEW	597" Magnum	26560	Auto (22 WMR)	8,	20"	40.	14*	11/7	2 W*	Carbon Steel 🕻 🗮 🖫	Matte	Black Synthetic	Matte	5 V/
	597" HB LS Magnum	26581	Auto (22 WMR)	8	20"	40"	14"	1 1/5*	2 W	Carbon Steel	Matte	Brown Laminate	Satin	6.4

	MODEL	FIVÈ												
	ORDER NO.	CALIBER	MAG. CAPACITY	BARREL LENGTH	TWEST — R-H 1 TURN IN	OVERALL SE S	LENGTH OF PULL	(COM3)	DROP (NEEL)	BARREL MATERIAL	BAIREL FINISH	STOCK MATERIAL	STOCK FINISH	ANC. WIT
NEW	89915	17 HMR	5	22*	16"	40 3/4	13 1/1°	1 1/8"	1 34.	Carbon Steel	Palished Blue	Brown Laminate	Satin	6 44
	89913	22 LR	5	22*	16"	40 3/4	13 1/4"	1 1/6"	1 3/6*	Carbon Steel	Polished Blue	Brown Laminate	Satin	6.483
NEW	89916 Youth	221R	5	16 1/5"	16"	35 1/4"	12 3/8"	1 1/4"	1 3/2"	Carbon Steel	Polished Blue	Hardwood	Satin	5.46
	89914	22 WMR	5	22	16*	40 34	13 3/8"	I 1/4"	1 ¾t"	Carbon Steel	Palished Blue	Brown Laminate	Satin	6 34

MODEL 552 /572													
MODEL.	ORDER NO.	ACTION TYPE (CALIBER)	CUPACITY:	BARREL LENGTH	OVERALL	LENGTH OF PULL	DROP (COMB)	DROP (HEEL)	BARRE	BARREL Finish	STOCK MATERIAL	STOCK FINISH	AVE WI.
552" BDL Deluxe Speedmaster*	25594	Auto (22, S, L, LR)	15*	21°	40	13 1/2	1 3/2*	2 5%*	Carbon Steel	Polished Blue	American Walnut	Gloss	534
572 BDL Deluxe Fieldmaster*	25624	Pump (22, S, L, LR)	15*	21*	40*	13 5/2"	1 1/2"	2 1/18*	Carbon Steel	Polished Blue	American Walnut	Gloss	E.C. 534
572" BDL Smoothbore	29829	Pump (22, S, L, LR)	15*	21"	40	13 5/8"	114	2 1/8	Carbon Steel	Polished Blue	American Walnut	Gloss	534.

Premier Dealer offerings

MUZZLELOADER SPECIFICATIONS

MODEL	BARREL LENGTH	OVERALL LENGTH	ORDER NO.	STOCK MATERIAL	STOCK FINESH	BARREL Material	BARREI Finish	AYG WT. (LBS.)
Genesis ML	28"	43"	89294	Black Synthetic	Black	Carbon Blue	Matte	71/4
Genesis MLS Overmold	28"	43"	89297	Overmold Synthetic	Black Overmold	Stainless	Satifi	71/4
Genesis ML Camo	28"	43"	89295	Mossy Oak* New Break-Up*	Camo	Carbon Blue	Camo	7 1/4
Genesis ML Camo	28"	43*	89276	Mossy Oak? New Break-Up*	Camo	Carbon Blue	Carno	7 3/4
Genesis ML SF Synthetic Thumbhole	28*	43*	89286	Black Synthetic	Black	Stainless	Satin	7 1/1
Genesis ML SF Came Thumbhole	28"	43*	89299	Mossy Oak® New Break-Up®	Сатю	Stainless	- Satin	71/2
Genesis ML SF Buckmasters*	28"	43"	89277	Realtree' Hardwoods' HD'"	Camo	Stainless	Satin	7 3/4
Genesis ML SF Laminate Thumbhole	28*	43"	89285	Grey Laminate	Grey Laminate	Stainless	Satin	8

INTERCHANGEABILITY CHART. Cartridges within groups shown are interchangeable. Other substitutions should not be made

without specific recommendation of the firearms manufacturer since improper combinations could result in firearm damage or personal injury.

RIMFIRE	CENTERFIRE (CONT.)	CENTERFIRE (CONT.)	CENTERFIRE (CONT.)	CENTERFIRE (CONT.)
22 W.R.F.	6.35mm Browning	32 Short Colt in 32 Long Colt but not conversely	38 Colt Special	38 Automatic in 38 Super +P - but not conversely
22 Remington Special	7mm Express, Remington	(SEE NOTE C)	38 S&W Special	380 Automatic
22 Win. Model 1890 in a 22 Win. Mag. Rimfire	280 Remington	32 S&W in 32 S&W Long but not conversely	38 Special Targetmaster®	9mm Browning Short (Corto Kurz)
- but not conversely	30-30 Sav.	32 S&W Long	38 S&W Special Mid-Range (SEE NOTE D)	9mm Luger (SEE NOTE E)
CENTERFIRE	30-30 Win.	32 Colt New Police	38 Special +P (SEE NOTE 8)	9mm Parabettum
25-20 Remington	30-30 Win. Accelerator* (SEE NOTE A)	32 Colt Police Positive	38-44 Special +P (SEE NOTE B)	44 S&W Special (SEE NOTE F)
25-20 W.C.F.	30-30 Marlin	32 W.C.F. (SEE NOTE A)	38 Special	44 Martin
25-20 Win.	30-30 Win. High Speed	32 Win. (SEE NOTE A)	38 Special Flat Point	44 Win.
25-20 Win, High Speed	30 W.C.F.	32-20 Win. High Speed (SEE NOTE A)	38 Short Colt in 38 Long Colt but not conversely.	44 Remington
25-20 Martin	32 Colt Automatic	32-20 Coft L.M.R	Both can be used in 38 Special	44-40 Vin.
25 W.C.F.	32 Auto. Colt Pistol (ACP)	32-20 W.C.F (SEE NOTE C)	38 Marlin	44 W.C.F.
6mm Reminator	32 (7.65mm) Automatic	32-20 Win.	38 Win. (SEE NOTE A)	45-70 Government
244 Remington	7.65mm Automatic Pistol	32-20 Martin	38 Remington (SEE NOTE A)	45-70 Martin
25 Automatic	7.65mm Browning (not interchangeable	38 S&W	38-40 Win.	45-70 Win.
25 Auto, Colt Pistol (ACP)	with 7.65mm Luger)	38 Colt New Police	38 W.C.F. (SEE NOTE A)	45-70- 4 05
25 (6.35mm) Automatic		380 Webley		

NOTE A: High-speed cartridges must not be used in revolvers. They should be used only in rilles made especially for them.

NOTE B: Ammunition with "+P" on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer. NOTE C: Not for use in revolvers chambered for 32 S&W or 32 S&W Long.

NOTE D: All 38 Special cartridges can be used in 357 Magnum revolvers but not conversely.

NOTE E: 9mm sub machine gun cartridges should not be used in handguns.

NOTE F: 44 Russian and 44 S&W Special can be used in 44 Remington Magnum revolvers but not conversely.

NOTE G: Not to be used in Win. M-66 and M-73.

BARREL SPECIFICATIONS

LENGTH & CHOKE	12-ca.	16-ca.	20-ca.*
Field Grade, Vent Rib, Wingmaster*			
30" Rem" Choke, Light Contour	26215		
30" Rem" Choke	24576		
28" Rem Choke, Light Contour	26217		
23" Rem Choke	24580		24606
	26219		24000
26" Rem ' Choke, Light Contour	24582		24608
26 Rem Choke	24302		. 24000
Deer Barrel, Super Slug Cantilever Scope Mount, New Contour	24551		
23° Fully Rifled	24331		
Deer Barret, Cantilever Scope Mount, Wingmaster*			
20° Fully Rifled	24557		
Deer Barrel, Rifle Sights			·
20" Rem * Choke	24545 ²	244954	
20° Fully Rifled	24558		
26° Imp. Cyl.			24578
SP` Deer Barrel, Cantilever Scope Mount			<u> </u>
20" Fully Rifled	26229		
20" Fully Rifted Camo	26203†		
20" Rem * Chake	262271		
SP` Deer, Rifle Sights			
20" Rem * Chake	24549 ²		
Express* Bead Sights	24620		,
Express® Vent Rib	24589		
Express* Deer, Hifle Sights (20*), Imp. Cyl.	24622		
Express* Deer, Fully Rifled, Rifle Sights (20*)	246113	_	246093
SP*, Vent Rib	2 1 2 2 2		1. 14 1/2 - 30.
30" Rem - Choke	24590		V A + ₹
28" Rem * Chake	- Z6225	~	79 5 4 4 44 5
26" Rem Choke	24592		

Model 870 eatra barrels with 3° chambers used on Super Magnum and Magnum receivers will handle both 2 ½° and 3° shells only. Use only 2 ½° shells when these barrels are used on non-Hagnum receivers. 20 gauge 870° Lightweight barrels will not 10°2 legister Studied 870° gans. I Cardiever Rem Tokels Deet barrels supplied with proved Options and Escended Rifled Order belows. 2 Refine-sighted Rem Tokel Deet barrels supplied with refine and Improved Options and Escended Rifled Order belows. 10° and 10°

MODEL 11.87 EXTRA BARRELS //	B" CHAMBERS	
LENGTH & CHOKE	12-ca	20-ga.*
Deer Barrel, Cantilever Scope Mount**	18 m 1 28 m	
21" Fully Rifled	29615	
Deer Barrel, Rifle Sights		
21" Fully Rifled	29606	29563³
21" Rem Choke?	29623	
SP* Deer Barrel, Cantilever Scope Mount**		
21" Fully Rifled	24645	
21" Fully Rifled Camo*	29537	
21" Rem Choke ¹	24647,	
SP* Deer Barrel, Rifle Sights**	North Comment	
21" Rem" Choke ²	29627 - •	
21" Fully Rifled	29609	
SP ⁻ Magnum, Vent Rib	1.100 00 100 00 00 00 00 00 00 00 00 00 00	
30" Rem Choke4	24638	
28" Rem Choke ⁴	29611	
26" Rem Choke ⁴	24640	
Premier* Vent Rib	トゥン かい (ACO 2 ² 頃	
30° Rem* Choke, Light Contour	.ac.,	
28" Rem Choke, Light Contour	29602	
28" Rem Choke	24644	
26" Rem Choke, Light Contour	29604 3 J	
	37™ SUPER MAGNUM	
SP* Super Magnum Deer Barrel, Rifle Sights	Patra Period, Patra	
23" Fully Rifled w/Rifle Sights (3" chamber)	24629	
SP* Super Magnum Deer Barrel, Cantilever Scope Mount	Planty Capacita	
23" Fully Rifled (3" chamber)	80500	_

Model II-37: Deet barrels are not equipped with a pressure-composability gas system, and will not further with target or light field leads.

"20 pauge 707: Lightweight barrels will not fit 20-pauge standard 810° gans." "Model II-87" beer barrels are compatible with Model II00° G3 shotgans.

Fitting Standard Barrels on Light Contions Shotgans. The love-exits on our light Contion Model II-87" shotgans are shaped to below the curve of the shimner-por

liked LC barrel, which means that a standard Meril Rio or Deer barrel cannot be litted to your gan unless you do one of not things: have your LC fore-end wood opened

yo by a competent unisenth or stocknowless; or purchase a standard profile fore-end form our Arms Service Division by writing to: Arms Service Division, Renington

Arms Co., P.O. Gan 700, Modificen, NC 27025-0700 or visit our website at: www.renington.com.

1. Cardileirer Rein* Choke Deer barreks supplied with Improved Opfoder and Extended Rilled Choke tubes. 2. Rolle-sighted Rem* Choke Deer barreks supplied w Rolled and Improved Opfoder Choke tubes. 3.2 ½/r chamber. 4.3 ½/r chamber. † Camo Mossy Oak* Reak-Up* Pattern.

MODEL SP-10" MAGNUM EXTRA BAR	Ave and the second
SP- Magnum, Vent Rib	
30 Rem Choke	27594
26 Rem Choke	27598

	10	00 17 001
ENGTH & CHOKE	12-a.	20-ga, LT-201
ield Grade Deer, Cantilever Scope Mount		
21° Fully Rilled	. 26595	
ield Grade Deer, Rifle Sights		
21" Fully Rifled	29570	
21° Ram - Choka ¹	29565	
21* Imp. Cyt.		24438
P Deer, Rifle Sights		
21" Rem" Choke ²	29571	
teel Shot Barrel, Vent Rib³ (See ammunition note below)		
30" Rem * Choke	29505	
26* Rem* Choke	29509	·
ield Grade, Vent Rib		
30" Rem - Chake	Z4488	
28* Rem * Choke	24464	24484
26" Rem Choke	24466	24486
Skeet, Vent Rib		
26" Rem" Choke	24490	
I NOTE: 11-20, 20-gauge Lights-right barrels (4000 Series) will not fine-19/ studgurs. (Reifer to parts kist or pre-19/7 Dereks). 2 Rifle-sighted Rem* Ch 3 Supplied with 140 Choke ash; Please note the following amunition recommendations for use with th When used with Model 1100 "Augmum storgurs: - Use 2 Vf* magnum or 7 magnum steel shotshells. - Use 2 Vf* magnum or 7 magnum lead shotshells. - Use 2 Vf* magnum or 7 magnum lead shotshells.	hoke Deer barrets supplied with Rifled and In	

FOR MORE INFO, VISIT www.REMINGTON.com

OR CALL 1-800-243-9700

300, ADL, Accelerator, BDL, Bandit, BriteBore, Bronze Point, BuckHammer, Bullet, Bullet Design, CBEE 22, CDL, Classic, Conquest, Copper-Lokt, Copper Solid, Care-Lokt, Custom Carry, Cyclone, D-Series, Deer Hunter, Desert Recon, Disintegrator, DriLube, Driving Band, Drop Dead Better, Duplex, Echo, Elite Hunter, Elite Skinner, Elsag, E.R. Remington & Sons, Escape, ETA, EtronX, Excursion, Express, Express-Steel, EZ, F.A.S.T., Fast Action Soft Touch, Fieldmaster, Figure 8, Fireball, Flexitab, G3, Gamemaster, Genesis, Green Color, Golden, Golden Saber, Grizzly, Gun Club, Hi-Speed, Ideal, Insignia Edition, Kleanbore, Lead-Lokt, LV SF, M24, M24A2, M24A3, MAX Gobbler, M-Series, Managed-Recoil, Marine Magnum, MCS Picatinny, Model Five, Model Seven, Model 105 CTL Model 11-87, Model 11-87P, Model 32, Model 332, Model 365, Model 40-X, Model 40-XB, Model 40-XBR, Model 40-XC, Model 40-XR, Model 40-XRBR, Model 40-XS, Model 412, Model 504, Model 504-T, Model 552, Model 572, Model 597, Model 673, Model 700, Model 700P, Model 700P USR, Model 710, Model 750, Model . 770. Model 798. Model 799. Model 830. Model 870. Model 870 MCS. Model 870P. Model 870P MAX. Model 1100, Model 7400, Model 7600, Model 7600P, Model 7615, Model 7615P, Model SP-10, MoistureGuard, Nitro 27, Nitro CLP, Nitro Mag, Nitro Turkey, Nitro-Steel, Parker, Peters, Pheasant, Power-Lokt, Power Piston, Predator, Premier, ProBore, Quick Look, R, R-15, R-P, Rangemaster, Ready, Realwood, Rem, Rem Dri 35, Rem DriLube, RemCloth, RemGrip, Rem-Line, Rem-Lite, Rem-Tech, Remington, Remington, Remington Law Enforcement, Remington Leadless, Remington Racing, Remington Shooting School and Remington Shooting School logo, Remington Targetmaster, Remington Ultra, Rescue, Rustless, S.A.S.S., Sendero, Shoot Like A Girl ... If You Can!, ShurShot, Slugger, SP, SPR, SPR18, SPR100, SPR210, SPR22, SPR220, SPR310, SPR310S, SPR453, SPR94, SPS, SP-T, SPS-T, Speedmaster, Sportsman, STS, Subsonic, SuperCell, Super Magnum, SWIFT-LOKT, TAC 8, Tango, Targetmaster, Thunderbolt, TorchCam, TriNyte, TVP, Ultra Bonded, Ultra Mag, UMC, Unibody, Viper, VLS, Vortex and Vortex logo, VS, VSF, VS SF, VTR, Weathermaster, Wetproof, Wingmaster, Wingmaster HD, Woodsmaster, XCR Extreme, X-Mark Pro, XR-100, Yellow Jacket and Zulu are trademarks of RA Brands, L.L.C., Madison, NC 27025. Palusol is a trademark of BASF. Briley is a trademark of Briley Manufacturing, Bushnell and Sharpshooter are trademarks of Bushnell. Delrin, Kevlar, Tellon and Tyvek are trademarks of DuPont. Match King is a trademark of Sierra Bullet Co., LLC. Swift, A-Frame and Scirocco are trademarks of Swift Bullet Co. Break-Up, Brush, Duck Blind, Mossy Oak, New Break-Up and Obsession are trademarks of Haas Outdoors, Inc. V-Max is a trademark of Hornady Manufacturing Company, Hogue is a trademark of Hogue, Inc. Advantage, Advantage Max-4, Advantage Timber, AP, APG, HD and Realtree are trademarks of Jordan Outdoor Enterprises. Ltd. SpecOps is a trademark of Knoxx Industries, LLC., HiViz is a trademark of North Pass, Ltd. Kraton is a trademark of Shell. Sako is a trademark of Sako, Ltd., Shilen is a trademark of Shilen, Inc., Speedfeed is a trademark of Armory Accessories, Inc. LimbSaver is a trademark of Steven Sims, Inc. Digital Tiger is a trademark of Tiger Stripe Products. TRUGLO is a trademark of Truglo, Inc. Skyline, Excel and Fall Flight are trademarks of Skyline Cover, LLC. Weaver is a trademark of Weaver Outdoor Optics. Williams and Fire Sights are trademarks of Williams Gun Sight Co.

Weights, stock dimensions, checkering pattern and wood grain may vary according to the individual firearm. Reminigton reserves the right to change or modify its products without notice. Pricing may vary by model, specification, color, size and availability. Follow the safety rules printed in firearms instruction books and on ammunition boxes. If you do not have an instruction book for your Remington firearm, write to Remington Arms Company, Inc., 870 Remington Drive, PO Box 700, Madison, NC 27025, for a free copy or visit our website at www.remington.com/manuals. Please specify the model and serial number. The firearms herein have been photographed with their actions closed to properly showcase their features. In actual practice, any firearm not in use must be left with ammunition removed, action open and safety on. Consumer Information, Arms Service, Parts and Repairs and Custom Shop: (800) 243-9700. Visit us on the web at: www.remington.com.

