

NUMBER 117044	REMINGTON ARMS CO. INC. RESEARCH & DEV. DEPT.	
SCALE 4X SIZE	SUPERSEDES-REFERENCE A17044/181-49	

TITLE
CLIP


DES. BY DATE AW. 1-31-44	DRN. BY DATE DD 18 APR 66	CHK. BY DATE DD 19 APR 66	APP. BY DATE AW 4/21/66
------------------------------------	-------------------------------------	-------------------------------------	-----------------------------------

FOR DETAILS, SEE PROCESS RECORD 1W.B.

MODEL	PART USE	QUAN.	SEE
721	17044 SAFETY SNAP WASHER	1	D17036-Y
722	"	1	D17036-Y
40-X	"	1	22565
40XCF	"	1	P.L.
725	SAFETY SNAP WASHER	1	D24575
725	BOLT STOP PIN SNAP WASHER	1	P.L.
I.F.R.	SEAR LEVER PIN CLIP	1	SKD-266
700 ADDL 700 BDL	SAFETY SNAP WASHER	1	D26345
XP 100	"	1	P.L.
600	"	1	P.L.
40X-B	"	1	P.L.
40XB IFR 40XCF	"	1	D27565
700 VAR	17044 SAFETY SNAP WASHER	1	P.L.
660	"	1	"
MOHAWK 600	17044 SAFETY SNAP WASHER	1	"
7LWT	"	1	P.L.

DO NOT SCALE THIS DRAWING: WORK TO FIGURES
UNLESS OTHERWISE NOTED, TOLERANCES
ON DECIMAL DIMENSIONS ARE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$
& ON ANGULAR DIMENSIONS $\pm 00^{\circ}30'$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGH-
NESS ACCEPTABLE, UNLESS OTHERWISE
SPECIFIED. FINISH ROUGHNESS TO BE
125 OR BETTER.

REF. A 736 X

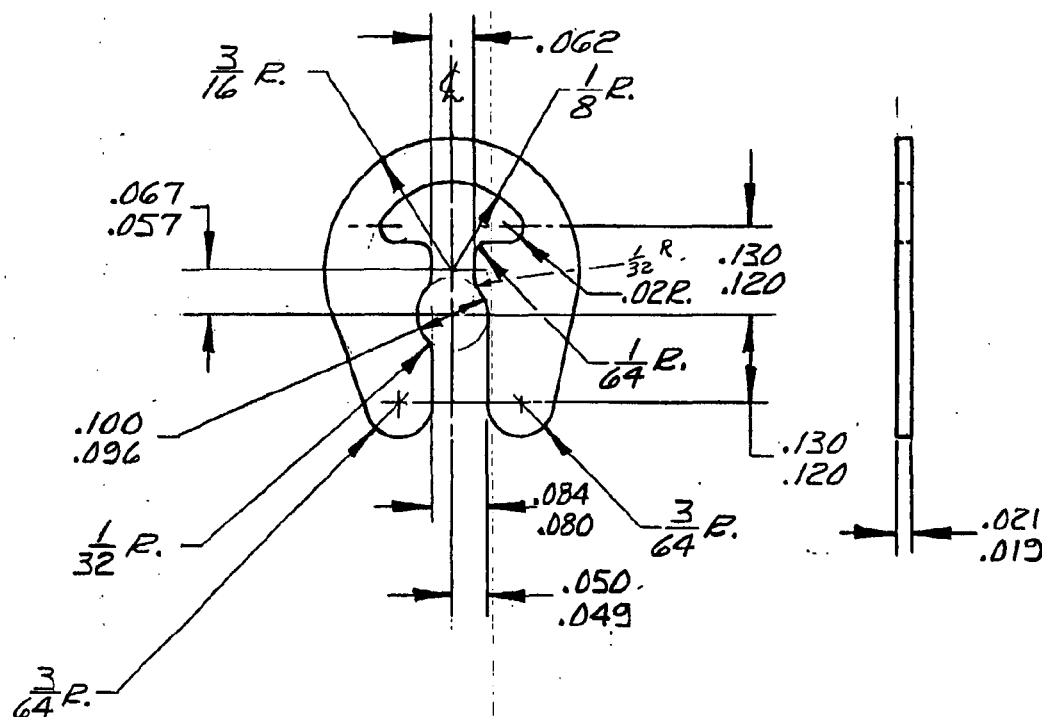

RECOMMENDED MATERIAL AND HEAT TREAT

MATERIAL **C-1095 C.R. SPRING STEEL**HEAT TREAT **H. T.**HARDNESS **R. 30. N. 66-69**COLOR **TEMPER. COLOR**

HEAT TREAT AND COLOR TO BE DONE BY REMINGTON

RAC 9/12/75

THIS DRAWING OR INFORMATION IS
PROPRIETARY INFORMATION TO THE
REMINGTON ARMS COMPANY, INC.

Superseded
By B-17044
Rev 21

A17044

ALT.	WAS	REFERENCE	BY	DATE
20	ADD USE 7LWT	11667	DEB	12/8/82
19	REMOVED	11204	FH	5-1-80
18	CHANGED H.T. WAS 72-75 FRA	10062	WAD	9-11-75
17	ADD MOHAWK USE 600	8444	RC	9-11-70
16	ADD-USE 660	6664	VF	10/10/66
15	REDRAWN	6505	DD	13 APR 66

TFA-3 REV. 1